KATALÓGUS

500+ válogatott kínai beszállító

KERT - GARDENING

2024.05.
v.1.0.

Milyen beszállítók termékeit tartalmazza a Kimport katalógus?

500+ válogatott kínai gyártó termékeiből összeállított termékkatalógus. A beszállítók nem az aktív vagy korábbi ügyfeleink beszállítói, hanem a következő nagyvállalatok (aktív vagy korábbi) beszállítói (kékre kattintva a forrás): LIDL (DE), ALDI (DE), KMART (AU), JOHN LEWIS (UK)
A forrásokon összesen közel 3000 kínai gyártó cégnevét találjuk. Ezen cégek hátterét leelenőriztük (így), és az 1000 általunk legjobbnak (legkisebb kockázat) ítélt vállalattal felvettük a kapcsolatot. Ezek közül 513 volt nyitott az együttműködésre. Ezen válogatott beszállítók termékeit tartalmazza ez és a többi Kimport katalógus.

Ár? MOQ? Gyártási idő? CE?

A termékek az esetek 99%-ában nincsenek készleten! A gyártási idő beszállítónként és termékcsoportonként változik! A rendelhető minimum mennyiségek beszállítónként és termékcsportonként eltérőek, az árak pedig a gyártási kapacitás, alapanyag árak és árfolyam (USD/RMB) ingadozása miatt változnak, ezért minden esetben egyedi ajánlatot kell kérni! A termékek nagy részéhez van érvényes CE certifikát, de nem minden esetben, viszont megfelelnek a CE sztenderdeknek. Egyes esetekben elképzelhető, hogy külön kell CE-t csináltatni!

Szállítás?

Korlátlan mennyiségű beszállítótól (minden oldalon bal alul található az adott beszállító kódja) lehet rendelni és konszolidáljuk a rendelést úgy, hogy egy (vagy minél kevesebb) rendelésként lehessen kezelni az importfolyamat során. Segíti az ügymenetet, amennyiben egy beszállítótól minél több terméket választunk, és összesen minél kevesebb különböző beszállítótól vásárolunk. Shenzhen, Ningbo, Qingdao, Jinhua és Xi'an városokban is rendelkezünk olyan raktárral ahol az áruk konszolidációját és feladását, igény szerint további címkézési műveleteket végre tudunk hajtani.

Mennyibe kerül ez?

Díjunk az SKU-k száma, áruérték és a kiválasztott beszállítók mennyiségétől függ, jellemzően az áruérték 3-6%-a.

Vámkezelésben, betarifálásban, előzetes szállítási díj kalkulációban is állunk rendelkezésükre, tehát segítünk megállapítani az egy termékre eső megközelítő beszerzési árat (a szállítási díjak előzetesen nem határozhatóak meg 100% pontossággal).

Árajánlatkéréshez kérjük megadni a beszállító kódját és amennyiben van a termékkép mellett termékkód, úgy azt is megjelölni!

Oscillating Sprinklers Series

BJ4614

16-HOLE OSCILLATING SPRINKLER WITH PLASTIC BASE
PKG:COLOR BOX
QTY/OUTER:12PCS
MEAS.:58X44X30CM
N.W.:7.2KGS G.W.: 8.2KGS
PCS 20'/40':456/9360

BJ4615

16 HOLE OSCILLATING SPRINKLER W/RUBBER JET
PKG:COLOR BOX
QTY/OUTER:4PCS
MEAS.:47.8X26X20.5CM
N.W.:1.94KGS G.W.:2.82KGS
PCS.:20'/40':4752/9504

BJ4616

FULL CIRCLE SPRINKLER WITH PLASTIC BASE
PKG:TIED ON CARD
QTY/OUTER:7PCS
MEAS.:68.5X53X13.5CM
N.W.:2.06KGS G.W.:3.68KGS
N.W.:4.5KGS G.W.:5.5KGS
PCS.:20'/40':4032/8568

BJ4617

16 HOLE OSCILLATING SPRINKLER W/PLASTIC JET
PKG:COLOR SLEEVE
QTY/OUTER:7PCS
MEAS.:50X41.5X13.5CM
N.W.:1.88KGS G.W.:2.92KGS
PCS.:20'/40': 6545/13685

BJ4618

18 HOLE OSCILLATING SPRINKLER W/RUBBER JET
PKG: COLOR BOX
QTY/OUTER:4PCS
MEAS.:54.5X32.5X20.5CM
N.W.:2.12KGS G.W.:3.33KGS
PCS:20'/40':3080/6468

BJ4619

17 HOLE OSCILLATING SPRINKLER W/PLASTIC JET
PKG: COLOR SLEEVE
QTY/OUTER:12PCS
MEAS.:47X48X27CM
N.W.:5.8KGS G.W.:6.8KGS
PCS 20'/40':5580/11400

Oscillating Sprinklers Series

BJ4613

18- HOLE METAL OSCILLATING SPRINKLER
W/BRASS NOZZLE
PKG: COLOR BOX
QTY/OUTER:8PCS
MEAS.:51X35X40CM
N.W.:6.6KGS G.W.:7.6KGS
PCS:20'/40':5376/5568

BJ4612

20- HOLE OSCILLATING SPRINKLER
W/PLASTIC NOZZLE
PKG: COLOR BOX
QTY/OUTER:6PCS
MEAS.:52X35X32CM
N.W.:4.23KGS G.W.:5.43KGS
PCS 20'/40':2772/5544

BJ4611

18- HOLE OSCILLATING SPRINKLER
W/RUBBER NOZZLE
PKG: COLOR BOX
QTY/OUTER:6PCS
MEAS.:52X35X32CM
N.W.:4.23KGS G.W.:5.43KGS
PCS 20'/40':2772/5544

Oscillating Sprinklers Series

BJ4609

18 HOLE OSCILLATING SPRINKLER
PKG: COLOR SLEEVE
QTY/OUTER:12PCS
MEAS.:49.5X39.5X45CM
N.W.:11.5KGS G.W.:12.5KGS
PCS:20'/40': 384/0/792/0

BJ4610

20-HOLE OSCILLATING SPRINKLER
MAX. 11 x 9M(4BAR)
MAX. 9.5 x 7.5M(2.75BAR)
PKG: TIE ON CARD
QTY/OUTER: 6PCS
MEAS:53 x 39 x 17.5CM
N.W.: 5.1KGS G.W.: 5.7KGS
PCS 20'/40':6192/12384

BJ4601

17-HOLE OSCILLATING SPRINKLER
PKG: COLOR SLEEVE
QTY/OUTER: 12PCS
MEAS.: 49X40X26CM
N.W.: 3.6KGS G.W.: 4.8KGS
PCS 20'/40': 624/1248

BJ4602

17-HOLE OSCILLATING SPRINKLER
W/JET
PKG: COLOR SLEEVE
QTY/OUTER: 12PCS
MEAS.: 49X42X28CM
N.W.: 3.7KGS G.W.: 4.4KGS
PCS 20'/40': 624/1248

Oscillating Sprinklers Series

BJ4603

19-HOLE OSCILLATING SPRINKLER
PKG: COLOR SLEEVE
QTY/OUTER: 12PCS
MEAS.: 47.5X47.5X27CM
N.W.: 3.7KGS G.W.: 4.5KGS
PCS 20'/40':5580/11400

BJ4604

19-HOLE OSCILLATING SPRINKLER
W/JET
PKG: COLOR SLEEVE
QTY/OUTER: 12PCS
MEAS.: 47.5X47.5X27CM
N.W.: 3.8KGS G.W.: 4.6KGS
PCS 20'/40': 5580/11400

BJ4605

17-HOLE OSCILLATING SPRINKLER
PKG: COLOR SLEEVE
QTY/OUTER: 12PCS
MEAS.: 53X41.5X22CM
N.W.: 3.9KGS G.W.: 4.5KGS
PCS 20'/40': 696/1404

BJ4606

17-HOLE OSCILLATING SPRINKLER
W/JET
PKG: COLOR SLEEVE
QTY/OUTER: 12PCS
MEAS.: 53X41.5X22CM
N.W.: 4.0KGS G.W.: 4.6KGS
PCS 20'/40': 696/1404

BJ4607

19-HOLE OSCILLATING SPRINKLER
PKG: COLOR SLEEVE
QTY/OUTER: 12PCS
MEAS.: 48X37X37CM
N.W.: 7.2KGS G.W.: 8.0KGS
PCS 20'/40': 510/1020

BJ4608

19-HOLE OSCILLATING SPRINKLER
W/JET
PKG: COLOR SLEEVE
QTY/OUTER: 12PCS
MEAS.: 48X37X37CM
N.W.: 7.4KGS G.W.: 8.2KGS
PCS 20'/40': 510/1020

Watering Wand Series

BJ4070

16" Aluminum shower head watering wand with on/off switch
PACKAGING:TIE ON CARD
QTY/OUTER:20PCS
MEAS:64x30x35CM
G.W./N.W.:6.5/5.5KGS
PCS 20'/40': 8300/ 17200

BJ4071

30" Aluminum shower head watering wand with on/off switch
PACKAGING:TIE ON CARD
QTY/OUTER:20PCS
MEAS:82x32x35CM
G.W./N.W.:7.5/6.5KGS
PCS 20'/40': 6500/ 13460

BJ4073

30 in. 9 PATTERN WATERING WAND
9 Selectable patterns: Mist, flat, jet, vertical, fan, center, shower, cone and soaker
PACKAGING:TIE ON CARD
QTY/OUTER:20PCS
MEAS:82x32x35CM
G.W./N.W.:7.5/6.5KGS
PCS 20'/40': 6500/ 13460

BJ4072

18 in. 9 PATTERN WATERING WAND
9 Selectable patterns: Mist, flat, jet, vertical, fan, center, shower, cone and soaker
PACKAGING:TIE ON CARD
QTY/OUTER:20PCS
MEAS:64x30x35CM
G.W./N.W.:8.5/7.5KGS
PCS 20'/40': 8300/ 17200

BJ4067

8 PATTERN WATERING WAND WITH FLOW CONTROL
8 PATTERN: JET-FLAT-SHOWER-MIST-CONE-SOAKER-FAN-QUAD
PACKAGING:TIE ON CARD
QTY/OUTER:20PCS
MEAS:64X30X35CM
G.W./N.W.:7.8/6.8KGS
PCS 20'/40': 8300/ 17200

Watering Wand Series

BJ4069

28 in. 8 PATTERN WATERING WAND WITH FLOW CONTROL
8 PATTERN: JET-FLAT-SHOWER-MIST-CONE-SOAKER-FAN-QUAD
PACKAGING:TIE ON CARD
QTY/OUTER:20PCS
MEAS:64X30X35CM
G.W./N.W.:7.8/6.8KGS
PCS 20'/40': 8300/ 17200

BJ4068

17 in. 8 PATTERN WATERING WAND WITH FLOW CONTROL
8 PATTERN: JET-FLAT-SHOWER-MIST-CONE-SOAKER-FAN-QUAD
PACKAGING:TIE ON CARD
QTY/OUTER:20PCS
MEAS:64X30X35CM
G.W./N.W.:7.8/6.8KGS
PCS 20'/40': 8300/ 17200

BJ4080

9-PATTERN TELESCOPIC WATERING WAND WITH 180° SWIVEL HEAD(92-141 CM)
9 PATTERNS: JET-CENTRAL-CONE-FLAT-FAN-ANGLE-RAIN-SHOWER-MIST
PKG. TIED ON CARD
QTY/OUTER:12PCS
MEAS:96.5X41X14.5CM
G.W./N.W.: 7.2KGS/6.7KGS
PCS:5760PCS/11520PCS

BJ4081

9-PATTERN TELESCOPIC WATERING WAND(92-141CM)
9 PATTERNS: JET-CENTRAL-CONE-FLAT-FAN-ANGLE-RAIN-SHOWER-MIST
PKG: TIED ON CARD
QTY/OUTER:12PCS
MEAS:96.5X41X14.5CM
G.W./N.W.: 7.2KGS/6.7KGS
PCS:5760PCS/11520PCS

BJ4082

9-PATTERN WATERING WAND WITH 180° SWIVEL HEAD (92CM)
9 PATTERNS: JET-CENTRAL-CONE-FLAT-FAN-ANGLE-RAIN-SHOWER-MIST
PKG. TIED ON CARD
QTY/OUTER:12PCS
MEAS:96.5X41X14.5CM
G.W./N.W.: 7.2KGS/6.7KGS
PCS:5760PCS/11520PCS

BJ4083

GARDEN WATERING WAND
PKG:TIED ON CARD
QTY/OUTER:6PCS
MEAS.:92.5X24.5X18.2CM
N.W.:2.00KGS G.W.:2.88KGS
PCS.:20'/40':4212/8424

Watering Wand Series

BJ4090

HIGH PRESSURE ATTACHMENT,
WITH 2-5/BASS NOZZEL
PRODUCT LENGTH:79CM
PACKAGING:BLISTER ON CARD
QTY/OUTER:24PCS
MEAS:90.5x44x19CM
G.W./N.W.:12.9/12KGS
PCS 20'/40': 9600/ 20160

BJ4062

SHOWER WATERING WAND
LENGTH:90CM
PACKAGING:TIE ON CARD
QTY/OUTER:20PCS
MEAS: 113X30X35CM
G.W./N.W.: 7.6/6.3KGS
PCS 20'/40': 4700/ 9700

BJ4060

SHOWER WATERING WAND
LENGTH:70CM
PACKAGING:TIE ON CARD
QTY/OUTER:20PCS
MEAS: 82X30X35CM
G.W./N.W.: 6.7/4.8KGS
PCS 20'/40': 6500/ 13460

BJ4064

SHOWER WATERING WAND
LENGTH:50CM
PACKAGING:TIE ON CARD
QTY/OUTER:20PCS
MEAS: 64X30X35CM
G.W./N.W.: 5.9/4.3KGS
PCS 20'/40': 8300/ 17200

BJ4063

8-PATTERN WATERING WAND
LENGTH:90CM
PACKAGING:TIE ON CARD
QTY/OUTER:20PCS
MEAS: 113X30X33CM
G.W./N.W.: 8.3/6.8KGS
PCS 20'/40': 5000/ 10400

BJ4061

8-PATTERN WATERING WAND
LENGTH:70CM
PACKAGING:TIE ON CARD
QTY/OUTER:20PCS
MEAS: 82X30X33CM
G.W./N.W.: 7.1/6.3KGS
PCS 20'/40': 7000/ 14300

BJ4065

8-PATTERN WATERING WAND
LENGTH:50CM
PACKAGING:TIE ON CARD
QTY/OUTER:20PCS
MEAS: 64X30X33CM
G.W./N.W.: 6.4/4.8KGS
PCS 20'/40': 8900/ 18500

Spray Nozzle Series

BJ4027

ZINC ALLOY SPRAY NOZZLE W/
ADJUSTABLE TIP
PKG: TIE ON CARD
QTY/OUTER: 12PCS
MEAS.: 41X25X16.5CM
N.W.: 4.1KGS G.W: 4.5KGS
PCS 20'/40': 2022/41160

BJ4028

ZINC ALLOY 10-PATTERN SPRAY NOZZLE
10 SPRAY PATTERNS: JET-MIST-SOAKER-
FLAT-ANGLE-VERTICAL-SHOWER-
SHOWER+CENTER-CENTER-CONE
PKG: TIE ON CARD
QTY/OUTER: 12PCS
MEAS.: 41X25X16.5CM
N.W.: 4.4KGS G.W: 4.8KGS
PCS 20'/40': 2022/41160

BJ4027T

ZINC ALLOY SPRAY NOZZLE W/ADJUSTABLE TIP
(TWO KINDS OF TPR COLORS COATED)
PKG:TIED ON CARD
QTY/OUTER:12PCS
MEAS:37.5X29.5X15CM
N.W.:4.1KGS G.W:4.5KGS
PCS 20'/40':2022/41160

BJ4028T

ZINC ALLOY 10-PATTERN SPRAY NOZZLE
(TWO KINDS OF TPR COLORS COATED)
10 SPRAY PATTERNS:
JET-MIST-SOAKER-FLAT-ANGLE-VERTICAL-
SHOWER-SHOWER+CENTER-CENTER-CONE
PKG:TIED ON CARD
QTY/OUTER:12PCS
MEAS.:41X25X16.5CM
N.W.:4.4KGS G.W:4.8KGS
PCS 20'/40': 2022/41160

Spray Nozzle Series

BJ4021

ZINC ALLOY 8-PATTERN SPRAY NOZZLE
8 SPRAY PATTERNS: JET-FLAT-SHOWER-MIST-CONE-SOAKER-FAN-QUAD
PKG: TIE ON CARD
QTY/OUTER: 36PCS
MEAS.: 51X26X35.5CM
N.W.: 14.0KGS G.W: 16.2KGS
PCS 20'/40': 1368/2808

BJ4024

ZINC ALLOY 8-PATTERN SPRAY NOZZLE
8 SPRAY PATTERNS: JET-FLAT-SHOWER-MIST-CONE-SOAKER-FAN-QUAD
PKG: TIE ON CARD
QTY/OUTER: 36PCS
MEAS.: 51X26X51CM
N.W: 14.3KGS G.W: 16.3KGS
PCS 20'/40': 1404/2808

BJ4023

ZINC ALLOY ADJUSTABLE SPRAY NOZZLE
PKG: TIE ON CARD
QTY/OUTER: 48PCS
MEAS.: 51X26X23CM
N.W: 14.8KGS G.W: 17.7KGS
PCS 20'/40': 2208/4032

BJ4017

ZINC ALLOY SPRAY NOZZLE
PKG: TIE ON CARD
QTY/OUTER: 48PCS
MEAS.: 51X26.5X48CM
N.W: 15.2KGS G.W: 17.0KGS
PCS 20'/40': 2160/4464

BJ4020

ZINC ALLOY 8-PATTERN SPRAY NOZZLE
8 SPRAY PATTERNS: JET-FLAT-SHOWER-MIST CONE SOAKER FAN QUAD
PKG: TIE ON CARD
QTY/OUTER: 36PCS
MEAS.: 51X26X35.5CM
N.W: 14.5KGS G.W: 16.7KGS
PCS 20'/40': 1368/2808

BJ4019

ZINC ALLOY 8-PATTERN SPRAY NOZZLE
8 SPRAY PATTERNS: JET-FLAT-SHOWER-MIST CONE SOAKER FAN QUAD
PKG: TIE ON CARD
QTY/OUTER: 36PCS
MEAS.: 51X26X51CM
N.W: 14.2KGS G.W: 16.5KGS
PCS 20'/40': 1332/2736

BJ4018

ZINC ALLOY 8-PATTERN SPRAY NOZZLE
8 SPRAY PATTERNS: JET-FLAT-SHOWER-MIST-CONE-SOAKER-FAN-QUAD
PKG: TIE ON CARD
QTY/OUTER: 36PCS
MEAS.: 51X26X35.5CM
N.W: 11.6KGS G.W: 13.7KGS
PCS 20'/40': 1368/2808

BJ4012

ZINC ALLOY ADJUSTABLE SPRAY NOZZLE
PKG: TIE ON CARD
QTY/OUTER: 48PCS
MEAS.: 51X51X23CM
N.W.: 12.6KGS G.W: 14.6KGS
PCS 20'/40': 2256/4632

Spray Nozzle Series

BJ4013

ZINC ALLOY SPRAY NOZZLE W/ ADJUSTABLE BRASS TIP NOZZLE
PKG: TIE ON CARD
QTY/OUTER: 36PCS
MEAS.: 53X26X33CM
N.W.: 14.1KGS G.W: 15.8KGS
PCS 20'/40': 2070/42480

BJ4011

ZINC ALLOY SPRAY NOZZLE
PKG: TIE ON CARD
QTY/OUTER: 48PCS
MEAS.: 51X51X23CM
N.W: 12.8KGS G.W: 14.6KGS
PCS 20'/40': 2256/46320

BJ4015

ZINC ALLOY 5-1/2" FULL SIZE THREADED SPRAY NOZZLE
PKG: TIE ON CARD
QTY/OUTER: 48PCS
MEAS.: 51X26X32CM
N.W.: 7.5KGS G.W: 9.6KGS
PCS 20'/40': 3120/65520

BJ4016

ZINC ALLOY 5-1/2" DELUXE SPRAY NOZZLE
PKG: TIE ON CARD
QTY/OUTER: 48PCS
MEAS.: 51X26X32CM
N.W.: 8.5KGS G.W: 10.2KGS
PCS 20'/40': 3120/65520

BJ4037

ZINC ALLOY 8 PATTERN SPRAY NOZZLE
WITH BRASS TOOL ADAPTOR
8 SPRAY PATTERN: SHOWER-JET-VERTICAL-CONE-SOAKER-HORIZONTAL-MIST-TRIANGLE
PACKAGING:TIE ON CARD
QTY/OUTER:12PCS
MEAS:33x30x23CM
G.W./N.W: 5.8/4.8KGS
PCS 20'/40': 15240/32160

BJ4038

ZINC ALLOY ADJUSTABLE SPRAY NOZZLE
WITH BRASS TOOL ADAPTOR
PACKAGING:TIE ON CARD
QTY/OUTER:12PCS
MEAS:33x30x23CM
G.W./N.W: 5.8/4.8KGS
PCS 20'/40': 15240/ 32160

BJ4037T

ZINC ALLOY 8 PATTERN SPRAY NOZZEL
WITH TPR CAOTED
WITH BRASS TOOL ADAPTOR
8 SPRAY PATTERN: SHOWER-JET-VERTICAL-CONE-SOAKER-HORIZONTAL-MIST-TRIANGLE
PACKAGING:TIE ON CARD
QTY/OUTER:12PCS
MEAS:33x30x23CM
G.W./N.W: 5.8/4.8KGS
PCS 20'/40': 15240/32160

BJ4038T

ZINC ALLOY ADJUSTABLE SPRAY NOZZEL
WITH TPR CAOTED
WITH BRASS TOOL ADAPTOR
PACKAGING:TIE ON CARD
QTY/OUTER:12PCS
MEAS:33x30x23CM
G.W./N.W: 5.8/4.8KGS
PCS 20'/40': 15240/ 32160

Spray Nozzle Series

BJ6011N

5" SNAP IN ADJUSTING NOZZLE
PKG: BLISTER ON CARD
QTY/OUTER:120PCS
MEAS.:76.5X39.5X38CM
N.W.:13.0KGS G.W.:16.0KGS
PCS:20'/40':68400/140640

BJ6011

5" SNAP-IN ADJUSTABLE NOZZLE
PACKAGING:BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS: 76.5x39.5x38CM
G.W./N.W.: 16.0KGS/13.0KGS
PCS 20'/40' : 68400/ 140640

BJ6011T

5" SNAP-IN ALU ADJUSTABLE NOZZLE
WITH TPR COATED AND SOFT RING
PKG:BLISTER ON CARD
QTY/OUTER:120PCS
MEAS.:76.5X39.5X38CM
N.W.:13.0KGS G.W.:16.0KGS
PCS 20'/40':68400/140640

BJ6012

PLASTIC ADJUSTABLE SPRAY NOZZLE
PKG: TIE ON CARD
QTY/OUTER: 64PCS
MEAS : 51X51X28CM
N.W.: 6.4KGS G.W: 6.8KGS
PCS 20'/40': 2464/50880

BJ6013

PLASTIC 6-PATTERN SPRAY NOZZLE
6 SPRAY PATTERNS: JET-FLAT-SHOWER-MIST-CONE-SOAKER-FAN-QUAD
PKG: TIE ON CARD
QTY/OUTER: 36PCS
MEAS : 51X28X51CM
N.W.: 5.3KGS G.W: 7.3KGS
PCS 20'/40': 1484/30600

BJ6014

PLASTIC 5-PATTERN SPRAY NOZZLE
5 SPRAY PATTERNS:FULL FUNCTION-GENTLE SHOWER-SHARP STEAM-MIST-FLAT SPRAY
PKG:TIE ON CARD
QTY/OUTER: 48PCS
MEAS: 51×25.5×56.5CM
N.W.: 4.5KGS G.W.:6.8KGS
PCS 20'/40' : 1776/ 36480

BJ6015

PLASTIC 8-PATTERN SPRAY NOZZLE
8 SPRAY PATTERNS: JET-FLAT-SHOWER-MIST-CONE-SOAKER-FAN-QUAD
PKG: TIE ON CARD
QTY/OUTER: 36PCS
MEAS.: 51X28X54CM
N.W.: 6.7KGS G.W: 8.8KGS
PCS 20'/40': 1404/28980

BJ6019

PLASTICS- PATTERN WATER NOZZLE W/FLOW CONTROL
5 PATTERN: JET-FLAT-SHOWER-MIST-CONE-
PACKAGING:TIE ON CARD
QTY: 6PCS/36PCS
MEAS: 51×28×54CM
G.W./N.W.:7.8KGS/6.8KGS
PCS 20'/40': 1404/ 28980

Spray Nozzle Series

BJ6033

Plastic spray nozzle w/Aluminum adjustable tip
PACKAGING:TIE ON CARD
QTY:8PCS/64PCS
MEAS:52×51×28CM
G.W./N.W.:8.5/7.0 kgs
PCS 20'/40': 2464/ 50880

BJ6034

PLASTIC 6- PATTERN SPRAY GUN
6SPRAY PATTERNS:
JET-FLAT-SHOWER- MIST-CONE-SOAKER
PACKAGING:TIE ON CARD
QTY:6PCS/36PCS
MEAS:51×28×51CM
G.W./N.W.:7.8KGS/6.8KGS
PCS 20'/40': 1494/ 30600

BJ6035

3 WAY ADJUSTABLE NOZZEL
PACKAGING:TIE ON CARD
QTY:8PCS/64PCS
MEAS:52×51×28CM
G.W./N.W.:8.0/7.0 KGS
PCS 20'/40': 2464/ 50880

BJ6036

PLASTIC 9- PATTERN SPRAY GUN
9 PATTERN: JET-FLAT-SHOWER-MIST-CONE-SOAKER-FAN-QUAD-CENTER
PACKAGING:TIE ON CARD
QTY:6PCS/36PCS
MEAS:51×28×51CM
G.W./N.W.:7.8KGS/6.8KGS
PCS 20'/40': 1494/ 30600

Spray Nozzle Series

BJ6037

PLASTIC ADJUSTABLE SPRAY GUN WITH FLOW CONTROL
PKG:TIED ON CARD
QTY/OUTER:8PCS/64PCS
MEAS.:52X51X26CM
N.W.:8.00KGS G.W.:9.00KGS
PCS.:20'/40':2464/5060

BJ6038

PLASTIC 9-PATTERN SPRAY GUN: JET MIST -SOAKER- FLAT VERTICAL SHOWER -FAN- CONE CENTER
PKG:TIED ON CARD
QTY/OUTER:6PCS/36PCS
MEAS.:51X26X51CM
N.W.:5.60KGS G.W.:6.80KGS
PCS :20'/40':14940/30600

BJ6039

PLASTIC ADJUSTABLE SPRAY GUN WITH FLOW CONTROL
PKG:TIED ON CARD
QTY/OUTER:12PCS
MEAS.:37X27.5X28CM
N.W.:2.60KGS G.W.:3.96KGS
PCS.:20'/40':11520/24192

BJ6040

4-PATTERN SPRAY NOZZLE
PKG:TIED ON CARD
QTY/OUTER:12PCS
MEAS.:37X27.5X28CM
N.W.:2.88KGS G.W.:4.00KGS
PCS.:20'/40':11520/24192

Plastic Fitting Series

BJ6701

½" ALUMINUM HOSE CONNECTOR WITH TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER:60PCS
MEAS.:33X26.5X28.5CM
N.W.5.62KGS G.W.:6.31KGS
PCS:20'/40':7060/137760

BJ6702

½" ALUMINUM WATERSTOP HOSE CONNECTOR WITH TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER:60PCS
MEAS.:33X26.5X28.5CM
N.W.:5.62KGS G.W.:6.31KGS
PCS:20'/40':7060/137760

BJ6703

½" ALUMINUM HOSE MENDER WITH TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER:60PCS
MEAS.:33X26.5X28.5CM
N.W.:6.1KGS G.W.:6.6KGS
PCS:20'/40':6720/137760

BJ6704

3/4" ALUMINUM HOSE CONNECTOR WITH TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER:60PCS
MEAS.:33X25.5X33CM
N.W.:7.85KGS G.W.:7.2KGS
PCS:20'/40':6426O/132300

BJ6705

3/4" ALUMINUM WATERSTOP HOSE CONNECTOR WITH TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER:60PCS
MEAS.:33X25.5X33CM
N.W.:7.85KGS G.W.:7.2KGS
PCS:20'/40':6426O/132300

BJ6706

3/4" ALUMINUM HOSE MENDER WITH TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER:60PCS
MEAS.:33X25.5X33CM
N.W.:9.5KGS G.W.:10.0KGS
PCS:20'/40':6480/115920

BJ6707

1/2" HOSE CONNECTOR WITH TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER:120PCS
MEAS.:52X33X28.5CM
N.W.:2.97KGS G.W.:3.84KGS
PCS:20'/40':7392O /147840

BJ6708

1/2" WATERSTOP HOSE CONNECTOR WITH TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER:120PCS
MEAS.:53X33X28.5CM
N.W.:3.60KGS G.W.:3.94KGS
PCS:20'/40':7392O /147840

BJ6709

1/2" HOSE MENDER WITH TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER:60PCS
MEAS.:33X26.5X29CM
N.W.:3.2KGS G.W.:3.96KGS
PCS:20'/40':6480/115920

BJ6710

3/4" HOSE CONNECTOR WITH TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER:60PCS
MEAS.:33X25.5X33CM
N.W.:4.2KGS G.W.:4.73KGS
PCS:20'/40':6426O/132300

BJ6711

3/4" WATERSTOP HOSE CONNECTOR WITH TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER:60PCS
MEAS.:33X25.5X33CM
N.W.:4.3KGS G.W.:4.83KGS
PCS:20'/40':6426O/132300

BJ6712

3/4" HOSE MENDER WITH TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER:60PCS
MEAS.:36X25.5X30CM
N.W.:4.6KGS G.W.:5.70KGS
PCS:20'/40':6480/115920

Plastic Fitting Series

BJ6713

1/2" HOSE CONNECTOR
PKG: BLISTER ON CARD
QTY/OUTER:120PCS
MEAS: 52X33X28.5CM
N.W.:2.37KGS G.W.:3.94KGS
PCS:20'/40': 73920 /147840

BJ6714

1/2"WATERSTOP HOSE CONNECTOR
PKG: BLISTER ON CARD
QTY/OUTER:120PCS
MEAS.:53X33X28.5CM
N.W:3.60KGS G.W.:3.94KGS
PCS:20'/40':73920 /147840

BJ6715

1/2"HOSE MENDER
PKG: BLISTER ON CARD
QTY/OUTER:60PCS
MEAS: 36X26.5X29CM
N.W.:2.2KGS G.W.:3.98KGS
PCS:20'/40': 60480/115920

BJ6716

3/4" HOSE CONNECTOR
PKG: BLISTER ON CARD
QTY/OUTER:60PCS
MEAS: 55X25.5X33CM
N.W.:4.2KGS G.W.:4.73KGS
PCS:20'/40':64260/132300

BJ6717

3/4" WATERSTOP HOSE CONNECTOR
PKG: BLISTER ON CARD
QTY/OUTER:60PCS
MEAS.:55X25.5X33CM
N.W.:4.5KGS G.W.:4.83KGS
PCS:20'/40':64260/132300

BJ6718

3/4" HOSE MENDER
PKG: BLISTER ON CARD
QTY/OUTER:60PCS
MEAS.:36X25.5X33CM
N.W.:5.8KGS G.W.:5.70KGS
PCS:20'/40':60480/115920

BJ6801

HOSE CONNECTOR FOR
1/2" ,3/4" AND 5/8"
PACKAGING: BLISTER ON CARD
QTY:240PCS
MEAS:55X35X38CM
G.W./N.W:9.5KGS/8.5KGS
PCS 20'/40':93600/193200

BJ6802

WATERSTOP HOSE CONNECTOR
FOR 1/2" ,3/4" AND 5/8"
PACKAGING: BLISTER ON CARD
QTY:240PCS
MEAS:55X35X38CM
G.W./N.W:9.5KGS/8.5KGS
PCS 20'/40':93600/193200

BJ6803

HOSE MENDER FOR 1/2" ,3/4" AND 5/8"
PACKAGING: BLISTER ON CARD
QTY:240PCS
MEAS:55X35X38CM
G.W./N.W: 9.5KGS/8.5KGS
PCS 20'/40':93600/193200

BJ6804

½" HOSE CONNECTOR WITH
TPR COATED AND ALU RING
PACKAGING: BLISTER ON CARD
QTY: 240PCS
MEAS: 55X35X38CM
G.W./N.W.: 9.5KGS/8.5KGS
PCS 20'/40': 93600/193200

BJ6805

½" WATERSTOP HOSE CONNECTOR
WITH TPR COATED AND ALU RING
PACKAGING: BLISTER ON CARD
QTY: 240PCS
MEAS: 55X35X38CM
G.W./N.W.: 9.5KGS/8.5KGS
PCS 20'/40': 93600/193200

BJ6806

½" HOSE MENDER
PACKAGING: BLISTER ON CARD
QTY:240PCS
MEAS:55X35X38CM
G.W./N.W:9.5KGS/8.5KGS
PCS 20'/40':93600/193200

Plastic Fitting Series

BJ6603A

1/2" HOSE CONNECTOR
WITH TPR COATED
PACKAGING:BLISTER ON CARD
QTY: 20PCS/240PCS
MEAS: 55×35×38CM
G.W./N.W.: 9.5KGS/8.5KGS
PCS 20'/40': 93600/ 193200

BJ6604A

1/2" WATERSTOP HOSE CONNECTOR
WITH TPR COATED
PACKAGING:BLISTER ON CARD
QTY: 20PCS/240PCS
MEAS: 55×35×38CM
G.W./N.W.: 9.5KGS/8.5KGS
PCS 20'/40': 93600/ 193200

BJ6010A

½"HOSE MENDER ,PLASTIC INNER
PACKAGING: BLISTER ON CARD
QTY: 20PCS/240PCS
MEAS: 48×34×38CM
G.W/N.W.: 9.8KGS/8.8KGS
PCS 20'/40': 93600/ 193200

BJ6605A

3/4" HOSE CONNECTOR WITH TPR
COATED AND ALUMINUM CAP
PACKAGING:BLISTER ON CARD
QTY: 20PCS/240PCS
MEAS: 55×35×40CM
G.W./N.W.: 12.0KGS/9.8KGS
PCS 20'/40': 88800/ 185120

BJ6606A

3/4" WATERSTOP HOSE CONNECTOR
WITH TPR COATED AND ALUMINUM CAP
PACKAGING:BLISTER ON CARD
QTY: 20PCS/240PCS
MEAS: 55×35×40CM
G.W./N.W.: 12.5KGS/10.8KGS
PCS 20'/40': 88800/ 185120

BJ6403A

3/4" HOSE MENDER ,PLASTIC INNER
CORE WITH ALU CAP
PKG:BLISTER ON CARD
QTY/OUTER:240PCS
MEAS:54×35×43CM
N.W.:7.06KGS G.W.:7.68
PCS 20'/40':107520/220800

BJ6609

ADJUSTABLE ANGLE CONNECTOR
FOR 1/2" HOSE

BJ6610

ADJUSTABLE WATERSTOP ANGLE
CONNECTOR
FOR 1/2"HOSE

BJ6611

1/2" HOSE MENDER

BJ6719

1/2" HOSE CONNECTOR
WITH ON/OFF SWITCH
PKG: TIED ON CARD
QTY/OUTER:60PCS
MEAS.:39X32.5X36.5CM
N.W.:6.7KGS G.W.:7.59KGS
PCS:20'/40':36720 /75600

BJ6720

3/4" HOSE CONNECTOR
WITH ON/OFF SWITCH
PKG: TIED ON CARD
QTY/OUTER:60PCS
MEAS.:39X36.5X36.0CM
N.W.:7.2KGS G.W:8.58KGS
PCS:20'/40':30240 /64800

BJ6601

1/2" HOSE CONNECTOR SOFT FACE
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 54X35X38CM
N.W.: 8.2KGS G.W.: 10.3KGS
PCS 20'/40': 93600/193200

BJ6602

1/2" WATERSTOP HOSE CONNECTOR
SOFT FACE
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 54X35X38CM
N.W.: 8.7KGS G.W.: 10.8KGS
PCS 20'/40': 93600/193200

Plastic Fitting Series

BJ6605

3/4" HOSE CONNECTOR SOFT FACE
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 54X35X40CM
N.W.: 9.6KGS G.W.: 11.8KGS
PCS 20'/40': 88800/183120

BJ6606

3/4" WATERSTOP HOSE CONNECTOR SOFT FACE
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 54X35X40CM
N.W.: 10.1KGS G.W.: 12.4KGS
PCS 20'/40': 88800/183120

BJ6006A

1/2" HOSE CONNECTOR
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 54X36X40CM
N.W.: 8.9KGS G.W.: 11.1KGS
PCS 20'/40': 88800/183120

BJ6007A

1/2" WATERSTOP HOSE CONNECTOR
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 54X35X40CM
N.W.: 9.4KGS G.W.: 11.6KGS
PCS 20'/40': 88800/183120

BJ6006

1/2" HOSE CONNECTOR
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 54X35X38CM
N.W.: 9.2KGS G.W.: 10.3KGS
PCS 20'/40': 93600/183200

BJ6007

1/2" WATERSTOP HOSE CONNECTOR
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 54X35X38CM
N.W.: 8.7KGS G.W.: 10.8KGS
PCS 20'/40': 93600/183200

BJ6010

1/2" HOSE MENDER
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 48X34X38CM
N.W.: 6.0KGS G.W.: 7.8KGS
PCS 20'/40': 107520/220800

BJ6401

3/4" HOSE CONNECTOR
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 54X35X40CM
N.W.: 9.6KGS G.W.: 11.9KGS
PCS 20'/40': 88800/183120

BJ6402

3/4" WATERSTOP HOSE CONNECTOR
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 54X36X40CM
N.W.: 10.1KGS G.W.: 12.4KGS
PCS 20'/40': 88800/183120

BJ6403

3/4" HOSE MENDER
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 54X35X43CM
N.W.: 9.8KGS G.W.: 12.0KGS
PCS 20'/40': 84000/171600

BJ6007F

3/4"FEMALE THREAD CONNECTOR
PKG:BLISTER ON CARD
QTY/OUTER:240PCS
MEAS.:54×35×38CM
N.W.:7.7KGS G.W.:9.8KGS
PCS 20'/40':93600/193200

BJ6006M

3/4" MALE THREAD CONNECTOR
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 54X35X38CM
N.W.: 7.5KGS G.W.: 9.8KGS
PCS 20'/40': 93600/193200

BJ6501

3/8" HOSE CONNECTOR
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 53X35X37CM
N.W.: 5.6KGS G.W.: 7.6KGS
PCS 20'/40': 96400/202800

BJ6502

3/8" WATERSTOP HOSE CONNECTOR
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 53X35X37CM
N.W.: 6.0KGS G.W.: 8.0KGS
PCS 20'/40': 96400/202800

Plastic Fitting Series

BJ6002

3/4" TAP ADAPTOR
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 48X34.5X36CM
N.W.: 3.8KGS G.W.: 5.5KGS
PCS 20'/40': 116640/240000

BJ6002A

1/2"-3/4" TAP ADAPTOR
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 48X34X36CM
N.W.: 5.1KGS G.W.: 6.8KGS
PCS 20'/40': 109200/224400

BJ6002B

1" TAP ADAPTOR
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 46.5X34.5X36CM
N.W.: 4.8KGS G.W.: 6.7KGS
PCS 20'/40': 114720/235680

BJ6003

3/4"-1" TAP ADAPTOR
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 48X34X40CM
N.W.: 6.3KGS G.W.: 8.2KGS
PCS 20'/40': 105600/216480

BJ6003A

1/2"-3/4"-1" TAP ADAPTOR
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 48X34X40CM
N.W.: 7.0KGS G.W.: 9.0KGS
PCS 20'/40': 105600/216480

BJ6003C

UNIVERSAL TAP ADAPTOR
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 58X41X48CM
N.W.: 12.0KGS G.W.: 15.0KGS
PCS 20'/40': 61200/126000

BJ6003N

3/4"-1" TAP ADAPTOR
WITH TPR COATED
PKG:BLISTER ON CARD
QTY./OUTER:240PCS
MEAS.:48X34X40CM
N.W.:6.5KGS G.W.: 8.5KGS
PCS 20'/40':105600/216480

BJ6003T

ROUND TAP CONNECTOR
WITH 1/2" HOSE CONNECTION AND METAL
CLIP FOR TAP WITHOUT THREAD AND WITH
ROUND SPOUT(EXTERNAL DIAME. 21.7-25.5MM
MIN.24MM TO MAX. 28CM
PKG:LUCKING BLISTER CARD
QTY./OUTER:6PCS
MEAS.:27.5X24X15CM
N.W.:2.6KGS G.W.: 3.1KGS
PCS 20'/40':39000/78000

BJ6004

3/4" TOOL ADAPTOR
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 48X34.5X36CM
N.W.: 3.2KGS G.W.: 4.6KGS
PCS 20'/40': 116640/240000

BJ6009N

2-WAY COUPLING
WITH TPR COATED
PKG:BLISTER ON CARD
QTY./OUTER:240PCS
MEAS.:48X33X36CM
N.W.:4.2KGS G.W.: 5.8KGS
PCS 20'/40':116805/244800

BJ6009B

2-WAY COUPLING
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 48X35X36CM
N.W.: 4.2KGS G.W.: 5.8KGS
PCS 20'/40': 116802/244800

BJ6009

3-WAY COUPLING
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 51X31X48CM
N.W.: 7.2KGS G.W.: 8.9KGS
PCS 20'/40': 112800/232080

BJ6009T

3-WAY COUPLING WITH TPR COATED
PKG: TIED ON CARD
QTY/OUTER:80PCS
MEAS.:39.5X31X29.5CM
N.W.:5.02KGS G.W.:6.04KGS
PCS:20'/40':62720 /129920

Plastic Fitting Series

BJ6025

TWO-WAY DISTRIBUTOR
WITH TWO SWITCHES
PKG: TIED ON CARD
QTY/OUTER:24PCS
MEAS.:51X46X45.0CM
N.W.:5.0KGS G.W.:5.50KGS
PCS:20'/40':6800/13600

BJ6026

FOUR-WAY DISTRIBUTOR WITH FOUR
SWITCHES AND PLASTIC ADAPTOR
PKG: TIED ON CARD
QTY/OUTER:24PCS
MEAS.:51X46X45.0CM
N.W.:5.0KGS G.W.:5.50KGS
PCS:20'/40':6800/13600

BJ6027

FOUR-WAY DISTRIBUTOR WITH FOUR
SWITCHES AND ALUMINIUM ADAPTOR
PKG: TIED ON CARD
QTY/OUTER:12PCS
MEAS.:31X45X45.0CM
N.W.:4.90KGS G.W.:5.54KGS
PCS:20'/40':5400/11400

BJ6023

3/4"Y-SWITCH COUPLING W/SWIVEL
PKG:BLISTER ON CARD
QTY/OUTER:200PCS
MEAS:28x28x77.5CM
N.W:8.6KGS G.W.:12.3KGS
PCS:20'/40':48200/99000

BJ6024

3/4"-1" DUAL SNAP-IN COUPLING
WITHOUT OFF, W/SWIVEL
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 64.5X41X82CM
N.W.: 15.4KGS G.W.: 20.0KGS
PCS:20'/40': 4152/8640

BJ6024A

3/4"-1" DUAL SNAP-IN COUPLING
WITH ALU CAP
WITHOUT OFF, W/SWIVEL
PKG:BLISTER ON CARD
QTY/OUTER:240PCS
QTY/64.5x41x82CM
N.W.:15.4KGS G.W.:20.0KGS
PCS:20'/40':4152/8640

BJ6100A

4PCS BASIC SET FOR 1/2" HOSE
INCL.: 6011, 6006, 6007, 6002
PKG: BLISTER ON CARD
QTY/OUTER: 48SETS
MEAS.: 51X33.5X27CM
N.W.: 6.5KGS G.W.: 8.5KGS
PCS 20'/40': 3000/6168

BJ6100B

4PCS BASIC SET FOR 1/2" HOSE
INCL.: 6011, 6006, 6007, 6003
PKG: BLISTER ON CARD
QTY/OUTER: 48SETS
MEAS.: 51X33.5X27CM
N.W.: 6.8KGS G.W.: 8.8KGS
PCS 20'/40': 3000/6168

BJ6100C

4PCS BASIC SET FOR 3/4" HOSE
INCL.: 6011, 6401, 6402, 6002
PKG: BLISTER ON CARD
QTY/OUTER: 48SETS
MEAS.: 49X25X43CM
N.W.: 7.2KGS G.W.: 9.2KGS
PCS 20'/40': 2232/45600

BJ6100D

4PCS BASIC SET FOR 3/4" HOSE
INCL.: 6011, 6401, 6402, 6003
PKG: BLISTER ON CARD
QTY/OUTER: 48SETS
MEAS.: 49X25X43CM
N.W.: 7.6KGS G.W.: 9.6KGS
PCS 20'/40': 2232/45600

Plastic Fitting Series

BJ6102A

ADJUSTABLE SPRAY NOZZLE SET
INCL.: 6012, 6006, 6007, 6002
PKG: SLIDING CARD
QTY/OUTER: 48SETS
MEAS.: 46X35X53CM
N.W.: 8.8KGS G.W.: 11.0KGS
PCS 20'/40': 15840/32640

BJ6102B

ADJUSTABLE SPRAY NOZZLE SET
INCL.: 6012, 6006, 6007, 6003
PKG: SLIDING CARD
QTY/OUTER: 48SETS
MEAS.: 46X35X53CM
N.W.: 9.1KGS G.W.: 11.3KGS
PCS 20'/40': 15840/32640

BJ6103A

6-PATTERN SPRAY NOZZLE SET
INCL.: 6013, 6006, 6007, 6002
PKG: SLIDING CARD
QTY/OUTER: 36SETS
MEAS.: 57X36X56CM
N.W.: 8.7KGS G.W.: 10.2KGS
PCS 20'/40': 8820/18000

BJ6103B

6-PATTERN SPRAY NOZZLE SET
INCL.: 6015, 6006, 6007, 6003
PKG: SLIDING CARD
QTY/OUTER: 36SETS
MEAS.: 57X36X56CM
N.W.: 10.0KGS G.W.: 11.5KGS
PCS 20'/40': 8820/18000

BJ6104A

6-PATTERN SPRAY NOZZLE SET
INCL.: 6014, 6006, 6007, 6002
PKG: SLIDING CARD
QTY/OUTER: 36SETS
MEAS.: 57X36X56CM
N.W.: 8.8KGS G.W.: 8.0KGS
PCS 20'/40': 8820/18000

BJ6104B

6-PATTERN SPRAY NOZZLE SET
INCL.: 6014, 6006, 6007, 6003
PKG: SLIDING CARD
QTY/OUTER: 36SETS
MEAS.: 57X36X56CM
N.W.: 8.9KGS G.W.: 8.2KGS
PCS 20'/40': 8820/18000

BJ6105A

6-PATTERN SPRAY NOZZLE SET
INCL.: 6015, 6006, 6007, 6002
PKG: SLIDING CARD
QTY/OUTER: 36SETS
MEAS.: 57X36X56CM
N.W.: 9.8KGS G.W.: 11.3KGS
PCS 20'/40': 8820/18000

BJ6105B

6-PATTERN SPRAY NOZZLE SET
INCL.: 6015, 6006, 6007, 6003
PKG: SLIDING CARD
QTY/OUTER: 36SETS
MEAS.: 57X36X56CM
N.W.: 10.0KGS G.W.: 11.5KGS
PCS 20'/40': 8820/18000

Brass Fitting Series

BJ3004

3/4" BRASS TOOL ADAPTOR
PKG: BLISTER ON CARD
QTY/OUTER: 200PCS
MEAS.: 34.5X30X37.5CM
N.W.: 7.6KGS G.W.: 9.0KGS
PCS 20'/40': 144000/259200

BJ3004A

1" BRASS TOOL ADAPTOR
PKG: BLISTER ON CARD
QTY/OUTER: 200PCS
MEAS.: 38X32X48CM
N.W.: 10.0KGS G.W.: 11.2KGS
PCS 20'/40': 103000/211000

BJ3004L

3/4" BRASS 3-SECTION ADAPTOR
PKG: BLISTER ON CARD
QTY/OUTER: 200PCS
MEAS.: 38X32X48CM
N.W.: 9.8KGS G.W.: 11.0KGS
PCS 20'/40': 103000/211000

BJ3002

3/4" BRASS TAP ADAPTOR
PKG: BLISTER ON CARD
QTY/OUTER: 200PCS
MEAS.: 30.5X28X45.5CM
N.W.: 8.4KGS G.W.: 10.0KGS
PCS 20'/40': 121000/248000

BJ3003

1" BRASS TAP ADAPTOR
PKG: BLISTER ON CARD
QTY/OUTER: 200PCS
MEAS.: 35.5X30X45.5CM
N.W.: 10.2KGS G.W.: 11.8KGS
PCS 20'/40': 116000/239000

BJ3005

1/2"-3/4" BRASS TAP ADAPTOR
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 30.5X32X30CM
N.W.: 11.8KGS G.W.: 13.2KGS
PCS 20'/40': 115600/239800

BJ3008

BRASS 2-WAY COUPLING
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 50X32X22CM
N.W.: 12.0KGS G.W.: 13.3KGS
PCS 20'/40': 192000/396000

BJ3009

BRASS 3-WAY COUPLING
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 34X22X51.5CM
N.W.: 20.5KGS G.W.: 21.8KGS
PCS 20'/40': 116800/188800

BJ3001

3/4"-1 BRASS TAP ADAPTOR
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 35X32X37CM
N.W.: 15.8KGS G.W.: 17.3KGS
PCS 20'/40': 100800/224000

BJ3006A

1/2" BRASS HOSE CONNECTOR
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 35X30X44CM
N.W.: 16.0KGS G.W.: 18.4KGS
PCS 20'/40': 106400/236800

BJ3007A

1/2" BRASS HOSE CONNECTOR W/STOP
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 37X30X44CM
N.W.: 17.7KGS G.W.: 19.2KGS
PCS 20'/40': 106400/216000

BJ3010

1/2" BRASS HOSE MENDER
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 35X32X37CM
N.W.: 16.0KGS G.W.: 17.5KGS
PCS 20'/40': 106800/224000

Brass Fitting Series

BJ3401A

3/4"BRASS HOSE CONNECTOR
PKG:BLISTER ON CARD
QTY/OUTER: 120PCS
MEAS: 34X23X51.5CM
G.W./N.W.: 19.3KGS/18.0KGS
PCS 20'/40': 84000/157200

BJ3402A

3/4"BRASS HOSE CONNECTOR W/stop
PKG:BLISTER ON CARD
QTY/OUTER: 120PCS
MEAS: 34X23X51.5CM
G.W./N.W.: 21.5KGS/20.2KGS
PCS 20'/40': 84000/157200

BJ3403

3/4" BRASS HOSE MENDER
PKG: BLISTER ON CARD
QTY/OUTER: 120PCS
MEAS.: 37X35X32CM
N.W.: 18.6KGS G.W.: 20.1KGS
PCS 20'/40': 81600/153600

BJ3007F

3/4" BRASS FEMALE COUPLING
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 32X28X49CM
N.W.: 14.0KGS G.W.: 15.9KGS
PCS 20'/40': 110400/227200

BJ3006M

3/4" BRASS MALE COUPLING
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 32X28X49CM
N.W.: 14.2KGS G.W.: 15.7KGS
PCS 20'/40': 110400/227200

BJ3024

3/4" BRASS 3-WAY SHUT OFF COUPLING W/WALE
PKG: BLISTER ON CARD
QTY/OUTER: 80PCS
MEAS.: 43X41X31CM
N.W.: 18.1KGS G.W.: 19.7KGS
PCS 20'/40': 41200/84800

BJ3030

3/4" BRASS 2-WAY SHUT OFF COUPLING W/WALE
PKG: BLISTER ON CARD
QTY/OUTER: 80PCS
MEAS.: 43X41X31CM
N.W.: 20.1KGS G.W.: 21.7KGS
PCS 20'/40': 41200/84800

BJ3031

3/4"BRASS 2-WAY COUPLING
PKG: TIE ON CARD
QTY/OUTER: 80PCS
MEAS.: 40X35X30CM
N.W.: 11.0KGS G.W.: 12.5KGS
PCS 20'/40': 53600/110400

BJ7006T

1/2"ALUMINUM HOSE CONNECTOR WITH TPR COATED
PACKAGING:BLISTER ON CARD
QTY: 20PCS/240PCS
MEAS: 52x38x38CM
G.W./N.W.: 13.8KGS/12.8KGS
PCS 20'/40': 91680/ 187200

BJ7007T

1/2" WATERSTOP ALUMINUM HOSE CONNECTOR WITH TPR COATED
PACKAGING:BLISTER ON CARD
QTY: 20PCS/240PCS
MEAS: 52x38x38CM
G.W./N.W.: 14KGS/13KGS
PCS 20'/40': 91680/ 187200

BJ7001T

3/4"-1" ALUMINUM TAP ADAPTOR WITH TPR COATED
PACKAGING:BLISTER ON CARD
QTY: 20PCS/240PCS
MEAS: 52x38x45CM
G.W./N.W.: 10.6KGS/9.6KGS
PCS 20'/40': 75600/ 153600

BJ7008

ALUMINIUM 2 WAY COUPLING
PACKAGING:BLISTER ON CARD
QTY: 20PCS/240PCS
MEAS: 50x32x22CM
G.W./N.W.: 4.6KGS/3.5KGS
PCS 20'/40': 192000/398030

BJ7009

ALUMINIUM 3 WAY COUPLING
PACKAGING:BLISTER ON CARD
QTY: 20PCS/240PCS
MEAS: 51x21x48CM
G.W./N.W.: 11.8KGS/10.8KGS
PCS 20'/40': 112800/ 232080

BJ7008T

ALUMINIUM 2-WAY COUPLING WITH TPR
PKG: BLISTER ON CARD
QTY/OUTER:80PCS
MEAS.:32.5X26X28CM
N.W:3.06KGS G.W:3.56KGS
PCS:20'/40':38560 /207360

BJ7009T

ALUMINIUM 3-WAY COUPLING WITH TPR
PKG: BLISTER ON CARD
QTY/OUTER:80PCS
MEAS.:39.5X31X29.5CM
N.W.:5.03KGS G.W:6.04KGS
PCS:20'/40':62720 /129920

Brass Fitting Series

BJ3011
4" BRASS ADJUSTABLE NOZZLE
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 34X31X36.5CM
N.W.: 19.4KGS G.W.: 20.8KGS
PCS 20'/40': 117600/199400

BJ3011L
4" BRASS ADJUSTABLE NOZZLE
WITH 3/4" 3-SECTION ADAPTOR
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 34X31X36.5CM
N.W.: 25.6KGS G.W.: 27.0KGS
PCS 20'/40': 117600/153600

BJ3013
4" BRASS ADJUSTABLE NOZZLE
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 42X31X36CM
N.W.: 19.0KGS G.W.: 20.4KGS
PCS 20'/40': 68800/162400

BJ3014
4" BRASS ADJUSTABLE NOZZLE
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 34X31X36.5CM
N.W.: 17.8KGS G.W.: 19.2KGS
PCS 20'/40': 117600/214400

BJ3014A
4" BRASS ADJUSTABLE NOZZLE
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 34X31X36.5CM
N.W.: 17.8KGS G.W.: 19.2KGS
PCS 20'/40': 117600/214400

BJ3014S
3" BRASS ADJUSTABLE NOZZLE
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 34X31X36.5CM
N.W.: 14.4KGS G.W.: 15.9KGS
PCS 20'/40': 117600/210800

BJ3015
4" BRASS ADJUSTABLE NOZZLE
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 45X30X44CM
N.W.: 20.0KGS G.W.: 21.4KGS
PCS 20'/40': 76000/156000

BJ3015T
4" BRASS ADJUSTABLE NOZZLE
W/TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 45X33X46CM
N.W.: 23.0KGS G.W.: 24.9KGS
PCS 20'/40': 68000/139200

BJ3016
4" BRASS ADJUSTABLE NOZZLE
PKG: BLISTER ON CARD
QTY/OUTER: 160PCS
MEAS.: 34X31X36.5CM
N.W.: 19.0KGS G.W.: 20.4KGS
PCS 20'/40': 117600/203200

BJ3026
3/4" BRASS 3-WAY SHUT OFF COUPLING W/VALVE
PKG: POLYBAG
QTY/OUTER: 24PCS
MEAS.: 30X25X19.5CM
N.W.: 13.9KGS G.W.: 14.9KGS
PCS 20'/40': 31920/41520

BJ3026A
3/4" BRASS 3-WAY SHUT OFF COUPLING W/VALVE
PKG: POLYBAG
QTY/OUTER: 24PCS
MEAS.: 30X25X19.5CM
N.W.: 12.7KGS G.W.: 13.7KGS
PCS 20'/40': 34800/45120

BJ3027
3/4" BRASS HOSE CONNECTOR W/STOP
PKG: BLISTER ON CARD
QTY/OUTER: 120PCS
MEAS.: 34X23X51.5CM
N.W.: 20.2KGS G.W.: 21.5KGS
PCS 20'/40': 84000/174000

BJ3027A
3/4" BRASS 4-WAY SHUT OFF COUPLING W/VALVE
PKG: POLYBAG
QTY/OUTER: 24PCS
MEAS.: 31.5X30X19.5CM
N.W.: 21.3KGS G.W.: 22.3KGS
PCS 20'/40': 22080/27840

Brass Fitting Series

BJ3001T
3/4"-1" BRASS TAP ADAPTOR
W/TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 51.5X39.5X45CM
N.W.: 25.4KGS G.W.: 26.9KGS
PCS 20'/40': 76800/115000

BJ3002T
3/4" BRASS TAP ADAPTOR
W/TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 45.5X39.5X39CM
N.W.: 12.9KGS G.W.: 14.4KGS
PCS 20'/40': 99600/204000

BJ3003T
1" BRASS TAP ADAPTOR
W/TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER: 240PCS
MEAS.: 45.5X39.5X47CM
N.W.: 15.0KGS G.W.: 16.5KGS
PCS 20'/40': 82800/169200

BJ3006AT
1/2" BRASS HOSE CONNECTOR
W/TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER: 120PCS
MEAS.: 37X35X32CM
N.W.: 15.3KGS G.W.: 16.8KGS
PCS 20'/40': 81600/169000

BJ3007AT
1/2" BRASS HOSE CONNECTOR
W/STOP, W/TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER: 120PCS
MEAS.: 37X35X32CM
N.W.: 15.1KGS G.W.: 16.6KGS
PCS 20'/40': 81600/169000

BJ3010T
1/2" BRASS HOSE MENDER
W/TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER: 120PCS
MEAS.: 37X35X32CM
N.W.: 13.5KGS G.W.: 15.0KGS
PCS 20'/40': 81600/169000

BJ3401AT
3/4" BRASS HOSE CONNECTOR
W/TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER: 120PCS
MEAS.: 38X34.5X34.5CM
N.W.: 18.6KGS G.W.: 20.3KGS
PCS 20'/40': 75000/148800

BJ3402AT
3/4" BRASS HOSE CONNECTOR
W/STOP, W/TPR COATED
PKG: BLISTER ON CARD
QTY/OUTER: 120PCS
MEAS.: 38X34.5X34.5CM
N.W.: 20.0KGS G.W.: 22.0KGS
PCS 20'/40': 75000/141600

BJ3403T
3/4" BRASS HOSE MENDER
W/TPR COATED
PKG:BLISTER ON CARD
QTY/OUTER: 120PCS
MEAS.: 38X34.5X34.5CM
N.W.: 20.0KGS G.W.: 22.0KGS
PCS20'/10': 75000/141600

BJ3601T
3/4" BRASS HOSE CONNECTOR
W/TPR COATED

BJ3602T
3/4" BRASS HOSE CONNECTOR
W/STOP, W/TPR COATED

BJ3604T
1/2", 3/4", 5/8" BRASS TOOL ADAPTOR
W/TPR COATED

Brass Fitting Series

BJ3101

BRASS HOSE BASIC SET
INCL.: 3001, 3006, 3007, 3013
PKG: SLIDING CARD
QTY/OUTER: 24SETS
MEAS.: 31X21X22CM
N.W.: 10.3KGS G.W.: 11.5KGS
PCS 20'/40': 41280/54000

BJ3102

BRASS HOSE BASIC SET
INCL.: 3002, 3006, 3007, 3013
PKG: SLIDING CARD
QTY/OUTER: 24SETS
MEAS.: 31X21X25CM
N.W.: 9.1KGS G.W.: 10.3KGS
PCS 20'/40': 46080/60000

BJ3106T

BRASS HOSE BASIC SET
INCL.: 3002T, 3006AT, 3007AT, 3015T
PKG: SLIDING CARD
QTY/OUTER: 24SETS
MEAS.: 35.5X34X24CM
N.W.: 11.3KGS G.W.: 12.3KGS
PCS 20'/40': 21000/43200

BJ3107T

BRASS HOSE BASIC SET
INCL.: 3001T, 3401AT, 3402AT, 3015T
PKG: SLIDING CARD
QTY/OUTER: 24SETS
MEAS.: 35.5X34X24CM
N.W.: 14.0KGS G.W.: 15.2KGS
PCS 20'/40': 21000/40800

BJ7101

ALUMINIUM HOSE BASIC SET
INCL.: 7001, 7006, 7007, 7013
PKG: SLIDING CARD
QTY/OUTER: 24SETS
MEAS.: 29X22X24CM
N.W.: 3.9KGS G.W.: 4.3KGS
PCS 20'/40': 44160/90960

BJ7102

ALUMINIUM HOSE BASIC SET
INCL.: 7002, 7006, 7007, 7013
PKG: SLIDING CARD
QTY/OUTER: 24SETS
MEAS.: 29X22X24CM
N.W.: 3.8KGS G.W.: 4.2KGS
PCS 20'/40': 44160/90960

Brass Fitting Series

BJ3606

1/2", 3/4", 5/8" BRASS HOSE CONNECTOR FEMALE

BJ3607

1/2", 3/4", 5/8" BRASS HOSE CONNECTOR MALE

BJ3608

BRASS THREAD NIPPLE REDUCED
Ø 1/2"IGX3/4"IG

BJ3609

BRASS THREAD NIPPLE REDUCED
Ø1/2"AGXØ1"IG

BJ3610

BRASS THREAD NIPPLE REDUCED
Ø1/2" AG X Ø3/4" AG,
Ø3/4" AG X Ø1" AG

BJ3611

BRASS THREAD NIPPLE
Ø3/4" AG X Ø3/4" AG,
Ø1" AG X Ø1" AG,
Ø1¼" AG X Ø1¼" AG

BJ3612

BRASS NIPPLE REDUCED

BJ3613

BRASS REDUCING PIECE
Ø1/2" IG X Ø3/4" AG,
Ø3/4" IG X Ø1" AG,
Ø1" IG X Ø1¼" AG

BJ3614

BRASS HOSE REPAIR CONNECTOR
1/2", 3/4", 1", 1¼"

BJ3615

BRASS QUICK COUPLING
Ø1/2"X1/2"IG, Ø3/4"X3/4"IG,
Ø1"X1"IG, Ø1¼"X1¼"IG

BJ3615A

BRASS QUICK COUPLING
Ø1/2"X1/2"AG, Ø3/4"X3/4"AG,
Ø1"X1"AG, Ø1¼"X1¼"AG

BJ3616

BRASS QUICK COUPLING
Ø1/2", Ø3/4", Ø1", Ø1¼"

Brass Fitting Series

BJ3617

BRASS SCREW CONNECTION, 3 PARTS
Ø1/2"X3/4"X1/2" IG
HOSE NOZZLE: 1/2"X1/2"
THREAD: 3/4"
Ø3/4"X1"XG/4" IG
HOSE NOZZLE: 3/4"X3/4"
THREAD: 1"

BJ3617A

BRASS SCREW CONNECTION, 2 PARTS
Ø1/2"XR3/4" IG, Ø3/4"XR1" IG,
Ø1"XR1" IG, Ø1"XR1¼" IG,
Ø1/2"XR1" IG, Ø3/4"XR3/4" IG

BJ3617B

BRASS NOZZLE WITH COLLAR AND O-RING
Ø 1/2"XR3/4",Ø 3/4"XR3/4",
Ø 1XR1",Ø 3/4"XR1",
Ø 1¼XR1¼",Ø 1"XR1¼",

BJ3618

BRASS HOSE NOZZLE WITH QUICK COUPLING 1/2" OR 3/4"

BJ3619

BRASS HOSE NOZZLE WITH QUICK COUPLING

BJ3620

BRASS ANGLED SCREWED JOINT, 2 PARTS
Ø1/2"XG/4" IG
HOSE NOZZLE: 1/2"
THREAD: 3/4"
Ø3/4"X1" IG
HOSE NOZZLE: 3/4"
THREAD: 1"

BJ3621

BRASS ANGLE COUPLING
Ø3/4" IG X Ø3/4" AG,
Ø1" IG X Ø1" AG,
Ø1¼" IG X Ø1¼" AG

BJ3623

BRASS THREAD NIPPLE REDUCED
Ø 1/2" IG X Ø 3/4" AG,
Ø 3/4" IG X Ø 1/2" AG,

BJ3624

BRASS DISTRIBUTOR
3/4" AG X 3/4" AG X 3/4" IG
NORMINAL DIAMETER: 1/2"
THREADED CONNECTION: 3/4"
2 X MALE THREAD
2 X FEMALE THREAD

BJ3625

BRASS CLAMP BOWL
3/4", 1", 1¼"

BJ3626

BRASS UNIVERSAL CLOSING COUPLING

BJ3627

BRASS QUICK COUPLING (VACUUM CLOSING)
3/4", 1", 1¼" SUCTION AND HIGH PRESSURE

Brass Fitting Series

BJ3628

BRASS FOOT VALVE
3/4", 1", 1¼"

BJ3629

BRASS NONRETURN VALVE
3/4", 1", 1¼" (BETWEEN VALVE)

BJ3630

BRASS ANGLE WITH WALL FASTENING 3/4" IG

BJ3631

BRASS HOSE NOZZLE 1/2"

BJ3632

BRASS 2-WAY CHECK VALVE 1",1 1/4"

BJ3633

BRASS FLOOR DRAIN

BJ3670

STRAINER
Ø 3/4" AG, Ø1" AG, Ø 1½" AG

BJ3680

WATER TAP, MAT CHROME PLATED
1/2" AG, 3/4" AG

BJ3681

WATER TAP WITH BALL VALVE
1/2" AG, 3/4" AG

BJ3682

BALL VALVE
1/8" IG, 3/8" IG, 1" IG, 1¼" IG

BJ3600

STAINLESS STEEL FASTENER
1/2" (6-12MM), 1" (16-25MM)

BJ3683

TEFLON THREAD STRIP
12M X 0.1MM

BJ3684

SEALING FOR ALL QUICK COUPLINGS

BJ3685

SEALING FOR ALL HIGH PRESSURE COUPLINGS

Sprinkler Series

BJ4001

1/2" ZINC ALLOY IMPULSE SPRINKLER
PKG: TIE ON CARD
QTY/OUTER: 60PCS
MEAS.: 53.5X28X32.5CM
N.W.: 13.2KGS G.W.: 13.8KGS
PCS 20'/40': 34500/71100

BJ4001-1

1/2" ZINC ALLOY IMPULSE SPRINKLER
PKG: TIE ON CARD
QTY/OUTER: 60PCS
MEAS.: 53.5X28X32.5CM
N.W.: 13.2KGS G.W.: 13.8KGS
PCS 20'/40': 34500/71100

BJ4001-2

1/2" ZINC ALLOY IMPULSE SPRINKLER
W/BRASS COATED FINISH, W/BRASS BASE
PKG: TIE ON CARD
QTY/OUTER: 60PCS
MEAS.: 56X32X20.5CM
N.W.: 16.3KGS G.W.: 17.8KGS
PCS 20'/40': 46800/94200

BJ4001-3

1/2"-3/4" ZINC ALLOY IMPULSE SPRINKLER
W/BRASS COATED FINISH, W/BRASS BASE
PKG: TIE ON CARD
QTY/OUTER: 60PCS
MEAS.: 56X32X20.5CM
N.W.: 16.3KGS G.W.: 17.8KGS
PCS 20'/40': 46800/94200

BJ4001-4

1/2"BRASS IMPULSE SPRINKLER
PKG: TIE ON CARD
QTY/OUTER: 60PCS
MEAS.: 56X32X39.6CM
N.W.: 14.0KGS G.W.: 15.5KGS
PCS 20'/40': 23760/49800

BJ4001A

PLASTIC IMPULSE SPRINKLER
PKG: TIE ON CARD
QTY/OUTER: 60PCS
MEAS.: 50.5X32.5X33.5CM
N.W.: 3.7KGS G.W.: 5.2KGS
PCS 20'/40': 31500/64500

BJ4001B

PLASTIC AND ZINC ALLOY IMPULSE SPRINKLER
PKG:TIED ON CARD
QTY/OUTER:60PCS
MEAS.: 50.5X32.5X33.5CM
N.W.:3.7KGS G.W.:5.20KGS
PCS.: 20'/40':31500/64500

BJ4001C

PLASTIC IMPULSE SPRINKLER
PKG:TIED ON CARD
QTY/OUTER:60PCS
MEAS.: 50.5X32.5X33.5CM
N.W.:3.7KGS G.W.:5.20KGS
PCS.:20'/40':31500/64500

Sprinkler Series

BJ4100A

ZINC ALLOY BASE
PKG: COLOR BOX
QTY/OUTER: 25PCS
MEAS.: 42X41X26CM
N.W.: 13.7KGS G.W.: 14.5KGS
PCS 20'/40': 12450/256000

BJ4100B

ZINC 1-WAY SPIKE
PKG: POLYBAG
QTY/OUTER: 150PCS
MEAS.: 44X30X26CM
N.W.: 10.5KGS G.W.: 11.3KGS
PCS 20'/40': 12450/256000

BJ4102B

ZINC ALLOY IMPULSE SPRINKLER
W/ ZINC ONE WAY SPIKE
W/ZINC 2-WAY SPIKE
PKG: TIE ON CARD
QTY/OUTER: 30PCS
MEAS: 53X37X27CM
N.W.: 10.5KGS G.W.: 12.0KGS
PCS 20'/40': 1725/36660

BJ4101

PLASTIC IMPULSE SPRINKLER
W/ZINC 2-WAY SPIKE
PKG: TIE ON CARD
QTY/OUTER: 30PCS
MEAS.: 53X37X27CM
N.W.: 5.0KGS G.W.: 6.5KGS
PCS 20'/40': 1560/32850

BJ4102

ZINC ALLOY IMPULSE SPRINKLER
W/ZINC 2-WAY SPIKE
PKG: TIE ON CARD
QTY/OUTER: 30PCS
MEAS.: 53X37X27CM
N.W.: 10.5KGS G.W.: 12.0KGS
PCS 20'/40': 1725/36660

BJ4108

ROTARY GEAR SPRINKLER
WITH 4 FUNCTIONS
PKG: TIED ON CARD
QTY/OUTER: 12PCS
MEAS.:46X30.5X39.5CM
N.W.:3.61KGS G.W.:5.58KGS
PCS:20'/40':7140/14700

BJ4103

ZINC ALLOY IMPULSE SPRINKLER
W/ZINC 2-WAY SPIKE
PKG: TIE ON CARD
QTY/OUTER: 28PCS
MEAS.: 58X65.5X40CM
N.W.: 11.9KGS G.W.: 13.7KGS
PCS 20'/40': 5180/10640

BJ4000

TRIPOD SPRINKLER STAND
PKG: COLOR BOX
QTY/OUTER: 10PCS
MEAS.: 62X58X24CM
N.W.: 8.4KGS G.W.: 9.6KGS
PCS 20'/40': 3300/6800

BJ4000A

ZINC ALLOY IMPULSE SPRINKLER ON TRIPOD
PKG: COLOR BOX
QTY/OUTER: 10PCS
MEAS.: 62X58X24CM
N.W.: 10.2KGS G.W.: 11.4KGS
PCS 20'/40': 3300/6800

BJ4000B

PLASTIC IMPULSE SPRINKLER ON TRIPOD
PKG: COLOR BOX
QTY/OUTER: 10PCS
MEAS.: 62X58X24CM
N.W.: 8.9KGS G.W.: 10.1KGS
PCS 20'/40': 3300/6800

BJ4000C

PLASTIC+ZINC ALLOY IMPULSE SPRINKLER WITH TRIPOD STAND
PKG:COLOR BOX
QTY/OUTER:4PCS
MEAS.:62.5X26.5X32CM
N.W.:7.96KGS G.W.:9.14KGS
PCS. 20'/40':2016/4032

Sprinkler Series

BJ4002

ZINC ALLOY BASE
PKG:COLOR BOX
QTY/OUTER:20PCS
MEAS:42X41X29CM
N.W.:6.4KGS G.W.:9.4KGS
PCS 20'/40':12500/25800

BJ4002A

ZINC ALLOY IMPULSE SPRINKLER
ON ZINC ALLOY BASE
PKG:COLOR BOX
QTY/OUTER:6PCS
MEAS:26X27X47CM
N.W.:3.7KGS G.W.:4.7KGS
PCS 20'/40':7052/14490

BJ4002B

BRASS 2-ARM ROTARY SPRINKLER
ON ZINC ALLOY BASE
PKG: COLOR BOX
QTY/OUTER: 6PCS
MEAS: 26X27X48CM
N.W.: 4.1KGS G.W.: 5.1KGS
PCS 20'/40': 7050/14490

BJ4003

ZINC ALLOY WHEEL BASE
PKG:COLOR BOX
QTY/OUTER:20PCS
MEAS:42X41X29CM
N.W.:6.2KGS G.W.:7.7KGS
PCS 20'/40':12500/25800

BJ4003B

BRASS 3-ARM ROTARY SPRINKLER
ON ZINC ALLOY WHEEL BASE
PKG: COLOR BOX
QTY/OUTER:6PCS
MEAS: 27X21X33CM
N.W.: 3.2KGS G.W.: 4.2KGS
PCS 20'/40': 8910/18300

BJ4003E

ZINC ALLOY 3-ARM ROTARY SPRINKLER
ON ZINC ALLOY WHEEL BASE
PKG:COLOR BOX
QTY/OUTER:6PCS
MEAS: 42X22X23CM
N.W.:2.8KGS G.W.:3.8KGS
PCS 20'/40':8070/16560

BJ4007

9-IN-1 TURRET METAL SPRINKLER
PKG: COLOR BOX
QTY/OUTER:12PCS
MEAS.:44X44X21CM
N.W.:6.80KGS G.W.:7.90KGS
PCS:20'/40':8400/17100

BJ4006

ROTARY GEAR SPRINKLER
WITH METAL BASE
PKG: COLOR BOX
QTY/OUTER:12PCS
MEAS: 52X30.5X43.5CM
N.W.:7.45KGS G.W.:8.60KGS
PCS:20'/40':4620/9240

BJ4104

BRASS 3-ARM ROTARY SPRINKLER
PKG: POLYBAG W/HEADER
QTY/OUTER: 60PCS
MEAS: 49.5X42.5X39CM
N.W.: 11.7KGS G.W.: 12.7KGS
PCS 20'/40': 20700/42000

BJ4105

BRASS 2-ARM ROTARY SPRINKLER
PKG: POLYBAG W/HEADER
QTY/OUTER: 100PCS
MEAS: 64X28X25CM
N.W.: 24.1KGS G.W.: 25.1KGS
PCS 20'/40': 6250/10300

Sprinkler Series

BJ4502

ADJUSTABLE 3-ARM SPRINKLER
W/PLASTIC 2-WAY SPIKE
PKG: POLYBAG W/HEADER
QTY/OUTER: 100PCS
MEAS.: 56.5X33X40CM
N.W.: 10.9KGS G.W.: 12.4KGS
PCS 20'/40': 3200/66000

BJ4503

PLASTIC IMPULSE SPRINKLER
W/PLASTIC 2-WAY SPIKE
PKG: TIE ON CARD
QTY/OUTER: 30PCS
MEAS.: 53X3.7X2.7CM
N.W.: 3.5KGS G.W.: 5.0KGS
PCS 20'/40': 15900/32850

BJ4504

ADJUSTABLE 3-ARM SPRINKLER
W/PLASTIC 2-WAY SPIKE
PKG: POLYBAG W/HEADER
QTY/OUTER: 100PCS
MEAS.: 61X35X39CM
N.W.: 8.1KGS G.W.: 9.1KGS
PCS 20'/40': 4000/83000

BJ4508

2-ARM PLASTIC CIRCULAR SPRINKLER
PKG: TIED ON CARD
QTY/OUTER:20PCS
MEAS.:39X21X17CM
N.W.:3.50KGS G.W.:4.85KGS
PCS:20'/40':4536/9060

BJ4500A

PLASTIC 2-WAY SPIKE
PKG: POLYBAG
QTY/OUTER: 90PCS
MEAS.: 56X21X39CM
N.W.: 3.4KGS G.W.: 4.2KGS
PCS 20'/40': 5535/11 3100

BJ4500B

PLASTIC 1-WAY SPIKE
PKG: POLYBAG
QTY/OUTER: 90PCS
MEAS.: 56X21X39CM
N.W.: 2.1KGS G.W.: 2.9KGS
PCS 20'/40': 5535/113400

BJ4500C

PLASTIC 1 WAY SPIKE W/FOOT-PLATE
PKG:POLYBAG
QTY/OUTER:50PCS
MEAS.:50X21X39CM
N.W.:3.6KGS G.W.:4.5KGS
PCS:20'/40':35000/70000

BJ6105

DANCING FLOWER SPRINKLER
PKG: POLYBAG W/HEADER
QTY/OUTER: 8PCS
MEAS.: 73X33X29CM
N.W.: 2.1KGS G.W.: 3.1KGS
PCS 20'/40': 4640/9600

Sprinkler Series

BJ4004

"H" SHAPE PLASTIC BASE
PKG: POLYBAG W/HEADER
QTY/OUTER: 60PCS
MEAS.: 73X20X70CM
N.W.: 7.1KGS G.W.: 8.4KGS
PCS 20/40': 9600/33900

BJ4004F

PLASTIC IMPULSE SPRINKLER
ON "H" SHAPE BASE
PKG: POLYBAG W/HEADER
QTY/OUTER: 50PCS
MEAS.: 64X45X45.5CM
N.W.: 8.5KGS G.W.: 9.9KGS
PCS 20'/40': 10750/22000

BJ4004G

PLASTIC 3-ARM ROTARY SPRINKLER
ON "H" SHAPE BASE
PKG: POLYBAG W/HEADER
QTY/OUTER: 50PCS
MEAS.: 64X45X45.5CM
N.W.: 8.2KGS G.W.: 9.6KGS
PCS 20'/40': 10750/22000

BJ4005

PLASTIC 3-ARM ROTARY SPRINKLER
ON PLASTIC WHEEL BASE
PKG: POLYBAG W/HEADER
QTY/OUTER: 72PCS
MEAS.: 66X45.5X67CM
N.W.: 6.9KGS G.W.: 11.2KGS
PCS 20'/40': 11880/24480

BJ4106

PLASTIC 3-ARM ROTARY SPRINKLER
PKG: BULK
QTY/OUTER: 200PCS
MEAS.: 82X47.5X65CM
N.W.: 10.2KGS G.W.: 11.0KGS
PCS 20'/40': 19000/41200

BJ4107

PLASTIC 3-ARM ROTARY SPRINKLER
PKG: BULK
QTY/OUTER: 40PCS
MEAS.: 82X47.5X65CM
N.W.: 9.6KGS G.W.: 11.0KGS
PCS 20'/40': 3960/8400

BJ4505

PLASTIC 5-PATTERN SPRINKLER
PKG: TIE ON CARD
QTY/OUTER: 48PCS
MEAS.: 51X53X36CM
N.W.: 6.6KGS G.W.: 8.6KGS
PCS 20'/40': 14640/30240

BJ4505S

PLASTIC 5-PATTERN SPRINKLER
PKG: MAIL BOX
QTY/OUTER: 6SETS
MEAS.: 51.5X31.5X39.5CM
N.W.: 7.5KGS G.W.: 9.15KGS
PCS 20'/40': 3120/6450

BJ4501

TURBO SPRINKLER W/SINGLE SPIKE
PKG: TIED ON CARD
QTY/OUTER: 120PCS
MEAS.: 56X32X64CM
N.W.: 6.4KGS G.W.: 9.30KGS
PCS.: 20'/40': 3540/7320O

BJ4501A

TURBO SPRINKLER W/SINGLE SPIKE
PKG: TIED ON CARD
QTY/OUTER: 18PCS
MEAS.: 36X24X21.5CM
N.W.: 1.36KGS G.W.: 2.70KGS
PCS.: 20'/40': 2592O/5292O

Sprinkler Series

BJ4005A

5-ARM PLASTIC CIRCULAR SPRINKLER
PKG: TIED ON CARD
QTY/OUTER:6PCS
MEAS.:65X36X34CM
N.W.:1.78KGS G.W.:3.24KGS
PCS:20'/40':2016/4032

BJ4006

CIRCULAR SPRINKLER WITH PALSTIC BASE
PKG:TIED ON CARD
QTY/OUTER:4PCS
MEAS.:68.5X53X13CM
N.W.:1.76KGS G.W.:3.40KGS
PCS.: 20'/40': 4032/8568

BJ4006A

CIRCULAR SPRINKLER WITH PALSTIC BASE
PKG:TIED ON CARD
QTY/OUTER:12PCS
MEAS.:45.5X41.5X37.5CM
N.W.:2.84KGS G.W.:5.07KGS
PCS :20'/40': 4680/10080

BJ4507

9-PATTERN SPRINKLER
WITH GROUND SPIKE
PKG:COLOR SLEEVE
QTY/OUTER:20PCS
MEAS.:33X31X38CM
N.W.:2.64KGS G.W.: 3.34KGS
PCS 20'/40':1318O/26380

BJ4014

FAN JET BRASS SPIKE SPRINKLER
PKG: BLISTER ON CARD
QTY/OUTER: 60PCS
MEAS.: 49X42X40CM
N.W.: 6.1KGS G.W.: 8.0KGS
PCS 20'/40': 20700/42900

BJ5502

2 HOUR TAP TIMER
PKG: DOUBLE BLISTER
QTY/OUTER: 25PCS
MEAS.: 58.5X46.5X21.5CM
N.W.: 8.0KGS G.W.: 10.0KGS
PCS 20'/40': 11500/23750

BJ5504

BATTERY TIMER
PKG: DOUBLE BLISTER
QTY/OUTER: 25PCS
MEAS.: 58.5X46.5X21.5CM
N.W.: 8.5KGS G.W.: 10.5KGS
PCS 20'/40': 11500/23750

Sprinkler Series

BJ4008D

PLASTIC 8-PATTERN SPRINKLER
PKG:COLOR SLEEVE
QTY/OUTER:20PCS
MEAS.:41.6X17X30CM
N.W.:3.36KGS G.W.:3.86KGS
PCS 20'/40':15140/30280

BJ4008H

6-FUNCTION GARDEN SPRINKLER
PKG: HANGTAG
QTY/OUTER:20PCS
MEAS.:44.5X40X26CM
N.W.:3.0KGS G.W.:4.20KGS
PCS:20'/40':12600/23400

BJ4008

ZINC ALLOY SPRINKLER
PKG: BLISTER ON CARD
QTY/OUTER: 48PCS
MEAS.: 46.5X26X34CM
N.W.: 10.7KGS G.W.: 12.0KGS
PCS 20'/40': 4224/8880

BJ4008C

ZINC ALLOY 8-PATTERN SPRINKLER
PKG: COLOR BOX
QTY/OUTER: 20PCS
MEAS.: 37X26X39CM
N.W.: 8.5KGS G.W.: 9.6KGS
PCS 20'/40': 1400/3000

BJ4008B

PLASTIC 8-PATTERN SPRINKLER
PKG: BLISTER ON CARD
QTY/OUTER: 60PCS
MEAS.: 72X55X47CM
N.W.: 12.8KGS G.W.: 15.8KGS
PCS 20'/40': 1840/2560

Hose Reel Series

BJ5222

CONVENIENT HOSE REEL
(STEEL TUBE)
STORE UP TO 45M
(1/2" OR 13MM)HOSE
PKG: COLOR BOX
QTY/OUTER: 5PCS
MEAS.: 60X34X39CM
N.W.: 8.0KGS G.W.: 10.0KGS
PCS 20'/40': 2100/4300

BJ5222A

CONVENIENT HOSE REEL
(ALUMINUM TUBE)
STORE UP TO 45M(1/2" OR
13MM)HOSE
PKG: COLOR BOX
QTY/OUTER: 5PCS
MEAS.: 60X34X39CM
N.W.: 6.7KGS G.W.: 8.2KGS
PCS 20'/40': 2100/4300

BJ5223

CONVENIENT HOSE REEL
(STEEL TUBE)
STORE UP TO 60M(1/2" OR
13MM)HOSE
PKG:COLOR BOX
QTY/OUTER:5PCS
MEAS:60X37X39CM
N.W.: 10.0KGS G.W.: 11.2KGS
PCS 20'/40':1750/3630

BJ5223A

CONVENIENT HOSE REEL
(ALUMINUM TUBE)
STORE UP TO 60M(1/2"OR13MM)HOSE
PKG:COLOR BOX
QTY/OUTER:5PCS
MEAS:60X37X39CM
N.W.: 7.8KGS G.W.: 9.5KGS
PCS 20'/40':1750/3630

BJ5225

CONVENIENT HOSE REEL
(STEEL TUBE)
STORE UP TO 50M(1/2" OR 13MM)HOSE
PKG: COLOR BOX
QTY/OUTER: 5PCS
MEAS.: 60X37X39CM
N.W.: 8.8KGS G.W.: 10.0KGS
PCS 20'/40': 1750/3630

BJ5226A

CONVENIENT HOSE REEL
(ALUMINUM TUBE)
STORE UP TO 60M(1/2"OR12MM)HOSE
PKG:COLOR BOX
QTY/OUTER:5PCS
MEAS:60X37X39CM
N.W.: 7.9KGS G.W.: 9.3KGS
PCS 20'/40':1750/3630

Hose Reel Series

BJ5231

HOSE REEL CART(STEEL TUBE)
STORE UP TO 45M(1/2" OR 13MM)HOSE
PKG: COLOR BOX
QTY/OUTER: 5PCS
MEAS.: 60X34X54CM
N.W.: 14.0KGS G.W.: 15.5KGS
PCS 20'/40': 128/265D

BJ5231A

HOSE REEL CART(ALUMINIUM TUBE)
STORE UP TO 45M(1/2" OR 13MM)HOSE
PKG: COLOR BOX
QTY/OUTER: 5PCS
MEAS.: 60X34X54CM
N.W.: 9.7KGS G.W.: 11.2KGS
PCS 20'/40': 128/265D

BJ5232

HOSE REEL CART(STEEL TUBE)
STORE UP TO 60M(1/2" OR 13MM)HOSE
PKG: COLOR BOX
QTY/OUTER: 5PCS
MEAS.: 60X37X54CM
N.W.: 14.4KGS G.W.: 16.0KGS
PCS 20'/40': 118/240D

BJ5232A

HOSE REEL CART(ALUMINIUM TUBE)
STORE UP TO 60M(1/2" OR 13MM)HOSE
PKG: COLOR BOX
QTY/OUTER: 5PCS
MEAS.: 60X37X54CM
N.W.: 10.3KGS G.W.: 11.8KGS
PCS 20'/40': 118/240D

BJ5234

HOSE REEL CART(STEEL TUBE)
STORE UP TO 50M(1/2" OR 13MM)HOSE
PKG: COLOR BOX
QTY/OUTER: 5PCS
MEAS.: 60X37X54CM
N.W.: 13.2KGS G.W.: 14.9KGS
PCS 20'/40': 118/240D

BJ5253

HOSE REEL CART(STEEL TUBE)
PKG: COLOR BOX
QTY/OUTER:4PCS
MEAS.:58X40X56CM
N.W.:17.5KGS G.W.:18.5KGS
PCS:20'/40':88/176S

Hose Reel Series

BJ5252

ADJUSTABLE METAL HOSE REEL CART
STORE UP TO 60M(1/2" OR 13MM)HOSE

UNASSEMBLED
PKG: COLOR BOX
QTY/OUTER: 3PCS
MEAS.: 56X40X20CM
N.W.: 11.3KGS G.W.: 12.8KGS
PCS 20'/40': 113/234D

ASSEMBLED
PKG: CARTON BOX
QTY/OUTER: 1PC
MEAS.: 43.5X40X62CM
N.W.: 3.8KGS G.W.: 4.5KGS
PCS 20'/40': 368/556

BJ5236

ADJUSTABLE HOSE REEL CART
STORE UP TO 60M(1/2" OR 13MM)HOSE

UNASSEMBLED
PKG: COLOR BOX
QTY/OUTER: 3PCS
MEAS.: 56X40X20CM
N.W.: 7.9KGS G.W.: 9.4KGS
PCS 20'/40': 113/234D

ASSEMBLED
PKG: CARTON BOX
QTY/OUTER: 1PC
MEAS.: 43.5X40X62CM
N.W.: 2.63KGS G.W.: 3.2KGS
PCS 20'/40': 368/556

BJ5233A

ADJUSTABLE HOSE REEL CART(ALUMINIUM TUBE)
STORE UP TO 50M(1/2" OR 13MM)HOSE
PKG: COLOR BOX
QTY/OUTER: 4PCS
MEAS.: 47X96.5X55CM
N.W.: 8.3KGS G.W.: 9.8KGS
PCS 20'/40': 120/240D

BJ5251

METAL HOSE REEL CART
STORE UP TO 60M(1/2" OR 13MM)HOSE
PKG: COLOR BOX
QTY/OUTER: 2PCS
MEAS.: 71X48X46CM
N.W.: 10.9KGS G.W.: 12.4KGS
PCS 20'/40': 380/780

Hose Reel Series

BJ5222R
SET CONVENIENT HOSE REEL
PKG: COLOR BOX
QTY/OUTER: 4SETS
MEAS.: 74X35X33CM
N.W.: 16.0KGS G.W.: 18.0KGS
PCS 20'/40': 1320/2720

BJ5232R
SET CONVENIENT HOSE REEL
PKG: COLOR BOX
QTY/OUTER: 4SETS
MEAS.: 74X35X33CM
N.W.: 16.0KGS G.W.: 18.0KGS
PCS 20'/40': 1320/2720

BJ5221
CONVENIENT HOSE REEL
STORE UP TO 25M(1/2"OR 13MM)HOSE
PKG: COLOR BOX
QTY/OUTER: 6PCS
MEAS.: 57X32X28.5CM
N.W.: 8.9KGS G.W.: 10.0KGS
PCS 20'/40': 3240/6690

BJ5301
PLASTIC HOSE HOLDER
PKG: LABEL
QTY/OUTER: 60PCS
MEAS.: 50X48X35CM
N.W.: 10.4KGS G.W.: 11.9KGS
PCS 20'/40': 20100/41400

BJ5224
SET PLASTIC HOSE HOLDER
PKG: COLOR BOX
QTY/OUTER: 4SETS
MEAS.: 62X36X31CM
N.W.: 8.8KGS G.W.: 10.8KGS
PCS 20'/40': 1600/3240

BJ5302
CONVENIENT HOSE GUIDE WITH ZINC ALLOY SPIKE
PKG: HANGTAG
QTY/OUTER:40PCS
MEAS.:44.5X40X26CM
N.W.:5.24KGS G.W:5.90KGS
PCS:20'/40':19200/38400

Garden Sprayer Series

BJ8201
2L GARDEN SPRAYER
PKG: HANGTAG
QTY/OUTER: 6PCS
MEAS: 38.5X33.6X33CM
N.W.: 3.52KGS G.W.: 3.92KGS
PCS 20'/40': 4116/8114

BJ8202
1.5L FOAM GARDEN SPRAYER
PKG: COLOR BOX
QTY/OUTER:6PCS
MEAS.:23X14X30.6CM
N.W.:3.0KGS G.W.:4.40KGS
PCS:20'/40':2592/5400

BJ8501
5L GARDEN SPRAYER
PKG: COLOR BOX
QTY/OUTER: 4PCS
MEAS: 38.5X37.5X51CM
N.W.: 5.4KGS G.W.: 6.0KGS
PCS 20'/40': 1584/3312

BJ8502
5L GARDEN SPRAYER
PKG: COLOR BOX
QTY/OUTER: 4PCS
MEAS: 40X39X53.5CM
N.W.: 6.3KGS G.W.: 7.0KGS
PCS 20'/40': 1456/3016

Garden Hose Series

BJ5110

1/2"X15M GARDEN HOSE SET
PKG: SHRINK+COLOR LABEL
QTY/OUTER: 6SETS
MEAS: 55X33X39CM
N.W.: 11.0KGS G.W.: 12.0KGS
PCS 20/40': 480/6780

BJ5111

3/4"X15M GARDEN HOSE SET
PKG: SHRINK+COLOR LABEL
QTY/OUTER: 6SETS
MEAS: 78X39X40CM
N.W.: 27.3KGS G.W.: 28.3KGS
PCS 20/40': 180/3600

BJ5112

3/4"X15M GARDEN HOSE SET
PKG: SHRINK+COLOR LABEL
QTY/OUTER: 6SETS
MEAS: 78X39X40CM
N.W.: 28.0KGS G.W.: 29.0KGS
PCS 20/40': 180/3600

BJ5113

1/2"X15M GARDEN HOSE
PKG: TIE ON CARD
QTY/OUTER: 6PCS
MEAS.: 33X33X40CM
N.W.: 10.5KGS G.W.: 11.5KGS
PCS 20/40': 360/7920

BJ5114

1/2"X15M GARDEN HOSE
PKG: TIE ON CARD
QTY/OUTER: 6PCS
MEAS.: 33X33X40CM
N.W.: 12.0KGS G.W.: 13.0KGS
PCS 20/40': 360/7920

BJ5115

1/2"X15M GARDEN HOSE
PKG: TIE ON CARD
QTY/OUTER: 6PCS
MEAS.: 33X33X40CM
N.W.: 11.4KGS G.W.: 12.4KGS
PCS 20/40': 360/7920

BJ5104(1/2")25M

PKG: SHRINK+COLOR LABEL
QTY/OUTER: 6PCS
MEAS.: 34X33X57CM
N.W.: 17.0KGS G.W.: 19.0KGS
PCS 20/40': 360/5280

SB5104(1/2")
SB5105(5/8")
SB5106(3/4")
GARDEN HOSE

BJ5105(5/8")25M

PKG: SHRINK+COLOR LABEL
QTY/OUTER: 6PCS
MEAS.: 78X39X46CM
N.W.: 39.0KGS G.W.: 37.0KGS
PCS 20/40': 180/3600

BJ5106(3/4")25M

PKG: SHRINK+COLOR LABEL
QTY/OUTER: 5PCS
MEAS.: 40X40X34CM
N.W.: 16.0KGS G.W.: 17.0KGS
PCS 20/40': 135/2760

Garden Hose Series

BJ2003A

Coil Hose 3/8 Inch x
50FT With 8 Pattern Nozzle
PKG: DOUBLE BUSTER
QTY/OUTER:6PCS
MEAS:56.5X34X41CM
N.W: 5.5KGS G.W: 6.0KGS
PCS:20'/40':1795/3680

BJ2003B

Coil Hose 3/8 Inch x
25FT With 8 Pattern Nozzle
PKG: DOUBLE BUSTER
QTY/OUTER:6PCS
MEAS: 41X41X46CM
N.W: 3.7KGS G.W: 4.2KGS
PCS:20'/40':2220/4440

Others

BJ6106

GARDEN SHOWER ON SPIKE
PKG: COLOR BOX
QTY/OUTER: 12PCS
MEAS: 75X37X49CM
N.W.: 8.2KGS G.W.: 9.0KGS
PCS 20'/40': 272/6740

BJ6107

GARDEN SHOWER WITH TRIPOD
PKG: COLOR BOX
QTY/OUTER: 6PCS
MEAS.: 77X21X41CM
N.W.: 6.2KGS G.W.: 7.2KGS
PCS 20'/40': 165/3480

BJ6108

GARDEN SHOWER WITH I SPIKE
PKG: TIED ON CARD
QTY/OUTER:40PCS
MEAS: 98X38X14CM
N.W.:8.32KGS G.W.:9.80KGS
PCS 20'/40': 160/4370

BJ6109

GARDEN SHOWER WITH TRIPOD
PKG: COLOR BOX
QTY/OUTER:6PCS
MEAS :93X47.5X29.5CM
N.W.:6.90KGS G.W.: 7.40KGS
PCS 20'/40': 115/2400

BJ4506

COOLINGMISTSYSTEM,
•6M RESISTANTFLEXIBLEEVATUBE, 3MWATERSUPPLYHOSE
•9MASSEMBLEDMISTLINEWITH8 BRASSNOZZLESWHICHCANBE FIXEDONTHEMISTLINE
•20SADDLECLAMPS
•20CABLETIES
•1PCSHOSECONNECTOR,

PKG:COLOR BOX
QTY/OUTER: 10PCS
MEAS: 84X31.5X32CM
N.W.: 4.6KGS G.W.: 5.5KGS
PCS 20'/40': 430/8600

Others

BJ9002

ICE SCRAPER WITH BROOM
PKG:BARCODE
QTY./OUTER:60PCS
MEAS.:56X43X51CM
N.W.:5.0KGS G.W.: 5.5KGS
PCS 20'/40':1302O/27240

BJ8005

TOOL HOLDER
PKG: COLOR SLEEVE
QTY/OUTER: 12PCS
MEAS.: 62X34X26CM
N.W.: 4.8KGS G.W.: 5.5KGS
PCS 20'/40': 588O/12360

BJ8001

LONG HANDLED GRABBER
PKG: TIE ON CARD
QTY/OUTER: 12PCS
MEAS.: 89.5X33X25CM
N.W.: 4.5KGS G.W.: 6.1KGS
PCS 20'/40': 427O/11760

BJ9101

DRAINAGE PLUGS(Dia.:40mm)
PKG:SLIDING BLISTER CARD
QTY./OUTER:24PCS
MEAS.:28X19X16.5CM
N.W.:1.98KGS G.W.:2.28KGS
PCS 20'/40':6825O/136536

BJ9004

ICE SCRAPER WITH GRIP
PKG:BARCODE
QTY./OUTER:96PCS
MEAS.:38X14X29CM
N.W.:4.5KGS G.W.:5.0KGS
PCS 20'/40':16384O/367680

BJ9005

SIMPLE ICE SCRAPER
PKG:BARCODE
QTY./OUTER:144PCS
MEAS.:36X14X29CM
N.W.:1.98KGS G.W.:2.28KGS
PCS 20'/40':27576O/551520

BJ9102

DRAINAGE PLUGS(Dia.:64mm)
PKG:SLIDING BLISTER CARD
QTY./OUTER:24PCS
MEAS.:28X19X16.5CM
N.W.:1.98KGS G.W.:2.28KGS
PCS 20'/40':6825O/136536

BJ9001

WATER BRUSH(INCLUDE HARDEN BRUSH AND SOFT BRUSH)
PKG:COLOR BOX
QTY/OUTER: 6PCS
MEAS: 92.5x34x26.5CM
N.W.: 11.8KGS G.W.: 12.4KGS
PCS 20'/40': 2112/4392

TS7001

for 15 pots maxim

Packing: Color box
Pcs:10
Dim.ctn:43*22*32

33 PIECE MICROIRRIGATION KIT

TS7107

Packing: Color box
Pcs:5
Dim.ctn: 64*37*37

1/2"quick connector

ITALIAN DESIGN | 1/2" | ABS | TPR | PP | TAG

- Made of durable ABS PP plastic coated with thermoplastic rubber (TPR)
- SIZE:3x3x6
- PCS:250
- Dim.ctn:42x28.5x23cm

ITEM NO	MATERIAL
I0019	ABS+TPR+PP

1/2"quick connector with stop

WATER BTOP | ITALIAN DESIGN | 1/2" | ABS | TPR | PP | TAG

- Made of durable ABS PP plastic coated with thermoplastic rubber (TPR)
- SIZE:3x3x6
- PCS:250
- Dim.ctn:42x28.5x23cm

ITEM NO	MATERIAL
I0020	ABS+TPR+PP

1/2" hose mender

ITALIAN DESIGN | 1/2" | ABS | TPR | PP | TAG

- Made of durable ABS PP plastic coated with thermoplastic rubber (TPR)
- SIZE:3x3x4.5
- PCS:250
- Dim.ctn:42x28.5x20cm

ITEM NO	MATERIAL
I0027	ABS+TPR+PP

3/4"quick connector

ITALIAN DESIGN | 3/4" | ABS | TPR | PP | TAG

- Made of durable ABS PP plastic coated with thermoplastic rubber (TPR)
- SIZE:4x3x6
- PCS:250
- Dim.ctn:42x28.5x29.5cm

ITEM NO	MATERIAL
I0021	ABS+TPR+PP

3/4"quick connector with stop

WATER BTOP | ITALIAN DESIGN | 3/4" | ABS | TPR | PP | TAG

- Made of durable ABS PP plastic coated with thermoplastic rubber (TPR)
- SIZE:4x3x6
- PCS:250
- Dim.ctn:42x28.5x29.5cm

ITEM NO	MATERIAL
I0022	ABS+TPR+PP

3/4" hose mender

ITALIAN DESIGN | 3/4" | ABS | TPR | PP | TAG

- Made of durable ABS PP plastic coated with thermoplastic rubber (TPR)
- SIZE:4x4x6
- PCS:250
- Dim.ctn:42x28.5x31cm

ITEM NO	MATERIAL
I0028	ABS+TPR+PP

3/4”tap adaptor

ITALIAN DESIGN | 3/4" | ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:3x3x4
- PCS:250
- Dim.ctn:42x28.5x28cm

ITEM NO	MATERIAL
I0025	ABS+PP+TPR

1”tap adaptor

ITALIAN DESIGN | 1" | ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:4x4x4
- PCS:250
- Dim.ctn:42x28.5x31cm

ITEM NO	MATERIAL
I0026	ABS+PP+TPR

3/4"-1/2"hose mender

ITALIAN DESIGN | 3/4" | 1/2" | ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:5.8X4.4X4.4
- PCS:250
- Dim.ctn:42x28.5x24cm

ITEM NO	MATERIAL
I0032	ABS+PP+TPR

1/2”-3/4”tap adaptor

ITALIAN DESIGN | 1/2" | 3/4" | ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:3x3x5
- PCS:250
- Dim.ctn:42x28.5x28cm

ITEM NO	MATERIAL
I0023	ABS+PP+TPR

3/4”-1”tap adaptor

ITALIAN DESIGN | 3/4" | 1" | ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:4x4x6
- PCS:250
- Dim.ctn:42x28.5x31cm

ITEM NO	MATERIAL
I0024	ABS+PP+TPR

1"-3/4"-1/2"tap adaptor

ITALIAN DESIGN | 1" | 3/4" | 1/2" | ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:4x4x6
- PCS:250
- Dim.ctn:42x28.5x31cm

ITEM NO	MATERIAL
I0033	ABS+PP+TPR

One way connector with valve

Aluminum | ABS | TPR | TAG

- Aluminium alloy body, durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:3x3x5
- PCS:250
- Dim.ctn:39x38.5x23cm

ITEM NO	MATERIAL
TS3020M	ABS+TPR

Two way connector with valve

Aluminum | ABS | TPR | TAG

- Aluminium alloy body, durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:4x4x6
- PCS:50
- Dim.ctn:56x30.5x15.5cm

ITEM NO	MATERIAL
TS3018M	ABS+TPR

Metal four way connector

Aluminum | ABS | TPR | TAG

- Aluminium alloy body, durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:28.7x13.8x4.3
- PCS:50
- Dim.ctn:54x42x40cm

ITEM NO	MATERIAL
TS3035M	ABS+TPR

8 functions water pistol

ITALIAN DESIGN | ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:19.5x16x6.2
- PCS:48
- Dim.ctn:48x43x25cm

ITEM NO	MATERIAL
I0001	ABS+TPR

Twist water pistol

ITALIAN DESIGN | ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:17x16x4
- PCS:48
- Dim.ctn:77x23x29cm

ITEM NO	MATERIAL
I0002	ABS+TPR

8 functions water pistol

ITALIAN DESIGN | Aluminum | ABS | TPR | TAG

- Aluminium alloy body, durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:20x13x6
- PCS:48
- Dim.ctn:48x43x25cm

ITEM NO	MATERIAL
I0011	ABS+TPR+Aluminum

Twist water pistol

ITALIAN DESIGN | Aluminum | ABS | TPR | TAG

- Aluminium alloy body, durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:16x15.6x4
- PCS:48
- Dim.ctn:77x23x29cm

ITEM NO	MATERIAL
I0012	ABS+TPR+Aluminum

8 functions plastic water pistol

ITALIAN DESIGN | ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:19.5x11x6
- PCS:48
- Dim.ctn:48x43x25cm

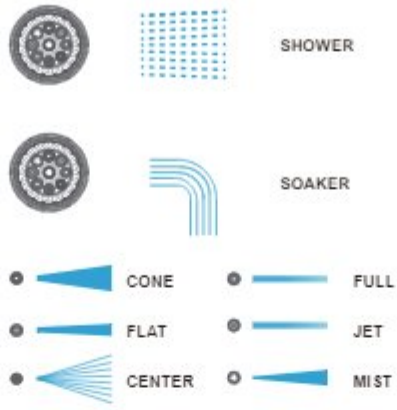

ITEM NO	MATERIAL
I0015	ABS+TPR

Plastic water pistol

ITALIAN DESIGN | ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:18.5x10.5x4.3
- PCS:48
- Dim.ctn:77x23x29cm

ITEM NO	MATERIAL
I0016	ABS+TPR

New nozzle

ITALIAN DESIGN | ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:17.5x3x3
- PCS:40
- Dim.ctn:43x22x18cm

ITEM NO	MATERIAL
I0029	ABS+TPR

8 pattern watering wand
8 pattern telescopic watering wand

ITALIAN DESIGN | Aluminum | ABS | TPR | TAG

SHOWER

SOAKER

- Aluminium alloy body, durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:44.5x6x6 / 68.5x6x6 / 81.5X6X6
- PCS:12
- Dim.ctn:50x45x25 / 76x28.5x22.5 / 82x28.5x22.5cm

ITEM NO	MATERIAL
I2001	ABS+TPR+Aluminum
I2002	ABS+TPR+Aluminum
I2003	ABS+TPR+Aluminum

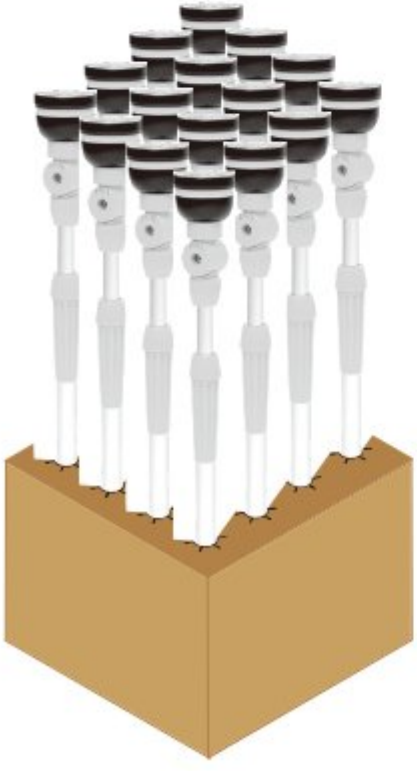

4 functions water pistol

ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:14.9x22.4x6.5
- PCS:12
- Dim.ctn:40x26x21.5cm

ITEM NO	MATERIAL
TS2130	ABS+TPR

Twist nozzle

ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:12.3x19.7x4.4
- PCS:12
- Dim.ctn:100x44x15.5cm

ITEM NO	MATERIAL
TS2131	ABS+TPR

Spray wand with 9 functions

Aluminum | ABS | TPR | TAG

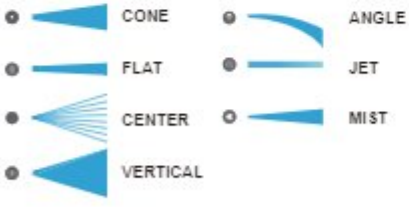

- Aluminium alloy body, durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:92-141x12.5x6.5
- PCS:12
- Dim.ctn:100x44x15.5cm

ITEM NO	MATERIAL
TS2125	ABS+TPR+Aluminum
TS2126	ABS+TPR+Aluminum
TS2127	ABS+TPR+Aluminum

8 functions water pistol

Aluminum | ABS | TPR | TAG

- Aluminium alloy body, durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:18x15x5.5
- PCS:48
- Dim.ctn:42x28.5x19cm

SHOWER

SOAKER

CONE JET FLAT MIST

ITEM NO	MATERIAL
TS479CHR	ABS+TPR+Aluminum

Twist water pistol

Aluminum | ABS | TAG

- Aluminium alloy body, durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:16x14x2
- PCS:50
- Dim.ctn:42x28.5x15cm

MIST JET

ITEM NO	MATERIAL
TS476CHR	ABS+TPR+Aluminum

Water wand

Aluminum | ABS | TPR | TAG

- Aluminium alloy body, durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:44.5x5.5x7.6
- PCS:24
- Dim.ctn: 48x40x18cm

SHOWER

ITEM NO	MATERIAL
I2004	ABS+TPR+Aluminum

Water wand

Aluminum | ABS | TPR | TAG

- Aluminium alloy body, durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:97.5x5.5x9.5
- PCS:20
- Dim.ctn:77.5x25.5x40cm

SHOWER

ITEM NO	MATERIAL
I2005	ABS+TPR+Aluminum

Timer

ABS | TPR | color box

- Made of durable ABS plastic
  coated with thermoplastic rubber (TPR)
- The Mechanical Timer features an oversized dial for ease of use. Mechanical operation that requires no batteries. Durable construction provides years of reliable use.Offers on and off settings or timed watering ranging from 0 to 120 minutes
- SIZE:15x6x8.5
- PCS:20
- Dim.ctn:36x26x20.5cm

ITEM NO	MATERIAL
TS5024	ABS+TPR

Timer

ABS | TPR | color box

- Made of durable ABS plastic
  coated with thermoplastic rubber (TPR)
- The Mechanical Timer features an oversized dial for ease of use. Mechanical operation that requires no batteries. Durable construction provides years of reliable use.Offers on and off settings or timed watering ranging from 0 to 120 minutes
- SIZE:15x14x8.5
- PCS:20
- Dim.ctn:53.5x34x32.5m

ITEM NO	MATERIAL
TS5025	ABS+TPR

Electronic LCD Digital Water Irrigation Timer

ABS | TPR | color box

- Made of durable ABS PP plastic
  coated with thermoplastic rubber (TPR)
- Easily care for your plants whether you are busy at home or away for the weekend, with an Advanced Electronic Water Timer. Set up to 3 individual start times to schedule watering exactly when you want. LCD screen can be adjusted from 0 degrees to 45 degrees. Make it more convenient for people who are not easy to squat. Such as pregnant women, the elderly...Easy-to-read large LCD screen displays information clearly.
- SIZE:15.5x9x6.5
- PCS:24
- Dim.ctn:48.5x42x20cm

ITEM NO	MATERIAL
TS5026	ABS+TPR

Transformers sprinkler

ABS | color box

- Made of durable ABS plastic
- 18 soft plastic adjustable spray nozzles. Gear drive motor for even, gentle lawn watering.Wide adjustment of spray width for different sized square areas. Easy flow control.
- SIZE:19.5x16x6.2
- PCS:48
- Dim.ctn:48x43x25cm

ITEM NO	MATERIAL
TS1094	ABS

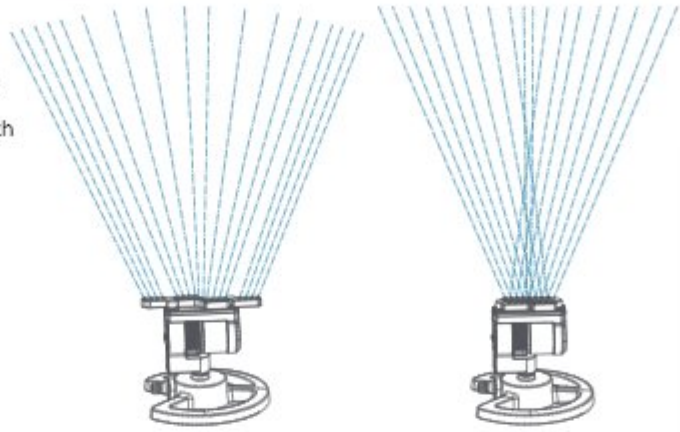

Oscillating sprinkler

ABS | color box

- Made of durable ABS plastic
- SIZE:17x16x4
- PCS:48
- Dim.ctn:77x23x29cm

ITEM NO	MATERIAL
TS8032	ABS

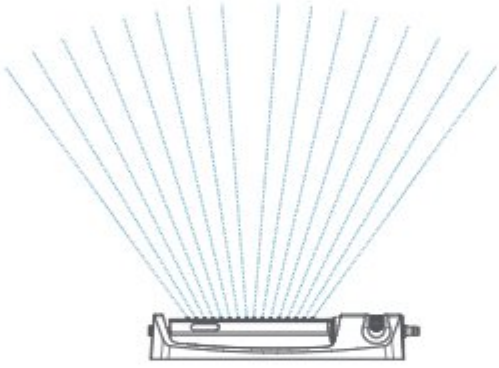

1L electric sprayer

ABS | TPR | color sleeve

- Made of durable ABS plastic
- THIS USER-FRIENDLY AUTOMATIC SPRAYER ALLOWS YOU TO SPRAY WITHOUT MANUAL PUMPING. THE PRESSURE SPRAYER ENABLES YOU TO WORK WITH A CONTINUOUS SPRAY FOR AN EQUAL AND OPTIMAL SPRAYING RESULT. THE SPRAYER CAN EASILY BE CHARGED WITH SUPPLIED USB CABLE.
- SIZE:32x14x14
- PCS:16
- Dim.ctn:57x39x32.5cm

ITEM NO	MATERIAL
TS8048-N	ABS+PE

Auto hose reel

ABS | TPR | color box

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- Auto hose reel makes your garden neatConvenient and flexible irrigation for your gardensJust pull gently, the hose retract automatically, easy and effortless.
- SIZE:43.9x21.1x38.4
- PCS:1
- Dim.ctn:46x21x40cm

15M 1/2" 1.5M 1/2"

20M 1/2" 1.5M 1/2"

25M 1/2" 1.5M 1/2"

15M 1/2" 1.5M 1/2"

30M 1/2" 1.5M 1/2"

35M 1/2" 1.5M 1/2"

ITEM NO	HOSE LENGTH	MATERIAL	W.B.PRESSURE	TEMP ERATURE	TIME OF HOSE RETEACK
TS8001	20m	ABS+TPR	8/24Bar	-5/+45	9s
TS8001-1	20m	ABS+TPR	8/24Bar	-5/+45	3s
TS8041	25m	ABS+TPR	8/24Bar	-5/+45	11.5s
TS8041-1	25m	ABS+TPR	8/24Bar	-5/+45	5s
TS8040	15m	ABS+TPR	8/24Bar	-5/+45	11.5s
TS8052	35m	ABS+TPR	8/24Bar	-5/+45	11.5s

HOSE REEL WITH HIGH QUALITY

Aluminum | ABS | color box

- Aluminium alloy body, durable ABS plastic coated
- With the ergonomic crank,with soft plastic components
  Easy enables space-saving storage of the garden hose and is convenient to use.
  Wind up the hose four times with ease.
  Quick and easy storage of water pipes.
  Reduce volume and transport costs.
  Sturdy and space-saving with soft plastic component.
- SIZE:35x15x44.5
- PCS:5
- Dim.ctn:76.5x36.5x36.5cm

ITEM NO	MATERIAL
TS8015J	ABS+Aluminum

HOSE REEL WITH HIGH QUALITY

Aluminum | ABS | TPR | color box

- Aluminium alloy body, durable ABS plastic coated with thermoplastic rubber (TPR)
- With the ergonomic crank,with soft plastic components
  Easy enables space-saving storage of the garden hose and is convenient to use.
  Wind up the hose four times with ease.
  Quick and easy storage of water pipes.
  Reduce volume and transport costs.
  Sturdy and space-saving with soft plastic component.
- SIZE:35x15x44.5
- PCS:5
- Dim.ctn:76.5x36.5x36.5cm

ITEM NO	MATERIAL
TS8015-N	ABS+TPR+Aluminum

HOSE REEL WITH HIGH QUALITY

Aluminum | ABS | color box

- Aluminium alloy body, durable ABS plastic coated
- With the ergonomic crank,with soft plastic components
  Easy enables space-saving storage of the garden hose and is convenient to use.
  Wind up the hose four times with ease.
  Quick and easy storage of water pipes.
  Reduce volume and transport costs.
  Sturdy and space-saving with soft plastic component.
- SIZE:35x15x44.5
- PCS:5
- Dim.ctn:79x46x36.5cm

60M 1/2"

ITEM NO	MATERIAL
TS8038	ABS+Aluminum

HOSE REEL WITH HIGH QUALITY

Aluminum | ABS | color box

- Aluminium alloy body, durable ABS plastic coated
- With the ergonomic crank,with soft plastic components and the sturdy hose guide.
  Easy enables space-saving storage of the garden hose and is convenient to use.Wind up the hose four times with ease.
  Quick and easy storage of water pipes.
  Auxiliary pipes are neatly arranged.
  Reduce volume and transport costs.
  Sturdy and space-saving with soft plastic component
- SIZE:35x15x44.5
- PCS:5
- Dim.ctn:79x46x36.5cm

60M 1/2"

ITEM NO	MATERIAL
TS8038G	ABS+Aluminum

NEW METAL HOSE REEL

Aluminum | ABS | color box

- Aluminium alloy body, durable ABS plastic coated
- With the ergonomic crank,with soft plastic components
  Easy enables space-saving storage of the garden hose and is convenient to use.
  Wind up the hose four times with ease.
  Quick and easy storage of water pipes.
  Reduce volume and transport costs.
  Sturdy and space-saving with soft plastic component.
- SIZE:49x42x74.5
- PCS:5
- Dim.ctn:49x42x74.5cm

60M 1/2"

ITEM NO	MATERIAL
TS8050	ABS+Aluminum

HOSE REEL WITH HIGH QUALITY

Aluminum | ABS | color box

- Aluminium alloy body, durable ABS plastic coated
- With the ergonomic crank,with soft plastic components and the sturdy hose guide.
  Easy enables space-saving storage of the garden hose and is convenient to use.Wind up the hose four times with ease.
  Quick and easy storage of water pipes.
  Auxiliary pipes are neatly arranged.
  Reduce volume and transport costs.
  Sturdy and space-saving with soft plastic component
- SIZE:31x19x35
- PCS:1
- Dim.ctn:45x20x36cm

60M 1/2"

ITEM NO	MATERIAL
TS8039	ABS+Aluminum

Car wash brush

ABS | color box

- Made of durable ABS plastic
- SIZE:7.5x7x32
- PCS:8
- Dim.ctn:54x18x20cm

ITEM NO	MATERIAL
TS8060	ABS

1/2" quick connector with soft grip

1/2" | ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:3x3x6
- PCS:250
- Dim.ctn:48x28.5x23cm

ITEM NO	MATERIAL
TS3005JR	ABS+PP+TPR

1/2" quick connector with stop with soft grip

WATER STOP | 1/2" | ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:3x3x6
- PCS:250
- Dim.ctn:48x28.5x23cm

ITEM NO	MATERIAL
TS3004JR	ABS+PP+TPR

1/2" quick connector with soft grip

3/4" | ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:4x3x6
- PCS:250
- Dim.ctn:48x28.5x29.5cm

ITEM NO	MATERIAL
TS3025JR	ABS+PP+TPR

1/2" quick connector with stop with soft grip

WATER STOP | 3/4" | ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:4x3x6
- PCS:250
- Dim.ctn:48x28.5x29.5cm

ITEM NO	MATERIAL
TS3024JR	ABS+PP+TPR

1/2" quick connector

1/2" ABS TAG

- Made of durable ABS PP plastic
- SIZE:3x3x6
- PCS:250
- Dim.ctn:48x28.5x23cm

ITEM NO	MATERIAL
TS3005J	ABS+PP

1/2" quick connector with stop

WATER STOP 1/2" ABS TAG

- Made of durable ABS PP plastic
- SIZE:3x3x6
- PCS:250
- Dim.ctn:48x28.5x23cm

ITEM NO	MATERIAL
TS3004J	ABS+PP

1/2" quick connector

3/4" ABS TAG

- Made of durable ABS PP plastic
- SIZE:4x3x6
- PCS:250
- Dim.ctn:48x28.5x29.5cm

ITEM NO	MATERIAL
TS3025J	ABS+PP

1/2" quick connector with stop

WATER STOP 3/4" ABS TAG

- Made of durable ABS PP plastic
- SIZE:4x3x6
- PCS:250
- Dim.ctn:48x28.5x29.5cm

ITEM NO	MATERIAL
TS3024J	ABS+PP

Hose mender

1/2" | ABS | TAG

- Made of durable ABS PP plastic
- SIZE:18x15x5.5
- PCS:250
- Dim.ctn:42x28.5x20cm

ITEM NO	MATERIAL
TS3006J	ABS+PP

Hose mender

3/4" | ABS | TAG

- Made of durable ABS PP plastic
- SIZE:16x14x2
- PCS:250
- Dim.ctn:42x28.5x31m

ITEM NO	MATERIAL
TS3030J	ABS+PP

Hose mender

1/2" | 3/4" | ABS | TAG

- Made of durable ABS PP plastic
- SIZE:17.5x3x3
- PCS:250
- Dim.ctn:42x28.5x24cm

ITEM NO	MATERIAL
TS3036J	ABS+PP

Hose Connector with Control Valve

ABS TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- Universal connector, enables the water supply to be shut off between two hose connectors
- Suitable for standard hose ststems 13-15mm(1/2"-5/8")
- SIZE:18x15x5.5
- PCS:20
- Dim.ctn:30X16.5X20.5cm

ITEM NO	MATERIAL
TS3050-J	ABS+PP+TPR

Regulator Valve

ABS TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- Universal connector, enables the water supply to be shut off between two hose connectors
- SIZE:16x14x2
- PCS:20
- Dim.ctn:30X16.5X20.5m

ITEM NO	MATERIAL
TS3050-J	ABS+PP+TPR

Coupling with Flow-Control Valve

ABS TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- Universal connector, enables the water supply to be shut off between two hose connectors
- SIZE:17.5x3x3
- PCS:20
- Dim.ctn:30X16.5X19cm

ITEM NO	MATERIAL
TS3039-J	ABS+PP+TPR

Angled Tap Connector

ABS TAG

- Made of durable ABS plastic
- Tap connector for 26.5mm(G3/4") and 33.3mm(1") screw thread
- Adjust the use Angle at any time to effectively prevent water hose twisting and winding peoblems
- SIZE:4x3.5x11.5
- PCS:20
- Dim.ctn:30x16.5x17cm

ITEM NO	MATERIAL
LX2007-J	ABS+PP

Tap adaptor

3/4" | PP | TAG

- Made of durable ABS PP plastic
- SIZE:4x3.8x1.6
- PCS:500
- Dim.ctn:42x28.5x27cm

ITEM NO	MATERIAL
TS3008J	PP

Tap adaptor

1/2" | 3/4" | ABS | TAG

- Made of durable ABS PP plastic
- SIZE:4.5x3x1.6
- PCS:500
- Dim.ctn:48x28.5x26cm

ITEM NO	MATERIAL
TS3007J	ABS

Tap adaptor

1" | ABS | TAG

- Made of durable ABS PP plastic
- SIZE:4x4.2x1.6
- PCS:500
- Dim.ctn:42x28.5x30cm

ITEM NO	MATERIAL
TS3009J	ABS

Tap adaptor

3/4" | 1" | ABS | TAG

- Made of durable ABS PP plastic
- SIZE:4.8x1.6x4
- PCS:500
- Dim.ctn:42x28.5x35cm

ITEM NO	MATERIAL
TS3014J	ABS

Tap adaptor

1/2" | 3/4" | 1" | ABS | TAG

- Made of durable ABS PP plastic
- SIZE:5.5x1.6x4
- PCS:500
- Dim.ctn:42x28.5x38cm

ITEM NO	MATERIAL
TS3016J	ABS

Flow meter

ABS | color box

- Made of durable ABS plastic
- SIZE:4.2x5.5x14.2
- PCS:-
- Dim.ctn:-

ITEM NO	MATERIAL
TS3112	ABS

Timer

ABS | TPR | color box

- Made of durable ABS plastic
  coated with thermoplastic rubber (TPR)
- The Mechanical Timer features an oversized dial for ease of use. Mechanical operation that requires no batteries. Durable construction provides years of reliable use.Offers on and off settings or timed watering ranging from 0 to 120 minutes
- SIZE:15x6x8.5
- PCS:20
- Dim.ctn:36x26x20.5cm

ITEM NO	MATERIAL
TS5024	ABS+TPR

Timer

ABS | TPR | color box

- Made of durable ABS plastic
  coated with thermoplastic rubber (TPR)
- The Mechanical Timer features an oversized dial for ease of use. Mechanical operation that requires no batteries. Durable construction provides years of reliable use.Offers on and off settings or timed watering ranging from 0 to 120 minutes
- SIZE:15x14x8.5
- PCS:20
- Dim.ctn:53.5x34x32.5m

ITEM NO	MATERIAL
TS5025	ABS+TPR

Electronic LCD Digital Water Irrigation Timer

ABS | TPR | color box

- Made of durable ABS PP plastic
  coated with thermoplastic rubber (TPR)
- SIZE:15.5x9x6.5
- PCS:24
- Dim.ctn:48.5x42x20cm

ITEM NO	MATERIAL
TS5026	ABS+TPR

The smart system is the intelligent solution to achieve your gardening dream. From lawn mowing to watering your flowerbeds, this interconnected system of smart gardening devices exactly fits your needs and the needs of your garden. Now you can take care of your garden from any place in the world, at any time.

Multi-Function Spray Gun With TPR Coated

ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- With 4 settings, from powerful jet to fine sprayer mist
- Ergonomic shape withlockable trigger(released byapplying the light pressure)
- Integrated flow control
- Weather-, UV-and frost-resistant
- TPR coated, feel confortable
- SIZE:14.9x22.4x6.5
- PCS:12
- Dim.ctn:40x26x21.5cm

ITEM NO	MATERIAL
TS2135	ABS+TPR

Multi-Function Spray Gun

ABS | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- With 4 settings, from powerful jet to fine sprayer mist
- Ergonomic shape withlockable trigger(released byapplying the light pressure)
- Integrated flow control
- Weather-, UV-and frost-resistant
- SIZE:14.9x22.4x6.5
- PCS:12
- Dim.ctn:40x26x21.5cm

ITEM NO	MATERIAL
TS2130	ABS

4 functions water nozzle

ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:10.5x6x16
- PCS:50
- Dim.ctn:60*27*31cm

ITEM NO	MATERIAL
TS2136	ABS+TPR

Spray Gun With TPR Coated

ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- With 4 settings, from powerful jet to fine sprayer mist
- Ergonomic shape withlockable trigger(released byapplying the light pressure)
- Integrated flow control
- Weather-, UV-and frost-resistant
- TPR coated, feel confortable
- SIZE:14.9x22.4x6.5
- PCS:12
- Dim.ctn:40x25x18cm

MIST JET

ITEM NO	MATERIAL
TS2134	ABS+TPR

Spray Gun

ABS | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- Adjustale from powerful jet to fine spray mist
- Ergonomic shape with lockable trigger(released by applying the light pressure)
- Integrated flow control
- Weather-, UV-and frost-resistant
- SIZE:14.9x22.4x6.5
- PCS:12
- Dim.ctn:40x25x18cm

MIST JET

ITEM NO	MATERIAL
TS2131	ABS

Spray Gun

ABS | TPR | TAG

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- SIZE:11.5x4x16
- PCS:50
- Dim.ctn:58*27*24.5cm

MIST JET

ITEM NO	MATERIAL
TS2124	ABS+TPR

Impulse sprinkler with spike

ABS | color box

- Made of durable ABS plastic coated with thermoplastic rubber (TPR)
- Gear driven rotation,Adjust spraying range
- Adjust Spraying Angle
- Adjustable area from 0-345°
  Irrigation area: 70-3142-4 bar
- SIZE:11x44.5x35
- PCS:-
- Dim.ctn:-

ITEM NO	MATERIAL
TS1036	ABS

Three arms sprinkler with spike

ABS | color box

- Made of durable ABS plastic
- Circular Sprinkler with 12 precision nozzles
  Irrigation area: 85-220at 2-4 bar
- Stable base, UV and weatherproof
- SIZE:15x8x25
- PCS:-
- Dim.ctn:-

ITEM NO	MATERIAL
TS1039	ABS

Transformers sprinkler

ABS | color box

- Made of durable ABS plastic
- 18 soft plastic adjustable soft nozzle.
  Gear drive motor for even, gentle lawn watering.Wide adjustment of spray width for different sized square areas.
  Easy flow control.
- SIZE:19.5x16x6.2
- PCS:48
- Dim.ctn:48x43x25cm

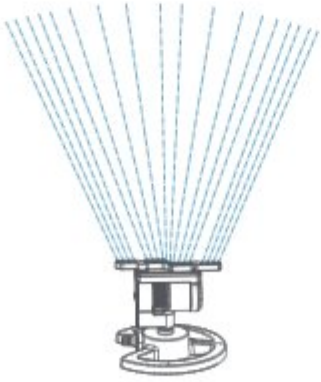

ITEM NO	MATERIAL
TS1084	ABS
TS1084-2	ABS

Circle Sprinkler

ABS | color box

- Made of durable ABS plastic
- Circular Sprinkler with 12 precision nozzles
  Irrigation area: 85-220at 2-4 bar
- Stable base, UV and weatherproof
- SIZE:10x21.5x23.5
- PCS:8
- Dim.ctn:40x40x23cm

ITEM NO	MATERIAL
TS1085	ABS

THREE ARM SPRINKLER WITH BASE

ABS | color box

- Made of durable ABS plastic
- SIZE:10x21.5x23.5
- PCS:8
- Dim.ctn:40x40x23cm

ITEM NO	MATERIAL
TS1038	ABS

OSCILLATING SPRINKLER

ABS | color box

- Made of durable ABS plastic
- SIZE:17x16x4
- PCS:8
- Dim.ctn:44x41x18cm

ITEM NO	MATERIAL
TS1087	ABS

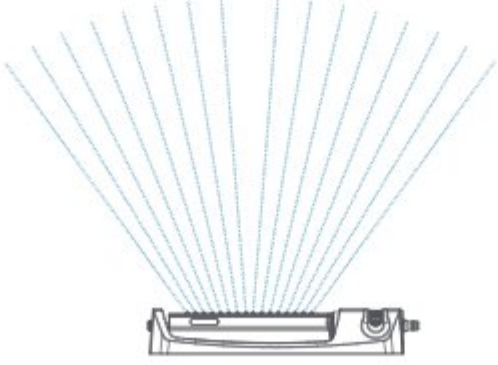

Wall-Mounted Hose Reel

Aluminum | ABS | TPR | color box

30M 1/2"

- Aluminium alloy body, durable ABS plastic coated with thermoplastic rubber (TPR)
- With the ergonomic crank,with soft plastic components Easy enables space-saving storage of the garden hose and is convenient to use.
  Wind up the hose four times with ease.
  Quick and easy storage of water pipes.
  Reduce volume and transport costs.
  Sturdy and space-saving with soft plastic component.
- SIZE:35x15x44.5
- PCS:5
- Dim.ctn:76.5x36.5x36.5cm

ITEM NO	MATERIAL
TS8053	ABS+TPR+Aluminum

HOSE REEL WITH HIGH QUALITY

Aluminum | ABS | TPR | color box

30M 1/2"

- Aluminium alloy body, durable ABS plastic coated with thermoplastic rubber (TPR)
- With the ergonomic crank,with soft plastic components Easy enables space-saving storage of the garden hose and is convenient to use.
  Wind up the hose four times with ease.
  Quick and easy storage of water pipes.
  Reduce volume and transport costs.
  Sturdy and space-saving with soft plastic component.
- SIZE:35x15x44.5
- PCS:5
- Dim.ctn:76.5x36.5x36.5cm

ITEM NO	MATERIAL
TS8015-N	ABS+TPR+Aluminum

TS8003 - OSCILLATING SPRINKLER

- Packing:Color box
- PCS:5
- Dim.ctn:50x41.5x19.5cm

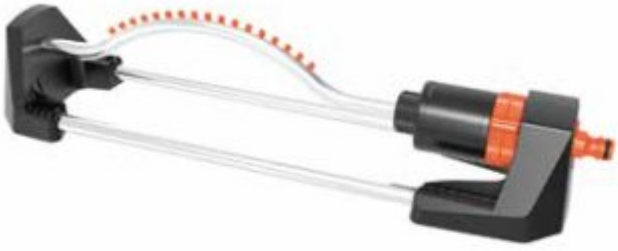

TS8018 - OSCILLATING SPRINKLER WITH PLASTIC NOZZLE

- Packing:Color box
- PCS:5
- Dim.ctn:50x41.5x19.5cm

TS8025 - OSCILLATING SPRINKLER WITH BRASS NOZZLE

- Packing:Color box
- PCS:5
- Dim.ctn:50x41.5x19.5cm

TS8026 - OSCILLATING SPRINKLER WITH PLASTIC BASE

- Packing:Color box
- PCS:5
- Dim.ctn:50x47.5x19.5cm

TS8027 - OSCILLATING SPRINKLER WITH PLASTIC NOZZLE

- Packing:Color box
- PCS:5
- Dim.ctn:50x47.5x19.5cm

TS8028 - OSCILLATING SPRINKLER WITH BRASS NOZZLE

- Packing:Color box
- PCS:5
- Dim.ctn:50x47.5x19.5cm

TS8031 - Hose reel cart with 20m hose

- Packing:Color box
- PCS:1
- Dim.ctn:33x28x40cm

TS8030 - Portable Hose Reel 60 Meter 1/2 Hose Capacity

- Packing:Color box
- PCS:5
- Dim.ctn:79x46x36.5cm

TS8013 - Mini portable hose reel with 10 meter hose

- Packing:Color box
- PCS:6
- Dim.ctn:52x29x48cm

TS8014 - Hose Reel 60 Meter 1/2 Hose Capacity

- Packing:Color box
- PCS:5
- Dim.ctn:79x46x36.5cm

TS8012 - Mini portable hose reel with 10 meter hose

- Packing:Color box
- PCS:6
- Dim.ctn:43.5x28x43cm

TS8014-N - Portable Hose Reel 60 Meter 1/2 Hose Capacity

- Packing:Color box
- PCS:5
- Dim.ctn:79x46x36.5cm

TS8017 - Portable Hose Reel 20 Meter 1/2 Hose Capacity

- Packing:Color box
- PCS:5
- Dim.ctn:76.5x29.5x33.5cm

TS8004 - Hose Reel Trolley 60 Meter 1/2 Hose Capacity Flexible Handle

- Packing:Color box
- PCS:5
- Dim.ctn:79x46x36.5cm

TS8015 - Hose Reel 30 Meter 1/2 Hose Capacity

- Packing:Color box
- PCS:5
- Dim.ctn:76.5x36.5x36.5cm

TS8002 - Portable Hose Reel 60 Meter 1/2 Hose Capacity Flexible Handle

- Packing:Color box
- PCS:5
- Dim.ctn:81.5x41.5x36.5cm

Hose

TS5014

X hose 25ft/50ft/75ft available

TS5014-25ft
Packing: Color Box
Pcs: 20
Dim. ctn: 58.5*24*42.5

TS5014-50ft
Packing: Color Box
Pcs: 20
Dim. ctn: 50*40*49

TS5014-75ft
Packing: Color Box
Pcs: 20
Dim. ctn: 78.5*50*32.5

TS5018

X hose 25ft/50ft/75ft available

TS5018-25ft
Packing: Color Box
Pcs: 20
Dim. ctn: 58.5*24*42.5

TS5018-50ft
Packing: Color Box
Pcs: 20
Dim. ctn: 50*40*49

TS5018-75ft
Packing: Color Box
Pcs: 20
Dim. ctn: 78.5*50*32.5

TS5019

X hose 25ft/50ft/75ft available

TS5019-25ft
Packing: Color Box
Pcs: 20
Dim. ctn: 58.5*24*42.5

TS5019-50ft
Packing: Color Box
Pcs: 20
Dim. ctn: 50*40*49

TS5019-75ft
Packing: Color Box
Pcs: 20
Dim. ctn: 78.5*50*32.5

TS5013

7.5m recoil hose set
plastic pistol+connector

Packing: Color Box
Pcs: 6
Dim. ctn: 35*33*44

TS5012

15m recoil hose set
plastic pistol+connector

Packing: Color Box
Pcs: 6
Dim. ctn: 47*41*36

Plastic connector

ode	Size	Packing	Pcs	Dim.ctn
I0003	1/2"	Tag	250	42x28.5x23
I0004	1/2"	Tag	250	42x28.5x23
I0005	3/4"	Tag	250	42x28.5x29.5
I0006	3/4"	Tag	250	42x28.5x29.5

Plastic connector

Code	Size	Packing	Pcs	Dim.ctn
TS3004C	1/2"	Tag	250	42x28.5x23
TS3005C	1/2"	Tag	250	42x28.5x23
TS3024C	3/4"	Tag	250	42x28.5x29.5
TS3025C	3/4"	Tag	250	42x28.5x29.5

Hose connector

Code	Size	Packing	Pcs	Dim.ctn
I0007	1/2"	Tag	250	42x28.5x20
I0008	3/4"	Tag	250	42x28.5x31
I0009	1/2"-3/4"	Tag	250	42x28.5x24

Hose mender

Code	Size	Packing	Pcs	Dim.ctn
TS3006C	1/2"	Tag	250	42x28.5x20
TS3030C	3/4"	Tag	250	42x28.5x31
TS3036C	1/2"-3/4"	Tag	250	42x28.5x24

Plastic connector

Code	Size	Packing	Pcs	Dim.ctn
TS3004	1/2"	Tag	250	42x28.5x27
TS3005	1/2"	Tag	250	42x28.5x27
TS3024	3/4"	Tag	250	42x28.5x34
TS3025	3/4"	Tag	250	42x28.5x34

Plastic connector

Code	Size	Packing	Pcs	Dim.ctn
TS3004H	1/2"	Tag	250	42x28.5x23
TS3005H	1/2"	Tag	250	42x28.5x23
TS3024H	3/4"	Tag	250	42x28.5x29.5
TS3025H	3/4"	Tag	250	42x28.5x29.5

Hose connector

Code	Size	Packing	Pcs	Dim.ctn
TS3006	1/2"	Tag	250	42x28.5x20
TS3030	3/4"	Tag	250	42x28.5x31
TS3036	1/2"-3/4"	Tag	250	42x28.5x24

Hose connector

Code	Size	Packing	Pcs	Dim.ctn
TS3006H	1/2"	Tag	250	42x28.5x20
TS3030H	3/4"	Tag	250	42x28.5x31
TS3036H	1/2"-3/4"	Tag	250	42x28.5x24

Plastic connector

Code	Size	Packing	Pcs	Dim.ctn
TS3004P	1/2"	Tag	250	42x28.5x23
TS3005P	1/2"	Tag	250	42x28.5x23
TS3024P	3/4"	Tag	250	42x28.5x29.5
TS3025P	3/4"	Tag	250	42x28.5x29.5

Plastic connector

Code	Size	Packing	Pcs	Dim.ctn
TS3004D	1/2"	Tag	250	42x28.5x23
TS3005D	1/2"	Tag	250	42x28.5x23
TS3024D	3/4"	Tag	250	42x28.5x29.5
TS3025D	3/4"	Tag	250	42x28.5x29.5

Hose connector

Code	Size	Packing	Pcs	Dim.ctn
TS3006P	1/2"	Tag	250	42x28.5x20
TS3030P	3/4"	Tag	250	42x28.5x31
TS3036P	1/2"-3/4"	Tag	250	42x28.5x24

Plastic connector

Code	Size	Packing	Pcs	Dim.ctn
TS3004F	1/2"	Tag	250	42x28.5x23
TS3005F	1/2"	Tag	250	42x28.5x23
TS3024F	3/4"	Tag	250	42x28.5x29.5
TS3025F	3/4"	Tag	250	42x28.5x29.5

KIMPORT

Plastic connector

Code	Size	Packing	Pcs	Dim.ctn
TS3004E	1/2"	Tag	250	42x28.5x23
TS3005E	1/2"	Tag	250	42x28.5x23
TS3024E	3/4"	Tag	250	42x28.5x29.5
TS3025E	3/4"	Tag	250	42x28.5x29.5

Hose connector

Code	Size	Packing	Pcs	Dim.ctn
TS3006E	1/2"	Tag	250	42x28.5x20
TS3030E	3/4"	Tag	250	42x28.5x31
TS3036E	1/2"-3/4"	Tag	250	42x28.5x24

Plastic connector

Code	Size	Packing	Pcs	Dim.ctn
LX2005C	1/2"	Tag	250	42x28.5x37
LX2006C	1/2"	Tag	250	42x28.5x37
LX2025C	3/4"	Tag	250	42x28.5x44
LX2026C	3/4"	Tag	250	42x28.5x44

Plastic connector

Code	Size	Packing	Pcs	Dim.ctn
LX2005	1/2"	Tag	250	42x28.5x37
LX2006	1/2"	Tag	250	42x28.5x37
LX2025	3/4"	Tag	250	42x28.5x44
LX2026	3/4"	Tag	250	42x28.5x44

Plastic connector

Code	Size	Packing	Pcs	Dim.ctn
LX2005R	1/2"	Tag	250	42x28.5x37
LX2006R	1/2"	Tag	250	42x28.5x37
LX2025R	3/4"	Tag	250	42x28.5x44
LX2026R	3/4"	Tag	250	42x28.5x44

Hose connector

Code	Size	Packing	Pcs	Dim.ctn
LX3006	1/2"	Tag	250	42x28.5x31
LX3030	3/4"	Tag	250	42x28.5x41
LX3036	1/2"-3/4"	Tag	250	42x28.5x34

Comfort hose connector with soft grip

Code	Size	Packing	Pcs	Dim.ctn
LX1002R	1/2"	Tag	250	42x28.5x28
LX1003R	1/2"	Tag	250	42x28.5x28
LX1004R	3/4"	Tag	250	42x28.5x36
LX1005R	3/4"	Tag	250	42x28.5x36

Comfort hose connector with soft grip

Code	Size	Packing	Pcs	Dim.ctn
LX3004R	1/2"	Tag	250	42x36x28
LX3005R	1/2"	Tag	250	42x36x28
LX3024R	3/4"	Tag	250	42x38x36
LX3025R	3/4"	Tag	250	42x38x36

Premium repare hose mender

Code	Size	Packing	Pcs	Dim.ctn
LX1006R	1/2"	Tag	250	42x28.5x28
LX1007R	3/4"	Tag	250	42x28.5x36
LX1008R	1/2"-3/4"	Tag	250	42x28.5x34

Hose connector with soft grip with metal cap

Code	Size	Packing	Pcs	Dim.ctn
TS3004L	1/2"	Tag	250	42x28.5x23
TS3005L	1/2"	Tag	250	42x28.5x23
TS3026L	3/4"	Tag	250	42x28.5x29.5
TS3027L	3/4"	Tag	250	42x28.5x29.5

Comfort hose connector with soft grip

Code	Size	Packing	Pcs	Dim.ctn
TS3004R	1/2"	Tag	250	42x28.5x23
TS3005R	1/2"	Tag	250	42x28.5x23
TS3024R	3/4"	Tag	250	42x28.5x29.5
TS3025R	3/4"	Tag	250	42x28.5x29.5

Metal premium repare hose mender

Code	Size	Packing	Pcs	Dim.ctn
TS3006M	1/2"	Tag	250	42x28.5x20
TS3030M	3/4"	Tag	250	42x28.5x31
TS3036M	1/2"-3/4"	Tag	250	42x28.5x24

Universal connector

Code	Size	Packing	Pcs	Dim.ctn
LX2001R	1/2"-3/4"	Tag	250	42x28.5x40
LX2002R	1/2"-3/4"	Tag	250	42x28.5x40

Hose mender

Code	Size	Packing	Pcs	Dim.ctn
LX2004R	1/2"-3/4"	Tag	250	42x28.5x43

Tap adaptor

Code	Size	Packing	Pcs	Dim.ctn
TS3015	3/8"	Tag	250	42x28.5x27

Angled quick connector

Code		Packing	Pcs	Dim.ctn
LX2023	w/o stop	Bulk	50	24x22x22
LX2024	w/o stop	Bulk	50	24x22x22

Angled quick connector

Code		Packing	Pcs	Dim.ctn
LX2023R	w/o stop	Bulk	50	24x22x22
LX2024R	w/o stop	Bulk	50	24x22x22

Angled quick connector

Code		Packing	Pcs	Dim.ctn
LX2023A	w/o stop	Bulk	50	23x21x21
LX2024A	w/o stop	Bulk	50	23x21x21

Angled quick connector

Code		Packing	Pcs	Dim.ctn
LX2015R	w/o stop	Bulk	50	34x19x17
LX2016R	w/o stop	Bulk	50	34x19x17

Angled quick connector

Code		Packing	Pcs	Dim.ctn
LX2015	w/o stop	Bulk	50	34x19x17
LX2016	w/o stop	Bulk	50	34x19x17

Angled quick connector

Code	Packing	Pcs	Dim.ctn
LX2007	Bulk	50	27x18x17

Angled quick connector

Code		Packing	Pcs	Dim.ctn
LX2011R	w/o stop	Bulk	50	32x19x17
LX2014R	w/o stop	Bulk	50	32x19x17

Angled quick connector

Code		Packing	Pcs	Dim.ctn
LX2011	w/o stop	Bulk	50	32x19x17
LX2014	w/o stop	Bulk	50	32x19x17

Angled quick connector

Code		Packing	Pcs	Dim.ctn
LX2012A	w/o stop	Bulk	50	32x19x17
LX2013A	w/o stop	Bulk	50	32x19x17

KIMPORT

Angled quick connector

Code		Packing	Pcs	Dim.ctn
LX2012	w/o stop	Bulk	50	32x19x17
LX2013	w/o stop	Bulk	50	32x19x17

Three outputs connector

Code	Size	Packing	Pcs	Dim.ctn
AP1006T	1/2"	Tag	250	42x32x31
AP1007T	3/4"	Tag	250	42x32x31

Tap

Code	Size	Packing	Pcs	Dim.ctn
LT2-1	1/2"	Tag	50	42x28.5x16.5
LT4-1	3/4"	Tag	50	42x28.5x16.5

High flow connector

Code	Size	Packing	Pcs	Dim.ctn
TS3024L	3/4"	Tag	250	42x28.5x37
TS3025L	3/4"	Tag	250	42x28.5x37
TS3024X	1"	Tag	250	42x28.5x56
TS3025X	1"	Tag	250	42x28.5x56

Hose mender

Code	Size	Packing	Pcs	Dim.ctn
TS3036X	3/4"-1"	Tag	250	53x53x29
TS3030X	1"	Tag	250	53x53x29

2-way connector to join differentsize hose

Code	Size	Packing	Pcs	Dim.ctn
TS3003X	-	Tag	500	42x28.5x31

2-way connector to join two lengths of hose

Code	Size	Packing	Pcs	Dim.ctn
TS3003L	-	Tag	500	42x28.5x32

Threaded adaptor with male connector

Code	Size	Packing	Pcs	Dim.ctn
TS3010L	-	Tag	500	42x28.5x28

Three hoses with high flow connectors

Code	Size	Packing	Pcs	Dim.ctn
TS3002L	-	Tag	500	42x28.5x35

Three way connector

Code	Size	Packing	Pcs	Dim.ctn
TS3002C	-	Tag	500	42x28.5x35

Tap adaptor

Code	Size	Packing	Pcs	Dim.ctn
TS3009L	1"	Tag	500	42x28.5x32

Tap adaptor

Code	Size	Packing	Pcs	Dim.ctn
TS3014L	3/4"-1"	Tag	500	42x28.5x40

Double snap-on joiner

Code	Size	Packing	Pcs	Dim.ctn
TS3003	-	Tag	500	42x28.5x25

Tap adaptor

Code	Size	Packing	Pcs	Dim.ctn
TS3037	1/2"	Tag	500	42x28.5x25
TS3008	3/4"	Tag	500	42x28.5x27
TS3009	1"	Tag	500	42x28.5x30

Three double snap-on joiner

Code	Size	Packing	Pcs	Dim.ctn
TS3002	-	Tag	500	42x28.5x33

Male BSP thread tap adaptor

Code	Size	Packing	Pcs	Dim.ctn
TS3010B	1/2"	Tag	500	42x28.5x15

Double snap-on joiner with soft grip

Code	Size	Packing	Pcs	Dim.ctn
TS3003N	-	Tag	500	42x28.5x26

Male BSP thread tap adaptor

Code	Size	Packing	Pcs	Dim.ctn
TS3010A	3/4"	Tag	500	42x28.5x19

Three double snap-on joiner with soft grip

Code	Size	Packing	Pcs	Dim.ctn
TS3002N	-	Tag	500	42x28.5x34

Male BSP thread tap adaptor

Code	Size	Packing	Pcs	Dim.ctn
TS3010	3/4"	Tag	500	42x28.5x18

Tap adaptor with metal reducer

Code	Size	Packing	Pcs	Dim.ctn
TS3008-P	3/4"	Tag	500	42x28.5x35

BSP thread

Code	Size	Packing	Pcs	Dim.ctn
TS3010X	3/4"	Tag	500	42x28.5x25

Tap adaptor with metal reducer

Code	Size	Packing	Pcs	Dim.ctn
TS3008-M	3/4"	Tag	500	42x28.5x38

Reducer

Code	Size	Packing	Pcs	Dim.ctn
TS3012	1/2"-3/4"	Tag	1000	42x28.5x30
TS3011	3/4"-1"	Tag	1000	42x28.5x22

Tap adaptor

Code	Size	Packing	Pcs	Dim.ctn
TS3007	1/2"-3/4"	Tag	500	42x28.5x26
TS3014	3/4"-1"	Tag	500	42x28.5x35

Tap adaptor

Code	Size	Packing	Pcs	Dim.ctn
TS3016	1/2"-3/4"-1"	Tag	500	42x28.5x38

Tap connector

Code	Size	Packing	Pcs	Dim.ctn
LX1010R	1/2"	Tag	500	42x28.5x25
LX1011R	3/4"	Tag	500	42x28.5x28
LX1012R	1"	Tag	500	42x28.5x31

Tap connector

Code	Size	Packing	Pcs	Dim.ctn
LX1013R	1/2"-3/4"	Tag	500	42x28.5x27
LX1014R	3/4"-1"	Tag	500	42x28.5x36

Tap adaptor with soft grip

Code	Size	Packing	Pcs	Dim.ctn
LX1024R	1/2"	Tag	500	42x28.5x30
LX1022R	3/4"	Tag	500	42x28.5x32
LX1019R	1"	Tag	500	42x28.5x35

Tap adaptor with soft grip

Code	Size	Packing	Pcs	Dim.ctn
LX1023R	1/2"-3/4"	Tag	500	42x28.5x31
LX1018R	3/4"-1"	Tag	500	42x28.5x40

Hose connector

Code	Size	Packing	Pcs	Dim.ctn
TS3051	-	Tag	500	42x28.5x20

Hose connector

Code	Size	Packing	Pcs	Dim.ctn
TS3038	-	Tag	500	42x28.5x23

Snap-on connector with soft grip

Code	Size	Packing	Pcs	Dim.ctn
LX1009R	3/4"	Tag	500	42x28.5x27

3/4"Connector with soft grip

Code		Packing	Pcs	Dim.ctn
TS3101R	w/o stop	Tag	250	42x28.5x19
TS3103R	w/o stop	Tag	250	42x28.5x19

3/4"Connector with soft grip

Code		Packing	Pcs	Dim.ctn
TS3102R	w/o stop	Tag	250	42x28.5x19
TS3104R	w/o stop	Tag	250	42x28.5x19

3/4"Standard female thread connector

Code		Packing	Pcs	Dim.ctn
TS3101	w/o stop	Tag	250	42x28.5x19
TS3103	w/o stop	Tag	250	42x28.5x19

3/4" Standard male thread connector

Code		Packing	Pcs	Dim.ctn
TS3102	w/o stop	Tag	250	42x28.5x19
TS3104	w/o stop	Tag	250	42x28.5x19

Round tap connector

Code	Size	Packing	Pcs	Dim.ctn
TS3041L	-	Tag	100	42x28.5x22

Hose repair-male

Code	Size	Packing	Pcs	Dim.ctn
TS3021	1/2"	Tag	250	42x28.5x23
TS3021-1	5/8"-3/4"	Tag	250	42x28.5x25

Multiple outlet tap connector

Code	Size	Packing	Pcs	Dim.ctn
TS3033	-	Tie on card	50	54x42x40

Recoil hose repair connector

Code	Size	Packing	Pcs	Dim.ctn
TS3019	1/2"	Tag	200	42x28.5x22
TS3019-1	5/8"-3/4"	Tag	200	42x28.5x26

Plastic four way connector with valve

Code	Size	Packing	Pcs	Dim.ctn
TS3035X	-	Tie on card	50	54x42x40

Hose repair-female

Code	Size	Packing	Pcs	Dim.ctn
TS3020-1	1/2"	Tag	250	42x28.5x27
TS3020-2	5/8"-3/4"	Tag	250	42x28.5x26

Plastic two way connector with valve

Code	Size	Packing	Pcs	Dim.ctn
TS3017	-	Tie on card	48	38x26x37

Round tap connector

Code	Size	Packing	Pcs	Dim.ctn
TS3040	-	Tag	100	42x28.5x16

Plastic two way connector with valve

Code	Size	Packing	Pcs	Dim.ctn
TS3018	-	Tie on card	48	34x23x27

Round tap connector

Code	Size	Packing	Pcs	Dim.ctn
TS3041	-	Tag	100	42x28.5x16

Aluminium two way connector with valve

Code	Size	Packing	Pcs	Dim.ctn
TS3018A	-	Tie on card	50	56x30.5x15.5

KIMPORT

Plastic two way connector with valve

Code	Size	Packing	Pcs	Dim.ctn
TS3018P	-	Tie on card	50	56x30.5x15.5

Plastic two way connector with valve

Code	Size	Packing	Pcs	Dim.ctn
TS3018USA1	-	Tie on card	48	34x23x27

Female thread connector with valve

Code	Size	Packing	Pcs	Dim.ctn
TS3020	3/4"	Tie on card	250	39x38.5x23

Inline connector with valve

Code	Size	Packing	Pcs	Dim.ctn
TS3039	-	Tie on card	250	39x38.5x23

Tool-end quick connector with manual valve

Code	Size	Packing	Pcs	Dim.ctn
TS3049	-	Tie on card	200	58.5x48.5x21

Tool-end quick connector with manual valve with soft rubber cover

Code	Size	Packing	Pcs	Dim.ctn
TS3050	-	Tie on card	200	58.5x48.5x21

Tap connector

Code	Size	Packing	Pcs	Dim.ctn
TS3013	-	Tag	100	42x28.5x26

Hose connector

Code	Size	Packing	Pcs	Dim.ctn
TS3111	-	Tag	250	42x28.5x27

Hose connector with clamp

Code	Size	Packing	Pcs	Dim.ctn
TS3111-1	-	Tag	250	42x28.5x27

Hose connector

Code	Size	Packing	Pcs	Dim.ctn
TS3028	-	Tag	250	42x28.5x28

Hose connector with soft grip

Code	Size	Packing	Pcs	Dim.ctn
TS3029	-	Tag	250	42x28.5x28

Plastic shut-off valve

Code	Size	Packing	Pcs	Dim.ctn
TS3042	-	Tag	250	42x28.5x27

Power Jet saves water and give more power

Code	Packing	Pcs	Dim.ctn
TS0001	Blister	48	43x27x18.5

Brass triple snap-on joiner

Code	Packing	Pcs	Dim.ctn
TSB03	Tag	100	32x18x18

Brass quick connector with stop

Code	Size	Packing	Pcs	Dim.ctn
TSB04	1/2"	Tag	100	32x23x10.5
TSB05	1/2"	Tag	100	32x23x10.5
TSB06	3/4"	Tag	100	32x23x11.5
TSB07	3/4"	Tag	100	32x23x11.5

Brass snap-on connector

Code	Size	Packing	Pcs	Dim.ctn
TSB16	3/4"	Tag	250	20x18x18

Brass quick connector

Code	Size	Packing	Pcs	Dim.ctn
TSB01	1/2"	Tag	100	18x18x16.5
TSB02	3/4"	Tag	100	32x23x13

Brass tap connector

Code	Size	Packing	Pcs	Dim.ctn
TSB08	1/2"	Tag	250	31x25x25
TSB13	3/4"	Tag	250	31x25x30
TSB09	1"	Tag	250	31x25x38

Brass hose connector

Code		Packing	Pcs	Dim.ctn
TSB48	w/o stop	Blister	100	58.5x49x20
TSB48-1	w/o stop	Blister	100	58.5x49x20

Brass tap connector

Code	Size	Packing	Pcs	Dim.ctn
TSB15	1/2"-3/4"	Tag	250	32x23x15
TSB14	3/4"-1"	Tag	250	32x23x29

Brass quick connector with soft grip

Code	Size	Packing	Pcs	Dim.ctn
TSB25	1/2"	Tag	100	32x23x12
TSB26	3/4"	Tag	100	32x23x15
TSB17	1/2"	Tag	100	32x23x12
TSB18	3/4"	Tag	100	32x23x15

Brass reducer

Code	Size	Packing	Pcs	Dim.ctn
TSB38	1/2"-3/4"	Tag	250	28.5x21x11
TSB31	3/4"-1"	Tag	250	28.5x21x15

Brass double snap-on joiner

Code	Packing	Pcs	Dim.ctn
TSB12	Tag	250	23x16x18

Tap adaptor

Code	Size	Packing	Pcs	Dim.ctn
TSB45	1/2"-3/4"-1"	Tag	500	42x28.5x38

KIMPORT

Brass coupling hsoe connector

Code	Size	Packing	Pcs	Dim.ctn
TSB29	3/4"	Polybag	200	30x36.5x16.5
TSB21	1"	Polybag	150	30x36.5x16.5

Brass hose nozzle

Code	Packing	Pcs	Dim.ctn
TSB19	Tag	100	32x18x18

Rubber coated brass hose nozzle

Code	Packing	Pcs	Dim.ctn
TSB20USA	Tag	100	32x18x18

Rubber coated brass hose nozzle

Code	Packing	Pcs	Dim.ctn
TSB20	Tag	100	32x18x18

Brass hose nozzle

Code	Packing	Pcs	Dim.ctn
TSB49	Blister	100	58.5x39x20

Hose protector

Code	Packing	Pcs	Dim.ctn
TSB28	-	-	32x18x18

Brass tap connector

Code	Size	Packing	Pcs	Dim.ctn
TSB10	3/4"	Tag	100	32x23x10
TSB27	1"	Tag	100	32x23x10

Brass snap-on connector

Code	Size	Packing	Pcs	Dim.ctn
TSB11	3/4"	Tag	100	-

Brass connector with valve

Code	Size	Packing	Pcs	Dim.ctn
TSB30	3/4"	Tag	100	-

Brass two way connector

Code	Packing	Pcs	Dim.ctn
TSB37	Tag	50	45x38x31

Brass multiple outlet tap connector

Code	Packing	Pcs	Dim.ctn
TSB32	Tag	10	22x18x16

Metal spike

Code	Packing	Pcs	Dim.ctn
TS0244	Tag	50	22x17x8

Brass click on tap male

Code	Packing	Pcs	Dim.ctn
TSB44	Blister	40	49x44x11.5

	Packing	Pcs	Dim.ctn
TS2091 - Thumb-control 9 pattern pistol - Pattern : CONE,SOAKER,JET,ANGLE,SHOWER, FULL,CENTER,FLAT,MIST	Tie on card	48	54x47x43
TS2092 - Thumb-control adjustable pistol - Pattern : MIST,JET	Tie on card	48	54x47x43

TS2123 - 8 function water nozzle - Pattern : SHOWER,FLAT,CONE,MIST,JET, FULL,CENTER,SOAKER	Tie on card	48	55x42x17
TS2124 - Water nozzle - Pattern : MIST,JET	Tie on card	48	54x40x17

TS2035 - 8 function thumb nozzle double colour rubber coated grip - Pattern : CONE,SHOWER,FLAT,SOAKER,JET, CENTER,MIST,FULL	Tie on card	48	62x29x27
TS2036 - Thumb Twist nozzle double colour rubber coated grip - Pattern : MIST,JET	Tie on card	48	70x22x30

TS2033 - 8 pattern click trigger nozzle double colour rubber coated - Pattern : CONE,SHOWER,FLAT,SOAKER,JET, CENTER,MIST,FULL	Tie on card	48	62x29x27
TS2034 - Twist click trigger nozzle double colour rubber coated grip - Pattern : MIST,JET	Tie on card	48	77x22x28

TS2037 - 8 pattern trigger nozzle double colour rubber coated - Pattern : CONE,SHOWER,FLAT,SOAKER,JET, CENTER,MIST,FULL	Tie on card	48	62x29x27
TS2038 - Twist trigger nozzle double colour rubber coated grip - Pattern : MIST,JET	Tie on card	48	77x22x28

KIMPORT

		Packing	Pcs	Dim.ctn
TS2041 TS2042	**TS2041 - Shower nozzle double colour rubber coated** - Pattern : SHOWER,,MIST,FULL	Tie on card	48	73x42x26
	TS2042 - Shower nozzle double colour rubber coated - Pattern : SHOWER,,MIST,FULL	Tie on card	48	73x42x26
TS2039 TS2097	**TS2039 - Shower nozzle fully adjustable spray nozzle** - Pattern : SHOWER,,MIST,FULL	Tie on card	48	73x42x26
	TS2097 - Washing car spray nozzle 8 pre-set spray patterns - Pattern : CONE,SHOWER,FLAT,SOAKER,JET, CENTER,MIST,FULL	Tie on card	48	46x49x30
TS2067 TS2068	**TS2067 - 7 pattern click trigger nozzle double colour rubber coated** - Pattern : POWER,WASH,RINSE,BUCKET,FILLER, SOAKER, SHOWER, FLAT, MIST	Tie on card	48	81x28x24
	TS2068 - Twist click trigger nozzle double colour rubber coated grip - Pattern : MIST,JET	Tie on card	48	57x39x25
TS2048 TS2046	**TS2048 - 8 pattern trigger nozzle double colour rubber coated** - Pattern : CONE,STREAM, MIST,VERTICAL,FLAT, FULL,SHOWER,CENTER	Tie on card	48	48x43x25
	TS2046 - Metal trigger nozzle double colour rubber coated grip - Pattern : MIST,JET	Tie on card	48	57x36x17
TS2045 TS2047	**TS2045 - 7 pattern front-pull lever nozzle double colour rubber coated** - Pattern : POWER WASH,RINSE,BUCKET FILLER, SOAKER,SHOWER,FLAT, MIST	Tie on card	48	59x43x23
	TS2047 - Twist front-pull lever nozzle double colour rubber coated grip - Pattern : MIST,JET	Tie on card	48	78x38x20

	Packing	Pcs	Dim.ctn
TS2069 TS2070			
TS2069 - 7 pattern nozzle - Pattern : CONE,SOAKER,SHOWER,FLAT,MIST, POWER WASH,RINSE	Tie on card	48	48x43x25
TS2070 - Twist nozzle - Pattern : MIST,JET	Tie on card	48	57x39x25
TS2052 TS2051			
TS2052 - Zinc 7 pattern back trigger pistol - Pattern : SHOWER,FLAT,CONE,MIST,JET, FULL,CENTER,SOAKER	Tie on card	48	68x38x29
TS2051 - Zinc back trigger twist pistol - Pattern : MIST,JET	Tie on card	48	65x38x15
TS2089 TS2088			
TS2089 - 8 pattern back trigger pistol with soft grip - Pattern : CONE,SOAKER,FULL,ANGLE, SHOWER,MIST,CENTER,FLAT	Tie on card	48	48x43x25
TS2088 - Back trigger twist pistol with soft grip - Pattern : MIST,JET	Tie on card	48	64x21x28
TS2082 TS2083			
TS2082 - 8 pattern back trigger pistol - Pattern : CONE,SOAKER,FULL,ANGLE, SHOWER,MIST,CENTER,FLAT	Tie on card	48	48x43x25
TS2083 - Back trigger twist pistol - Pattern : MIST,JET	Tie on card	48	77x23x29
TS2081 TS2080			
TS2081 - 8 pattern trigger pistol - Pattern : CONE,SHOWER,FLAT,SOAKER,JET, CENTER,MIST,FULL	Tie on card	48	68x36x29
TS2080 - 7 pattern trigger pistol - Pattern : CONE,FULL,MIST,JET,SHOWER, FLAT,CENTER	Tie on card	48	70x24x20

KIMPORT

	Packing	Pcs	Dim.ctn
TS2085 TS2086			
TS2085 - 8 pattern back trigger pistol with soft grip - Pattern : CONE,SOAKER,FULL,ANGLE, SHOWER,MIST,CENTER,FLAT	Tie on card	48	55x42x17
TS2086 - Back trigger twist pistol with soft grip - Pattern : MIST,JET	Tie on card	48	54x40x17
TS2065 TS2066			
TS2065 - 8 pattern back trigger pistol - Pattern : CONE,JET,MIST,FLAT,VERTICAL, SHOWER,SOAKER,FULL	Tie on card	48	75x40x15
TS2066 - Back trigger twist pistol - Pattern : MIST,JET	Tie on card	48	77x23x29
TS2065-NEW TS2066-NEW			
TS2065-NEW - 8 pattern back trigger pistol with soft grip - Pattern : CONE,JET,MIST,FLAT,VERTICAL, SHOWER,SOAKER,FULL	Tie on card	48	75x40x15
TS2066-NEW - Back trigger twist pistol with soft grip - Pattern : MIST,JET	Tie on card	48	77x23x29
TS2005 TS2009			
TS2005 - 8 pattern pistol - Pattern : CONE,SOAKER,FULL,ANGLE, SHOWER,MIST,CENTER,FLAT	Tie on card	48	48x43x25
TS2009 - Adjustable plastic pistol - Pattern : MIST,JET	Tie on card	48	57x36x17
TS2111 TS2011			
TS2111 - 6"adjustable plastic pistol - Pattern : JET	Tie on card	48	61x22x24
TS2011 - 4" adjustable plastic pistol - Pattern : JET	Tie on card	48	61x22x24

		Packing	Pcs	Dim.ctn
TS2015 TS2016A	**TS2015 - Zinc simple basic nozzle** - Pattern : CONE,SOAKER,SHOWER,FLAT,MIST, POWER WASH,RINSE	Tie on card	48	61x22x24
	TS2016A - Zinc basic nozzle - Pattern : MIST,JET	Tie on card	48	40x35x15
TS2006	**TS2006 - Simple basic pistol** - Pattern : MIST,JET	Tie on card	100	60x36x17
TS2060	**TS2060 - Simple basic pistol** - Pattern : MIST,JET	Tie on card	100	65x21x26
TS2006R	**TS2006R - Simple basic pistol with soft grip** - Pattern : MIST,JET	Tie on card	100	65x21x26
LX1015R	**LX1015R - Comfort adjustable spray nozzle with soft grip** - Pattern : MIST,JET	Tie on card	100	65x21x26
TS2006N	**TS2006N - New pistol with flow control** - Pattern : MIST,JET	Tie on card	100	60x36x17
TS2006L	**TS2006L - High flow adjustable spray nozzle** - Pattern : MIST,JET	Tie on card	100	65x21x26
TS2076	**TS2076 - 8 pattern pistol thumb control** - Pattern : CONE,SOAKER,FULL,ANGLE, SHOWER,MISTCENTER,FLAT	Tie on card	50	67.5x30x27
TS2071	**TS2071 - Shower nozzle** - Pattern : SHOWER	Tie on card	48	60x31x49

KIMPORT

		Packing	Pcs	Dim.ctn
	TS2055 - 8 pattern watering wand - Pattern : CONE,SHOWER,FLAT,SOAKER, JET,CENTER,MIST,FULL	Tie on card	24	50x45x25
	TS2112 - 8 pattern watering wand - Pattern : CONE,SHOWER,FLAT,SOAKER, JET,CENTER,MIST,FULL	Tie on card	12	76x28.5x22.5
	TS2113 - 8 pattern telescopic watering wand - Pattern : CONE,SHOWER,FLAT,SOAKER, JET,CENTER,MIST,FULL	Tie on card	12	82x28.5x22.5
	TS2119 - 8 pattern watering wand - Pattern : CONE,SOAKER,FULL,ANGLE, SHOWER,MIST,CENTER,FLAT	Tie on card	12	81.5x26x22
	TS2120 - Shower watering wand - Pattern : SHOWER,FULL,MIST	Tie on card	12	76.5x28.5x22.5
	TS2121 - Shower watering wand aluminium handle - Pattern : SHOWER,FULL,MIST	Tie on card	12	81.5x28.5x22.5
	TS2114 - Shower watering wand aluminium handle - Pattern : SHOWER,FULL,MIST	Tie on card	12	76.5x28.5x22.5
	TS2115 - Shower watering wand - Pattern : SHOWER,FULL,MIST	Tie on card	12	81.5x28.5x22.5

Three arm sprinkler with round base

Code	Packing	Pcs	Dim.ctn
TS1001	POLYBAG	20	53x53x30

Two arm sprinkler with round base

Code	Packing	Pcs	Dim.ctn
TS1002	POLYBAG	20	53x53x30

Impulse sprinkler with round base

Code	Packing	Pcs	Dim.ctn
TS1003	POLYBAG	20	53x53x30

Metal sprinkler with plastic butterfly shape base

Code	Packing	Pcs	Dim.ctn
TS1043	Color box	10	48x36x22

Plastic sprinkler with palstic butterfly shape base

Code	Packing	Pcs	Dim.ctn
TS1042	Color box	10	48x36x22

LED sprinkler with butterfly shape base

Code	Packing	Pcs	Dim.ctn
TS1062	Color box	10	48x36x22

Three arm sprinkler with butterfly shape base

Code	Packing	Pcs	Dim.ctn
TS1041	Color box	10	42x37x25

LED sprinkler

Code	Packing	Pcs	Dim.ctn
TS1055	Color box	10	58.5x48x21

LED sprinkler with spike

Code	Packing	Pcs	Dim.ctn
TS1060	Color box	12	40x34x23.5

LED sprinkler with round base

Code	Packing	Pcs	Dim.ctn
TS1061	Color box	10	63.5x60x31

Three leaves sprinkler-Wheel base

Code	Packing	Pcs	Dim.ctn
TS1053	Color box	10	48x46x21

Three arm with sprinkler

Code	Packing	Pcs	Dim.ctn
242Q-1	POLYBAG	50	53x53x28

Three arm sprinkler -Wheel base

Code	Packing	Pcs	Dim.ctn
TS1058	Color box	10	48x46x21

Spike sprinkler

Code	Packing	Pcs	Dim.ctn
L2415Q	POLYBAG	50	39x39x22

Pulsating sprinkler -Wheel base

Code	Packing	Pcs	Dim.ctn
TS1054	Color box	10	48x46x21

Sprinkler

Code	Packing	Pcs	Dim.ctn
242Q	POLYBAG	50	53x53x28

ZINC NEW BASE + zinc impulse sprinkler

Code	Packing	Pcs	Dim.ctn
WL-230BW	Tag	40	61x40x47

New three arm sprinkler with spike

Code	Packing	Pcs	Dim.ctn
TS1080	POLYBAG	50	56x38x32

9 function sprinkler

Code	Packing	Pcs	Dim.ctn
L9W	Tie on card	12	42x42x20

New three arm sprinkler

Code	Packing	Pcs	Dim.ctn
TS1076	Tie on card	24	48x43.5x59.5

Airplane sprinkler

Code	Packing	Pcs	Dim.ctn
TS1009	POLYBAG	50	56x38x37

Spike sprinkler

Code	Packing	Pcs	Dim.ctn
TS1013	POLYBAG	100	40x33x38

Metal 3-arm whirling sprinkler

Code	Packing	Pcs	Dim.ctn
TS1021	Color box	10	46x43.5x23.5

Plastic sprinkler with metal spike

Code	Packing	Pcs	Dim.ctn
TS1069	Bulk	50	42x40x24

8 function sprinkler

Code	Packing	Pcs	Dim.ctn
TS1048	Tag	50	49x36x46

Plastic sprinkler with plastic spike

Code	Packing	Pcs	Dim.ctn
TS1004	Bulk	50	42x40x24

Pyramid sprinkler

Code	Packing	Pcs	Dim.ctn
TS1031	Tag	50	46x28x38

Plastic sprinkler with metal spike

Code	Packing	Pcs	Dim.ctn
TS1068	POLYBAG	40	42x28.5x29.5

Sprinkler with spike

Code	Packing	Pcs	Dim.ctn
TS1070	POLYBAG	50	36x36x35

Plastic sprinkler with plastic spike

Code	Packing	Pcs	Dim.ctn
TS1064	POLYBAG	40	42x28.5x29.5

Plastic sprinkler with metal spike

Code	Packing	Pcs	Dim.ctn
TS1073	Bulk	50	42x40x24

Plastic sprinkler with spike

Code	Packing	Pcs	Dim.ctn
TS1074	Bulk	50	42x40x24

Plastic sprinkler with metal spike

Code	Packing	Pcs	Dim.ctn
TS1071	Bulk	50	42x40x24

Plastic sprinkler with spike

Code	Packing	Pcs	Dim.ctn
TS1072	Bulk	50	42x40x24

Two arm sprinkler with spike

Code	Packing	Pcs	Dim.ctn
TS1010	POLYBAG	50	38x38x36

Three arm sprinkler with spike

Code	Packing	Pcs	Dim.ctn
TS1011	POLYBAG	50	56x38x32

Two leaves sprinkler

Code	Packing	Pcs	Dim.ctn
TS1052	POLYBAG	50	42x28.5x29.5

Three leaves sprinkler

Code	Packing	Pcs	Dim.ctn
TS1051	POLYBAG	50	42x28.5x23

Three arm sprinkler with metal spike

Code	Packing	Pcs	Dim.ctn
TS1037A	POLYBAG	50	42x28.5x32

Three arm sprinkler with spike

Code	Packing	Pcs	Dim.ctn
TS1037	POLYBAG	50	42x28.5x32

Zinc sprinkler with spike

Code	Packing	Pcs	Dim.ctn
TS1022	Bulk	40	39.5x33x30

Zinc sprinkler with spike

Code	Packing	Pcs	Dim.ctn
TS1022-NEW	Tag	48	56x41x36

Sunflower sprinkler

Code	Packing	Pcs	Dim.ctn
TS1046	POLYBAG	48	56x38x32

Butterfly sprinkler with spike

Code	Packing	Pcs	Dim.ctn
TS1012	POLYBAG	50	42x28.5x29

Metal spike

Code	Packing	Pcs	Dim.ctn
TS1018	Bulk	100	42x28.5x20

Plastic spike

Code	Packing	Pcs	Dim.ctn
TS1026	Bulk	100	42x28.5x22

TELESCOPIC RAISER

Code	Packing	Pcs	Dim.ctn
TS1401	Color box	10	59x24x52.5

Telescopic raiser with Zinc impulse sprinkler

Code	Packing	Pcs	Dim.ctn
TS1402	Color box	10	59x24x52.5

Telescopic raiser with plastic impulse sprinkler

Code	Packing	Pcs	Dim.ctn
TS1405	Color box	10	59x24x52.5

Zinc sprinkler with spike

Code	Packing	Pcs	Dim.ctn
TS1023	Color box	40	43x29x30

Dancing flower sprinkler

Code	Packing	Pcs	Dim.ctn
TS1701	POLYBAG	24	66x32x46

Dancing flower sprinkler

Code	Packing	Pcs	Dim.ctn
TS1702	POLYBAG	24	66x32x46

Dancing flower sprinkler

Code	Packing	Pcs	Dim.ctn
TS1703	POLYBAG	24	66x32x46

Dancing flower sprinkler

Code	Packing	Pcs	Dim.ctn
TS1708	POLYBAG	24	66x32x46

GARDEN SHOWER ONE SPIKE

Code	Packing	Pcs	Dim.ctn
TS1406	Color box	6	106.5x25x29.5

GARDEN SHOWER with tripod

Code	Packing	Pcs	Dim.ctn
TS1407	Color box	6	106.5x25x29.5

2IN1 GARDEN SHOWER/SPRAY LANCE

Code	Packing	Pcs	Dim.ctn
TS1407-1	Color box	6	75x39.5x30

Plastic sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6032	1/2"	Bulk	300	42*28.5*29

Plastic taiwan sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6029	1/2"	Bulk	250	44*33*38

Zinc impulse sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6022	1/2"	Bulk	50	32*32*18.5

Plastic impulse sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6001	1/2"	Bulk	200	39*39*37

Plastic impulse sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS55B2	1/2"	Bulk	300	58*35.5*46.5

Plastic impulse sprikler

Code	Size	Packing	Pcs	Dim. ctn
TS55B4	3/4"	Bulk	200	54*36.5*50.5

Plastic impulse sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS80B2	1/2"	Bulk	300	58*35.5*46.5

Plastic impulse sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS80B4	3/4"	Bulk	200	54*36.5*50.5

Plastic impulse sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS7225	1/2"	Bulk	300	54*36.5*46.5

Plastic impulse sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS7225F	3/4"	Bulk	100	56*37.5*58.5

Plastic impulse sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6028	1/2"	POLYBAG	350	40*33*38

Plastic sprikler

Code	Size	Packing	Pcs	Dim. ctn
TS6033	1/2"	POLYBAG	350	40*33*38

Plastic sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6034	3/4"	POLYBAG	200	40*38*45

Plastic sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6035	3/4"	POLYBAG	200	40*38*45

Plastic sprinkler

Code	Size	Packing	Pcs	Dim. ctn
L70	1/2"	Bulk	350	37.5*31*21

Plastic sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6023	3/4"	Bulk	100	41*28*17

KIMPORT

Zinc sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6020	3/4"	POLYBAG	100	40*38*36

Zinc sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6021	3/4	POLYBAG	100	40*38*36

Plastic sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6024F	3/4"	POLYBAG	100	50*38*30

Plastic sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6024	3/4"	POLYBAG	100	50*37*27

Plastic sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6018	3/4"	POLYBAG	100	50*38*30

Plastic sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6040	3/4"	POLYBAG	100	47*35*34

Plastic nozzle sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6005	3/4"	POLYBAG	100	40*38*36

Brass nozzle sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6005B	3/4"	POLYBAG	100	40*38*36

Plastic nozzle sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6004	3/4"	POLYBAG	100	40*38*36

Brass nozzle sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6004B	3/4"	POLYBAG	100	40*38*36

2 way sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6006	1"	POLYBAG	50	36*36*35

2 way sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6006N	1"	POLYBAG	50	36*36*35

3 way sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6007	1"	POLYBAG	50	50*50*32

3 way sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6008	1"	POLYBAG	50	50*50*53

4 way sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6009	1"	POLYBAG	50	50*50*57

5 way sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6010	1"	POLYBAG	50	45*45*57

Pulsating sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6015	1"	POLYBAG	40	40*33*38

Power sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6011	1.5"	POLYBAG	10	40*33*38

Pop up sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6080	3/4"	Bulk	500	40*33*38

Pop up sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6081	1/2"	Bulk	1000	40*33*55

Pop-up with full or part circle

Code	Size	Packing	Pcs	Dim. ctn
TS6303	-	Bulk	12	45*31.5*24

Pop-up sprinkler

Code	Size	Packing	Pcs	Dim. ctn
TS6302	1/2"	Bulk	50	51*33*31

TS7003

Packing: 6pcs/Polybag
Pcs:48
Dim. ctn: 43*30*15

TS7004

Packing:6pcs/Blister
Pcs:24
Dim. ctn:41*38*42

Water cone
Water cone is an ideal watering tool to take care of take care of the plants when you are in the travelling.It is easy use,and save water,one bottle of water can watering for one week.

1.Fill the cones with sand or cotton wool
2.Fill the bottle with water
3.Press the cones down onto the neck of the bottle
4.Gentaly insert the cone into the soil near the root of the plant to be irrigated

TS7102

Simple flower frame irrigation kit

	TS6101 Micro sprinkler
	TS6102 Micro sprinkler
	TS6103 Micro sprinkler
	TS6107 Micro sprinkler
	TS6108 Micro sprinkler
	TS6109 Micro sprinkler
	TS6110 Micro sprinkler
	TS6111 Micro sprinkler
	TS6120 Micro sprinkler
	TS6121 Micro sprinkler
	TS1025 Butterfly sprinkler

	TS6117 Micro jet sprinkler
	TS6118 Micro jet sprinkler
	TS6119 Micro jet sprinkler

	TS6112 Dripper
	TS6116 Dripper
	TS6113 Dripper
	TS6212 Dripper
	TS6210 Dripper
	AD2103-2L Dripper
	AD2103-4L Dripper
	AD2103-8L Dripper

	TS7008 Dripper
	TS7009 Dripper

	TS7014 Dripper
	TS7022 Dripper
	TS6211 Dripper
	TS6213 Dripper

	TS3106 Pump connector
	TS3105 Pump connector
	15722 Connector
	15723 Connector

KIMPORT

TS7013-1
Micro sprinkler

TS7013
Micro sprinkler

TS7026
16mm two way joiner

TS7027
16mm three way joiner

TS7025
16mm elbow joiner

TS6501
Adjustable spike dripper

TS6502
Connector tube

TS6503
Spike Dripper

TS6504
Spike Dripper

TS7028
Tube puncher

TS7030
Tube stopper

TS7031
Tube stopper

TS7032
1" adaptor

TS7033
3/4" adaptor

TS6115
16mm barbed connector

TS6114
16mm barbed connector

TS7034
Mini valve

TS6205
Filter

TS6204
1" filter

TS6201
Quick coupling valve

TS6202
Quick coupling valve

TS7023
16mm pipe joiner

Tape off take

Code	Packing	Pcs	Dim. ctn
AD5101	Polybag	1400	42*41*32

Tape off take

Code	Packing	Pcs	Dim. ctn
AD5102	Polybag	400	42*32*25

Lock type off take

Code	Packing	Pcs	Dim. ctn
AD5103	Polybag	400	42*32*25

Connection for lay flat hose

Code	Packing	Pcs	Dim. ctn
AD5104	Polybag	500	42*32*31

Lock coupling for tape

Code	Packing	Pcs	Dim. ctn
AD5108	Polybag	400	42*32*25

Tape plug

Code	Packing	Pcs	Dim. ctn
AD5110	Polybag	1000	42*32*31

Lock tee for tape

Code	Packing	Pcs	Dim. ctn
AD5116	Polybag	200	42*32*25

Lock cross for tape

Code	Packing	Pcs	Dim. ctn
AD5130	Polybag	200	42*32*31

Tape plug

Code	Packing	Pcs	Dim. ctn
AD5126	Polybag	2000	42*32*31

Lock coupling for tape

Code	Packing	Pcs	Dim. ctn
AD5127	Polybag	600	42*32*25

Lock elbow for tape

Code	Packing	Pcs	Dim. ctn
AD5128	Polybag	400	42*32*30

Maxi valve

Code	Packing	Pcs	Dim. ctn
AD6101	Polybag	300	42*32*25

Tape valve for lay flat hose

Code	Packing	Pcs	Dim. ctn
AD6503	Polybag	100	42*32*31

Punch for Lay Flat Tape

Code	Packing	Pcs	Dim. ctn
AD5117	Polybag	20	42*32*31

Lock tape coupler with valve

Code	Packing	Pcs	Dim. ctn
AD6206	Polybag	300	42*32*25

Off take valve for tape

Code	Packing	Pcs	Dim. ctn
AD6504	Polybag	300	42*32*25

KIMPORT

Plug for tape fog (GS)32mm

Code	Packing	Pcs	Dim. ctn
AD70332	Polybag	200	39*39*45

Plug for tape fog(GS)40mm

Code	Packing	Pcs	Dim. ctn
AD70340	Polybag	200	42*28.5*30

Coupling-connector for tape fog(GS)32mm

Code	Packing	Pcs	Dim. ctn
AD70232	Polybag	200	42*30*34

Coupling-connector for tape fog(GS)40mm

Code	Packing	Pcs	Dim. ctn
AD70240	Polybag	200	42*28.5*30

Start to tape the fog(GS)of 32mm with external thread1"

Code	Packing	Pcs	Dim. ctn
AD70132	Polybag	200	42*28.5*35

Start to tape the fog(GS)of 40mm with external thread1"

Code	Packing	Pcs	Dim. ctn
AD70140	Polybag	100	42*32*20

Ball valve LFT-32mm-fog

Code	Packing	Pcs	Dim. ctn
AD70432	Polybag	50	42*28.5*19

Ball valve LFT-40mm-fog

Code	Packing	Pcs	Dim. ctn
AD70440	Polybag	50	42*28.5*19

CLAMP SADDLE WITH BOLT

Code	Size	Packing	Pcs	Dim. cm
9111	25-1/2"	Polybag	25	-
9121	32-1/2"	Polybag	50	-
9132	40-3/4"	Polybag	25	-

REDUCING COUPLING

Code	Size	Packing	Pcs	Dim. cm
13821	3/4"-1/2"	Polybag	100	42*28.5*22
13832	1"-3/4"	Polybag	100	-
13843	1 1/4"-1"	Polybag	100	-

BARBED MALE TEE

Size	Size	Packing	Pcs	Dim. cm
15422	16*16*16	Polybag	100	-

MALE THREADED END CAP

Code	Size	Packing	Pcs	Dim. cm
14111	1/2"	Polybag	1000	42*28.5*22
14122	3/4"	Polybag	500	42*28.5*22

MALE-MALE TEE

Size	Size	Packing	Pcs	Dim. cm
13133	1"	Polybag	100	-
13122	3/4"	Polybag	200	-

NIPPLE

Code	Size	Packing	Pcs	Dim. cm
13522	3/4"	Polybag	100	42*28.5*21
13533	1"	Polybag	200	42*28.5*23
13544	1 1/4"	Polybag	200	-
13555	1 1/2"	Polybag	200	-

BARBED MALE NIPPLE

Code	Size	Packing	Pcs	Dim. cm
15221	16-1/2"	Polybag	250	-
15222	16-3/4"	Polybag	200	-
15265	2-1"	Polybag	200	-

COUPLING

Code	Size	Packing	Pcs	Dim. cm
13711	1/2"	Polybag	500	42*28.5*39
13722	3/4"	Polybag	500	42*28.5*28
13733	1"	Polybag	250	42*28.5*32

LOCK TYPE ELBOW

Code	Size	Packing	Pcs	Dim. cm
12722	1/2"-3/4"	Polybag	250	-
12744	20*20	Polybag	200	-

LOCK TYPE COUPLING

Code	Size	Packing	Pcs	Dim. cm
12322	16*16	Polybag	200	-
12344	20*20	Polybag	200	-
12366	25*25	Polybag	200	-

BARBED MALE ELBOW

Code	Size	Packing	Pcs	Dim. cm
15643	25*1/2"	Polybag	200	-

REDUCING MALE-FEMALE

Code	Size	Packing	Pcs	Dim. cm
13812	1/2"-3/4"	Polybag	100	42*28.5*20
13823	3/4"-1"	Polybag	200	-

BUSHING

Code	Size	Packing	Pcs	Dim. cm
15821	3/4"-1/2"	Polybag	400	42*28.5*21
13832	1"-3/4"	Polybag	200	42*28.5*23

MALE-MALE ELBOW

Code	Size	Packing	Pcs	Dim. cm
13322	3/4"-3/4"	Polybag	200	-
13333	1"-1"	Polybag	200	-
13344	1 1/4"-1 1/4"	Polybag	200	-

MALE-MALE TEE

Code	Size	Packing	Pcs	Dim. cm
13144	1 1/4"	Polybag	200	-

REDUCING NIPPLE

Code	Size	Packing	Pcs	Dim. cm
13621	3/4"-1/2"	Polybag	100	42*28.5*21
13632	1"-3/4"	Polybag	200	42*28.5*23

Rain bird connector

Size	Size	Packing	Pcs	Dim. cm
15220	3/4"	Polybag	200	-

FEMALE THREADED END CAP

Code	Size	Packing	Pcs	Dim. cm
14211	1/2"	Polybag	200	-
14255	1"	Polybag	200	-

BARBED NIPPLE

Code	Size	Packing	Pcs	Dim. cm
15122	16*16	Polybag	200	-

LOCK TYPE TEE

Code	Size	Packing	Pcs	Dim. cm
12422	16*16*16	Polybag	200	-
12444	20*20*20	Polybag	200	-

TS7002
Magic seeder

C7014
Bird feeder Drinking kit

TS5004
Comfortable hose hanger

TS5008
Hose hanger

C7151
Pot Hanger

TS9018
Garden Water wand

TS7022-1
Seed sower



C7063
Table clip

TS5006
Plastic hose guider

C7152
Triangular gasket for flower pot

MK005
Fly trap
Universal for all kinds of bottle

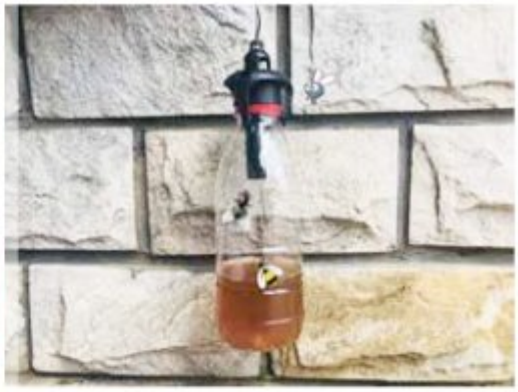

TSA034
Nail in common use

LS16-S
Garden Nail

LS16
SPIKE FOR 1/2" PIPE

ATS1705
Garden Nail

ATS1710
Garden Nail

TS9019a
Pot Hanger

TS9028
Hose washer set-12pcs

TS9007
Big plastic shovel material:nylon

TS9008
Big plastic shovel material:nylon

TS9005
Plastic rake material:nylon

TS9004
Plastic fork material:nylon

TS9023
9 tooth roke material:pp

TS9006
Plastic hoe material:nylon

TS7035
Bottle top waterers

TS9021
Garden tool set New style

TS9024
Garden tool set New style

TS9025
Garden tool set New style

TS9019
Garden tool set New style

TS9026
Garden tool set New style

TS9014
Plastic fork nylon for children use

TS9015
Plastic rake nylon for children use

TS5005
Plastic hose guider

TS5003
Electronic timer

TS5002
Electronic timer

TS5001
Electronic timer

TS3778
Plastic holder

TSA037
Bottle top birds feeder

TSA029
Friedly plant clip

TS9011
Matal garden tool
set material:nylon

TS9013
Garden tool set new style

KIMPORT

1-Zone Digital Water Timer

1 Program

Model : GWT101S

Features

- Rain Delay Watering Function.
- Automatic Watering.
- Manually watering without interrupting programming.
- Next irrigation time reminder.
- Low voltage indication.
- Easy turn off all plans.

Specification

- 1" or ¾ Inlet thread and ¾" Outlet thread.
- Watering frequency : 1 hr to 12 hr, 1 day to 7 days
- Watering duration : 1 min to 240min
- IPX4
- Battery : 2 x AA
- Operation pressure : 0.5 – 8bar (7-116 PSI)
- Flow Rate : 5L/min – 35L/min

LD-0333

1-Zone Digital Water Timer

3 Program

Model : GWT102S

Features

- 3 irrigation plans per day.
- Rain Delay Watering Function.
- Automatic Watering.
- Manually watering without interrupting programming.
- Next irrigation time reminder.
- Low voltage indication.
- Easy turn off all plans.

Specification

- 1" or ¾ Inlet thread and ¾" Outlet thread.
- Watering frequency : 6 hr to 7 days or any day of week.
- Watering duration : 1 min to 240min
- IPX4
- Battery : 2 x AA
- Operation pressure : 0.5 – 8bar (7-116 PSI)
- Flow Rate : 5L/min – 35L/min

LD-0333

KIMPORT

2-Zone Digital Water Timer

2 Program

Model : GWT201S

Features

- Two zone water timer.
- Each zone can set an individual watering plan.
- Separated set each zone's manually watering.
- Automatic Watering.
- Manually watering without interrupting programming.
- Rain Delay function.
- Next irrigation time reminder.
- Low voltage indication.
- Easy turn off all plans.

Specification

- 1" or ¾ Inlet thread and 2 x ¾" Outlet thread.
- Watering frequency : 1 hr to 12 hr, 1 day to 7 days
- Watering duration : 1 min to 240min
- IPX4
- Battery : 2 x AA
- Operation pressure : 0.5 – 8bar (7-116 PSI)
- Flow Rate : 5L/min – 35L/min

2-Zone Digital Water Timer

6 Program

Model : GWT202S

Features

- Two zone water timer.
- Each zone can set 3 different watering plans per day.
- Separated set each zone's manually watering.
- Automatic Watering.
- Manually watering without. interrupting programming.
- Rain Delay Function.
- Next irrigation time reminder.
- Low voltage indication.
- Easy turn off all plans.

Specification

- 1" or ¾ Inlet thread and 2 x ¾" Outlet thread.
- Watering frequency : 1 hr to 12 hr, 1 day to 7 days
- Watering duration : 1 min to 240min
- IPX4
- Battery : 2 x AA
- Operation pressure : 0.5 – 8bar (7-116 PSI)
- Flow Rate : 5L/min – 35L/min

Water Flow Meter

Model : GFM101S

Features

- Track Water usage & Water flow
- 4 different modes to show water flow status.
  - > Flow mode --- Real time water flow rate.
  - > Consumption --- Last time water usage.
  - > Average : Daily water usage of a week
  - > Total : Total water usage

Specification

- ¾" Inlet BSP F thread , ¾" outlet BSP M thread with a nipple Joint .
- Water measurement range : 0 -99999 Gallon
- IPX6
- Battery : CR2032 x 1
- Operation pressure : 0.5 – 8bar (7-116 PSI)
- Flow Rate : 1L/min – 40L/min

KIMPORT

Automatic Drip Irrigation Kit with Pump Timer

Model : GDT101S

Features

- Efficient Water Saving Des
- Built-in water pump.
- Auto & Manual watering mode.
- Water shortage alert.
- Use for max 15 pot plants.
- Built in Lithium ion Rechargeable Battery.
- USB C port for charging. (USB cable Charging or Solar Charging).
- Work together with water tank or buckets.

Specification

- Pumping head —4m
- Water flow rate 45L/H
- Water Duration from 10s to 30 min
- Water Frequency 1 hour to 12 hours, 1 day to 7 days.
- 1*18650 Lithium Ion Rechargeable Battery (2600mAh).
- 5V 5W solar panel
- 4mm pipe for Inlet and Outlet
- Working Temperature 5°C to 50°C (34.7°F to 122°F)

Accessories

- 1 x 10m (32.8 ft) Tubin
- 10 x T Barb Fitting
- 1 x Filter
- 10 x Micro Drip Emitters
- 1 x TubingEnd Capsul
- 1 x USBA to USBC Cable

3-dial Digital Water Timer

Model : GWT103S

Features

- Easy to use.
- Automatic Watering mode.
- Manual watering mode.
- Rain Delay Watering Function.
- Battery indication.

Specification

- 1" or ¾ Inlet thread and ¾" Outlet thread.
- Watering frequency : 1 hr to 72 hr, a Week
- Watering duration : 1 min to 90min
- Rain Delay Watering : 24, 48, 72 hours.
- IP54
- Battery : 2 x AA
- Operation pressure : 0.5 – 8bar (7-116 PSI)
- Flow Rate : 5L/min – 35L/min

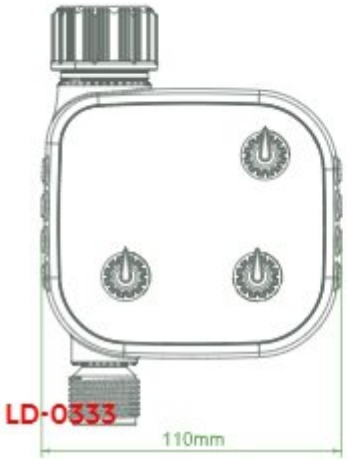

4-Zone Digital Water Timer

Model : GWT401S

Features

- Rain Delay Watering Functi
- Automatic Watering.
- Next irrigation time reminder.
- Low voltage indication.
- Manually watering without interrupting programming.
- Easy turn off all plans.

Specification

- 1" or ¾ Inlet thread and 4 x ¾" Outlet thread.
- Watering frequency : 1 hr to 12 hr, 1 day to 7 days
- Watering duration : 1 min to 240min
- Rain Delay Watering : 24, 48, 72 hours.
- IP54
- Battery : 4 x AA
- Operation pressure : 0.5 – 8bar (7-116 PSI)
- Flow Rate : 5L/min – 35L/min

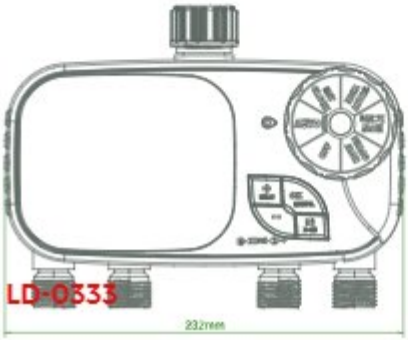

LD-0333

KIMPORT

Wi-fi Controlled 1-Zone Water Timer

Model : GRT101B
GRG101D

Features

- Easy App remoted controll
- 2 watering schedule setting type
  (Timed watering typeand Cycle & Soak watering type)
- Rain Delay Function.
- Manually Watering on/off.
- Voice controlled via Google Home or Amazon Alexa.
- Low power alert.

Specification

- 1" or ¾ Inlet thread and ¾" Outlet thread.
- Watering frequency : any day or everyday in one week
- Watering duration : 1 min to 240min
- Rain Delay Watering : 24, 48, 72 hours
- IP54
- Battery : 4 x AA
- Operation pressure : 0.5 – 8bar (7-116 PSI)
- Flow Rate : 5L/min – 35L/min

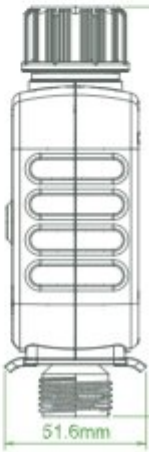

LD-0333

KIMPORT

Wi-fi Controlled 2-Zone Water Timer

Model : GRT201B
GRG101D

Features

- Easy App remoted controll
- 2 independent watering system.
- 2 watering schedule setting type.
  (Normal watering type and Cycle & Soak wateringtype)
- Rain Delay Function.
- Manually Watering on/off.
- Voice controlled via Google Home or Am
- Low power alert.

Specification

- 1" or ¾ Inlet thread and 2 x ¾" Outlet thread.
- Watering frequency : any day or everyday in one wee
- Watering duration : 1 min to 240min
- Rain Delay Watering : 24, 48, 72 hours.
- IP54
- Battery : 4 x AA
- Operation pressure : 0.5 – 8bar (7-116 PSI)
- Flow Rate : 5L/min – 35L/min

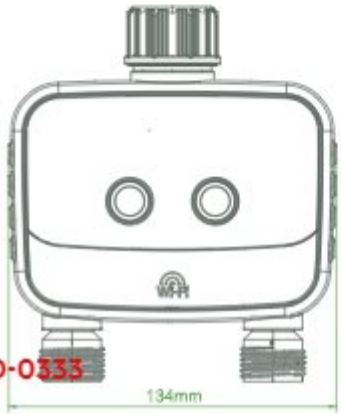

LD-0333

SPRAY GUN
水枪系列

Item No.WD53020

Description: Adjustable metal nozzle

Spray Pattern:

Adjustable spray from fine mist to powerful jet stream.

Item No.WD53020-2

Description: Adjustable metal nozzle with soft cover

Spray Pattern:

Adjustable spray from fine mist to powerful jet stream.

Item No.WD53021

Description: 7-pattern metal nozzle

Spray Patterns:

Item No.WD53021-2

Description: 7-pattern metal nozzle with soft cover

Spray Patterns:

MIST

CONE

GENTLE

SPRAY GUN

Item No.WD53014

Description: 6-pattern metal nozzle with metal trigger

Spray Patterns:

Item No.WD53014-1

Description: 6-pattern metal nozzle with plastic trigger

Spray Patterns:

Item No.WD53015

Description: 10-pattern metal nozzle with metal trigger

Spray Patterns:



Item No.WD53015-1

Description: 10-pattern metal nozzle with plastic trigger

Spray Patterns:



Item No.WD53009

Description: 8-pattern metal nozzle

Spray Patterns:

Item No.WD53008

Description: Adjustable metal nozzle

Spray Patterns:

Adjustable spray from fine mist to powerful jet stream.

Item No.WD53016

Description: 6-pattern metal nozzle with metal trigger

Spray Patterns:

Item No.WD53016-1

Description: 6-pattern metal nozzle with plastic trigger

Spray Patterns:



SPRAY GUN

Item No.WD53017

Description: 8-pattern metal nozzle

Spray Patterns:



Item No.WD53005

Description: Adjustable metal nozzle

Spray Patterns:

Adjustable spray from fine mist to powerful jet stream.

Item No.WD52017

Description: 7-pattern plastic nozzle

Spray Patterns:

Item No.WD53007

Description: Adjustable metal nozzle

Spray Patterns:

Adjustable spray from fine mist to powerful jet stream.

Item No.WD53007-1

Description: Adjustable metal nozzle

Spray Patterns:

Adjustable spray from fine mist to powerful jet stream.

Item No.WD52014

Description: 5-pattern plastic nozzle

Spray Patterns:

Jet Shower Full Branch Flat

SPRAY GUN

Item No.WD52015

Description: 8-pattern plastic nozzle

Spray Patterns:

Item No.WD52021

Description: Adjustable plastic nozzle

Spray Patterns:

Adjustable spray from fine mist to powerful jet stream.

Item No.WD52004

Description: Adjustable plastic nozzle

Spray Patterns:

Adjustable spray from fine mist to powerful jet stream.

Item No.WD52005

Description: 8-pattern spray nozzle

Spray Patterns:



Item No.WD52019

Description: 8-pattern spray nozzle

Spray Patterns:



Item No.WD52020

Description: Adjustable plastic nozzle

Spray Patterns:

Adjustable spray from fine mist to powerful jet stream

Item No.WD52004-1

Description: Adjustable plastic nozzle

Spray Patterns:

Adjustable spray from fine mist to powerful jet stream.

Item No.WD52005-1

Description: 8-pattern spray nozzle

Spray Patterns:

SPRAY GUN

Item No.WD52068

Description: 4-pattern spray nozzle

Spray Patterns:

Item No.WD52069

Description: Adjustable plastic nozzle

Spray Patterns:

Adjustable spray from fine mist to powerful jet stream.

Item No.WD52070

Description: 4-pattern spray nozzle

Spray Patterns:

Item No.WD52071

Description: Adjustable plastic nozzle

Spray Patterns:

Adjustable spray from fine mist to powerful jet stream.

SPRAY GUN

Item No.WD52072

Description: 5-pattern spray nozzle

Spray Patterns:

Item No.WD52073

Description: Adjustable Metal Spray Gun

Spray Patterns:

Adjustable spray from fine mist to powerful jet stream.

Item No.WD52001

Description: Adjustable plastic nozzle

Spray Patterns:

Adjustable spray from fine mist to powerful jet stream.

Item No.WD52002

Description: Adjustable plastic nozzle

Spray Patterns:

Adjustable spray from fine mist to powerful jet stream.

Item No.WD73006-1

Description: Fire hose nozzle

Spray Patterns:

Spray from fine mist to power jet stream

Item No.WD73009

Description: Fire hose nozzle with handle

Spray Patterns:

Spray from fine mist to power jet stream

Item No.WD53002-1

Description: Adjustable metal Nozzle

Spray Patterns:

Adjustable spray from fine mist to Powerful jet stream

Item No.WD53002-2

Description: Adjustable metal Nozzle

Spray Patterns:

Adjustable spray from fine mist to Powerful jet stream

SPRAY GUN

Item No.WD53001-3

Description: Adjustable metal Nozzle

Spray Patterns:

Adjustable spray from fine mist to Powerful jet stream

Item No.WD53002-3

Description: Adjustable metal Nozzle

Spray Patterns:

Adjustable spray from fine mist to Powerful jet stream

Item No.WD53006

Description: Adjustable metal nozzle

Spray Patterns:

Adjustable spray from fine mist to powerful jet stream.

Item No.WD62012

Description: Aluminum alloy shower nozzle

SPRAY GUN

Item No.WD62008

Description: 18" 8-pattern water wand

Spray Patterns:



FLAT

CENTER

JET

SHOWER

CONE

SPRAY GUN

Item No.WD33007

Description: Plastic impulse sprinkler

Item No.WD33007-1

Description: Plastic impulse sprinkler with 1-way plastic spike

Item No.WD33007-3

Description: Plastic impulse sprinkler with zinc spike

Item No.WD33009

Description: 3-Arm metal totary sprinkler with wheel base

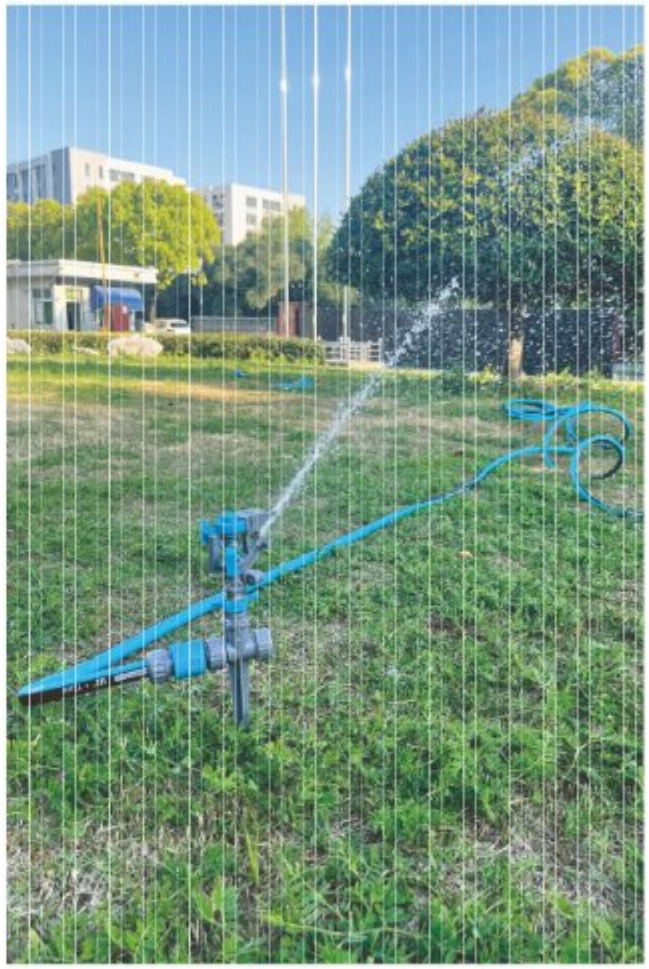

Item No.WD33007-2

Description: Plastic impulse sprinkler with 2-way plastic spike

HOSE FITTINGS
接头系列

Item No.WD22003

Description: 1/2" plastic hose mender

Item No.WD22004

Description: 1/2" male hose coupling

Item No.WD22005

Description: 1/2" female hose coupling

Item No.WD22030

Description: 5/8" -3/4"male hose coupling

Item No.WD22031

Description: 5/8" -3/4"female hose coupling

Item No.WD22032

Description: 5/8"-3/4" plastic hose mender

Item No.WD25001

Description: 5/8" -3/4"metal male hose coupling

Item No.WD25002

Description: 5/8"-3/4"metal female hose coupling

Item No.WD25003

Description: 5/8"-3/4"metal hose mender

Item No.WD72001

Description: 5" plastic adjustable hose nozzle

Item No.WD22001

Description: Plastic 2-way hose shut-off valve

Item No.WD22006-1

Description: 1/2" male adaptor

Item No.WD22008

Description: Three section tool adaptor

Item No.WD22009

Description: 3/4" female adaptor

Item No.WD22006

Description: 3/4" male adaptor

Item No.WD22007

Description: 2-way snap-in coupling

Item No.WD22011

Description: Tap adaptor

HOSE FITTINGS

Item No.WD22016

Description: 1/2" quick connector

Item No.WD22017

Description: 1/2" quick connector with stop

Item No.WD22016-1

Description: 1/2" male quick connector

Item No.WD22027

Description: 1/2" hose mender

Item No.WD22028

Description: 3/4" hose mender

Item No.WD22029

Description: 3-way snap-in coupling

Item No.WD22017-1

Description: 1/2" female quick connector with stop

Item No.WD22020

Description: 3/4" quick connector

Item No.WD22021

Description: 3/4" quick connector with stop

Item No.WD22033

Description: 3/4" male adaptor

Item No.WD22035

Description: Metal hose connector with valve

Item No.WD22036

Description: 3/8" quick hose connector

Item No.WD22025-2

Description: 1/2"-3/4" female tap adaptor

Item No.WD22025

Description: 3/4"-1" female tap adaptor

Item No.WD22026-2

Description: Plastic 2-way hose shut-off valvae

Item No.WD22081

Description: 1/2"anti fold quick connector

Item No.WD22082

Description: 1/2 anti fold quick connector with stop

Item No.WD73004

Description: Brass adjustable hose nozzle

HOSE FITTINGS

WATER PIPE
水管系列

Item No.WD23021

Description: 1/2-3/4 brass tap adpator

Item No.WD23016

Description: 1/2" brass quick connector

Item No.WD23017

Description: 1/2" brass quick connector with stop

Item No.WD23007

Description: 3/4"brass connector

Item No.WD23030

Description: Brass nozzle

Item No.WD23025

Description: PVC hose with nozzle



Item No.WD1014

Description: Hose washer



Item No.WD1014-1

Description: Hose washer

Item No.WD72030

Description: 3/8" three layer PVC hose

Item No.WD72031

Description: 1/2" three layer PVC hose with one line

Item No.WD72031-1

Description: 1/2" three layer PVC hose

Item No.WD72032

Description: 5/8" three layer PVC hose

Item No.WD72033

Description: 3/8" three layer transparent PVC hose

Item No.WD72034

Description: 1/2" three layer transparent PVC hose

Item No.WD72034-1

Description: 1/2" three layer PVC hose

Item No.WD72035

Description: 5/8" three layer transparent PVC hose

Item No.WD72035-1

Description: 5/8" three layer PVC hose

KIMPORT

WATER PIPE

Item No.WD72036

Description: 3/8" single transparent PVC hose

Item No.WD72037

Description: 1/2" single transparent PVC hose
Single transparent PVC hose

Item No.WD72038

Description: Single non-transparent PVC hose

Item No.WD72038

Description: Fog surface Suction pipe

Item No.WD72038-1

Description: Fog surface Suction pipe with oblique cutting

Item No.WD72039

Description: Transparent Suction pipe

Item No.WD72039-1

Description: Transparent Suction pipe with oblique cutting

Item No.WD72040

Description: Transparent Suction pipe with oblique cutting

Item No.WD72041

Description: Transparent Suction pipe with oblique cutting

Item No.WD82010

Description: Mini hose reel with 10M pvc hose

Hose Cart

LD-0898

4 SIMPLE STEPS TO USE THIS CUBE REEL CORRECTLY

Unique cube design with 2 mounted type, constant-force stainless steel spring with a lightly pulling force, make your garden life easily and happy.

STEP 1
Fold back the bracket holde

STEP 2
open the mounted plate of ratation base

STEP 3
Fix the cube reel with 4 metal sticks.

STEP 4
Ready to use with 360° swivel angle

Mount the cube hose reel to the wall with bracket which can be swiveled 180°, you can water your garden to each corner you want.

Fix the cube reel on the ground with 4 hooks, the hose can be pulled out lightly and swiveled 360°by using the rotation base.

4TH GENERATION CUBE REEL WITH ADVANCED CONTRUCTURE AND FUNCTION

15
ONE-STOP SOURCING
★ MADE IN CHINA ★

This cube reel was designed with new concept and multi - advanced function to make watering easy and you can enjoy your garden life with this reel!

- Auto-rewind.
- Fitting.
- Hose layering.
- Optional slow return.
- Constant force stainless steel spring.
- Wall& ground mounted.
- 360°rotation base.
- Adjustable stop ball.
- No screws design on the surface.
- Metal frame inside.

reddot design award winner 2018

Adjustable stop ball
- This is the best slow return device on the market.

180°wall bracket
- This is the best slow return device on the market.

180°

Safety slow retraction
- This is the best slow return device on the market.

Constant-force stainless steel spring
- This is the best slow return device on the market.

AUTO ROLL-UP

Ground mounted 360° swivel base
- This is the best slow return device on the market.

-5℃~45℃

Low-speed Retraction
This is the best slow return device on the market. increase the retraction time to 7- 10s, ensure the hose goes back to the box slowly and safely.

180° Swivel wall mounted braccket
Hose reel can be mounted on the wall and 180 degree swivel to enlarge the area of watering.

Ground mounted 360° swivel base
The watering coverage can be enlarged with this 360° rotation base.

KIMPORT

GRACE YOUT GARDEN WITH THIS RETRACTABLE GARDEN CUBE REEL

The idea of this cube reel design comes from the watercube natatorium in year 2008 Olympic game. This hose reel equipped with a constant-force stainless steel spring which is a core technic of this hose reel, it makes the reel can be used on the grass with 4 hooks. The hose reel can be locked at any desired length which is convenient during watering your garden. a slow retum device makes the hose retacted backk slowly which will be much safety to the user and bystander. Once you finish yout watering, the hose layering system can ensure the hose neatly retract back to the housing. It is helpful in your garden life.

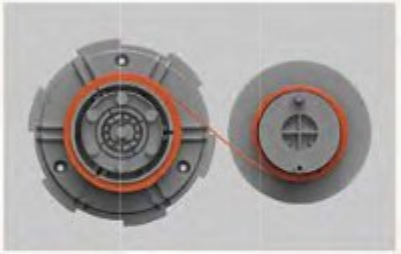

Constant-force stainless steel spring

This is the core technic to decrease the pulling force and hose can be pull out easily.

Steel frame for stable inner structure

Two steel frame at both side of the reel makes the inner structure is more sturdy.

Hose layering system

This is a unique device which can layering the hose back neatly and avoid kink.

Any length lock system

The hose can be locked at any desired length with a unique any length lock system and make garden watering easier.

PATENT IS AVAILABLE IN EUROPE, AUSTRALIA,NORTH AMERICA AND CHINA

EU EU USA AU

15 YEARS

ONE.STOP SOURCING

★ MADE IN CHINA ★

reddot design award winner 2018

Garden Hose Reel

LD-1364

GARDEN HOSE REEL

Keep your grass green, flowers beauty and a happy life.
Enjoy your garden life with the right watering product.

NW-A

Unique feature:

- Auto-rewind.
- Fitting.
- Hose layering.
- Optional slow return.
- Constant force stainless steel spring.
- Wall& ground mounted.
- 360°rotation base.
- Adjustable stop bolt.
- No screws design on the surface.
- Metal frame inside.

Euro Type
1/2-3/4" BSP
3/4-1" BSP

US Type
3/4" NPT

Euro Type

Model	NW-A10	NW-A20	NW-A25	NW-A30
Hose Length	10+1M	20+2M	25+2M	30+2M
Hose Size	1/2"	1/2"	1/2"	1/2"
Hose Material	PVC	PVC	PVC	PVC
W.B. Pressure	8/24BAR	8/24BAR	8/24BAR	8/24BAR
Case Material	PP	PP	PP	PP
Temperature	-5/+45°C	-5/+45°C	-5/+45°C	-5/+45°C
Fitting	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP
Packing	36x19.5x32CM	42x22.5x39CM	45x26x42CM	45x26x42CM
G.W.N.W.	6.0/5.0KGS	8.5/7.5KGS	11.5/10.5KGS	12.5/11.5KGS
20gp/40gp	1340/ 2600PCS	840/ 1740PCS	650/ 1350PCS	650/ 1350PCS

Certificates(All model) CE REACH PAHs

US Type

Model	NW-A10	NW-A20	NW-A25	NW-A30
Hose Length	33+3ft	65+6ft	85+6ft	100+6ft / 65+6ft
Hose Size	1/2"	1/2"	1/2"	1/2" / 5/8"
Hose Material	PVC	PVC	PVC	PVC
W.B. Pressure	116/348PSI	116/348PSI	116/348PSI	116/348PSI
Case Material	PP	PP	PP	PP
Temperature	23/113°F	23/113°F	23/113°F	23/113°F
Fitting	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
Packing	36x19.5x32CM	42x22.5x39CM	45x26x42CM	45x26x42CM
G.W.N.W.	6.0/5.0KGS	8.5/7.5KGS	11.5/10.5KGS	12.5/11.5KGS
20gp/40gp	1340/ 2600PCS	840/ 1740PCS	650/ 1350PCS	650/ 1350PCS

KIMPORT

CHOOSE A RIGHT RETRACTABLE GARDEN HOSE REEL TO EASY YOUR GARDEN LIFE.

It is born to be one of part of your garden and makes your garden life easy with automatic retraction, any length lock, slow return function. Enjoy your garden life with this nice reel instead of mass and tangled hose.

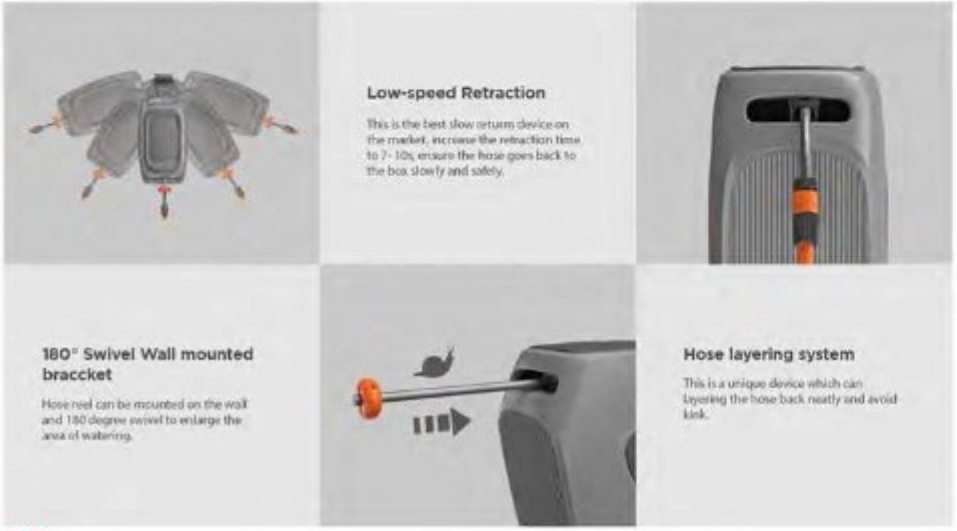

Low-speed Retraction

This is the best slow return device on the market, increase the retraction time to 7- 10s, ensure the hose goes back to the box slowly and safely.

180° Swivel Wall mounted braccket

Hose reel can be mounted on the wall and 180 degree swivel to enlarge the area of watering.

Hose layering system

This is a unique device which can layering the hose back neatly and avoid kink.

NW-G

Unique feature:

- With a unique locking ratchet, the hose can be locked at any length, covering your garden easily.
- The automatic hose guide, and rewind system can avoid tangling and kinking when you retract it.
- Solid 180-degree rotation make full coverage of your garden possible. The reel can be easily disconnected from the bracket for storage in winter.
- Hose can be retract back to the unit with a safety speed to avoid hurt or damage.

Euro Type
1/2-3/4" BSP
3/4-1" BSP

US Type
3/4" NPT

Euro Type

Model	NW- G15	NW- G20	NW- G25	NW- G30	NW- G35
Hose Length	15+1.5M	20+2M	25+2M	30+2M	35+2M
Hose Size	1/2"	1/2"	1/2"	1/2"	1/2"
Hose Material	PVC	PVC	PVC	PVC	PVC
W.B. Pressure	8/24BAR	8/24BAR	8/24BAR	8/24BAR	8/24BAR
Case Material	PP	PP	PP	PP	PP
Temperature	-5/+45C	-5/+45C	-5/+45C	-5/+45C	-5/+45C
Fitting	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP
Packing	38x26x35CM	45x21x36CM	46x24x40CM	46x24x40CM	46x24x40CM
G.W./N.W.	6.0/5.0KGS	7.0/6.0KGS	10.0/9.0KGS	12.0/11.0KGS	12.0/11.0KGS
20gp/40gp	1000/ 2050PCS	900/ 1800PCS	620/ 1480PCS	620/ 1480PCS	620/ 1480PCS
Certificates(All model)	CE REACH PAHs				

US Type

Model	NW- G15	NW- G20	NW- G25	NW- G30	NW- G35
Hose Length	50+5ft	65+6ft	82+6ft	100+6ft / 65+6ft	115+6ft
Hose Size	1/2"	1/2"	1/2"	1/2" / 5/8"	1/2"
Hose Material	PVC	PVC	PVC	PVC	PVC
W.B. Pressure	116/348PSI	116/348PSI	116/348PSI	116/348PSI	116/348PSI
Case Material	PP	PP	PP	PP	PP
Temperature	23/113°F	23/113°F	23/113°F	23/113°F	23/113°F
Fitting	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
Packing	38x26x35CM	43x21x36CM	46x24x40CM	46x24x40CM	46x24x40CM
G.W./N.W.	6.0/5.0KGS	7.0/6.0KGS	10.0/9.0KGS	12.0/11.0KGS	12.0/11.0KGS
20gp/40gp	1000/ 2050PCS	900/ 1800PCS	620/ 1480PCS	620/ 1480PCS	620/ 1480PCS

NW-I

Unique feature:

- With a unique locking ratchet, the hose can be locked at any length, covering your garden easily.
- The automatic hose guide, and rewind system can avoid tangling and kinking when you retract it.
- Solid 180-degree rotation make full coverage of your garden possible. The reel can be easily disconnected from the bracket for storage in winter.
- Hose can be retract back to the unit with a safety speed to avoid hurt or damage.

Euro Type
1/2-3/4" BSP
3/4-1" BSP

US Type
3/4" NPT

Euro Type

Model	NW-I15	NW-I20	NW-I25	NW-I30	NW-I35	NW-I40	NW-I45
Hose Length	15+1.5M	20+2M	25+2M	30+2M	35+2	40+2M	45+2M
Hose Size	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Hose Material	PVC	PVC	PVC	PVC	PVC	PVC	PVC
W.B. Pressure	8/24BAR	8/24BAR	8/24BAR	8/24BAR	8/24BAR	8/24BAR	8/24BAR
Case Material	PP	PP	PP	PP	PP	PP	PP
Temperature	-5/+45C	-5/+45C	-5/+45C	-5/+45C	-5/+45C	-5/+45C	-5/+45C
Fitting	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP
Packing	38x20x33CM	45x22x37.5CM	45x22x37.5CM	48x28x42CM	48x28x42CM	52x28.5x45.5CM	52x28.5x45.5CM
G.W./N.W.	6.0/5.5KGS	7.5/7.0KGS	9.0/8.5KGS	11/10KGS	12/11KGS	13/12KGS	14.5/13.5KGS
20gp/40gp	1155/ 2387PCS	720/ 1560PCS	720/ 1560PCS	480/ 960PCS	480/ 960PCS	440/ 880PCS	440/ 880PCS

Certificates(All model) CE REACH PAHs

US Type

Model	NW-I15	NW-I20	NW-I25	NW-I30	NW-I35	NW-I40	NW-I45
Hose Length	50+5ft	65+6ft	82+6ft	100+6ft / 65+6ft	115+6ft	132+6ft / 100+6ft	140+6ft
Hose Size	1/2"	1/2"	1/2"	1/2" / 5/8"	1/2"	1/2" / 5/8"	1/2"
Hose Material	PVC	PVC	PVC	PVC	PVC	PVC	PVC
W.B. Pressure	116/348PSI	116/348PSI	116/348PSI	116/348PSI	116/348PSI	116/348PSI	116/348PSI
Case Material	PP	PP	PP	PP	PP	PP	PP
Temperature	23/113°F	23/113°F	23/113°F	23/113°F	23/113°F	23/113°F	23/113°F
Fitting	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
Packing	38x20x33CM	45x22x37.5CM	45x22x37.5CM	48x28x42CM	48x28x42CM	52x28.5x45.5CM	52x28.5x45.5CM
G.W./N.W.	6.0/5.5KGS	7.5/7.0KGS	9.0/8.5KGS	11/10KGS	12/11KGS	13/12KGS	14.5/13.5KGS
20gp/40gp	1155/ 2387PCS	720/ 1560PCS	720/ 1560PCS	480/ 960PCS	480/ 960PCS	440/ 880PCS	440/ 880PCS

Product Details

Lock At Any Length

Auto Hose Layering System

180° Swivel Bracket

Low-speed Retraction

KIMPORT

GARDEN HOSE REEL

Reinforced inner structure and spare parts ensure the quality of the garden hose reel is quite stable, this new reel equipped with new all necessary function to easy your garden work.

15 YEARS PROFESSIONAL GIN PRODUCTS EXPERT

ONE-STOP SOURCING
★ MADE IN CHINA ★

Convenient Handle Bar
- The hose reel can be move away easily with a handle bar.

Adjustable Stop Ball
- The stopper ball can be adjusted in any position as you like.

Wall Bracket
- with 180°swivel angle.

Adjustable Nozzle
- 2 pattern nozzle allow you water the garden easily.

Sturdy Casing
- The intensified polypropylene casing will not deform or fade due to sun or rain exposure.

What a nice shot with this awesome reel in your garden, wish you a happy garden life in this summer.

NW-J

Unique feature:

- With a **unique** locking ratchet, the hose can be locked at any length, covering your garden easily.
- The automatic hose guide, and rewind system can avoid tangling and kinking when you retract it.
- Solid 180-degree rotation make full coverage of your garden possible. The reel can be easily disconnected from the bracket for storage in winter.
- Hose can be retract back to the unit with a safety speed to avoid hurt or damage.

Euro Type
1/2-3/4" BSP
3/4-1" BSP

US Type
3/4" NPT

Euro Type

Model	NW- J15	NW- J20	NW- J30	NW- J35	NW- J40	NW- J45
Hose Length	15+1.5M	20+2M	30+2M	35+2M	40+2M	45+2M
Hose Size	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Hose Material	PVC	PVC	PVC	PVC	PVC	PVC
W.B. Pressure	8/24BAR	8/24BAR	8/24BAR	8/24BAR	8/24BAR	8/24BAR
Case Material	PP	PP	PP	PP	PP	PP
Temperature	-5/+45C	-5/+45C	-5/+45C	-5/+45C	-5/+45C	-5/+45C
Fitting	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP
Packing	38x20x33CM	43x22x38CM	50.5x28.5x41.5CM	50.5x28.5x41.5CM	52x27x49CM	52x27x49CM
G.W./N.W.	6.0/5.5KGS	7.5/7.0KGS	11/10KGS	12/11KGS	13/12KGS	14.5/13.5KGS
20gp/40gp	1155/ 2387PCS	780/ 1620PCS	495/ 1035PCS	495/ 1035PCS	440/ 880PCS	440/ 880PCS
Certificates(All model)	CE	REACH	PAHs			

US Type

Model	NW- J15	NW- J20	NW- J30	NW- J35	NW- J40	NW- J45
Hose Length	50+5ft	65+6ft	100+6ft / 65+6ft	115+6ft	132+6ft / 100+6ft	140+6ft
Hose Size	1/2"	1/2"	1/2" / 5/8"	1/2"	1/2" / 5/8"	1/2"
Hose Material	PVC	PVC	PVC	PVC	PVC	PVC
W.B. Pressure	116/348PSI	116/348PSI	116/348PSI	116/348PSI	116/348PSI	116/348PSI
Case Material	PP	PP	PP	PP	PP	PP
Temperature	23/113°F	23/113°F	23/113°F	23/113°F	23/113°F	23/113°F
Fitting	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
Packing	38x20x33CM	43x22x38CM	50.5x28.5x41.5CM	50.5x28.5x41.5CM	52x27x49CM	52x27x49CM
G.W./N.W.	6.0/5.5KGS	7.5/7.0KGS	11/10KGS	12/11KGS	13/12KGS	14.5/13.5KGS
20gp/40gp	1155/ 2387PCS	780/ 1620PCS	495/ 1035PCS	495/ 1035PCS	440/ 880PCS	440/ 880PCS

KIMPORT

NW-D

Unique feature:

- With a unique locking ratchet, the hose can be locked at any length, covering your garden easily.
- The automatic hose guide, and rewind system can avoid tangling and kinking when you retract it.
- Solid 180-degree rotation make full coverage of your garden possible. The reel can be easily disconnected from the bracket for storage in winter.
- Hose can be retract back to the unit with a safety speed to avoid hurt or damage.

Euro Type 1/2-3/4" BSP 3/4-1" BSP

US Type 3/4" NPT

180° | ø1/2" | AUTO ROLL-UP | -5°C~45°C | 24bar

Euro Type

Model	NW- D10	NW- D15	NW- D20	NW- D25	NW- D30
Hose Length	10+1M	15+1.5M	20+2M	25+2M	30+2M
Hose Size	1/2"	1/2"	1/2"	1/2"	1/2"
Hose Material	PVC	PVC	PVC	PVC	PVC
W.B. Pressure	8/24BAR	8/24BAR	8/24BAR	8/24BAR	8/24BAR
Case Material	PP	PP	PP	PP	PP
Temperature	-5/+45C	-5/+45C	-5/+45C	-5/+45C	-5/+45C
Fitting	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP
Packing	28x20x33CM	58x20x20CM	43x21x39CM	46x24x39CM	46x24x39CM
G.W./N.W.	5.5/4.5KGS	6.5/5.5KGS	7.5/6.5KGS	10.0/9.0KGS	11.0/10.0KGS
20gp/40gp	1155/2387PCS	1155/2387PCS	936/1910PCS	620/1480PCS	620/1480PCS

Certificates(All model): CE REACH PAHs

US Type

Model	NW- D10	NW- D15	NW- D20	NW- D25	NW- D30
Hose Length	33+3ft	50+5ft	65+6ft	82+8ft	100+8ft / 65+6ft
Hose Size	1/2"	1/2"	1/2"	1/2"	1/2" / 5/8"
Hose Material	PVC	PVC	PVC	PVC	PVC
W.B. Pressure	116/348PSI	116/348PSI	116/348PSI	116/348PSI	116/348PSI
Case Material	PP	PP	PP	PP	PP
Temperature	23/113°F	23/113°F	23/113°F	23/113°F	23/113°F
Fitting	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
Packing	28x20x33CM	58x20x20CM	43x21x39CM	46x24x39CM	46x24x39CM
G.W./N.W.	5.5/4.5KGS	6.5/5.5KGS	7.5/6.5KGS	10.0/9.0KGS	11.0/10.0KGS
20gp/40gp	1155/2387PCS	1155/2387PCS	936/1910PCS	620/1480PCS	620/1480PCS

NW-F

Unique feature:

- With a unique locking ratchet, the hose can be locked at any length, covering your garden easily.
- The automatic hose guide, and rewind system can avoid tangling and kinking when you retract it.
- Solid 180-degree rotation make full coverage of your garden possible. The reel can be easily disconnected from the bracket for storage in winter.
- Hose can be retract back to the unit with a safety speed to avoid hurt or damage.

Euro Type 1/2-3/4" BSP 3/4-1" BSP

US Type 3/4" NPT

180° | ø1/2" | AUTO ROLL-UP | -5°C~45°C | 24bar

Euro Type

Model	NW- F10	NW- F15	NW- F20	NW- F25	NW- F30
Hose Length	10+1M	15+1.5M	20+2M	25+2M	30+2M
Hose Size	1/2"	1/2"	1/2"	1/2"	1/2"
Hose Material	PVC	PVC	PVC	PVC	PVC
W.B. Pressure	8/24BAR	8/24BAR	8/24BAR	8/24BAR	8/24BAR
Case Material	PP	PP	PP	PP	PP
Temperature	-5/+45C	-5/+45C	-5/+45C	-5/+45C	-5/+45C
Fitting	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP
Packing	35x19.5x29CM	43x21x26.5CM	43x21x36.5CM	46x23.5x40CM	46x23.5x40CM
G.W./N.W.	5.0/4.0KGS	6.5/5.5KGS	7.5/6.5KGS	10.0/9.0KGS	11.0/10.0KGS
20gp/40gp	1768/3640PCS	1170/2418PCS	1080/2232PCS	620/1480PCS	620/1480PCS

Certificates(All model): CE REACH PAHs

US Type

Model	NW- F10	NW- F15	NW- F20	NW- F25	NW- F30
Hose Length	33+3ft	50+5ft	65+6ft	82+8ft	100+8ft / 65+6ft
Hose Size	1/2"	1/2"	1/2"	1/2"	1/2" / 5/8"
Hose Material	PVC	PVC	PVC	PVC	PVC
W.B. Pressure	116/348PSI	116/348PSI	116/348PSI	116/348PSI	116/348PSI
Case Material	PP	PP	PP	PP	PP
Temperature	23/113°F	23/113°F	23/113°F	23/113°F	23/113°F
Fitting	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
Packing	35x19.5x29CM	43x21x26.5CM	43x21x36.5CM	46x23.5x40CM	46x23.5x40CM
G.W./N.W.	5.0/4.0KGS	6.5/5.5KGS	7.5/6.5KGS	10.0/9.0KGS	11.0/10.0KGS
20gp/40gp	1768/3640PCS	1170/2418PCS	1080/2232PCS	620/1480PCS	620/1480PCS

KIMPORT

NW-B

Unique feature:

- With a unique locking ratchet, the hose can be locked at any length, covering your garden easily.
- The automatic hose guide, and rewind system can avoid tangling and kinking when you retract it.
- Solid 180-degree rotation make full coverage of your garden possible. The reel can be easily disconnected from the bracket for storage in winter.
- Hose can be retract back to the unit with a safety speed to avoid hurt or damage.

Euro Type
1/2-3/4" BSP
3/4-1" BSP

US Type
3/4" NPT

Euro Type

Model	NW- B10	NW- B15	NW- B20	NW- B25	NW- B30
Hose Length	10+1M	15+1.5M	20+2M	25+2M	30+2M
Hose Size	1/2"	1/2"	1/2"	1/2"	1/2"
Hose Material	PVC	PVC	PVC	PVC	PVC
W.B. Pressure	8/24BAR	8/24BAR	8/24BAR	8/24BAR	8/24BAR
Case Material	PP	PP	PP	PP	PP
Temperature	-5/+45C	-5/+45C	-5/+45C	-5/+45C	-5/+45C
Fitting	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP
Packing	33x17.5x28CM	38x18x34.5CM	37.5x20.5x39CM	41.5x23x37CM	41.5x23x37CM
G.W./N.W.	4.5/3.5KGS	6.0/5.0KGS	7.0/6.0KGS	9.0/8.0KGS	11.0/10.0KGS
20gp/40gp	1680/ 3400PCS	1260/ 2700PCS	1080/ 2232PCS	660/ 1600PCS	660/ 1600PCS

Certificates(All model) CE REACH PAHs

US Type

Model	NW- B10	NW- B15	NW- B20	NW- B25	NW- B30
Hose Length	33+3ft	50+5ft	65+6ft	82+6ft	100+6ft / 65+6ft
Hose Size	1/2"	1/2"	1/2"	1/2"	1/2" / 3/4"
Hose Material	PVC	PVC	PVC	PVC	PVC
W.B. Pressure	116/348PSI	116/348PSI	116/348PSI	116/348PSI	116/348PSI
Case Material	PP	PP	PP	PP	PP
Temperature	23/113°F	23/113°F	23/113°F	23/113°F	23/113°F
Fitting	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
Packing	33x17.5x28CM	38x18x34.5CM	37.5x20.5x39CM	41.5x23x37CM	41.5x23x37CM
G.W./N.W.	4.5/3.5KGS	6.0/5.0KGS	7.0/6.0KGS	9.0/8.0KGS	11.0/10.0KGS
20gp/40gp	1680/ 3400PCS	1260/ 2700PCS	1080/ 2232PCS	660/ 1600PCS	660/ 1600PCS

LD-1364

NAW-B NAW-X10

Model	NAW-B10	NAW-B15	NAW-B20	NAW- X10
Hose Length	10+1M	15+1.5M	20+2M	15+1.5M
Hose Size	5/16"	1/2"	1/2"	5/16"
Hose Material	PVC	PVC	PVC	PVC
W.B. Pressure	8/24BAR	8/24BAR	8/24BAR	8/24BAR
Case Material	PP	PP	PP	PP
Temperature	-5/+45C	-5/+45C	-5/+45C	-5/+45C
Fitting	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP
Packing	Inner Box:32.5x16.5x29CM Master Carton:59.5x34x44.8CM	36x29x33CM	43x21x35CM	Inner Box:32.5x16.5x29CM Master Carton:59.5x34x44.8CM
G.W./N.W.	10.0/9.0KGS	6.5/5.5KGS	8.5/7.5KGS	10.0/9.0KGS
20gp/40gp	1620/ 3412PCS	1155/ 2387PCS	780/ 1620PCS	1620/ 3412PCS

Certificates(All model) CE REACH PAHs

NAW-J10 NAW-D10

Model	NW- J10	NAW-D10
Hose Length	15+1.5M	10+1M
Hose Size	5/16"	5/16"
Hose Material	PVC	PVC
W.B. Pressure	8/24BAR	8/24BAR
Case Material	PP	PP
Temperature	-5/+45C	-5/+45C
Fitting	1/2"-3/4" BSP	1/2"-3/4" BSP
Packing	Inner Box:32.5x16.5x28CM Master Carton:59.5x34x4.8CM	Inner Box:31x27x16.5CM Master Carton:55x33x30CM
G.W./N.W.	10.0/9.0KGS	14.4/12.8KGS
20gp/40gp	1620/ 3412PCS	1816/ 3440PCS
Certificates(All model)	CE REACH PAHs	

NAW-A09 NAW-A10

Model	NAW-A09	NAW-A15	NAW-A10
Hose Length	9+1M	12+1M	10+1M
Hose Size	5/16"	5/16"	5/16"
Hose Material	PVC	PVC	PVC
W.B. Pressure	8/24BAR	8/24BAR	8/24BAR
Case Material	PP	PP	PP
Temperature	-5/+45C	-5/+45C	-5/+45C
Fitting	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP
Packing	Inner Box:31x27x16.5CM Master Carton:55x33x35CM	Inner Box:31.5x29.5x14CM Master Carton:53x33x30CM	Inner Box:28.5x26x14CM Master Carton:56x33x32CM
G.W./N.W.	14.4/12.8KGS	16/14.4KGS	16/14.4KGS
20gp/40gp	1816/ 3440PCS	1652/ 3416PCS	1904/ 2668PCS
Certificates(All model)	CE REACH PAHs		

NW-H1000

This is a right choice to take good care of your plants with this portable reel if you have a balcony.

- Easy to rewind.
- Portable to use.
- Convenient to storage.

Model	NW- H1000
Hose Length	10+2M
Hose Size	5/16"
Hose Material	PVC
W.B. Pressure	8/24BAR
Case Material	PP
Temperature	-5/+45C
Fitting	1/2"-3/4" BSP
Packing	53.5x31.5x34CM
G.W./N.W.	10.0/9.0KGS
20gp/40gp	1980/ 3900PCS
Certificates(All model)	CE REACH PAHs

NW-H2000

Model	NW- H2000	NW- H3000
Hose Length	10+2M	15+2M
Hose Size	5/16"	5/16"
Hose Material	PVC	PP
W.B. Pressure	8/24BAR	8/24BAR
Case Material	PP	PP
Temperature	-5/+45C	-5/+45C
Fitting	1/2"-3/4" BSP	1/2"-3/4" BSP
Packing	66.5x30x33CM	66.5x30x33CM
G.W./N.W.	10.0/9.0KGS	10.0/9.0KGS
20gp/40gp	2275/ 4680PCS	2275/ 4680PCS

This is a right choice to take good care of your plants with this portable reel if you have a balcony.

CE REACH PAHs

NW-A-S

- 145° swivel angle
- Wall mounted bracket
- Ground mounted base
- Easily rewind handle
- Compact resistance case
- Adjustable stop ball
- Foldable handle bar for easy carry

CE REACH

PAHs

Model	NW-A10-S	NW-A20-S	NW-A25-S	NW-A30-S
Hose Length	10+1M	20+2M	25+2M	30+2M
Hose Size	1/2"	1/2"	1/2"	1/2"
Hose Material	PVC	PVC	PVC	PVC
W.B. Pressure	8/24BAR	8/24BAR	8/24BAR	8/24BAR
Case Material	PP	PP	PP	PP
Temperature	-5/+45C	-5/+45C	-5/+45C	-5/+45C
Fitting	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP
Packing	38x19.5x33CM	42x22.5x39CM	45x26x42CM	45x26x42CM
G.W./N.W.	4.5/3.0KGS	8.5/5.5KGS	9.5/7.5KGS	9.5/8.5KGS
20gp/40gp	1340/ 2803PCS	840/ 1748PCS	680/ 1350PCS	650/ 1380PCS

NW-B-S

- 145° swivel angle
- Wall mounted bracket
- Easily rewind handle
- Compact resistance case
- Adjustable stop ball

CE REACH

PAHs

Model	NW-B10-S	NW-B15-S	NW-B20-S	NW-B25-S	NW-B30-S
Hose Length	10+1M	15+1.5M	20+2M	25+2M	30+2M
Hose Size	1/2"	1/2"	1/2"	1/2"	1/2"
Hose Material	PVC	PVC	PVC	PVC	PVC
W.B. Pressure	8/24BAR	8/24BAR	8/24BAR	8/24BAR	8/24BAR
Case Material	PP	PP	PP	PP	PP
Temperature	-5/+45C	-5/+45C	-5/+45C	-5/+45C	-5/+45C
Fitting	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP
Packing	33x17.5x29CM	38x18x34.5CM	37.5x20.5x26CM	41.5x23x37CM	41.5x23x37CM
G.W./N.W.	4.5/3.5KGS	8.0/5.5KGS	7.0/6.0KGS	9.0/8.0KGS	11.0/10.0KGS
20gp/40gp	1680/ 3400PCS	1280/ 2700PCS	1260/ 2232PCS	880/ 1808PCS	880/ 1808PCS

NW-H8300

CE REACH

PAHs

Model	NW-H8300B	NW-H8315B
Hose Length	UP TO STORE 20M	15-20M
Hose Size	1/2"	1/2"
Hose Material	PVC	PVC
W.S. Pressure	8/24BAR	8/24BAR
Case Material	PP	PP
Temperature	-5/+45C	-5/+45C
Fitting	1/2"-3/4" BSP	1/2"-3/4" BSP
Packing	Inner Box:39x12x38CM Master Carton:81.5x31.5x37CM(5 in 1 box)	33x30.5x32.5CM
G.W./N.W.	11.0/10.0KGS	3.5/3.0KGS
20gp/40gp	168/ 336PCS	882/ 1862PCS

NW-HAW-15

CE REACH

PAHs

Model	NW-HAW-15
Hose Length	15M
Hose Size	1/2"
Hose Material	PVC
W.S. Pressure	8/24BAR
Case Material	PP
Temperature	-5/+45C
Fitting	1/2"-3/4" BSP
Packing	46x24x40CM
G.W./N.W.	13.0/12.0KGS
20gp/40gp	630/ 1480PCS

NW-H7100

Euro Type

1/2-3/4" BSP

3/4-1" BSP

CE REACH PAHs

US Type

3/4" NPT

Model	US Type		Euro Type
	NW-H7100	NW-H7100B	NW-H7115B
Hose Length	UP TO 100FT	UP TO STORE 60M	15-60M
Hose Size	5/8"	1/2"	1/2"
Hose Material	PVC	PVC	PVC
W.S. Pressure	110/348PSI	8/24BAR	8/24BAR
Case Material	PP	PP	PP
Temperature	33/113 °F	-5/+45C	-5/+45C
Fitting	3/4" NPT	1/2"-3/4" BSP	1/2"-3/4" BSP
Packing	22.2x14.7x17.7 in	Inner Box:36x11x45CM Master Carton:56.5x37.5x4(.5CM(5 in 1 box)	39x21.5x46.5CM
G.W./N.W.	33/30.8Lbs	15.0/14.0KGS	5.5/4.5KGS
20gp/40gp	110/ 226PCS	180/ 226PCS	780/ 1600PCS

NW-H1100

Euro Type

1/2-3/4" BSP

3/4-1" BSP

CE REACH PAHs

US Type

3/4" NPT

Model	US Type			Euro Type	
	NW-H1100	NW-H1100	NW-H1100B	NW-H1115	NW-H1115B
Hose Length	UP TO 100FT	UP TO STORE 60M	UP TO STORE 45M	15-60M	15-45M
Hose Size	5/8"	1/2"	1/2"	1/2"	1/2"
Hose Material	PVC	PVC	PVC	PVC	PVC
W.S. Pressure	110/348PSI	8/24BAR	8/24BAR	8/24BAR	8/24BAR
Case Material	PP	PP	PP	PP	PP
Temperature	33/113 °F	-5/+45C	-5/+45C	-5/+45C	-5/+45C
Fitting	3/4" NPT	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP	1/2"-3/4" BSP
Packing	30.1x19x21.3 in	78.8x41.8x54.8CM	76.5x40.5x54.2CM	42x41x60.3CM	42x41x60.3CM
G.W./N.W.	35.3/33Lbs	16.0/15.0KGS	16.0/15.0KGS	7.6/6.6KGS	7.6/6.6KGS
20gp/40gp	64/ 183PCS	84/ 168PCS	84/ 168PCS	352/ 691PCS	352/ 691PCS

GARDEN HOSE

Metal Garden Hose

Made of premium 304 stainless steel, compact and lightweight, and more flexible than any other hose! 304 Stainless Steel, which is UV resistant and reflects the harmful effects of the sun. Keeping it cooler to the touch than other hoses. Corrosion-resistant, protecting it against the elements.

Features

- Life-time warranty
- UV-resistant & puncture proof
- Lightweight & easy to coil

Application

- Garden/Terrace Watering
- Car Washing
- House Cleaning

Product Choices

- **Length:** 25ft-100ft/7.5m-30m
- **Fittings:** America or EU standard
- **Packaging:** Color board, OPP bag or Customized.
- **Accessories:** Optional Nozzles

PUNCTURE PROOF ✓	WEATHER PROOF ✓	THORN PROOF ✓
DOG PROOF ✓	KINK PROOF ✓	TEAR PROOF ✓

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Hose Diameter	Length	Color Box Size	PCS Per Carton	Carton Size
TMG-1625	16mm	25ft/7.62m	25*9*25	6	52*29*27
TMG-1650	16mm	50ft/15.2m	30*10*30	6	62*32*32
TMG-1425	14mm	25ft/7.62m	22*9*22	6	46*29*24
TMG-1450	14mm	50ft/15.2m	26*10*26	6	54*32*28

Flat Garden Hose

Made of T-FLEX Inner Tube and high-density jacket to provide ultra lightweight, high burst pressure and long lasting performance. Designed perfectly for commercial & professional gardeners.

Features

- Lead Free & Drinking Water Safe.
- California Prop 65 Passed.
- Abrasion & Puncture Resistant with burst pressure over 600+ PSI.
- Does NOT Expand or Retract (Patent Free in USA)

Application

- Commercial/Professional Gardening
- Car Washing
- House Cleaning

Product Choices

- **Length:** 25ft-100ft/7.6m – 30.5m or Customized
- **Color:**Green, Blue, Black, or Customized
- **Packaging & Accessories:** Color Box w/ Blister Cover, Blister, Mail Box or Customized

Item No.	Length	Display Option	Pieces Per Carton	Carton Size
TFG-25S	25ft/7.62m	Square	8	35*35*34
TFG-50S	50ft/15.2m	Square	6	45*23*50
TFG-25H	25ft/7.62m	Hexagon	8	40*35*38
TFG-50H	50ft/15.2m	Hexagon	6	45*25*59

LEAD FREE | Drinking Water Safe | Heavy Duty Structure | Easy To Store

GARDEN HOSE

Super Expandable Hose

Made of Ultra Heavy Duty inner tube and new webbing to provide better long lasting working lifetime. Advanced YOYO hose brings a multi-purpose application to watering patios, terrace, car washing and even in cleaning muddy driveways. It is perfect for DIY hardware retailers and online distributors.

Features

- Self-Expandable & Retracting Water Hose Capable Of Redefining Extendable Hoses.
- Heavy Duty Fabric And Tubes To Prevent Leakage.
- Easy To Transport & Long-Lasting

Application

- Garden/Terrace Watering
- Car Washing
- House Cleaning

Product Choices

- Length: 25ft –100ft/ 7.60m – 30.5m or Customized.
- Color: Green, Blue, Red, Orange, Black or Customized.
- Packaging & Accessories: OPP Bag, Color Box, Blister Box, Polybag, Kraft Paper Bag, or Customized upon request.

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Size		Thickness	Length	W.P.	B.P.
	I.D.	O.D.				
	mm	mm	mm	Feet/m	bar	bar
TYG-0625	6	9.5/10	1.75/2	25FT/7.5m	4	12
TYG-0650	6	9.5/10	1.75/2	50FT/15m	4	12
TYG-0675	6	9.5/10	1.75/2	75FT/22.5m	4	12
TYG-06100	6	9.5/10	1.75/2	100FT/30m	4	12

Super Expandable Hose

TB-101

- Bungee Hose with ABS-made Plastic Quick Connector

TB-102

- Bungee Hose with ABS-made Plastic Screwed Connector

TB-103

- Bungee Hose with Aluminum Quick Fitting

TB-104

- Bungee Hose with Aluminum Screwed Fitting & Hose Guard

TB-106

- Bungee Hose with Brass Quick Fitting

TB-107

- Bungee Hose with Brass Fitting & Hose Guard

GARDEN HOSE

Expandable Hose

Made of best quality Latex or TPE hose & strong polyester fabric. It can be used easily for watering & car washing, and it is perfect for DIY homecenters and online retailers. (As Seen On TV)

Features

- Automatically Expands 3X With Water Pressure.
- Ultra Lightweight & Stores Easily.
- Kink & Tangle & Twist Resistant.
- Anti-abrasion, anti-UV.

Application

- Flowers Watering
- General Car Wash
- House Cleaning

Product Choices

- Length: 25ft – 200ft/ 7.60m – 61.0m or Customized.
- Colors: Green, Blue, Red, Orange, Black or Customized.
- Packaging & Accessories: OPP Bag, Color Box, Blister Box, Polybag, Kraft Paper Bag, or Customized upon request.

AS SEEN ON TV

Plastic Clamp

Aluminum Clamp

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Size		Thickness	Length	W.P.	B.P.
	I.D.	O.D.				
	mm	mm	mm	Feet/m	bar	bar
TXH-0625	6	9.5	1.75	25FT/7.6m	4	12
TXH-0650	6	9.5	1.75	50FT/15.2m	4	12
TXH-0675	6	9.5	1.75	75FT/22.8m	4	12
TXH-06100	6	9.5	1.75	100FT/30.5m	4	12

Expandable Hose

TE-105
- ABS-made Plastic Quick Connector

TE-106
- ABS-made Plastic Screwed Connector

TE-107
- Quick-release Aluminum Connector

TE-108
- Screwed Aluminum Connector

TE-109
- Quick-release Copper Connector

TE-110
- Screwed Copper Connector

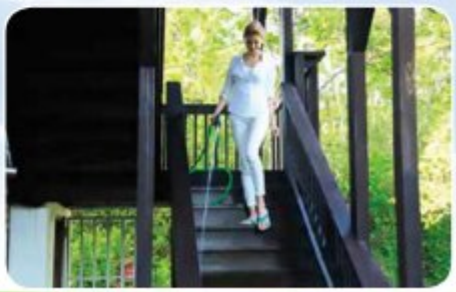

GARDEN HOSE Packaging Options

TEP-01
Color Box

Item No.	Size	Carton Size(cm)	Quantity(pcs)
TEP01-25	25FT	40*40*40	20
TEP01-50	50FT	50*40*48	20
TEP01-75	75FT	60*45*50	20
TEP01-100	100FT	65*45*55	20

TEP-02
Blister

Item No.	Size	Carton Size(cm)	Quantity(pcs)
TEP02-25	25FT	48*33*40	12
TEP02-50	50FT	48*33*40	12
TEP02-75	75FT	48*33*52	12
TEP02-100	100FT	57*36*52	12

TEP-03
Hose Holder Set With Nozzle

Item No.	Size	Carton Size(cm)	Quantity(pcs)
TEP03-25	25FT	47*44*30.5	6
TEP03-50	50FT	47*44*30.5	6

Packaging Options

TEP-04
Storage Box

Item No.	Size	Carton Size(cm)	Quantity(pcs)
TEP04-25	25FT	62*28*29	6
TEP04-50	50FT	62*28*29	6
TEP04-75	75FT	62*32*33	6
TEP04-100	100FT	49*36*44	4

TEP-05
Storage Sack

Item No.	Size	Carton Size(cm)	Quantity(pcs)
TEP05-25	25FT	52*27*42	20
TEP05-50	50FT	50*27*56	15
TEP05-75	75FT	52*28*62	12
TEP05-100	100FT	54*28*56	10

TEP-06
Storage Sack With Mesh

Item No.	Size	Carton Size(cm)	Quantity(pcs)
TEP06-25	25FT	52*27*42	20
TEP06-50	50FT	50*27*56	15
TEP06-75	75FT	52*28*62	12
TEP06-100	100FT	54*28*56	10

GARDEN HOSE

Hose Nozzles

Hose Nozzles

TH-001
- ABS-made 7 Function Nozzle Green

TH-002
- ABS-made 7 Function Nozzle Blue

TH-003
- ABS-made 8 Function Nozzle Green

TH-004
- ABS-made 8 Function Nozzle Blue

TH-013
- Adjustable Metal Spray Gun (Zinc Alloy +TPR)

TH-014
- 10-pattern Metal Spray Gun (Zinc Alloy +TPR)

TH-015
- Adjustable Spray Gun (ABS+TPR)

TH-016
- 10-pattern Spray Gun (ABS+TPR)

TH-005
- 2-pattern Thumb Control Spray Nozzle (ABS+TPR)

TH-006
- 8-pattern Thumb Control Spray Nozzle (ABS+TPR)

TH-007
- Adjustable Metal Spray Gun (Zinc Alloy +ABS+TPR)

TH-008
- 10-pattern Metal Spray Gun (Zinc Alloy +ABS+TPR)

TH-017
- Adjustable Metal Spray Gun (Zinc Alloy +TPR)

TH-018
- 8-pattern Metal Spray Gun (Zinc Alloy +TPR)

TH-019
- Heavy Duty Metal Spray Gun (Zinc Alloy + TPR)

TH-020
- 8-pattern Metal Spray Gun (Zinc Alloy +TPR)

TH-009
- 8-pattern Spray Gun (ABS+TPR)

TH-010
- 9 Function Nozzle (ABS+TPR)

TH-011
- Thumb Control Pistol Nozzle

TH-012
- Thumb Control 8-pattern Pistol Nozzle

TH-021
- Adjustable Spray Pistol Nozzle)

TH-022
- 7-pattern Spray Nozzle

TH-023
- Adjustable Metal Spray Gun (Zinc Alloy +TPR)

TH-024
- 8-pattern Front Trigger Nozzle

GARDEN HOSE Sets Recommended

T-801

T-802

Expandable Hose for Europe

T-803

T-804

Expandable Hose for Japan/Korea

T-805

T-806

Expandable Hose for America

Hose Adaptors & Hangers

TS-101
- Brass Faucet Manifold 4-way Splitter

TS-102
- Brass Faucet Manifold 4-way Splitter with quick-connector

TS-103
- 2-way Brass Y splitter

TS-104
- 2-way Brass Y splitter with quick-connector

TS-105
- Zinc Alloy Y Splitter

TS-106
- ABS-made Y Splitter

TS-107
- 2-way plastic Y splitter

TS-108
- Plastic Shut-off

TS-109
- Universal Tap Adaptor

TS-110
- Japan Tap Adaptor with Screws

TS-111
- 3 Way Adaptor

TS-112
- 2 Way Adaptor to Connector

TS-113
- Hose Hook Plastic/ Green- A

TS-114
- Hose Hook Plastic/ Green - B

TS-115
- Hose Hook Plastic/ Green - C

TS-116
- Hose Hanger Heavy-duty Metal

TS-117
- Hose Hanger Heavy-duty Metal

Car Wash Accessories

TC-201
- Adjustable Angle Fan Sprayer

TC-202
- Solid Brass Jet Nozzle

TC-202B
- Black pistol

TC-203
- Big Shot Brass Nozzle

TC-204G
- 8-pattern Car Wash Nozzle with Soap Cup

TC-204Y
- 8-pattern Car Wash Nozzle with Soap Cup

TC-205
- Car Wash Sponge

TC-206
- Car Wash Towels 3pcs Set

TC-207
- Car Wash Mitt-A

TC-208
- Car Wash Mitt-B

Sprinklers & Dog Washers

TC-209
- Roof Mounted Sprinkler

TC-210
- multi-color Aluminum Mini Sprinkler

TC-211
- Dog Washer

Water Wands

TC-212 2-in-1 Water Wands

Car is part of our life, our family. Our goal of bringing the best quality car wash accessories is to make your life easier and better.

You can either wash and shine your car at home or use our strong metal nozzles to clean windows and drive-ways for houses.

TC-213
- 18" Shower Wands Customized Color Available

TC-214
- 18" 10-Pattern Water Wand Customized Color Available

TC-215
- 33" Shower Wands Customized Color Available

GARDEN HOSE

Hybrid Garden Hose

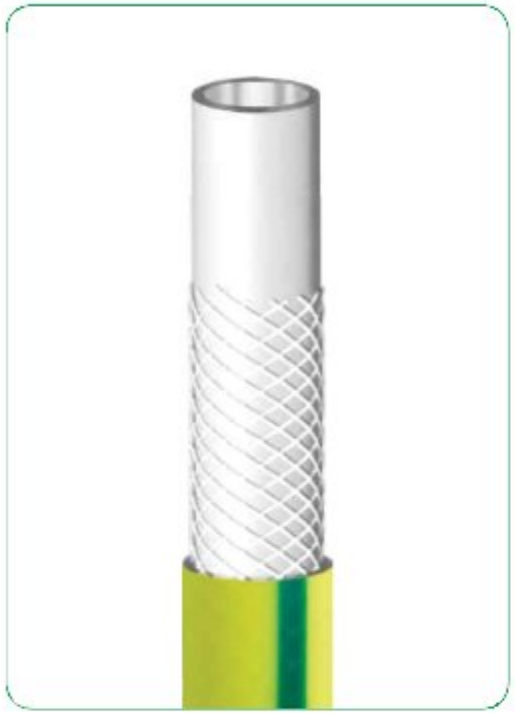

Made of Premium Hybrid Polymer to eliminate kinking under pressure. Hybrid Garden Hose does not fight you when you coil it. It is convenient to maneuver around. Ideal for extreme weather locations and contractors.

Features

- Can be used under -20℃ .
- Extreme All-weather Flexibility.
- Lightweight & Coils Easily.
- Kink & Abrasion Resistant.

Application

- Watering Gardens
- General Car Wash
- Daily Cleaning

Product Choices

- Length: 10ft – 100ft/ 5m – 50m or Customized Upon Request.
- Color: Green, Blue, Red, Orange, or Customized
- Packaging & Accessories: Plastic film, Heated shrink, Color card or Customized upon request.

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Nominal Dimension	Hose Dimension			Working Pressure	Burst Pressure	Net Weight	Measure
		I.D.	O.D.	Length				
	Inch	mm	mm	m	Bar	Bar	Kg/roll	m^3
THG1-1217	1/2"	12	17	25	8	24	3.75	0.0115
THG1-1521	5/8"	15	21	25	8	24	5.70	0.0200
THG1-1925	3/4"	19	25	25	7	20	6.25	0.0270
THG1-2531	1"	25	31	25	5	15	8.00	0.0420

Heavy Duty Garden Hose

Made of Premium Quality PVC & Unique Multi-Layer Technology. 4-Layer garden hose provides a strong and heavy structure for long lifetime. It is durable and non-torsion under high-pressure conditions. Ideal for industrial irrigation and parks cleaning.

Features

- Heavy Duty & Non-torsion Reinforced.
- Unique 4-layer Structure.
- Kink Resistant.

Application

- Industrial Irrigation
- Watering Gardens
- Parks & Buildings Cleaning

Product Choices

- Length: 10ft – 100ft/ 5m – 50m or Customized Upon Request.
- Color: Green, Blue, Red, Orange, or Customized
- Packaging & Accessories: Plastic film, Heated shrink, Color card or Customized upon request.

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Nominal Dimension	Hose Dimension			Working Pressure	Burst Pressure	Net Weight	Measure
		I.D.	O.D.	Length				
	Inch	mm	mm	m	Bar	Bar	Kg/roll	m^3
THDG1-1217	1/2"	12	17	25	8	24	3.75	0.0115
THDG1-1521	5/8"	15	21	25	8	24	5.70	0.0200
THDG1-1925	3/4"	19	25	25	7	20	6.25	0.0270
THDG1-2531	1"	25	31	25	5	15	8.00	0.0420

GARDEN HOSE

Medium Duty Knitted Garden Hose

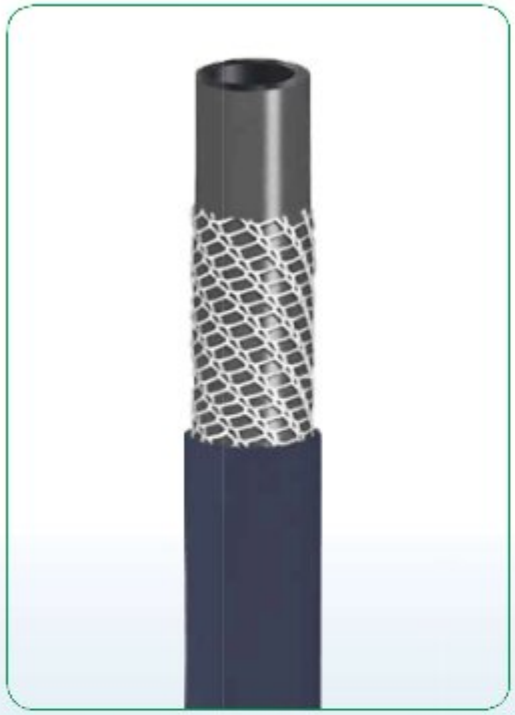

Made of Good Quality PVC & Unique Knitting Technology. 3-Layer Knitted Garden Hose is designed for most garden and yard watering. Ideal for traditional wholesale and merchandising.

Features

- Brilliant Knitting Structure.
- Lightweight & Easy to Coil.
- Good Durability.

Application

- Watering Gardens
- General Car Wash
- Daily Cleaning

Product Choices

- Length: 10ft – 100ft/ 5m – 30m or Customized Upon Request.
- Color: Green, Blue, Red, Orange, or Customized
- Packaging & Accessories: Plastic film, Heated shrink, Color card or Customized upon request.

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Nominal Dimension	Hose Dimension			Working Pressure	Burst Pressure	Net Weight	Measure
		I.D.	O.D.	Length				
	Inch	mm	mm	m	Bar	Bar	Kg/roll	m^3
TMDK-1216	1/2"	12	16	25	5	18	3.00	0.0115
TMDK-1217	1/2"	12	17	25	6	20	3.75	0.0115
TMDK-1620	5/8"	16	20	25	5	15	3.50	0.0190
TMDK-1621	5/8"	16	21	25	6	18	4.50	0.0200
TMDK-1924	3/4"	19	24	25	4	12	5.25	0.0260
TMDK-1925	3/4"	19	25	25	5	15	6.25	0.0270
TMDK-2530	1"	25	30	25	4	12	6.75	0.0414
TMDK-2531	1"	25	31	25	4	12	8.00	0.0420

Medium Duty Striped Garden Hose

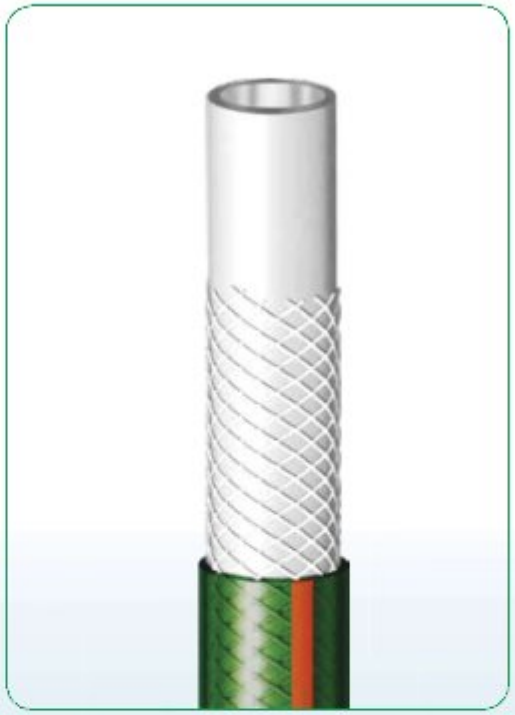

Made of Good Quality PVC & Unique Stripe Technology. 3-Layer Striped Garden Hose is designed for most garden and yard watering. Ideal for traditional wholesale and merchandising.

Features

- Great Striped Lining on Surfaces.
- Lightweight & Easy to Coil.
- Good Durability.

Application

- Watering Gardens
- General Car Wash
- Daily Cleaning

Product Choices

- Length: 10ft – 100ft/ 5m – 30m or Customized Upon Request.
- Color: Green, Blue, Red, Orange, or Customized
- Packaging & Accessories: Plastic film, Heated shrink, Color card or Customized upon request.

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Nominal Dimension	Hose Dimension			Working Pressure	Burst Pressure	Net Weight	Measure
		I.D.	O.D.	Length				
	Inch	mm	mm	m	Bar	Bar	Kg/roll	m^3
TMDS-1216	1/2"	12	16	25	5	18	3.00	0.0115
TMDS-1217	1/2"	12	17	25	6	20	3.75	0.0115
TMDS-1620	5/8"	16	20	25	5	15	3.50	0.0190
TMDS-1621	5/8"	16	21	25	6	18	4.50	0.0200
TMDS-1924	3/4"	19	24	25	4	12	5.25	0.0260
TMDS-1925	3/4"	19	25	25	5	15	6.25	0.0270
TMDS-2530	1"	25	30	25	4	12	6.75	0.0414
TMDS-2531	1"	25	31	25	4	12	8.00	0.0420

GARDEN HOSE

Light Duty Garden Hose

Made of Standard Quality PVC Material & Polyester. Standard Garden Hose is designed for low-cost garden supplies. Ideal set available with hose nozzles/spray guns.

Features

- Light Duty & Low-cost.
- General Purpose Watering.
- Use Easily with Hose Nozzles.

Application

- Watering Gardens
- General Car Wash
- Daily Cleaning

Product Choices

- Length: 10ft – 100ft/ 5m – 50m or Customized Upon Request.
- Color: Green, Blue, Red, Orange, or Customized
- Packaging & Accessories: Plastic film, Heated shrink, Color card or Customized upon request.

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Nominal Dimension	Hose Dimension			Working Pressure	Burst Pressure	Net Weight	Measure
		I.D.	O.D.	Length				
	Inch	mm	mm	m	Bar	Bar	Kg/roll	m³
TJDG-1216	1/2"	12	16	25	5	18	3.00	0.0115
TJDG-1217	1/2"	12	17	25	6	20	3.75	0.0115
TJDG-1620	5/8"	16	20	25	5	15	3.50	0.0190
TJDG-1621	5/8"	16	21	25	6	18	4.50	0.0200
TJDG-1924	3/4"	19	24	25	4	12	5.25	0.0260
TJDG-1925	3/4"	19	25	25	5	15	6.25	0.0270
TJDG-2530	1"	25	30	25	4	12	6.75	0.0414
TJDG-2531	1"	25	31	25	4	12	8.00	0.0420

Hose Nozzles & Accessories

TG-101

- 4PC Hose Nozzle Set for 3/4" hose (68 X 34 X 55cm)

TG-102

- 4PC Hose Nozzle Set for 1/2" hose (57 X 34 X 55cm)

TG-103

- 5PC Hose Nozzle Set (54 X 40 X 42cm)

TG-106

- Hose Reel with Pre-attached Hose & Hose Nozzles Available in 10m-30m.

TG-104

- Garden Hose Fitting 1/2", 5/8", 3/4", 1"

TG-105

- Garden Hose Fitting 1/2", 5/8", 3/4", 1"

TG-107

- Garden Hose Fitting 1/2", 5/8", 3/4", 1"

TG-108

- Garden Hose Fitting 1/2", 5/8", 3/4", 1"

TG-109

- Garden Hose Metal Connector

TG-110

- Garden Hose Quick-release Hose-Nozzle Connector Orange

TG-111

- Garden Hose Quick-release Hose-Nozzle Connector Green

TG-112

- Garden Hose Quick-release Hose-Nozzle Connector Blue

GARDEN HOSE

Soaker Hose

Made of 65% recycled materials and designed to save up to 70% of water used by a standard hose. Simply lay out the soaker system in the setup required, bury the soaker hose under the topsoil or mulch and turn on the tap to provide your plants with the perfect amount of moisture. Water seeps from hose to soak the roots, ensure continuous & healthy plant growth. Perfect for shrubs, gardens and flowerbeds

Features

- Providing gentle, even soaking
- Meet lead-free standards
- Water saving & green garden irrigation

Application

- Shrubs & flowerbeds watering
- Garden & yard watering

Product Choices

- Size: 1/2" or 3/8" Standard
- Connectors: Plastic and brass connectors (with valve option)
- Packaging & Accessories: Heated Shrink Wrap or Color Cardboard

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Length	Pieces Per Carton	Carton Size(cm)	G.W. (kg)	N.W. (kg)
TSK-25	25ft/7.62m	20	52*26*58	13	12.5
TSK-50A	50ft/15.2m	5	30*30*43	6.6	6.2
TSK-50B	50ft/15.2m	12	58*29*50	15.5	14.5
TSK-75	75ft/22.5m	8	60*30*55	15.5	14.5
TSK-100	100ft/30.5m	6	67*34*42	13.5	12.5
TSK-20m	20m	8	68*32*35	14	13
TSK-50m	50m	2	43*43*25	9	8.2
TSK-100m	100m	1	43*43*29	9	8.2

Three Tube Sprinkler Hose

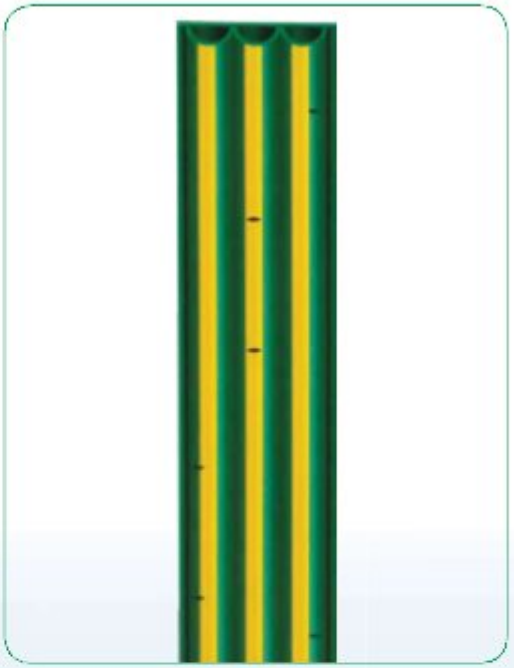

Made of Unique 3 Channel Hose Technology. Three-tube Spray Hose lay flat with micro perforation complete with plastic or brass fittings for connection.

Features

- Micro Perforation
- Low Working Pressure: 4Bar

Application

- Watering Park
- Farm Dripping
- Soaking & Spraying

Product Choices

- Length: 10ft – 50ft/ 5m – 20m or Customized Upon Request.
- Color: Green, Blue, Red, Orange, or Customized
- Packaging & Accessories: Plastic film, heated shrink, color card or Customized upon request.

TTS-101

TTS-102

Item No.	Length	Carton Size	Weight	Qty/Ctn
	FT	cm	kg/s	pcs
TTS-025	25	35×28×40	18/17	20
TTS-050	50	34×34×40	18/17	10
TTS-100	100	55×55×18	18/17	5

GARDEN HOSE Packaging Options

TGP-101A

TGP-101B

TGP-101

With 4 Pcs hose nozzle set	
Heat shrink with colorful card packing with carton	
Size	1/2" 5/8" 3/4"
Length	10M-30M

TGP-102A

TGP-102B

TGP-102

With 5 Pcs hose nozzle set	
Heat shrink with colorful card packing with carton	
Size	1/2" 5/8" 3/4"
Length	10M-30M

TGP-103A

TGP-103B

TGP-103

With brass coupling	
Heat shrink with colorful card packing with carton	
Size	1/2" 5/8" 3/4"
Length	25FT-100FT

TGP-104A TGP-104B

TGP-104

Without hose accessories	
Heat shrink with colorful card packing with carton	
Size	1/2" 5/8" 3/4" 1"
Length	10M-50M

Packaging Options

TGP-105

Garden Hose Packed in Taco Shell (Retailer Friendly)	
Applicable to sale in the supermarket	
Size	1/2" 5/8" 3/4"
Length	15M 20M 25M 30M

TGP-106

With the 4 pcs quick plastic coupling	
Heat shrink with single wall corrugated board colorful card packing with carton	
Applicable to sale in the supermarket	
Size	1/2" 5/8" 3/4"
Length	15M 20M 25M 30M

THR-101

With hose reel, multifunctional hose accessories	
Easy take-in and out	
Is the ideal necessity for various garden irrigation vehicle washing and daily washing	
Size	1/2" 5/8" 3/4"
Length	15M-45M

THR-102

With hose reel, multifunctional hose accessories	
Easy take-in and out	
Is the ideal necessity for various garden irrigation vehicle washing and daily washing	
Size	1/2" 5/8" 3/4"
Length	15M-45M

Agriculture & Irrigation

Premium Plus Lay Flat Hose

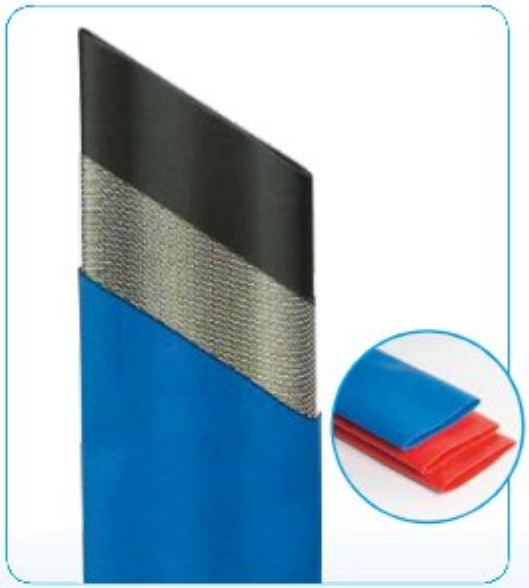

Made of a balanced polyester yarn spiral wrap, longitudinal strength member and Grade A+ PVC tube cover to prevent separation. It utilizes one-step extrusion machine that brings X lining to strongthon hose for longer duration. It is perfect for high-end industrial grade market.

Features

- Best Quality & Long-lasting Lifetime
- Corrosion & Rust Proof & Anti UV
- Environmental Grade, Non-Smell, Non-Toxic.

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Type	Hose Dimension		Working Pressure	Burst Pressure	Net Weight	Measure
		I.D.	Length				
	Inch	mm	m/roll	Bar	Bar	Kg/m	m^3
TLP-08025	1"	25	100	8	25	0.15	0.0186
TLP-08032	1-1/4"	32	100	8	25	0.17	0.0223
TLP-08040	1-1/2"	38	100	8	25	0.2	0.0261
TLP-04050	2"	51	100	4	12	0.22	0.0357
TLP-06050	2"	51	100	6	18	28	0.0357
TLP-08050	2"	51	100	8	25	0.3	0.038
TLP-04064	2-1/2"	64	100	4	13	0.3	0.0465
TLP-06064	2-1/2"	64	100	6	18	0.42	0.0465
TLP-03075	3"	76	100	3	9	0.4	0.061
TLP-04075	3"	76	100	4	12	0.48	0.063
TLP-06075	3"	76	100	6	18	0.55	0.063
TLP-08075	3"	76	100	8	25	0.8	0.0898
TLP-03100	4"	102	100	3	9	0.53	0.0833
TLP-04100	4"	102	100	4	11	0.62	0.0833
TLP-06100	4"	102	101	6	18	0.95	0.086
TLP-03125	5"	125	102	3	11	0.75	0.109
TLP-03150	6"	152	100	3	"	0.9	0.141
TLP-03200	8"	200	100	3	10	1.8	0.212

LAY FLAT HOSE

Heavy Duty Lay Flat Hose

Made of Premium quality PVC and textile reinforcement. It can be used whether under low medium/high temperatures and it is perfect for heavy-duty usage at working pressure of 6-8 Bar.

Features

- Strong mildew-proof hose that rolls up flat for easy storage.
- Reinforced with spiral plies and longitudinal synthetic cords for strength, durability, flexibility and burst resistance. Resistant to oils, grease, many chemicals and acids.

Application

- Agriculture - Drip Irrigation, Sprinkling, Dewatering, Grain Chutes
- Mining - Leaching, Dewatering, Pumping, Dust Chutes, Waste Water Disposal, Ventilation
- Municipalities - Fire Prevention, Emergency Sewage, Flood Control Lines, Horticulture
- Construction - Concrete Chutes, Boring, Dewatering, Pile Driving

Product Choices

- Length: 10-100meter
- Color: Blue, Red, Brown, Green, Yellow, or Customized
- Packaging & Accessories: Plastic film, Woven bag with cardboard, Hose with couplings & connectors.

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Type	Working Pressure	Weight	Length	Measure
	Inch	Bar	Kg/m	M	m³
TLH-06038	1-1/2"	06	0.30	100	0.0294
TLH-06050	2"	06	0.36	100	0.050
TLH-06064	2-1/2"	06	0.49	100	0.062
TLH-06075	3"	06	0.62	100	0.0832
TLH-06100	4"	06	0.80	100	0.109
TLH-06125	5"	06	1.15	100	0.152
TLH-06150	6"	06	1.55	100	0.181
TLH-06200	8"	06	1.95	100	0.257
TLH-08038	1-1/2"	08	0.33	100	0.030
TLH-08050	2"	08	0.475	100	0.053
TLH-08064	2-1/2"	08	0.55	100	0.064
TLH-08075	3"	08	0.68	100	0.085
TLH-08100	4"	08	0.85	100	0.112
TLH-04250	10"	04	2.80	50	0.140
TLH-04300	12"	04	3.50	50	0.170

Medium Duty Lay Flat Hose

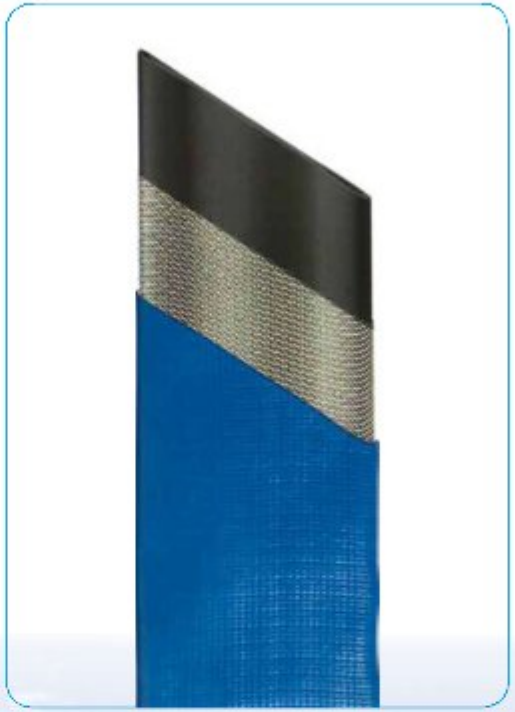

Made of Good quality PVC and textile reinforcement. It is perfect for medium-duty water discharge purposes at working pressure of 4 Bar.

Features

- Strong enough for watering/dewatering.
- Resists Kinking & Twisting.
- Environmental Grade, Non-Smell, Non-Toxic.

Application

- Agriculture - Drip Irrigation, Sprinkling, Dewatering, Grain Chutes.
- Mining - Leaching, Dewatering, Pumping, Dust Chutes, Waste Water Disposal, Ventilation.
- Marine - Water Supply for Ships, Unloading of Vessels, Submarine Exploration.
- Municipalities - Fire Prevention, Emergency Sewage, Flood Control Lines, Horticulture.
- Construction - Concrete Chutes, Boring, Dewatering, Pile Driving.
- Fishery - Fish Farming.

Product Choices

- Length: 10-100meter
- Color: Blue, Red, Brown, Green, Yellow, or Customized
- Packaging & Accessories: Plastic film, Woven bag with cardboard, Hose with couplings & connectors.

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Type	Working Pressure	Weight	Length	Measure
	Inch	Bar	Kg/m	M	m³
TLM-04025	1"	04	0.20	100	0.021
TLM-04038	1-1/2"	04	0.27	100	0.031
TLM-04050	2"	04	0.33	100	0.047
TLM-04064	2-1/2"	04	0.42	100	0.058
TLM-04075	3"	04	0.56	100	0.076
TLM-04100	4"	04	0.70	100	0.104
TLM-04125	5"	04	1.00	100	0.125
TLM-04150	6"	04	1.35	100	0.153
TLM-04200	8"	04	1.70	100	0.208

LAY FLAT HOSE

Light Duty Lay Flat Hose

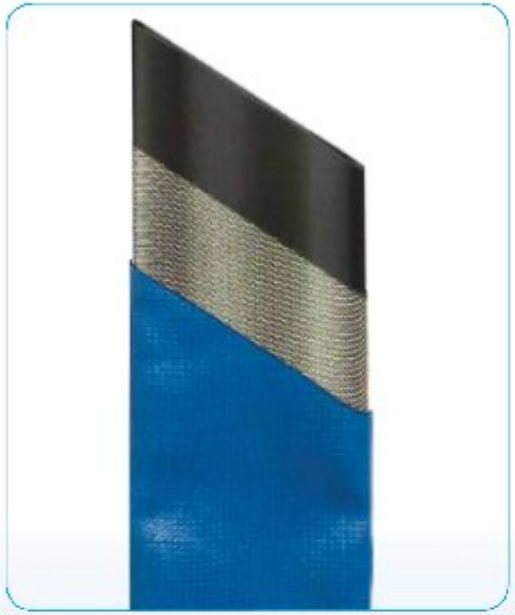

Made of standard quality PVC and textile reinforcement. Designed as a low-cost light duty for general open-end water discharge.

Features

- Balanced polyester yarn spiral wrap, longitudinal strength.
- Ideal for economic agriculture and irrigation industry.
- Lightweight for general-purpose applications.

Application

- Agriculture - Drip Irrigation, Sprinkling, Dewatering, Grain Chutes.
- Marine - Water Supply for Ships, Unloading of Vessels.
- Municipalities - Fire Prevention, Emergency Sewage,
- Flood Control Lines, Horticulture.

Product Choices

- Length: 10-100meter
- Color: Blue, Red, Brown, Green, Yellow, or Customized
- Packaging & Accessories: Plastic film, Woven bag with cardboard, Hose with couplings & connectors.

+ 60 °C / – 5°C | NO TOXIC | FITTINGS

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Type	Working Pressure	Weight	Length	Measure
	Inch	Bar	Kg/m	M	m³
TLL-02025	1"	02	0.175	100	0.0125
TLL-02038	1-1/2"	02	0.20	100	0.019
TLL-02050	2"	02	0.26	100	0.026
TLL-02064	2-1/2"	02	0.31	100	0.034
TLL-02075	3"	02	0.38	100	0.042
TLL-02100	4"	02	0.52	100	0.0557
TLL-02125	5"	02	0.81	100	0.079
TLL-02150	6"	02	1.15	100	0.095
TLL-02200	8"	02	1.4	100	0.140
TLL-03025	1"	03	0.19	100	0.013
TLL-03038	1-1/2"	03	0.25	100	0.022
TLL-03050	2"	03	0.31	100	0.028
TLL-03064	2-1/2"	03	0.37	100	0.037
TLL-03075	3"	03	0.45	100	0.045
TLL-03100	4"	03	0.65	100	0.058
TLL-03125	5"	03	0.90	100	0.082
TLL-03150	6"	03	1.25	100	0.099
TLL-03200	8"	03	1.55	100	0.143

Suction Hose

Made of Co-extruded PVC wall hose construction reinforced with a rigid external PVC helix.

Features

- Completely smooth interior maximizes prevents clogs and maximizes airflow.
- Excellent quality and crush resistant.
- External helix acts as wearstrip, protecting the outside of the hose.

Application

- Agricultural, Air Duct Cleaning, Chemical Fumes, Duct Cleaning.
- Landfill Venting, Lawn & Leaf Collection, Waste Disposal.
- Plastic Pellet Transfer, Plastics Industry, Sand & Gravel Suction.

Product Choices

- Length: 12/25/50/100 Feet or Customized
- Color: Blue, Red, Brown, Green, Yellow, or Customized
- Packaging & Accessories: Plastic film, Woven bag. Hose with fittings

+160 °C / – 20 °C | FOUR SEASONS | BRASS FITTINGS | PLASTIC FITTINGS

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Type	Hose Dimension	Working pressure	Burst pressure	Length	Net weight
	Inch	mm	Bar	Bar	m	Kg/roll±0.1
TSH1-025	1"	25	8	32	30	11
TSH1-032	1-1/4"	32	8	30	30	14.4
TSH1-038	1-1/2"	38	8	26	30	16.5
TSH1-051	2"	51	7	24	30	22.1
TSH1-064	2-1/2"	64	6	20	30	33
TSH1-076	3"	76	5	20	30	39
TSH1-102	4"	102	5	16	30	66
TSH2-025	1"	25	6	18	30	9.5
TSH2-032	1-1/4"	32	6	18	30	12.5
TSH2-038	1-1/2"	38	6	18	30	14
TSH2-051	2"	51	5	15	30	19
TSH2-064	2-1/2"	64	4	12	30	28
TSH2-076	3"	76	3	9	30	33
TSH2-102	4"	102	3	9	30	56

LAY FLAT HOSE

Packaging Options

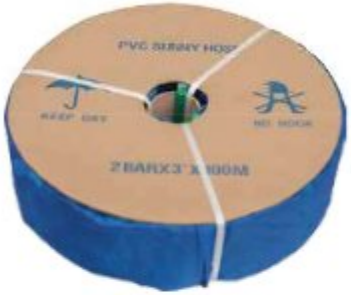

TL-110

- Lay flat Hose Standard Packaging

TL-111

- Pre-attached Pin-Lug Available

TL-112

- Pre-attached Couplings Available

TL-113

- Heavy Duty Hose with Pre-attached Pin-Lug Available

Hose Couplings & Fittings

Material: Aluminum

Material: PP

TL-101 Standard Pin Lug Coupling

Item No.	Size	Item No.	Size
TL101-125	1-1/4"	TL101-300	3"
TL101-150	1-1/2"	TL101-400	4"
TL101-200	2"	TL101-600	6"
TL101-250	2-1/2"		

Material: Aluminum

Material: PP

TL-102 Male Shank

Item No.	Size	Item No.	Size
TL102-125	1-1/4"	TL102-300	3"
TL102-150	1-1/2"	TL102-400	4"
TL102-200	2"	TL102-600	6"
TL102-250	2-1/2"		

Material: Aluminum

Material: PP

TL-103 Male Adapter / Hose Shank

Item No.	Size	Item No.	Size
TL103-100	1"	TL103-250	2-1/2"
TL103-125	1-1/4"	TL103-300	3"
TL103-150	1-1/2"	TL103-400	4"
TL103-200	2"	TL103-600	6"

Material: Aluminum

Material: PP

TL-104 Female Coupler / Hose Shank

Item No.	Size	Item No.	Size
TL104-100	1"	TL104-250	2-1/2"
TL104-125	1-1/4"	TL104-300	3"
TL104-150	1-1/2"	TL104-400	4"
TL104-200	2"	TL104-600	6"

TL-105

- 1" - 6" Ferrules

TL-106

- 1" - 6" Clamp

Automotive & Industrial

LD-1545

Car Wash Hose

Made of Standard Quality PVC Hose or Knitted PVC Hose. Car Wash Hose is ideal set with brass and plastic fittings. Designed for American auto parts seater.

Features

- Heavy Duty 3-Layer PVC Hose.
- Quick Connect or Bend Restrictor Available.
- Easy to Use.

Application

- General Car Wash
- RV Cleaning
- Garden Watering

Product Choices

- Length: 50ft/15.2m or Customized Upon Request.
- Color: Grey, Dark Blue, Black or Customized
- Packaging & Accessories: Color cardboard, Plastic film or Customized upon request.

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Nominal Dimension	Hose Dimension			Working Pressure	Burst Pressure	Net Weight	Measure
		I.D.	O.D.	Length				
	Inch	mm	mm	m	Bar	Bar	Kg/roll	m^3
TCW-1216	1/2"	12	16	25	5	18	3.00	0.0115
TCW-1217	1/2"	12	17	25	6	20	3.75	0.0115
TCW-1319	5/8"	16	20	25	5	15	3.50	0.0190
TCW-1320	5/8"	16	21	25	6	18	4.50	0.0200
TCW-1924	3/4"	19	24	25	4	12	5.25	0.0260
TCW-1925	3/4"	19	25	25	5	15	6.25	0.0270
TCW-2530	1"	25	30	25	4	12	6.75	0.0414
TCW-2531	1"	25	31	25	4	12	8.00	0.0420

INDUSTRIAL HOSE

Hybrid Air Hose

Made of Premium Rubberized PVC Hybrid PVC Polymer to create ultra lightweight and flexibility in cold weather up to -25'c. This hybrid air hose is designed for premium automotive and industrial application.

Features

- Extreme All-Weather Flexibility.
- Kink Resistant under pressure.
- Lays Flat & Zero Memory.
- Optional Bend Restrictor for Extended Hose Life.

Application

- Air tools
- Automotive parts
- Industrial usage

Product Choices

- Length: 25ft/50ft/100ft, 10m/15m/20m or Customized
- Color: Bright Green, Red, Orange, or Customized.
- Packaging & Accessories: Taco Shell, Heated shrink, Color card or Customized upon request.

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Type	Hose Dimension				Working Pressure	Burst Pressure	Pcs/Carton	Net Weight	Measure
		I.D.	O.D.	Well	Length					
	Inch	mm	mm	mm	Feet	Bar	Bar		Kg/carton	cm
THA-06025	1/4'	6	12	3.0	25	20	80	20	18	43x22x51
THA-06050	1/4'	6	12	3.0	50	20	80	10	18	31x31x50
THA-08025	5/16'	8	14	3.0	25	20	80	20	22	48x24x57
THA-08050	5/16'	8	14	3.0	50	20	80	10	22	33x33x58
THA-10025	3/8'	9.5	15.5	3.0	25	20	80	20	25	51x25x65
THA-10050	3/8'	9.5	15.5	3.0	50	20	80	10	25	35x35x65
THA-10075	3/8'	9.5	15.5	3.0	75	20	80	5	19	35x35x50
THA-10100	3/8'	9.5	15.5	3.0	100	20	80	5	25	38x38x50

PVC Air Hose

Made of Premium PVC & Reinforced Polyester. PVC Air Hose is ideal for general-purpose applications.

Features

- Lightweight & Kink-resistant Design.
- Bright Fluorescent Color for Safety.
- Maximum Working Pressure: 300PSI

Application

- Air tools
- Automotive parts
- Industrial usage

Product Choices

- Length: 25ft/50ft/100ft, 10m/15m/20m or Customized
- Color: Green, Red, Orange, or Customized.
- Packaging & Accessories: Taco Shell, Heated shrink, Color card or Customized upon request.

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Type	Hose Dimension				Working Pressure	Burst Pressure	Pcs/Carton	Net Weight	Measure
		I.D.	O.D.	Well	Length					
	Inch	mm	mm	mm	Feet	Bar	Bar		Kg/carton	cm
TPA-06025	1/4'	6	12	3.0	25	20	80	20	18	43x22x51
TPA-06050	1/4'	6	12	3.0	50	20	80	10	18	31x31x50
TPA-08025	5/16'	8	14	3.0	25	20	80	20	22	48x24x57
TPA-08050	5/16'	8	14	3.0	50	20	80	10	22	33x33x58
TPA-10025	3/8'	9.5	15.5	3.0	25	20	80	20	25	51x25x65
TPA-10050	3/8'	9.5	15.5	3.0	50	20	80	10	25	35x35x65
TPA-10075	3/8'	9.5	15.5	3.0	75	20	80	5	19	35x35x50
TPA-10100	3/8'	9.5	15.5	3.0	100	20	80	5	25	38x38x50

INDUSTRIAL HOSE

Air Hose Packagings

TAP-01
- Air Hose with Bandit & Cardboard Package

TAP-02
- Air Hose with Hose Guard & Heated Shrink Package

TAP-03
- Air Hose in Taco Shell Package (U.S. Popular)

TAP-04
- Air Hose with Spring & Cardboard Package

Note:T&T hose is available in a wide variety of lengths, dimensions and fittings to meet all your needs.

Item No.	Type	Hose Dimension				Working Pressure	Burst Pressure	Pcs/Carton	Net Weight	Measure
		I.D.	O.D.	Well	Length					
	Inch	mm	mm	mm	Feet	Bar	Bar		Kg/carton	cm
TAP1-06025	1/4"	6	12	3.0	25	20	80	20	18	49x22x51
TAP1-06050	1/4"	6	12	3.0	50	20	80	10	18	31x31x50
TAP1-08025	5/16"	8	14	3.0	25	20	80	20	22	48x24x57
TAP1-08050	5/16"	8	14	3.0	50	20	80	10	22	33x33x58
TAP1-10025	3/8"	9.5	15.5	3.0	25	20	80	20	25	51x29x65
TAP1-10050	3/8"	9.5	15.5	3.0	50	20	80	10	25	35x35x65
TAP1-10075	3/8"	9.5	15.5	3.0	75	20	80	5	19	35x35x50
TAP1-10100	3/8"	9.5	15.5	3.0	100	20	80	5	25	38x38x50

Air Hose Accessories

TA-101
- Air Hose Fittings for Tire

TA-102
- Air Hose Fittings Adaptor

TA-103
- Air Hose Fittings 1/4 NPT

TA-104
- Air Hose EU-Standard Quick Fittings

TA-105
- Air Hose British Standard Fittings

TA-106
- Air Hose Fittings 1/4 NPT

TA-107
- Air Hose Fittings 1/4 NPT

TA-108
- Air Compressor Fittings

TA-109
- Air Hose Japan-Standard Quick Fittings

TA-111
- Hose End Just Fitting

TA-112
- Hose End With Spring

TA-113
- Hose End With Bandit/Hose Guard

INDUSTRIAL HOSE

Fiber Reinforced Hose

Made of Good Quality PVC & High tensile synthetic fiber spiraled. Clear and transparent structure is ideal for low-cost liquid transfer in any situation.

Features

- Easy to Use
- Competitive Price
- Abrasion & Corrosion Resistance

Product Choices

- Length: 25ft/50ft/100ft, 10m/15m/20m, or Customized.
- Color: Transparent Blue or Customized.
- Packaging & Accessories: Plastic film or Customized upon request.

Item No.	Nominal Dimension	Hose Dimension			Working Pressure	Burst Pressure	Net Weight	Measure
		I.D.	O.D.	Length				
	Inch	mm	mm	m	Bar	Bar	Kg/roll	m^3
FR1-0510	3/16"	5	10	100	12	36	7.2	0.015
FR1-0610	1/4"	6	10	100	8	24	6.5	0.023
FR1-0611	1/4"	6	11	100	10	30	8.5	0.025
FR1-0812	5/16"	8	12	100	7	21	8.6	0.032
FR1-0813	5/16"	8	13	100	10	30	10.2	0.032
FR1-0914	3/8"	9	14	100	10	30	11.2	0.035
FR1-1014	3/8"	10	14	100	7	21	10.0	0.035
FR1-1015	3/8"	10	15	100	9	27	12.5	0.035
FR1-1317	1/2"	13	17	100	6	18	12.5	0.045
FR1-1318	1/2"	13	18	100	8	24	15.0	0.045
FR1-1620	5/8"	16	20	50	5	15	7.0	0.035
FR1-1621	5/8"	16	21	50	7	21	9.0	0.035
FR1-1924	3/4"	19	24	50	5	15	10.5	0.044
FR1-1925	3/4"	19	25	50	7	21	12.5	0.044
FR1-2530	1"	25	30	50	4	12	13.8	0.069
FR1-2531	1"	25	31	50	6	18	16.0	0.069
FR1-3238	1-1/4"	32	38	40	3.5	11	16.4	0.118
FR1-3239	1-1/4"	32	39	40	5	15	20.4	0.118
FR1-3845	1-1/2"	38	45	40	3.5	11	23.0	0.184
FR1-3846	1-1/2"	38	46	40	5	15	26.5	0.184
FR1-5059	2"	50	59	30	3	9	29.0	0.242
FR1-5060	2"	50	60	30	4	2	35.0	0.242

Single Clear Hose

Made of Good Quality Non-Toxic Clear PVC. Clear and transparent structure is ideal for low-cost liquid transfer in light duty industrial machines.

Features

- Lightweight & Non-Toxic
- Soft & Elastic
- High Level of Transparency

Application

- Liquid transfer
- Industrial usage

Product Choices

- Length: 25ft/50ft/100ft, 10m/15m/20m, or Customized.
- Color: Transparent Blue/Green or Customized.
- Packaging & Accessories: Plastic film or Customized upon request.

Item No.	Type	Normal Size				Working Pressure	Weight	Measure
		I.D.	O.D.	Wall	Length			
	Inch	mm	mm	mm	m	Bar	Kg/roll	m^3
TSC-0509	3/16"	5	9	2.0	100	2.5	5.0	0.03
TSC-0608	1/4"	6	8	1.0	100	1.5	2.8	0.015
TSC-0810	1/4"	8	10	2.0	100	2.2	7.1	0.03
TSC-0810	5/16"	8	10	1.0	100	1.5	3.5	0.017
TSC-0812	5/16"	8	12	2.0	100	2.0	8.7	0.032
TSC-1012	3/8"	10	12	1.0	100	1.5	4.4	0.019
TSC-1014	3/8"	10	14	2.0	50	2.0	5.5	0.017
TSC-1316	1/2"	13	16	1.5	50	1.5	4.2	0.021
TSC-1216	1/2"	12	16	2.0	50	1.8	5.1	0.025
TSC-1620	5/8"	16	20	2.0	50	1.5	6.7	0.03
TSC-1621	5/8"	16	21	2.5	50	1.6	9.4	0.03
TSC-1923	3/4"	19	23	2.0	50	1.0	8.3	0.044
TSC-1926	3/4"	19	26	3.5	50	1.5	14.5	0.05
TSC-2530	1"	25	30	2.5	50	1.0	13.4	0.069
TSC-2533	1"	25	33	4.0	50	1.5	22.0	0.080
TSC-3238	1-1/4"	32	38	3.0	40	1.0	16.4	0.115
TSC-3240	1-1/4"	32	40	4.0	40	1.2	27.5	0.148
TSC-3844	1-1/2"	38	44	3.0	40	1.0	19.2	0.132
TSC-3848	1-1/2"	38	48	5.0	40	1.2	34.2	0.263
TSC-5058	2"	50	58	4.0	40	1.0	33.8	0.242
TSC-5060	2"	50	60	5.0	40	1.2	47.5	0.4033

INDUSTRIAL HOSE

High Pressure Spray Hose

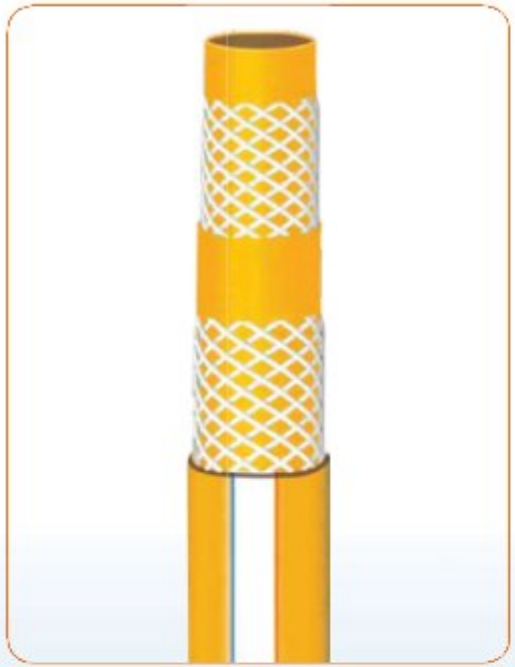

Made of quality PVC composite materials and high strengthen polyester, 5-Layer construction provides best quality under high pressure.

Features

- Strong adhesion between yarn & inner tube.
- Flexible under high pressure.
- Anti-aging & Corrosion resisted.

Application

- Applicable for High Pressure Power sprayer
- Agricultural Spraying
- Pest Controlling of Orchards

Product Choices

- Length: 50ft/100ft, 15m/30m, or Customized.
- Color: Orange, Red or Customized.
- Packaging & Accessories: Plastic film, Color card or Customized upon request.

TPWA

TPWB

Item No.	Type	Hose Dimension	Working Pressure	Burst Pressure	Length	Measure
		O.D.				
	Inch	mm	Bar	Bar	Kg/roll	m³
TPW-75	7.5	13	40	160	100	0.032
TPW-85	8.5	14.5	40	160	100	0.035
TPW-10	10	17	35	135	100	0.053
TPW-13	13	20	30	120	100	0.065

Steel Wire Hose

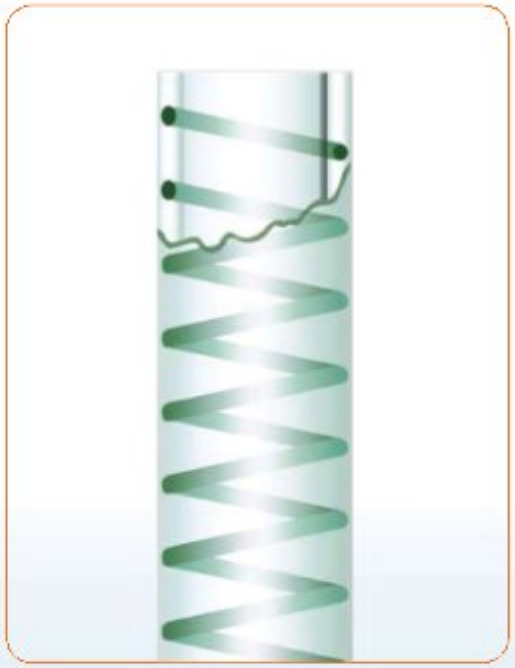

Made of Good Quality PVC & Stainless Steel Wire. Clear and transparent structure is ideal for low-cost liquid transfer in hard weather and industrial application.

Features

- High Pressure Usage
- All-weather Condition
- Competitive Price

Application

- Liquid transfer
- Industrial usage

Product Choices

- Length: 25ft/50ft/100ft, 10m/15m/20m, or Customized.
- Color: Transparent Blue/Green or Customized.
- Packaging & Accessories: Plastic film or Customized upon request.

Item No.	Type	Normal Size				Working Pressure	Weight	Measure
		I.D.	O.D.	Well	Length			
	Inch	mm	mm	mm	m	Bar	Kg/roll	m³
TSW-013	1/2"	13	19	3.0	100	9	0.23	0.065
TSW-015	5/8"	15	21	3.0	100	9	0.28	0.085
TSW-019	3/4"	19	26	3.5	50	8	0.36	0.0492
TSW-025	1"	25	33	4.0	50	8	0.54	0.085
TSW-032	1-1/4"	32	41	4.5	50	7	0.8	0.1212
TSW-038	1-1/2"	38	45	5.0	50	6	1.05	0.1764
TSW-045	1-3/4"	45	56	5.5	50	6	1.25	0.2562
TSW-051	2"	51	63	6.0	40	5	1.65	0.32
TSW-064	2-1/2"	64	80	8.0	30	4.5	2.7	0.448
TSW-075	3"	75	91	8.0	20	4	3.1	0.39
TSW-100	4"	100	118	9.0	20	3	5.0	0.69

INDUSTRIAL HOSE Gas Hose

Features

- Adopting qualified PVC synthesis materials with built-in reinforced fibre.
- Soft and elastic, bright and brilliant.
- Suitable for carrying the household gasoline.

Item No.	Nominal dimension	Hose dimension			Operation pressure	Explosive pressure	Net weight	Measure
		I.D.	O.D.	Length				
	Inch	mm	mm	m	Bar	Bar	Kg/roll	m^3
TMO-8514	5/16'	8.5	14	50	3	9	6.8	0.015
TMO-0814	3/8'	9	14	50	3	9	6.1	0.018
TMO-1015	3/8'	10	15	50	3	9	6.5	0.02

Shower Hose

Features

- Adopting qualified foodstuff hygiene PVC synthesis materials.
- Light weight, soft and elastic with long life span.
- Colorful, brilliant and beautiful.
- Non toxic, hi-temperature resistance.
- Applicable to be the necessary pipe for shower and bathroom.

Item No.	Nominal dimension	Hose dimension			Working pressure	Burst pressure	Net weight	Measure
		I.D.	O.D.	Length				
	Inch	mm	mm	m	Bar	Bar	Kg/roll	m^3
TLY-8514	5/16'	8.5	14	50	3	9	6.8	0.015

Merchandising & Retailer Display

KIMPORT

PE COATED STEEL PIPE

PE coated steel pipe 農業用支柱

Item No	Dia(mm)	Height(mm)	Ctn Qty (pcs)
CSP-8-60	Φ8	600	100
CSP-8-75	Φ8	750	100
CSP-8-90	Φ8	900	100
CSP-8-120	Φ8	1200	100
CSP-8-150	Φ8	1500	100
CSP-8-180	Φ8	1800	100
CSP-11-75	Φ11	750	100
CSP-11-90	Φ11	900	100
CSP-11-120	Φ11	1200	100
CSP-11-150	Φ11	1500	100
CSP-11-180	Φ11	1800	100
CSP-16-90	Φ16	900	50
CSP-16-120	Φ16	1200	50
CSP-16-150	Φ16	1500	50
CSP-16-180	Φ16	1800	50
CSP-16-210	Φ16	2100	50
CSP-16-240	Φ16	2400	50
CSP-20-90	Φ20	900	50
CSP-20-120	Φ20	1200	50
CSP-20-150	Φ20	1500	50
CSP-20-180	Φ20	1800	50
CSP-20-210	Φ20	2100	50
CSP-20-240	Φ20	2400	50
CSP-20-270	Φ20	2700	50
CSP-20-300	Φ20	3000	50
CSP-34-180	Φ34	1800	50
CSP-34-210	Φ34	2100	50
CSP-34-240	Φ34	2400	50
CSP-34-270	Φ34	2700	50

用途

For climbing plants, to support flowers and leaves growing, avoid to fall and break off. They can be made up of different style with ties.

植物を固定用

PLASTIC COATED STEEL BAMBOO

PE coated steel pipe 農業用支柱

Item No	Dia(mm)	Height(mm)	Ctn Qty (pcs)
CSB-8-60	Φ8	600	100
CSB-8-75	Φ8	750	100
CSB-8-90	Φ8	900	100
CSB-8-120	Φ8	1200	100
CSB-8-150	Φ8	1500	100
CSB-8-180	Φ8	1800	100
CSB-11-75	Φ11	750	100
CSB-11-90	Φ11	900	100
CSB-11-120	Φ11	1200	100
CSB-11-150	Φ11	1500	100
CSB-11-180	Φ11	1800	100
CSB-16-90	Φ16	900	50
CSB-16-120	Φ16	1200	50
CSB-16-150	Φ16	1500	50
CSB-16-180	Φ16	1800	50
CSB-16-210	Φ16	2100	50
CSB-16-240	Φ16	2400	50
CSB-20-90	Φ20	900	50
CSB-20-120	Φ20	1200	50
CSB-20-150	Φ20	1500	50
CSB-20-180	Φ20	1800	50
CSB-20-210	Φ20	2100	50
CSB-20-240	Φ20	2400	50
CSB-20-270	Φ20	2700	50
CSB-20-300	Φ20	3000	50

用途

For supporting plant, to keep the plant up; They also can make up of brackets according to your need.

植物を支える

BROWN STEEL PLANT STAKE

Brown steel plant stake 農業用支柱

Item No	Dia(mm)	Height(mm)	Ctn Qty (pcs)
BCSP-11-90	Φ11	900	100
BCSP-11-120	Φ11	1200	100
BCSP-11-150	Φ11	1500	100
BCSP-11-180	Φ11	1800	100

用途

With the clean design, pretty fit for the growth of the vine plants.

植物を固定用

PLASTIC COATED BAMBOO

Plast coated bamboo 园艺支柱

Item No	Dia(mm)	Height(mm)	Ctn Qty (pcs)
CB-8-75	Φ8	750	100
CB-8-90	Φ8	900	100
CB-8-120	Φ8	1200	100
CB-8-150	Φ8	1500	100
CB-8-180	Φ8	1800	100
CB-16-120	Φ16	1200	100
CB-16-180	Φ16	1800	100
CB-16-210	Φ16	2100	100
CB-16-240	Φ16	2400	100
CB-20-120	Φ20	1200	100
CB-20-150	Φ20	1500	100
CB-20-180	Φ20	1800	100
CB-20-210	Φ20	2100	100
CB-20-240	Φ20	2400	100

用途
For supporting plant, to keep the plant up; They also can make up of brackets according to your need.
植物を支える

TUNNEL PIPE

Tunnel pipeトンネル支柱

Item No	Dia(mm)	Height(mm)	Ctn Qty (pcs)
PSTP-8-120	Φ8	1200	50
PSTP-8-150	Φ8	1500	50
PSTP-8-180	Φ8	1800	50
PSTP-11-120	Φ11	1200	50
PSTP-11-150	Φ11	1500	50
PSTP-11-180	Φ11	1800	50
PSTP-11-210	Φ11	2100	50
PSTP-11-240	Φ11	2400	50
PSTP-11-270	Φ11	2700	50

用途
As the support in the nursery house. It is smooth for cover the film or non woven fabric.
園室用支柱

CHRYSANTHEMUMM SUPPORT

PE coated steel pipe 园艺支柱

Item No	Dia(mm)	Height(mm)	Ctn Qty (pcs)
CS-A	Φ7.3	300-530	50
CS-B	Φ7.3	480-850	50
CS-C	Φ7.3	600-1050	50
CS-D	Φ9.3	900-1600	50
CS-E	Φ9.3	1000-1850	50

用途
Clean design to better support chrysanthemum.
菊花を支える

EMBOSSING STAKE

Embossing stake 园艺支柱

Item No	Dia(mm)	Height(mm)	Ctn Qty (pcs)
ES-8-90	Φ8	900	100
ES-8-120	Φ8	1200	100
ES-11-90	Φ11	900	100
ES-11-120	Φ11	1200	100
ES-11-150	Φ11	1500	100
ES-16-150	Φ16	1500	50
ES-16-180	Φ16	1800	50

用途
Very effective for plants to climbing up for the pattern on the surface.
植物を支える

COWPEA SUPPORT

Cowpea support 豆用支柱

Item No	Dia(mm)	Height(mm)	Ctn Qty (pcs)
CS-26	Φ8	900	50

用途
For supporting the cowpea plant growth. It can be make up different style by the connectors.
植物を支える

KIMPORT

TOMATO CAGE

Item No	Item Size(cm)
TS-5(used one)	3pcs CSP-11-153 9pcs connector
TS-5(new one)	3pcs CSP-11-153 3pcs connector 1pcs wigwam grip

用途:
to support tomato growing, avoid to fall and break off. Wigwam grip is movable to adjust the position according to the height of tomatos.
トマト用支える支柱

NEW STAKES

New Stakes 二般支柱

Item No	Dia(mm)	Height(mm)	Ctn Qty (pcs)
NS-11-120	Φ11	1200	50
NS-11-150	Φ11	1500	50
NS-16-120	Φ16	1200	50
NS-16-150	Φ16	1500	50
NS-16-180	Φ16	1800	50
NS-16-210	Φ16	2100	50
NS-16-240	Φ16	2400	50
NS-20-120	Φ20	1200	50
NS-20-150	Φ20	1500	50
NS-20-180	Φ20	1800	50
NS-20-210	Φ20	2100	50
NS-20-240	Φ20	2400	50

用途:
For climbing plants, to support flowers and leaves growing, avoid to fall and break off. They can be made up of different style with ties.
植物を固定用

TRIANGLE STAKES

Triangle stakes 固芸支柱

Item No	Dia(mm)	Height(mm)	Ctn Qty (pcs)
TT600	Φ7	600	100
TT750	Φ7	750	100
TT900	Φ7	900	100
TT1200	Φ7	1200	80

用途:
For the plants to climb and lead the way of growth. Insert three legs balanced into the earth.
つる性植物の支えや誘引に便利

LEAVE SUPPORT

Leave support 固芸支柱

Item No	pcs/set	dia of ring	Height	Ctn Qty (Pcs)
FS-3-14	3	140	280	100
FS-3-18	3	180	280	100

特徴:各リングがバッカー式で取り外し、移動ができますので、
植物の成長に合せる。
用途:朝顔やつるむらさきなどのつるものプランター栽培に最
適なリングになった支柱です。
Characteristic: All the rings could be taken off and moved. Good for the plants growing.
Use: Fit for vine plants like Bitter gourd and cucumber.

FLOWER SCREEN

Flower screen 固芸支柱

Item No	Wide(mm)	Height(mm)	Ctn Qty (pcs)
FS60	130	600	100
FS75	260	750	100
FS90	390	900	100
FS120	390	1200	100

特徴:使い勝手がいい。
用途:つる性植物の誘引に!保温・遮光のフレームとして!
Characteristic: easy to use.
Use: Used for vine plants growth, also for the frame of shading.

FLOWER SUPPORT

Flower Holder 花架

Item No	Size(cm)	Description
FH-345	45	3pcs rings (Φ18 / 16 / 14cm)
FH-360	60	3pcs rings (Ø22 / 20 / 18cm)
FH-375	75	3pcs rings (Ø28 / 25 / 22cm)
FH-390	90	3pcs rings(Φ30 / 28 / 26cm)
FH-4120	120	4pcs rings (Ø33 / 30 / 28 / 26cm)

PE COATED SPIRALS

Pe coated spirals 園芸支柱

Item No	Dia(mm)	Height(mm)	Ctn Qty (pcs)
SR8-120	Φ8	1200	25
SR8-150	Φ8	1500	25
SR8-180	Φ8	1800	25
SR11-120	Φ11	1200	25
SR11-150	Φ11	1500	25
SR11-180	Φ11	1800	25

特徴：強度高い材質，美観度アップする。
用途：つる性植物に誘引します、又トマトの栽培にも活躍。
Characteristic: High strength, nice appearance.
Use: Used for vine plants and tomatos growth.

EMBOSSING SPIRALS

Embossing spirals 園芸支柱

Item No	Dia(mm)	Height(mm)	Ctn Qty (pcs)
ESR8-120	Φ8	1200	25
ESR8-150	Φ8	1500	25
LSR8-180	Φ8	1800	25
ESR11-120	Φ11	1200	25
ESR11-150	Φ11	1500	25
ESR11-180	Φ11	1800	25

特徴：強度高い材質，美観度アップする。
用途：つる性植物に誘引します、又トマトの栽培にも活躍。
Characteristic: Tough material with beautiful appearance.
Use: Very effective for the growth of vine plants.

EMBOSSING SPIRALS

Aluminum spirals 園芸支柱

Item No	Dia(mm)	Height(mm)	Ctn Qty (pcs)
SR6-120	Φ6	1200	100
SR6-150	Φ6	1500	100
SR6-180	Φ6	1800	100
R8-120	Φ8	1200	100
SR8-150	Φ8	1500	100
SR8-180	Φ8	1800	100
SR11-120	Φ11	1200	80
SR11-150	Φ11	1500	80
SR11-180	Φ11	1800	80

特徴：強度高い材質、美観度アップする。
用途：つる性植物に誘引します、又トマトの栽培にも活躍。
Characteristic: High strength, nice appearance.
Use: Easy for vine plants to climb up.



STAKE COMBINATION

Stake combination B

Item No	Specification
SC-B	Φ11mm*1900mmL stakes*4 connector arm*4 ball finials*4

Characteristic: Easy to assemble and widely used.
Use: Effective for vine plants climbing up.

Stake combination C

Item No	Specification
SC-C	Φ11mm*1500mmL stakes*5 connector arm*5 ball finials*1

Characteristic: Easy to assemble and widely used.
Use: Effective for vine plants climbing up.

Stake combination D

Item No	Specification
SC-D	Φ11mm*1000mmL stakes*10 connector arm*5 stake connector*5 ball finials*1

Characteristic: Easy to assemble and widely used.
Use: Effective for vine plants climbing up.

GARDEN ARCH

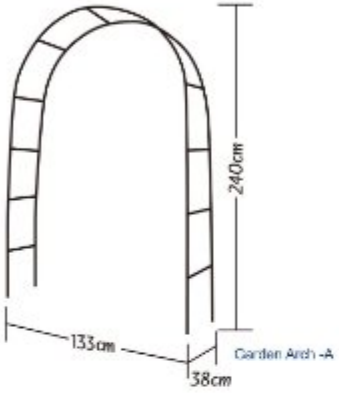

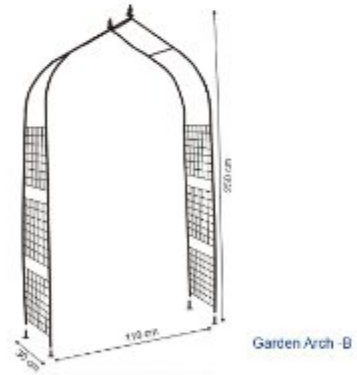

Item No	Specification	Ctn Qty
Garden Arch -A	steel inside powder coated 133W*38D*240Hcm	5
Garden Arch -B	steel inside powder coated 110W*30D*250Hcm	3

用途:
Easy to assemble in beautiful design.
植物を支える

NURSERY HOUSE

Item No	Specification	Ctn Qty
NH-F	Tunnel pipe Φ8mm*120cmL*3pcs Clips*9pcs Plastic nails*2pcs PE film	6
NH-F	Tunnel pipe Φ8mm*120cmL*3pcs Clips*9pcs Plastic nails*2pcs Nonwoven fabriv	6
NH-F	Tunnel pipe Φ8mm*120cmL*3pcs Clips*9pcs Plastic nails*2pcs Shading net	6
NH-F	Tunnel pipe Φ8mm*120cmL*3pcs Clips*9pcs Plastic nails*2pcs Insect net	6

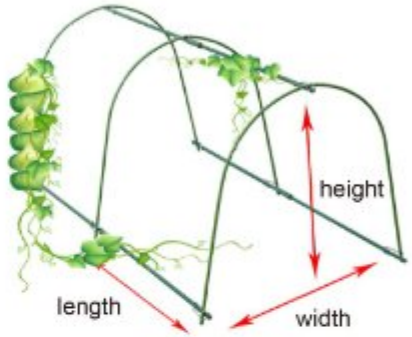

用途:
be widely used to protect the plants and vegetables in family garden.
小さい温室を組み合わせて、家庭菜園に適応野菜を守る。

PE FILM

Item No	grams/m²	Size	Color	Ctn Qty
PFL-2	20	0.65*10	白 White 黒 Black	40

特徴：通気性があり、環境にも優しい。
用途：果実などの保護用、作物の増産を促進する。

Characteristic: Perfect air permeability, eco-friendly.
Use: Protect the plants and promote the harvest.

MULCHING FILM

Item No	Size	Ctn Qty
MF-1	3*2m	40
MF-2	5*2m	40
MF-3	10*2m	40

用途：

Raise the temperature of earth, protect the earth and fertilizer to promote the efficiency of fertilizer.
向上地温, 土壌, 肥料を保護する, 発芽促進。

ANTI-INSECT NET

Item No	Size	Ctn Qty
AIN-1	1.8*3m	40
AIN-2	1.35*3m	40
AIN-3	1.5*5m	40

用途：

Be used to stop the insect damage to the vegetables.
Also it can keep the vegetables inside warm.
保温する,虫が避ける。

GARDEN NET

Item No	Size	Ctn Qty
GN-1	1.8*0.9m	72
GN-2	1.8*1.8m	36
GN-3	1.8*2.7m	36
GN-4	1.8*3.6m	36
GN-5	1.8*5m	10
GN-6	1.8*10m	10

用途：

Portable, at the same time very effective for vine plants like cucumber to grow.
植物の栽培しやすい。

ANTI-BIRD NET

Item No	Size	Ctn Qty
ABN-1	5*2m	50
ABN-2	5*4m	50
ABN-3	10*2m	50
ABN-4	10*4m	50

用途：

Protect the vegetables from the damage of birds.
鳥が避ける。

KIMPORT

PLASTIC NAIL

Item No	Length(cm)	Shape	Ctn Qty(pcs)
PN-1	11	round	40
PN-2	13	T	40

特徴:使い易い、お買い得。
用途:ビニール、防虫ネット、不織布などに固定用。

Characteristic: easy to use and very cheap.
Use: To be used to fix weedmat, nets and films.

CROSS JOINT

Item No	Size(mm)	pcs	Ctn Qty(pcs)
STC-8	Φ8	30	180
STC-11	Φ11	24	180
STC-16	Φ16	12	180
STC-20	Φ20	9	180

特徴:因くて便利だ。
用途:支柱と支柱の組み合わせ用。

Characteristic: easy to use and connet the stakes firmly.
Use: connect the stakes in cross line.

UNIVERSAL CLAMP

Item No	Size(mm)	pcs	Ctn Qty(pcs)
MC-8	Φ8	30	120
MC-11	Φ11	24	120
MC-16	Φ16	12	120
MC-20	Φ20	9	120

特徴:自由に固定できる。
用途:回せるジョイント、又は、小さいサイズと大きいサイズの組み合わせも自由。

Characteristic: Could adjust the angle and fix the stakes.
Use: Adjustable the angle and fix different size stakes, connect the stake in different direction.

STAKE EXTENDER

Item No	Dia(mm)	pcs	Ctn Qty(pcs)
SE-8	Φ8	12	100
SE-11	Φ11	10	100
SE-16	Φ16	8	100
SE-20	Φ20	6	100

特徴: 支柱と支柱をしつかり固定できる。
用途: 支柱と支柱が連接する。
Characteristic: Easily connect the stakes.
Use: Extend the length of stakes.

KIMPORT

TWIST TIE

Item No	Size	Width(mm)	Ctn Qty(pcs)
3001	10cm*1000本	2.6	110
3002	12cm*1000本	2.6	90
3003	15cm*1000本	2.6	72
3004	20cm*1000本	2.6	55
3005	25cm*1000本	2.6	40
3006	30cm*1000本	2.6	32
3007	12cm*100本	2.6	480
3008	15cm*100本	2.6	480
3009	20cm*100本	2.6	480
3010	30m	2.6	200
3012	30m*2	2.6	100
3014	50m	2.6	128
3015	100m	2.6	96

特徴:優しくて植物に傷つきません。ビニタイの長さも自由に調整できる。
用途:使う長さでカットして使用。
Characteristic: won't hurt the plants.
Use: Used to fix the plants and the stakes.The length is adjustable.

GARDEN CLIPS

Item No	Size(cm)	pcs
GC-1	6.8*6*0.5	10

特徴:使用されたりしやすくなる。
用途:植物を固定用。
Characteristic: Very easy to use.
Use: Be used to fix the plant.

CONNECTOR A CONNECTOR B

Item No	Size(mm)	pcs	Ctn Qty(pcs)
PC-1-8	Φ8	10	50
PC-1-11	Φ11	10	50
PC-1-16	Φ16	10	20
PC-1-20	Φ20	10	20
PC-2-8	Φ8	10	50
PC-2-11	Φ11	10	50
PC-2-16	Φ16	10	20
PC-2-20	Φ20	10	20

特徴:固くて三種類で選択も多い。
用途:支柱と支柱の繋ぎ用。
Characteristic: firmly and multiple selectable.
Use: Used to connect stakes.

PLANT LABEL

Item No	Size(cm)	pcs	Ctn Qty(pcs)
PLA-1	13	10	50
PLB-1	11	10	50

特徴:書きは非常に便利。
用途:植物の名前を表記されていた。
Characteristic: Convenient to write and very portable.
Use: Be used to mark the name of plants.

KIMPORT

STRUCTURE CONNECTORS

Item No	Size(mm)
SC3-T	16mm
SC3-X	16mm
SC4-X	16mm
SC4-Y	16mm
SC5-Y	16mm

特徴: 回くて便利だ。
用途: 支柱と支柱の組み合わせ用。
Characteristic: easy to use and connect the stakes firmly
Use: connect the stakes in different ways

NEW STAKE CONNECTOR

Item No	Dia(mm)
NST-8	Φ8
NST-11	Φ11
NST-16	Φ16
NST-20	Φ20

特徴: 支柱と支柱をしつかりでき。
用途: 支柱と支柱の繋ぎ用。
Characteristic: connect the stakes firmly
Use: connect the stakes in cross way

FILM BUCKLE (SMALL SIZE)

Item No	Dia(mm)
SFB-4	4
SFB-11	6

特徴: トンネル支柱として最適です。
用途: トンネル支柱に網と膜を固定用。
Characteristic: fit for tunnel pipe
Use: be used to fix the net or film with the tunnel pipe

KIMPORT

STAKE CONNECTOR ARM

Item No	Size(mm)
SCA-11-A	11mm*30cm
SCA-11-B	11mm*30cm
SCA-16-A	16mm*30cm
SCA-16-B	16mm*30cm

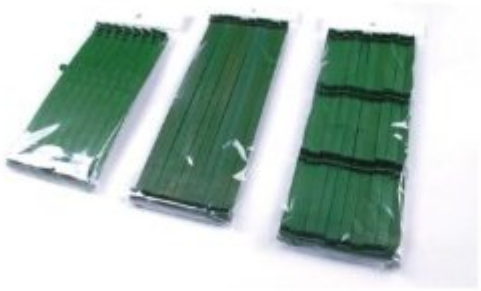

特徴: 固くて便利だ。
用途: 支柱と支柱の組み合わせ用。
Characteristic: easy to use and connect the stakes firmly
Use: to assemble the stakes

FOAM WIRE

Item No	Size(mm)	Color
FW-1	Φ7*10m	green

特徴: 柔らかい。
用途: 植物を固定用。
Characteristic: Soft material to protect plant.
Use: Be used to fix the plant.

GARDEN RINGS



Item No	pcs
GR-1	8
GR-2	10
GR-3	10

特徴: 使用されている場所が多い。
用途: 機能が多い, 使うやすい。
Characteristic: Can be used in many occasions.
Use: Very easy to use and functional.

TREE GUARD

Item No	Size(cm)	Color
TG-1	33.5*20	gray

特徴: 使用されたりしやすくなる。
用途: 木々の表面を保護する。
Characteristic: Very easy to use.
Use: Be used to protect the surface of trees.

KIMPORT

FILM BUCKLE

Item No	Size(mm)	pcs
FB-A-8	Φ8	10
FB-A-10	Φ10	10
FB-A-16	Φ16	8
FB-A-20	Φ20	8

特徴: トンネル支柱として最適です。
用途: トンネル支柱に網と膜を固定用。
Characteristic: Fit for tunnel pipe.
Use: Be used to fix the net or film with the tunnel pipe.

TWIST TIE

Item No	Size	Color
PTT-1	Φ7*5m	green
PTT-2	Φ4*5m	green

特徴: 柔らかい。
用途: 植物を固定用。
Characteristic: Soft material to protect plant.
Use: Be used to fix the plant.

TREE RIBBON

Item No	Size(cm)	pcs
PTR-1	17	100
PTR-2	35	50

特徴: 優しさの植物を固定。
用途: 各種園芸製品を固定用。
Characteristic: Fix the plant very soft.
Use: Be used to fix garden support or net with plants.

TREE TIE

Item No	Size(m)	Color
TT-350	0.03*50	green

特徴: 優しさの植物を固定。
用途: 各種園芸製品を固定用。
Characteristic: Fix the plant very soft.
Use: Be used to fix garden support or net with plants.

VINYL COATING WIRE

Item No	Size	Color
VCW-1	Φ1.6mm*16m	black
VCW-2	Φ0.9mm*40m	black

特徴: 使用されたりしやすくなる。
用途: 植物を固定用。
Characteristic: Very easy to use.
Use: Be used to fix the plant.

GARDEN SIFTER

Item No	Size(cm)	Color
GS-835	Φ35 H:8	blue

Characteristic: Clean design with nice appearance.
Use: Easy way for plant sifting.

GARDEN SIFTER

Item No	Size(cm)	Color
BSA-35	35	black/green
BSA-70	70	black/green
BSA-100	100	black/green
BSA-118	118	black
BSA-91	90	black

Characteristic: Clean design with nice appearance.
Use: Easy way for plant supporting.

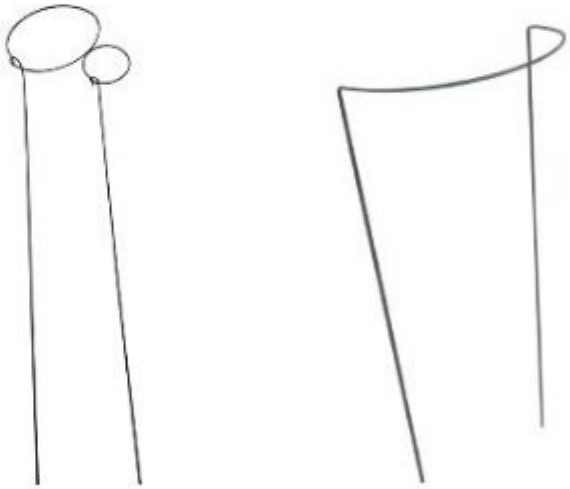

STEEL NAIL

Item No	Size	Pcs/CTN
SN-1	Φ2.8mm 10cm	250
SN-2	Φ2.8mm 15cm	250
SN-3	Φ3.5mm 15cm	250
SN-4	Φ3.5mm 20cm	250

特徴: シートなどの固定に　すごく役に　立ちます。
用途: 防草シート、農業ビニールなどに使います。
Characteristic: portable
Use: easily used in weedmat , film and net fixing

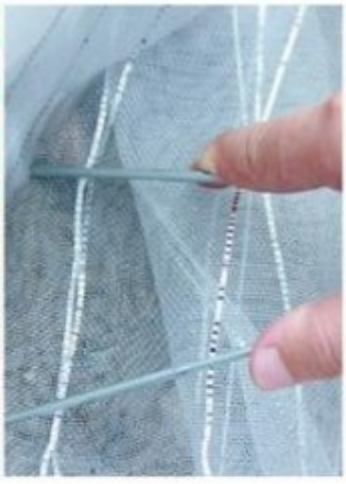

PLASTIC MAT

Item No	Size	Pcs/bag
PM-1	6cm	10

特徴: シートなどの固定に　すごく役に　立ちます。
用途: 防草シート、農業ビニールなどに使います
Characteristic: portable
Use: easily used in weedmat , film and net fixing

Flat steel handle.
Grip Options: 1#,2#,3#,4#,6#,10#.

HA4901S-1
29-1/2"
12pcs/20.0kgs/21.0kgs/1.38"

HA4902S-1
29-1/2"
12pcs/20.5kgs/21.5kgs/1.46"

HA4903S-1
29-1/2"
12pcs/20.0kgs/21.0kgs/1.53"

HA4904S-1
29-1/2"
12pcs/20.5kgs/21.5kgs/1.57"

HA4905S-1
29"
12pcs/19.0kgs/20.0kgs/1.83"

HA4906S-1
28"
12pcs/19.0kgs/20.0kgs/1.88"

FLAT STEEL HANDLE

HA4907S-1
28"
12pcs/19.0kgs/20.0kgs/1.51'

HA4908S-1
28"
12pcs/19.0kgs/20.0kgs/1.50'

HA4909S-1
28"
12pcs/17.0kgs/18.0kgs/1.50'

HA4913S-1
27"
12pcs/17.0kgs/18kgs/1.45'

HA4914S-1
27"
12pcs/17.0kgs/18kgs/1.45'

HA4917S-1
29-1/2"
12pcs/20.5kgs/21.5kgs/1.46'

HA4910S-1
28"
12pcs/17.0kgs/18.0kgs/1.50'

HA4911S-1
29-1/2"
12pcs/20.0kgs/21.0kgs/1.53'

HA4912S-1
29"
12pcs/19.0kgs/20.0kgs/1.51'

HA4918S-1
29-1/2"
12pcs/20.0kgs/21.0kgs/1.38'

HA4928S-1
27"
12pcs/15kgs/16kgs/1.3'

HA4929S-1
27-1/2"
12pcs/15.5kgs/16.5kgs/1.3'

FLAT STEEL HANDLE

HA4931S-1
27"
12pcs/15.3kgs/16.3kgs/1.4'

HA4934S-1
26-3/4"
12pcs/20kgs/21kgs/1.4'

HA4935S-1
26-1/2"
12pcs/14.6kgs/15.6kgs/1.4'

HA4984S-1
27"
12pcs/15.6kgs/16.6kgs/1.4'

HA4985S-1
27"
12pcs/16kgs/17kgs/1.4'

Flat steel telescopic handle.
Grip options:3# 10#

HA1910S-3
26"/33-4/5"
12pcs/17.6kgs/18.6kgs/1.45'

HA1903S-3
26"/33-4/5"
12pcs/21kgs/21.5kgs/1.45'

HA1904S-3
26"/34"
12pcs/21.6kgs/22.6kgs/1.45'

HA1906S-3
24-3/4" / 32-1/2"
12pcs/19.5kgs/20.5kgs/1.45'

HA1935S-3
26"/33-4/5"
12pcs/19.2kgs/20.2kgs/1.45'

ROUND STEEL TELESCOPIC HANDLE

Round steel telescopic handle.
Grip Options:7#.9#

HA2935S-9
25"-38"
12pcs/19kgs/20kgs/1.4'

HA2904S-9
25"/38"
12pcs/21.0kgs/22.0kgs/1.42'

HA2903S-9
25"/38"
12pcs/20.4kgs/21.4kgs/1.31'

HA2906S-9
24"/37"
12pcs/20.0kgs/21.0kgs/1.19'

HA2910S-9
24"/37"
12pcs/16.6kgs/17.6kgs/1.07'

HA7940S-5
28-1/2"
6pcs/7.6kgs/8.6kgs/0.95'

HA7941S-5
28-1/2"
6pcs/8.2kgs/9.2kgs/0.95'

Triangle steel handle.
Grip Option:5#

Gear function for saving strength

HA7925S-5
27-3/4"
6pcs/6.25kgs/7.05kgs/0.9'

HA7931S-5
27-3/4"
6pcs/6.5kgs/7.5kgs/0.9'

HA7934S-5
27-3/4"
6pcs/6.5kgs/7.5kgs/0.9'

ROUND STEEL HANDLE

HA3920S-7
25"
6pcs/5.1kgs/6.1kgs/0.9'

Round steel handle.
Grip Options:7#.8#

HA3920S-8
25"
6pcs/5.1kgs/6.1kgs/0.9'

Flat aluminum telescopic handle.
Grip Options:3# 11#

HA4924
16-1/2"
12pcs/8.4kgs/9.4kgs/0.85'

HA4923
13"
12pcs/4.9kgs/5.6kgs/0.8'

HA1901R-11
27-1/4"
6pcs/9.78kgs/10.5kgs/0.93'

HA1902R-11
27-1/4"
6pcs/9.78kgs/10.5kgs/0.93'

HA1903R-11
27-1/8"
6pcs/10.1kgs/11kgs/0.89'

HA1904R-11
27-1/8"
6pcs/10.1kgs/11kgs/0.89'

HA1905R-11
27-1/4"
6pcs/9.78kgs/10.5kgs/0.93'

HA1906R-11
27"
6pcs/9.78kgs/10.5kgs/0.9'

HA1907R-11
27"
6pcs/9.78kgs/10.5kgs/0.9'

FLAT ALUMINUM TELESCOPIC HANDLE

HA1909R-11
25-3/8"
6pcs/8.16kgs/9.0kgs/0.8'

HA1910R-11
25-3/8"
6pcs/8.16kgs/9.0kgs/0.8'

HA1911R-11
27-1/8"
6pcs/10.1kgs/11kgs/0.89'

HA1928R-11
27-1/4"-33-1/4"
6pcs/8.1kgs/9.1kgs/0.9'

HA1929R-11
27-1/2"-33-3/4"
6pcs/8.3kgs/9.3kgs/0.9'

HA1931R-11
27-1/4"-33-1/4"
6pcs/8.2kgs/9.2kgs/0.9'

HA1912R-11
27"
6pcs/9.78kgs/10.5kgs/0.9'

HA1917R-11
27-1/4"
6pcs/9.78kgs/10.5kgs/0.93'

HA1918R-11
27-1/4"
6pcs/9.78kgs/10.5kgs/0.93'

HA1934R-11
27"-33"
6pcs/8.8kgs/9.8kgs/0.9'

HA1935R-11
27"-33-1/8"
6pcs/7.9kgs/8.9kgs/0.9'

HA1984R-11
27-1/8"
6pcs/10.1kgs/11kgs/0.89'

HA1985R-11
27-1/8"
6pcs/10.1kgs/11kgs/0.89'

FLAT ALUMINUM HANDLE

HA4910R-4
27-3/4"
6pcs/5.7kgs/6.7kgs/0.65'

HA4906R-4
28"
6pcs/5.7kgs/6.7kgs/0.65'

Flat aluminum handle.
Grip Options:1#,2#,3#,4#,6#,10#

HA4904R-4
28-3/4"
6pcs/6.4kgs/7.4kgs/0.67'

HA4903R-4
28-3/4"
6pcs/5.9kgs/6.9kgs/0.70'

HA4935R-4
28-3/4"
6pcs/5.9kgs/6.9kgs/0.70'

HA8928R-3
27-3/4"
6pcs/7.9kgs/8.9kgs/0.65'

HA8929R-3
27-3/4"
6pcs/7.8kgs/8.8kgs/0.65'

HA8931R-3
27-3/4"
6pcs/7.9kgs/8.9kgs/0.65'

Octagonal aluminum handle
Grip Option:3#

HA8935R-3
27"
6pcs/7.6kgs/8.6kgs/0.65'

OCTAGONAL ALUMINUM TELESCOPIC HANDLE

Octagonal aluminum telescopic handle.
Grip Option:3#

HA6928R-3
23-1/8" - 30-3/4"
6pcs/7.9kgs/8.9kgs/0.7'

HA6929R-3
23-1/8" - 31-3/4"
6pcs/8.2kgs/9.2kgs/0.7'

HA6931R-3
23-1/8" - 31-3/4"
6pcs/8.0kgs/9.0kgs/0.7'

HA6935R-3
22-1/8" - 31-1/8"
6pcs/7.7kgs/8.7kgs/0.7'

HA4811S-3
22-1/2"
12pcs/14kgs/15kgs/1.3'

HA4805S-3
22-1/2"
12pcs/14.5kgs/15.5kgs/1.3'

Flat steel handle.
Grip Options:1#,2#,3#,4#,6#,10#

HA4801S-1
23"
12pcs/14.5kgs/15.5kgs/1.42'

HA4802S-1
22-1/2"
12pcs/10.7kgs/11.7kgs/1.3'

HA4803S-1
22-1/2"
12pcs/10.8kgs/11.8kgs/1.3'

HA4804S-1
23"
12pcs/15.0kgs/16.0kgs/1.37'

HA4809S-1
22-1/2"
12pcs/10.9kgs/11.9kgs/1.3'

HA4814S-1
22-1/2"
12pcs/10.9kgs/11.9kgs/1.3'

HA4826S-1
18-1/2"
12pcs/8.4kgs/9.4kgs/1.3'

HA4827S-1
18-1/2"
12pcs/8.4kgs/9.4kgs/1.3'

Flat steel telescopic handle
Grip options:3# 10#

HA1801S-3
27-1/2"- 33-1/8"
6pcs/9.3kgs/10.3kgs/0.96'

HA1804S-3
27-1/2"- 33-1/8"
6pcs/9.3kgs/10.3kgs/0.96'

HA3802S-8
21-1/4"
12pcs/13.0kgs/14.0kgs/0.88'

HA3803S-8
21-1/4"
12pcs/13.0kgs/14.0kgs/0.88'

Round steel handle.
Grip Options:7#.8#

ROUND STEEL TELESCOPIC HANDLE

Round steel telescopic handle
Grip Options:7#.9#

HA2801S-9
25"-33"
6pcs/8.9kgs/9.9kgs/0.91'

HA2804S-9
25"-33"
6pcs/8.8kgs/9.8kgs/0.91'

HA7801S-5
24-1/2"
6pcs/6.3kgs/7.3kgs/0.63'

HA7804S-5
24"
6pcs/6.4kgs/7.4kgs/0.63'

HA7809S-5
22-3/4"
6pcs/5.5kgs/6.5kgs/0.6'

Triangle steel handle
Grip Option:5#

Flat aluminum handle.
Grip Options:1#,2#,3#,4#,6#,10#

HA4801R-3
23"
6pcs/6.2kgs/7.2kgs/0.63'

HA4804R-3
23"
6pcs/6.3kgs/7.3kgs/0.63'

HA4809R-3
23"
6pcs/6.1kgs/7.1kgs/0.63'

HA4814R-3
24"
6pcs/6.1kgs/7.1kgs/0.65'

HA4819R-3
22-1/2"
6pcs/6.3kgs/7.3kgs/0.63'

HA1803R-11
28"- 28-1/2"
6pcs/6.4kgs/7.4kgs/0.7'

HA1804R-11
29"- 29-3/4"
6pcs/7.3kgs/8.3kgs/0.75'

HA1814R-11
30"- 30-3/4"
6pcs/6.4kgs/7.4kgs/0.74'

HA1809R-11
27-3/4"- 28-1/2"
6pcs/6.4kgs/7.4c/0.74'

HA1801R-11
29-3/8"-30"
6PCS/7.3KGS/8.3KGS/0.74'

HA1802R-11
28"- 28-1/2"
6pcs/6.3kgs/7.3kgs/0.7'

Aluminum flat telescopic tube
Grip Options:3# 11#

HA1811R-11
27-3/4"- 28-1/2"
6pcs/5.8kgs/6.8kgs/0.74'

HA1826R-11
25"- 25-3/4"
6pcs/5.2kgs/6.2kgs/0.68'

HA1827R-11
25"- 25-3/4"
6pcs/5.3kgs/6.3kgs/0.68'

HA1819R-11
30"- 30-3/4"
6pcs/7.2kgs/8.2kgs/0.74'

OCTAGONAL ALUMINUM HANDLE

Octagonal aluminum handle.
Grip Option:3#

HA8801R-3
22-1/2"
6pcs/6.6kgs/7.6kgs/0.63'

HA8811R-3
22-1/2"
6pcs/6.6kgs/7.6kgs/0.63'

HA6801R-3
26"- 31"
6pcs/7.6kgs/8.6kgs/0.9'

HA6819R-3
26"- 31"
6pcs/7.6kgs/8.6kgs/0.86'

Octagonal
aluminum telescopic
handle.
Grip Option:3#

HA9801
22"
6pcs/5.4kgs/6.4kgs/0.63'

HA1814R-10
27"
6pcs/9.78kgs/10.5kgs/0.9'

HA4812
18-3/4"
12pcs/6.4kgs/7.4kgs/0.59'

HA4807S-1
20"
6pcs/5.1kgs/6.1kgs/0.63'

HA4808R
37"
6pcs/8.4kgs/9.4kgs/2.7'

HE023
280g/12"
12pcs/48pcs/13.4kgs/15kgs/6.3'

HE017
13-1/4"
10pcs/60pcs/20.0kgs/21.5kgs/2.3'

HE025
410g/13"
12pcs/48pcs/19.7kgs/21kgs/6.7'

HE022
175g/9"
12pcs/48pcs/8.4kgs/9.9kgs/3.2'

HE026
270g/13"
12pcs/48pcs/12.9kgs/14.5kgs/6.7'

HE017-1
380g/13-1/2"
12pcs/48pcs/18.2kgs/19.5kgs/6.7'

HE013
250g/13-1/4"
12pcs/48pcs/12kgs/13.5kgs/6.7'

HE016
14-1/2"
12pcs/72pcs/24.0kgs/25.5kgs/3.07'

GRASS SHEAR

HE009
14-1/2"
12pcs/72pcs/24.5kgs/26.0kgs/3.07'

HE011
13-1/2"
12pcs/48pcs/15.25kgs/16.75kgs/1.75'

HE005
13-1/4"
10pcs/60pcs/20.0kgs/21.5kgs/2.3'

HE006
14-1/2"
12pcs/72pcs/24.0kgs/25.5kgs/3.07'

HE014
14-1/2"
12pcs/72pcs/24.0kgs/25.5kgs/3.07'

HE024
250g/13-1/4"
12pcs/48pcs/12kgs/13.5kgs/6.7'

HE006-1
14-1/2"
12pcs/72pcs/24.0kgs/25.5kgs/3.07'

HE004
13"
12pcs/72pcs/23.0kgs/24.5kgs/3.16'

HE002S
12-1/4"
10pcs/60pcs/14.0kgs/15.5kgs/1.23'

HE004-1
13"
12pcs/72pcs/23.0kgs/24.5kgs/3.16'

HE007S
13-1/4"
10pcs/60pcs/24.0kg/25.5kgs/2.23'

HE001S
12"
12pcs/60pcs/19.5kgs/20.5kgs/3.7'

HE003S
12-1/4"
10pcs/60pcs/14.0kgs/15.5kgs/1.23'

HE001S-1
12"
12pcs/60pcs/19.5kgs/20.5kgs/3.7'

PRUNER

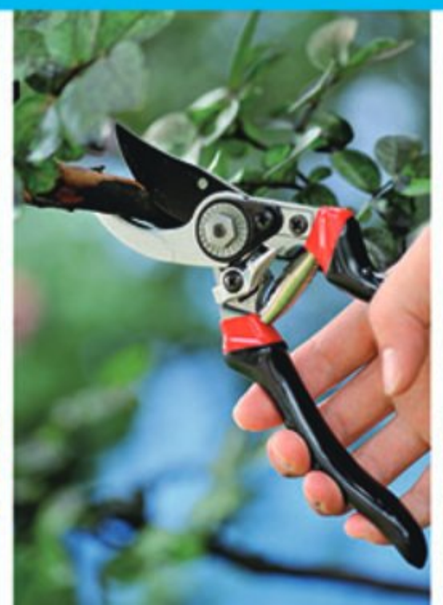

LD-0201

HC145

HC146

open size adjustable

HC095
195g/6-1/2"
12pcs/48pcs/9.3kgs/10.8kgs/2.8'

HC095-1
195g/6-1/2"
12pcs/48pcs/9.3kgs/10.8kgs/2.8'

HC095-2
230g/8"
12pcs/48pcs/11kgs/12.5kgs/3.1'

HC154
230g/8"
12pcs/48pcs/11.0kgs/12.5kgs/3.1'

PRUNER

HC134
265g/8-1/2"
12pcs/48pcs/12.5kgs/14kgs/3.2'

HC149
8"
24pcs/48pcs/10.5kgs/11.5kgs/1.31'

HC134-1
270g/8-1/2"
12pcs/48pcs/13kgs/14.5kgs/3.2'

HC157
190g/7-1/2"
12pcs/48pcs/9.1kgs/10.6kgs/3.1'

HC155
290g/8"
12pcs/48pcs/6.5kgs/8.0kgs/3.1'

HC016
8-1/4"
12pcs/72pcs/15.2kgs/18.7kgs/1.93'

HC156
180g/6-1/2"
12pcs/48pcs/6.5kgs/8.0kgs/2.9'

HC017
8-1/4"
12pcs/72pcs/15.2kgs/18.7kgs/1.93'

HC121-1
215g/8"
12pcs/48pcs/10.3kgs/11.8kgs/3.1'

HC121
205g/8"
12pcs/48pcs/9.8kgs/11.3kgs/3.1'

HC122-1
220g/8"
12pcs/48pcs/10.5kgs/12.0kgs/3.1'

HC122
185g/8"
12pcs/48pcs/8.9kgs/10.4kgs/3.1'

HC123-1
235g/8"
12pcs/48pcs/11.3kgs/12.8kgs/3.1'

HC123
205g/8"
12pcs/48pcs/9.8kgs/11.3kgs/3.1'

HC058R
6"
12pcs/72pcs/7.92kgs/8.9kgs/1.98'

HC058-1
6"
12pcs/72pcs/8.64kgs/9.5kgs/1.98'

HC059R
6"
12pcs/72pcs/8.64kgs/9.5kgs/1.98'

HC059-1
6"
12pcs/72pcs/7.92kgs/8.9kgs/1.96'

PRUNER

HC001R
7-3/4"
12pcs/72pcs/13.7kgs/16.0kgs/2.1'

HC001R-1
7-3/4"
12pcs/72pcs/13.7kgs/16.0kgs/2.1'

HC085R
8-1/4"
12pcs/72pcs/18.0kgs/19.5kgs/1.78'

HC085R-1
8"
12pcs/72pcs/18.0kgs/19.5kgs/1.63'

HC085R-2
8"
12pcs/72pcs/18.0kgs/19.5kgs/1.63'

HC001-2
190g/7-1/2"
12pcs/48pcs/9.1kgs/10.6kgs/3.1'

HC003
8-1/4"
12pcs/72pcs/14.0kgs/15.0kgs/1.77'

HC014R-1
8-1/4"
12pcs/72pcs/16.8kgs/18.3kgs/1.78'

HC014R
8"
12pcs/72pcs/16.8kgs/18.3kgs/1.63'

HC015R
8"
12pcs/72pcs/16.8kgs/18.3kgs/1.63'

HC141
170g/6"
12pcs/48pcs/8.2kgs/9.7kgs/2.8'

HC142
180g/6"
12pcs/48pcs/8.6kgs/10.1kgs/2.8'

HC143
185g/6"
12pcs/48pcs/8.9kgs/10.4kgs/2.8'

HC131
150g/7"
12pcs/48pcs/7.2kgs/8.5kgs/2.8'

HC132
150g/7"
12pcs/48pcs/7.2kgs/8.5kgs/2.8'

HC133
145g/7"
12pcs/48pcs/7.0kgs/8.5kgs/2.8'

HC071R
8"
12pcs/72pcs/13.4kgs/14.9kgs/1.95'

HC071R-1
8"
12pcs/72pcs/10.65kgs/12.15kgs/2.3'

HC076
8"
12pcs/72pcs/12.24kgs/13.6kgs/1.9'

HC018R
8"
12pcs/72pcs/13.4kgs/14.9kgs/1.95'

HC090R
6-3/4"
12pcs/72pcs/9.36kgs/11.52kgs/1.02'

PRUNER

HC031R
8-1/2"
12pcs/72pcs/18.7kgs/20.5kgs/2.1'

HC033R
8-1/4"
12pcs/72pcs/19.0kgs/20.3kgs/2.37'

HC034R
8-1/4"
12pcs/72pcs/19.0kgs/20.3kgs/2.37'

HC035R
8-1/4"
12pcs/72pcs/18.5kgs/19.8kgs/2.37'

HC057R
8"
12pcs/72pcs/13.0kgs/14.0kgs/1.4'

HC075R
7"
12pcs/72pcs/11.5kgs/14.2kgs/1.67'

HC037S
8"
12pcs/72pcs/17.0kgs/18.0kgs/1.41'

HC124
200g/8"
12pcs/48pcs/10.5kgs/12kgs/3.1'

HC065S
8-1/4"
12pcs/72pcs/15.2kgs/16.7kgs/2.2'

HC125
225g/8"
12pcs/48pcs/10.8kgs/12.3kgs/3.1'

HC094
8"
12pcs/72pcs/16.5kgs/17.5kgs/1.41'

HC115
200g/8"
12pcs/48pcs/10.5kgs/12kgs/3.1'

HC007
8"
12pcs/72pcs/15.2kgs/18.7kgs/1.93'

HC005
8-1/2"
12pcs/72pcs/15.2kgs/18.7kgs/1.93'

HC008
8"
12pcs/72pcs/15.2kgs/18.7kgs/1.93'

HC006
8-1/4"
12pcs/72pcs/15.2kgs/18.7kgs/1.93'

HC011
8-1/2"
12pcs/72pcs/16.8kgs/19.5kgs/1.93'

HC009
8-1/2"
12pcs/72pcs/16.6kgs/19.3kgs/1.93'

HC012
8"
12pcs/72pcs/16.8kgs/19.5kgs/1.93'

HC010
8"
12pcs/72pcs/16.6kgs/19.3kgs/1.93'

HC013
7-1/2"
12pcs/72pcs/16.0kgs/17.0kgs/1.77'

HC113
8-1/2"
12pcs/72pcs/16.56kgs/18.2kgs/2.01'

HC043
7-1/2"
12pcs/72pcs/11.0kgs/12.0kgs/2.0'

HC114
8-1/2"
12pcs/72pcs/17.28kgs/18.9kgs/2.01'

PRUNER

HC022
8"
12pcs/72pcs/14.4kgs/15.5kgs/2.2'

HC021
8"
12pcs/72pcs/14.4kgs/15.5kgs/2.2'

HC026
8"
12pcs/72pcs/16.8kgs/17.8kgs/1.77'

HC027
7-1/2"
12pcs/72pcs/17.0kgs/18.0kgs/1.77'

HC120
135g/8"
12pcs/48pcs/6.5kgs/8.0kgs/3.1'

HC128
140g/8"
12pcs/48pcs/6.5kgs/8.0kgs/3.1'

HC081
8"
12pcs/72pcs/14.0kgs/15.5kgs/1.63'

HC080
8"
12pcs/72pcs/14.0kgs/15.5kgs/1.63'

HC098
7-1/2"
12pcs/48pcs/7.2kgs/8.7kgs/1.6'

HC099
7-3/8"
12pcs/48pcs/7.75kgs/9.25kgs/1.6'

HC077
7-1/2"
12pcs/72pcs/16.0kgs/17.0kgs/1.77'

HC077-1
7-1/2"
12pcs/72pcs/9.05kgs/10.8kgs/1.8'

HC053
6"
24pcs/96pcs/11.0kgs/12.0kgs/0.86'

HC054
6-1/2"
24pcs/96pcs/11.0kgs/12.0kgs/0.86'

HC051
7-1/2"
24pcs/96pcs/9.8kgs/13.6kgs/1.15'

HC049
7"
12pcs/72pcs/8.2kgs/9.2kgs/1.67"

HC050
7"
12pcs/72pcs/8.2kgs/9.2kgs/1.67"

HC064
7"
12pcs/72pcs/21.0kgs/22.5kgs/1.71'

HC039S
7"
24pcs/96pcs/12.5kgs/16.3kgs/1.15'

HC038S
7-1/2"
24pcs/96pcs/9.8kgs/13.6kgs/1.15'

HC040
8"
24pcs/96pcs/11.2kgs/13.0kgs/1.26'

HC150
8"
24pcs/96pcs/11.2kgs/13.0kgs/1.26'

HC151
8"
24pcs/96pcs/11.2kgs/13.0kgs/1.26'

HC068
6"
24pcs/96pcs/5.2kgs/9.1kgs/1.76'

TREE PRUNER

SS991
12"
12pcs/12.0kgs/13.0kgs/1.02'

SS995
12"
12pcs/15.0kgs/17.5kgs/1.17'

SS1020
49"
24pcs/14.2.0kgs/15.5kgs/1.45'

P125
Diameter:238x280mm/1100g



SS992
10-1/4"
6pcs/5.9kgs/7.0kgs/0.7'

SS993
12"
24pcs/15.0kgs/19.5kgs/2.33'

BOW SAW & PRUNING SAW

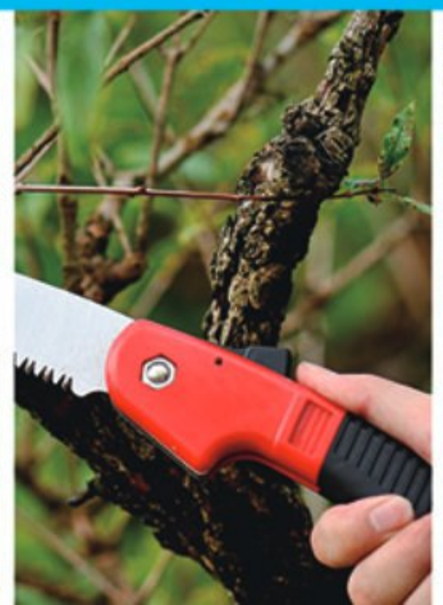

Peg style sawtooth

Replace saw blades

Wet wooden replace sawblade
21"/24"/30"

HS4001-21"
21" bow saw
670g/67x22x3.5cm

HS4001-24"

HS4001-30"
30" bow saw
800g/89.5x23.5x3.5cm

HS4040
3 In 1 saw
570g/510mm

Multifunctional idea,
three sawblade for cutting
PVC pipe, wood, aluminum pipe.

HS4036-21"

HS4036-24"
24" bow saw
655g/70x23.5x2.5cm

HS4036-30"
30" bow saw
660g/85x24.5x2.5cm

Replace saw blades

Dry wooden replace sawblade
21"/24"/30"



Rake style sawtooth

HS403-21
21" bow saw
590g/71x18x2.5cm

HS403F-21"
21" bow saw
590g/64x21.5x2.5cm

HS403F-30"
21" bow saw
705g/84x18x2.5cm

HS409-21"

HS2002
13" pruning saw
290g/530cm

HS3006
12" pruning saw
255g /53cm

HS3003
13" pruning saw
290g / 530cm

HS3007
12" pruning saw
200g/500cm

HS2003
6-1/4" Jab saw
90g/29.5cm

HS1005
10" Folding saw
240g/33cm

HS2001
6-1/4" Jab saw
140g/30.5cm

HS1003
6" Folding saw
275g / 23cm

HS1027A
6" Folding saw
215g /Total length :225cm

HS1004
9" Folding saw
385g/30cm

HS2004
13" pruning saw
275g / 50cm

HS3008
13" pruning saw
225g / 47cm

HS2006
12" pruning saw
210g / 51cm

HS3004
12" pruning saw
200g / 500cm

HS3005
12" pruning saw
180g /43.5cm

HS2001W
14" pruning saw
190g/490mm

HS3001
12" pruning saw
230g/490mm

HS3002
14" pruning saw
235g/500mm

HG3002
20" Machete
510g/69cm

HG3001
18" Machete
480g/610mm

HS6004
13" hand saw
310g/53cm

HS6001
12" hand saw
320g

HS6002
13" hand saw
350g

HS6003
13" hand saw
310g/42x11x3cm

HW01001
9-Pattern plastic trigger nozzle.

HW01002
Adjustable 3-way plastic trigger nozzle.

HW02001
Plastic 2-way hose connector

HW02004
Plastic"Y" snap-in coupling.

HW02002
Plastic 4-way hose connector

HW01003
Snap-In Twist Nozzle,
Material PP+ABS

HW01004
Snap-In Twist Nozzle.

HW02003
Plastic hose quick
connector.

HW02005
Plastic 2-way snap-in
coupling.

2017
NEW DESIGN

HG0002

SGC001

BG004

BG001

BG003

BG002

K118

HAND TOOLS

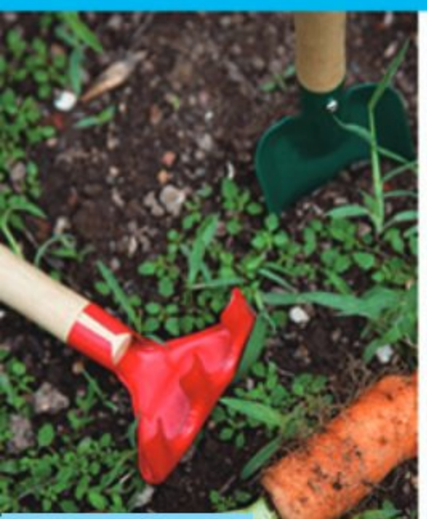

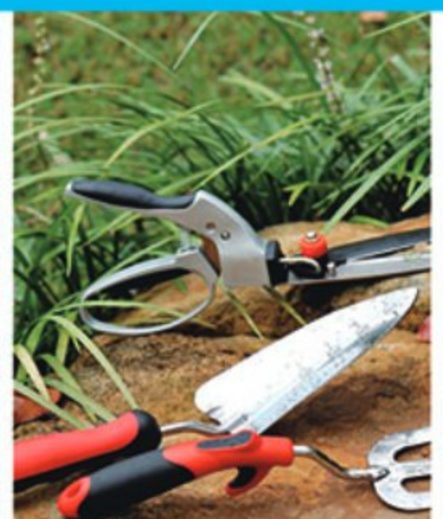

LD-0201

K905 STAINLESS STEEL BLADE, ALUMINUM HANDLE

K905DS 22-1/8" 24 pcs/48pcs/14.4kgs/15.4kgs /3.9'

K905GS 20-4/5" 24 pcs/48pcs/15.3kgs/16.3kgs /3.9'

K905KS 21-1/2" 24 pcs/48pcs/19.2kgs/20.2kgs /3.9'

K905NS 26-1/3" 24 pcs/48pcs/15.8kgs/16.8kgs /4.0'

K905TS 21-1/2" 24 pcs/48pcs/17.3kgs/18.3kgs /3.9'

K2501 CARBON STEEL BLADE, STEEL TELESCOPIC TUBE

K2501A 27"/39-3/4" 10pcs/40pcs/21.6kgs/28.5kgs/2.14'

K2501C 23"-34" 10pcs/40pcs/26kgs/27.5kgs/2.5'

K2501D 29-1/2"/41-3/4" 10pcs/40pcs/27.2kgs/29.5kgs/2.53'

K2501F 26"/38-1/4" 10pcs/40pcs/29kgs/31.5kgs/4.03'

K2501G 26-1/2"/38-1/4" 10pcs/40pcs/25.5kgs/27.8kgs/2.11'

K2501H 23-1/2"-35-1/2" 10pcs/40pcs/27.4kgs/28.9kgs/2.5'

K2501N 29-3/4"/42" 10pcs/40pcs/24.8kgs/27.0kgs/2.12'

STAINLESS STEEL BLADE WITH POLISHED,
PP+TPR SOFT GRIP.

Grip options

K719

K719AS 13-1/4" 24 pcs/48pcs/14.8kgs/15.8kgs /0.86'

K719GS 12-1/2" 24 pcs/48pcs/11.0kgs/12.0kgs /0.85'

K719BS 13-1/2" 24 pcs/48pcs/15.1kgs/16.4kgs/0.86'

K719HS 12-1/2" 24 pcs/48pcs/15.8kgs/16.8kgs /0.6'

K719CS 13-1/4" 24 pcs/48pcs/11.0kgs/12.0kgs /0.86'

K719IS 12-1/2" 24 pcs/48pcs/11.5kgs/12.5kgs /0.88'

K719DS 13-1/4" 24 pcs/48pcs/11.5kgs/12.5kgs /0.85'

K719KS 11" 24 pcs/48pcs/12.0kgs/13.0kgs /0.85'

K719ES 13-1/2" 24 pcs/48pcs/11.0kgs/12.0kgs /0.6'

K719NS 14-1/4" 24 pcs/48pcs/10.0kgs/11.0kgs /0.8'

K719ES-1 13-1/4" 24 pcs/48pcs/9.5kgs/10.5kgs /0.55'

K719PS 13-1/4" 24 pcs/48pcs/12.9kgs/14kgs/0.85'

K719FS 13-1/4" 24 pcs/48pcs/15.8kgs/16.8kgs /0.86'

K719SS 13-1/2" 24 pcs/48pcs/10.1kgs/11.1kgs /0.6'

K603 CARBON STEEL BLADE WITH POWDER COATING , PP+TPR SOFT GRIP.

K603A
13-1/4" 24 pcs/48pcs/14.4kgs/15.4kgs /0.86'

K603E-1
13-1/4" 24 pcs/48pcs/9.5kgs/10.5kgs /0.55'

K603I
12-1/2" 24 pcs/48pcs/11.5kgs/12.5kgs /0.88'

K603B
13-1/2" 24 pcs/48pcs/15.1kgs/16.4kgs/0.86'

K603F
13-1/4" 24 pcs/48pcs/15.8kgs/16.8kgs /0.86'

K603K
11" 24 pcs/48pcs/12.0kgs/13.0kgs /0.85'

K603C
13-1/4" 24 pcs/48pcs/11.0kgs/12.0kgs /0.86'

K603N
14-1/4" 24 pcs/48pcs/10.0kgs/11.0kgs /0.8'

K603D
13-1/4" 24 pcs/48pcs/11.5kgs/12.5kgs /0.85'

K603G
12-1/2" 24 pcs/48pcs/11.0kgs/12.0kgs /0.85'

K603P
13-1/4" 24 pcs/48pcs/12.9kgs/14kgs/0.85'

K603E
13-1/2" 24 pcs/48pcs/11.0kgs/12.0kgs /0.6'

K603H
12-1/2" 24 pcs/48pcs/15.8kgs/16.8kgs /0.6'

K603S
13-1/2" 24 pcs/48pcs/10.1kgs/11.1kgs /0.6'

K901 STAINLESS STEEL BLADE WITH POLISHED, PP+TPR SOFT GRIP.

K901AS 13-1/4" 24 pcs/48pcs/14.4kgs/15.4kgs /0.86'

K901GS 12-1/2" 24 pcs/48pcs/10.7kgs/11.7kgs /0.85'

K901BS 13-1/2" 24 pcs/48pcs/15.1kgs/16.4kgs/0.86'

K901HS 12-1/2" 24 pcs/48pcs/15.8kgs/16.8kgs /0.6'

K901CS 13-1/4" 24 pcs/48pcs/11.0kgs/12.0kgs /0.86'

K901IS 12-1/2" 24 pcs/48pcs/11.5kgs/12.5kgs /0.88'

K901DS 13-1/4" 24 pcs/48pcs/11.5kgs/12.5kgs /0.85'

K901KS 13-1/4" 24 pcs/48pcs/14.4kgs/15.4kgs /0.86'

K901ES 13-1/2" 24 pcs/48pcs/11.0kgs/12.0kgs /0.6'

K901NS 14-1/4" 24 pcs/48pcs/10.0kgs/11.0kgs /0.8'

K901ES-1 13-1/4" 24 pcs/48pcs/14.4kgs/15.4kgs /0.86'

K901PS 13-1/4" 24 pcs/48pcs/12.9kgs/14kgs/0.85'

K901FS 13-1/4" 24 pcs/48pcs/15.8kgs/16.8kgs /0.86'

K901SS 13-1/2" 24 pcs/48pcs/10.1kgs/11.1kgs /0.6'

KIMPORT

HAND TOOLS

K902

STAINLESS STEEL BLADE WITH POLISHED, PP+TPR SOFT GRIP.

K902AS
13-1/4" 24 pcs/48pcs/14.4kgs/15.4kgs /0.86'

K902DS
13-1/4" 24 pcs/48pcs/11.5kgs/12.5kgs /0.85'

K902BS
13-1/2" 24 pcs/48pcs/15.1kgs/16.4kgs/0.86'

K902ES
13-1/2" 24 pcs/48pcs/11.0kgs/12.0kgs /0.6'

K902CS
13-1/4" 24 pcs/48pcs/11.0kgs/12.0kgs /0.86'

K902ES-1
13-1/4" 24 pcs/48pcs/14.4kgs/15.4kgs /0.86'

K902FS
13-1/4" 24 pcs/48pcs/15.8kgs/16.8kgs /0.86'

K902KS
13-1/4" 24 pcs/48pcs/14.4kgs/15.4kgs /0.86'

K902GS
12-1/2" 24 pcs/48pcs/10.7kgs/11.7kgs /0.85'

K902NS
14-1/4" 24 pcs/48pcs/10.0kgs/11.0kgs /0.8'

K902HS
12-1/2" 24 pcs/48pcs/15.8kgs/16.8kgs /0.6'

K902PS
13-1/4" 24 pcs/48pcs/12.9kgs/14kgs/0.85'

K902IS
12-1/2" 24 pcs/48pcs/11.5kgs/12.5kgs /0.88'

K902SS
13-1/2" 24 pcs/48pcs/10.1kgs/11.1kgs /0.6'

K730

ALUMINUM ALLOYED BLADE WITH POLISHED,PVC DIPPING GRIP.

K730A
11" 6pcs/72pcs/18.18kgs/20.18kgs/2.47'

K730C
9" 6pcs/72pcs/17.1kgs/19.1kgs/2.26'

K730B
11" 6pcs/72pcs/16.0kgs/18.0kgs/2.22'

K730D
10" 6pcs/72pcs/19.27kgs/21.27kgs/2.33'

K730E
12-1/4" 6pcs/72pcs/14.9kgs/16.9kgs/1.80'

K903

K903BS
14-1/2" 24 pcs/48pcs/12.2kgs/13.2kgs/0.85'

K903FS
12-1/2" 24 pcs/48pcs/11.3kgs/12.3kgs/0.85'

K903CS
13-1/3" 24 pcs/48pcs/11.0kgs/12.0kgs /0.86'

K903IS
13-4/5" 24 pcs/48pcs/11.5kgs/12.5kgs/0.9'

K903ES
13" 24 pcs/48pcs/9.6kgs/10.6kgs/0.80'

K903PS
13-4/5" 24 pcs/48pcs/12.4kgs/13.4kgs/0.85'

HAND TOOLS

K718A 12-1/2" 10pcs/60pcs/13.5kgs/14.5kgs/1.30'

K718D 16-1/2" 10pcs/60pcs/13.5kgs/14.5kgs/1.98'

K718G 13" 10pcs/60pcs/16.0kgs/17.0kgs/2.0'

K718

K718F 16-1/2" 10pcs/60pcs/17.0kgs/18.0kgs/2.9'

K718N 12-1/2" 10pcs/60pcs/10.0kgs/11.0kgs/1.45'

K720A 12-1/2" 10pcs/60pcs/13.5kgs/14.5kgs/1.30'

K720D 16-1/2" 10pcs/60pcs/13.5kgs/14.5kgs/1.98'

K720E 15-1/2" 10pcs/60pcs/10.0kgs/11.0kgs/1.71'

K720F 16-1/2" 10pcs/60pcs/17.0kgs/18.0kgs/2.9'

K720

K720F 16-1/2" 10pcs/60pcs/17.0kgs/18.0kgs/2.9'

K720G 13" 10pcs/60pcs/16.0kgs/17.0kgs/2.0'

K720N 12-1/2" 10pcs/60pcs/10.0kgs/11.0kgs/1.45'

K721

K721AS 12-7/8" 12pcs/72pcs/16.56kgs/18.06kgs/1.85'

K721CS 11-3/4" 12pcs/72pcs/13.25kgs/14.75kgs/1.90'

K721ES 12" 12pcs/72pcs/9.65kgs/11.15kgs/1.90'

K411

K411A 11-1/2" 12pcs/72pcs/13.0kgs/14.0kgs/1.32'

K411B 11-1/2" 12pcs/72pcs/10.0kgs/11.0kgs/1.02'

K411C 10-1/2" 12pcs/72pcs/10.0kgs/11.0kgs/1.13'

K411D 12" 12pcs/72pcs/11.0kgs/12.0kgs/1.33'

K411E 11-3/4" 12pcs/72pcs/9.5kgs/10.5kgs/0.9'

K403C 14-1/2" 12pcs/72pcs/16.5kgs/17.5kgs/1.90'

K403D 13-1/2" 12pcs/72pcs/14.5kgs/15.5kgs/1.64'

K403E 14" 12pcs/72pcs/9.5kgs/10.5kgs/1.13'

K403

K403A 15" 12pcs/72pcs/17.5kgs/18.5kgs/1.95'

K403B 14-1/2" 12pcs/72pcs/14.5kgs/15.5kgs/1.67'

HAND TOOLS

K735

K735A 13-1/2" 12pcs/72pcs/18.9kgs/21.0kgs/2.12'

K735B 13-1/2" 12pcs/72pcs/16.6kgs/18.6kgs/1.79'

K735D 11-1/2" 12pcs/72pcs/14.0kgs/16.0kgs/1.62'

K735E 12" 12pcs/72pcs/11.7kgs/13.0kgs/1.04'

K735F 10-1/2" 12pcs/72pcs/20.2kgs/22.5kgs/2.03'

K311

K311A 11-3/4" 12pcs/72pcs/8.0kgs/9.0kgs/2.27'

K311B 12" 12pcs/72pcs/8.0kgs/9.0kgs/1.62'

K311C 11" 12pcs/72pcs/9.5kgs/10.5kgs/2.13'

K311D 11" 12pcs/72pcs/8.0kgs/9.0kgs/2.27'

K744

K744A 10.5" 12pcs/72pcs/8.0kgs/9.0kgs/2.27'

K744B 10.5" 12pcs/72pcs/8.0kgs/9.0kgs/1.62'

K744C 9.5" 12pcs/72pcs/9.5kgs/10.5kgs/2.13'

K744D 9-1/4" 12pcs/72pcs/8.0kgs/9.0kgs/2.27'

K310

K310A 10" 12pcs/72pcs/9.5kgs/10.5kgs/1.17'

K310C 10" 12pcs/72pcs/10.0kgs/11.0kgs/0.7'

K310D 9-1/2" 12pcs/72pcs/9.0kgs/10.0kgs/1.23'

K732

K732AS 11-3/4" 12pcs/72pcs/21.6kgs/22.6kgs/1.72'

K732BS 11-3/4" 12pcs/72pcs/25.8kgs/16.8kgs/1.50'

K732DS 12" 12pcs/72pcs/11.0kgs/12.0kgs/1.29'

K733

K733AS 11-1/2" 12pcs/72pcs/13.0kgs/14.0kgs/1.32'

K733DS 12" 12pcs/72pcs/11.0kgs/12.0kgs/1.33'

K733GS 10-1/4" 12pcs/72pcs/14.0kgs/15.0kgs/1.83'

K308

K308A 10" 12pcs/72pcs/9.5kgs/10.5kgs/1.17'

K308B 10" 12pcs/72pcs/7.0kgs/8.0kgs/1.11'

K308C 10" 12pcs/72pcs/10.0kgs/11.0kgs/0.7'

K308D 9-1/2" 12pcs/72pcs/9.0kgs/10.0kgs/1.23'

K308E 11" 12pcs/72pcs/10kgs/11kgs/0.7'

K309

K309A 10" 12pcs/72pcs/9.5kgs/10.5kgs/1.17'

K309C 10" 12pcs/72pcs/10.0kgs/11.0kgs/0.7'

K309D 9-1/2" 12pcs/72pcs/9.0kgs/10.0kgs/1.23'

K1041

MST065

K724D

MST001

MST053

MST014

MST054

K322A
7-1/2" 12pcs/72pcs/7.1kgs/8.1kgs/0.88

K322C
7-1/2" 12pcs/72pcs/6.9kgs/7.9kgs/0.7

K322D
7" 12pcs/72pcs/6.79kgs/7.79kgs/0.93

K322

K768

K747F-1

K1040

K765

MST006

K1019

MST034

K1002

MST004

HAND TOOLS

K1031

K1036

K1033

K1013-1

K1030

K1032

K725F-1

K1006-2

K1006-1

MST015

MST052

MST015-3

MST027

K1020

K102

K103SL

K102SL

K743

K751

HG0001

K725F

K725A

K746

K801

HAND TOOLS

MST057

MST058

MST059

SG001

MST061

K723Q

K755

K723P

K723A

S518

S603
SIZE: 37"-1/4
PACKAGING DATA:
8pcs/9.6kgs/11.0kgs/2.57'

S601
SIZE: 37"
PACKAGING DATA:
1pc/1.5kgs/2.5kgs/0.57'

S605

S615

S604
SIZE: 40"
PACKAGING DATA:
8pcs/12.0kgs/13.0kgs/3.5'

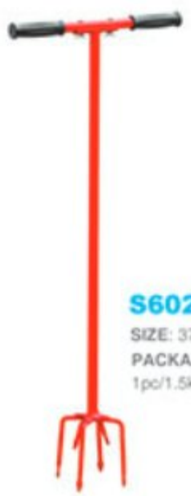

S602
SIZE: 37"
PACKAGING DATA:
1pc/1.5kgs/2.5kgs/0.57'

S611
SIZE: 37"
PACKAGING DATA:
1pc/1.85kgs/2.85kgs/0.65'

LEAF RAKE

MST007

K723N

R122

R118

R214

R118-1


R145

R146

R152

R125

R126

R153

R121

R220

R120A

BOW RAKE
MST003-16T
1.2mm/3.0mm/16
MST042-14T
2.0mm/5.0mm/14
MST018-12T
2.0mm/3.0mm/12
MST003-10T
1.2mm/3.0mm/10
MST017-8T
1.5mm/3.0mm/8

K723G

MST022

MST024

MST003-14T
1.2mm/3.0mm/14

MST020-16T
2.0mm/5.0mm/16

HJ001

HJ002

HJ001-2

HJ003

K775

K750

SB001

K747

K749
500mmx310mm

K742
300mmx220mm

K748
400mmx300mm

K750
550mmx350mm

BULB PLANTER & FRUIT PICKER

K114-1

K114-2

FP006

FP007

FP008

FP009

FP010

HG3003

HG3004

K120

MST028

K1034

K116

2017
NEW DESIGN

G007

G001-1

G001

C9017

G004

C9018

GARDEN ACCESSORIES

MP006

MP011

MP008

SB030

SB021

SB006

HJ010
15.8x26cm/PAP/21.2g

HJ011
31.6x51.3cm/ABS/65g

HJ013
23.8x43.8cm/ABS /43g

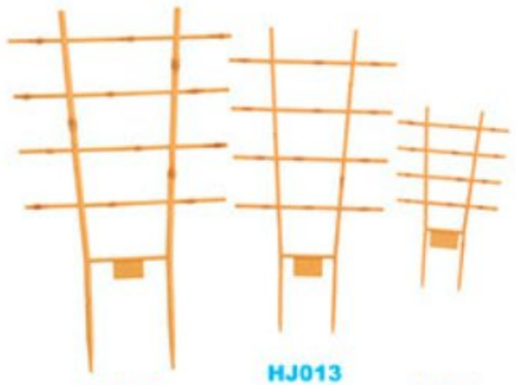

HJ011

HJ013

HJ010

HD004

T2005

T2005B

GDY001

修枝剪
PRUNING SHEARS

Our uniqueness
庆琏的与众不同

- 采用大小手结构，适合大手和小手人群，可剪切不同直径的树枝，提高剪切效率。
  Featuring a dual-size design, perfect for both large and small hands, capable of cutting branches of varying diameters, for enhanced cutting efficiency.
- 手柄设计符合人体工程学，握持舒适耐磨防滑。
  Ergonomically designed handle, comfortable, durable, and anti-slip grip.
- 采用优质钢材弹簧，省力回弹设计，剪切更舒适。
  Featuring High-Quality steel springs for effortless cutting with a comfortable, easy recoil design.
- 刀片采用优质钢材，持久耐用，剪切快速利落，切口光滑整齐，不易损伤植物枝干。
  Crafted with premium steel blades for long-lasting durability, ensuring swift and precise cuts with a smooth finish that won't harm plant branches.

新鲜树枝 Live Wood | 枯树枝 Dry Wood | 剪绳子软管塑料 Cuttingropes, ropes, hoses, or plastic | 省力 Effort-Saving | 齿轮结构 Gear Mechanism | 大小手 Dual-Size Design | 专利产品 Patented | 剪切直径 Cutting Capacity

安全锁扣 Secured Locking | 护手工具 Hand Guard | 人体工程学握把 Ergonomic Handle | 防震动 Shock-absorber | 烤漆 Coating | 电镀 Chrome Plated | 不锈钢材料 Stainless Steel | 专用钢材 Exclusive steel | 优质铝材 Premium Aluminum

LD-1605

KIMPORT

修枝剪 PRUNING SHEARS

刀片采用高碳钢K5，环保耐磨涂层，刃口锋利，剪切不伤枝；弧形手柄设计，手持舒适不疲劳；安全锁扣，收纳放心；大小双开口设计，剪切更科学。

Crafted with premium steel blades and an eco-friendly, wear-resistant coating for sharp edges that cut without harming branches. The ergonomic curved handle ensures a comfortable, fatigue-free grip, while the safety lock provides peace of mind. The dual-size opening design makes cutting more efficient and precise.

GP-1343A
尺寸 / Size: **8.5 inch(220mm)** 重量 / Weight: **222g**

GP-1344A
尺寸 / Size: **8.5 inch(218mm)** 重量 / Weight: **228g**

GP-1336A
尺寸 / Size: **9 inch(224mm)** 重量 / Weight: **240g**

GP-1337A
尺寸 / Size: **8.5 inch(213mm)** 重量 / Weight: **244g**

修枝剪 PRUNING SHEARS

GP-1240
尺寸 / Size: **8 inch (205mm)** 重量 / Weight: **232g**

GP-1239
尺寸 / Size: **8 inch (205mm)** 重量 / Weight: **225g**

GP-1296A
尺寸 / Size: **8.5 inch(215mm)** 重量 / Weight: **200g**

GP-1297A
尺寸 / Size: **8.5 inch(213mm)** 重量 / Weight: **206g**

GP-1345
尺寸 / Size: **8 inch (202mm)** 重量 / Weight: **185g**

大小手设计 Dual-Size Design

大小手设计

剪刀的具有独特的大小手设计，它能根据男、女使用者不同的手握尺寸，设定开口大小，适合各种手形的使用者。
These scissors feature a unique dual-size design, allowing adjustment of the opening size to accommodate users with varying hand sizes, making it suitable for individuals of all hand shapes, whether male or female.

GP-1296
尺寸 / Size: **8.5 inch(218mm)** 重量 / Weight: **201g**

GP-1297
尺寸 / Size: **8.5 inch(210mm)** 重量 / Weight: **204g**

GP-1305
尺寸 / Size: **8 inch (205mm)** 重量 / Weight: **198g**

GP-1306
尺寸 / Size: **8 inch (204mm)** 重量 / Weight: **223g**

修枝剪 PRUNING SHEARS

GP-1048
尺寸 / Size: **7.5 inch(190mm)** 重量 / Weight: **143g**

GP-1049
尺寸 / Size: **7.5 inch(190mm)** 重量 / Weight: **150g**

GP-1050
尺寸 / Size: **7.5 inch(190mm)** 重量 / Weight: **131g**

GP-1120
尺寸 / Size: **8 inch (205mm)** 重量 / Weight: **160g**

GP-1121
尺寸 / Size: **7.5 inch(186mm)** 重量 / Weight: **110g**

GP-1217
尺寸 / Size: **7.5 inch(186mm)** 重量 / Weight: **110g**

GP-1357
尺寸 / Size: **8 inch(212mm)** 重量 / Weight: **240g**

GP-1358
尺寸 / Size: **8 inch(208mm)** 重量 / Weight: **244g**

GP-1421
尺寸 / Size: **8.5 inch(215mm)** 重量 / Weight: **217g**

GP-1503-S
尺寸 / Size: **7 inch(175mm)** 重量 / Weight: **133g**

GP-1051-S
尺寸 / Size: **7 inch (183mm)** 重量 / Weight: **128g**

GP-1351
尺寸 / Size: **6 inch(156mm)** 重量 / Weight: **58g**

GP-1352
尺寸 / Size: **6 inch(155mm)** 重量 / Weight: **63g**

修枝剪 PRUNING SHEARS

刀片采用优质钢材，环保耐磨涂层，锋利持久，剪切不伤枝；黄金刃角，科学配比，剪切轻松省力，手柄采用铝合金打造，更显高端大气。

The blades are crafted from high-quality steel with an environmentally friendly, wear-resistant coating for long-lasting sharpness without damaging branches. The golden blade angle, designed with precision, ensures effortless and efficient cutting. What's more, the aluminum alloy handle adds a touch of high-end sophistication, making it a cut above the rest.

GP-1341
尺寸 / Size: 8.5 inch(210mm)　重量 / Weight: 230g

GP-1143
尺寸 / Size: 8 inch(201mm)　重量 / Weight: 228g

GP-1412
尺寸 / Size: 8.5 inch(210mm)　重量 / Weight: 216g

GP-1284
尺寸 / Size: 8 inch (202mm)　重量 / Weight: 192g

GP-1261
尺寸 / Size: 8 inch (205mm)　重量 / Weight: 247g

GP-1262
尺寸 / Size: 8 inch(202mm)　重量 / Weight: 250g

GP-1287
尺寸 / Size: 8 inch (202mm)　重量 / Weight: 239g

GP-1339
尺寸 / Size: 8.5 inch(215mm)　重量 / Weight: 218g

GP-1311
尺寸 / Size: 8.5 inch(215mm)　重量 / Weight: 255g

GP-1312
尺寸 / Size: 8.5 inch(210mm)　重量 / Weight: 264g

修枝剪 PRUNING SHEARS

GP-1408
尺寸 / Size: 8 inch (205mm)　重量 / Weight: 193g

GP-1146
尺寸 / Size: 8 inch (205mm)　重量 / Weight: 191g

GP-1362
尺寸 / Size: 6 inch(155mm)　重量 / Weight: 118g

GP-1361
尺寸 / Size: 6 inch(155mm)　重量 / Weight: 124g

GP-1017
尺寸 / Size: 6.5 inch(175mm)　重量 / Weight: 153g

GP-1014
尺寸 / Size: 7 inch (172mm)　重量 / Weight: 161g

GPCY-0002
尺寸 / Size: 8.5 inch(210mm)　重量 / Weight: 228g

GP-1417
尺寸 / Size: 7 inch(176mm)　重量 / Weight: 149g
尺寸 / Size: 8 inch (202mm)　重量 / Weight: 209g

GP-1025
尺寸 / Size: 8.5 inch (218mm)　重量 / Weight: 206g

GP-1004
尺寸 / Size: 8.5 inch(213mm)　重量 / Weight: 238g

修枝剪 PRUNING SHEARS

GP-1030
尺寸 / Size: 8.5 inch (217mm) 重量 / Weight: 260g

GP-1002
尺寸 / Size: 8.5 inch(210mm) 重量 / Weight: 187g

GP-1003
尺寸 / Size: 8.5 inch(210mm) 重量 / Weight: 232g

GP-1357
尺寸 / Size: 8 inch (207mm) 重量 / Weight: 267g

GP-1141
尺寸 / Size: 8.5 inch(220mm) 重量 / Weight: 243g

GP-1013A
尺寸 / Size: 8 inch(200mm) 重量 / Weight: 230g

GP-1018
尺寸 / Size: 7.5 inch(190mm) 重量 / Weight: 116g

GP-1019
尺寸 / Size: 7 inch(180mm) 重量 / Weight: 120g

GP-1020
尺寸 / Size: 7.5 inch(190mm) 重量 / Weight: 116g

GP-1122
尺寸 / Size: 8.5 inch(214mm) 重量 / Weight: 230g

GP-1033
尺寸 / Size: 8 inch (205mm) 重量 / Weight: 112g

GM-7027
尺寸 / Size: 12 inch (305mm) 重量 / Weight: 258g

Our uniqueness
庆琏的与众不同

- 巧妙的连杆设计，剪切省力，提高效率。

  Smart lever design for effortless cutting, boosting efficiency.

- 手柄软胶包裹，防滑舒适，缓冲垫片设计，工具寿命更长久。

  Soft over-mold handle for a comfortable, non-slip grip, and a shock absorber design for extended tool lifespan.

- 超长刀身的设计，使我们的粗枝剪更省力可剪范围更大。

  The ultra-long blade design makes our heavy-duty loppers both more efficient and capable of cutting a wider range of branches with less effort.

- 刀片采用精选钢材，耐磨环保材料，剪切锋利，让你修枝不再烦恼。

  The blades are made from carefully selected steel and wear-resistant, environmentally friendly materials, ensuring a sharp cut and freeing you from the hassle of pruning.

新鲜树枝 Live Wood
枯树枝 Dry Wood
3x 省力 Effort-Saving
防震动 Shock-absorber
齿轮结构 Gear Mechanism
可伸缩 Extendable
专利产品 Patented
剪切直径 Cutting Capacity
专用钢材 Exclusive Steel
优质铝材 Premium Aluminum
烤漆 Coating
电镀 Chrome Plated

粗枝剪 LOPPERS

刀片采用优质钢材，环保耐磨涂层，省力弧形大刃口，剪切省力，坚固耐用；防震缓冲垫片设计，减少噪音和震动，使用更舒适；握把符合人体工程学设计，握持更自在。

The blades, crafted from high-quality steel with an eco-friendly wear-resistant coating, feature a large curved edge for effortless cutting, making them durable and robust. With shock-absorbing cushioning, they reduce noise and vibration, ensuring a comfortable experience. The ergonomic handle design provides a natural and comfortable grip.

GL-4086
尺寸 / Size: **24 inch(610mm)** 重量 / Weight: **960g**

GL-40B86
尺寸 / Size: **28 inch(705mm)** 重量 / Weight: **1040g**
尺寸 / Size: **24 inch(610mm)** 重量 / Weight: **960g**

GL-4111
尺寸 / Size: **28-1/2 inch(720mm)** 重量 / Weight: **916g**
尺寸 / Size: **19-3/4 inch(500mm)** 重量 / Weight: **724g**
尺寸 / Size: **25 inch(635mm)** 重量 / Weight: **841g**

GL-41156
尺寸 / Size: **29 inch(735mm)** 重量 / Weight: **945g**

粗枝剪 LOPPERS

GL-4214
尺寸 / Size: 30-1/4 inch(775mm)　重量 / Weight: 1285g

GL-4534
尺寸 / Size: 30-1/4 inch(770mm)　重量 / Weight: 1330g
尺寸 / Size: 24 inch(610mm)　重量 / Weight: 1182g

GL-5034
尺寸 / Size: 29 inch(735mm)　重量 / Weight: 1155g
尺寸 / Size: 24 inch(610mm)　重量 / Weight: 1100g

GL-5234
尺寸 / Size: 30 inch(760mm)　重量 / Weight: 1350g

GL-5561
尺寸 / Size: 30 inch(765mm)　重量 / Weight: 1310g

GL-50B156
尺寸 / Size: 28-1/2 inch(725mm)　重量 / Weight: 1200g

GL-59106
尺寸 / Size: 28-1/2 inch(725mm)　重量 / Weight: 980g

GL-6199
尺寸 / Size: 29 inch(735mm)　重量 / Weight: 1230g

GL-7034
尺寸 / Size: 29 inch(750mm)　重量 / Weight: 1250g

GL-108156
尺寸 / Size: 29 inch(740mm)　重量 / Weight: 1188g

粗枝剪 LOPPERS

GL-119156
尺寸 / Size: 29-1/2 inch(745mm) 重量 / Weight: 1255g

GL-7834
尺寸 / Size: 22 inch(560mm) 重量 / Weight: 930g

GL-12161
尺寸 / Size: 29 inch(740mm) 重量 / Weight: 1025g

GL-78129
尺寸 / Size: 22 inch(560mm) 重量 / Weight: 952g

GL-12361
尺寸 / Size: 29 inch(735mm) 重量 / Weight: 1040g

GL-102135
尺寸 / Size: 30-1/2 inch(780mm) 重量 / Weight: 1286g

GL-134156
尺寸 / Size: 30-1/2 inch(770mm) 重量 / Weight: 1320g

GL-107152
尺寸 / Size: 28-1/2 inch(720mm) 重量 / Weight: 1245g

GL-7734
尺寸 / Size: 22 inch(555mm) 重量 / Weight: 920g

GL-121128
尺寸 / Size: 29 inch(740mm) 重量 / Weight: 1055g

粗枝剪 LOPPERS

GL-4528
尺寸 / Size: 26 inch - 38 inch(655-965mm) 重量 / Weight: 1640g

GL-119155
尺寸 / Size: 25-1/2 inch - 33-1/2 inch(640-850mm)
重量 / Weight: 1700g

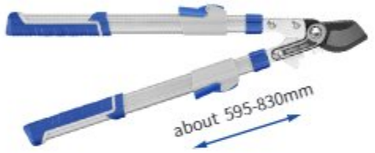

GL-117145
尺寸 / Size: 23-1/2 inch - 32-1/2 inch(595-830mm)
重量 / Weight: 1830g

GL-5096
尺寸 / Size: 25 inch - 33 inch(640-835mm) 重量 / Weight: 1680g

超大剪切直径 Supersized Cutting Capacity

剪刀具有独特的多杠杆设计，它能使剪刀的剪切直径大幅度提高，并且剪切粗枝更省力。
These Loppers feature a unique multi-lever design that significantly increases the cutting diameter, making it much easier to cut through thicker branches.

GL-70115
尺寸 / Size: 26-3/4 inch - 36-1/2 inch(680-930mm)
重量 / Weight: 1578g

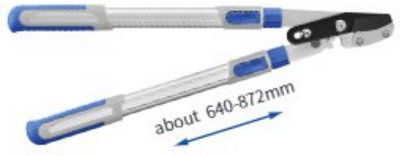

GL-72126
尺寸 / Size: 25-1/2 inch - 35 inch(640-872mm) 重量 / Weight: 1440g

GL-103155
尺寸 / Size: 26-1/2 inch -35 inch(670-885mm) 重量 / Weight: 1822g

GL-107126
尺寸 / Size: 25 inch - 34 inch(625-860mm) 重量 / Weight: 1395g

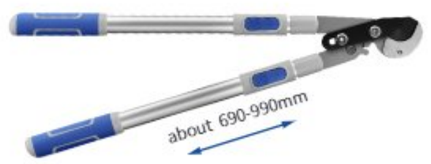

GL-116158
尺寸 / Size: 27 inch - 39 inch(690-990mm) 重量 / Weight: 1410g

GL-135154
尺寸 / Size: 27 inch - 38-1 / 2 inch(687-980mm) 重量 / Weight: 1622g

整篱剪
HEDGESHEARS

Our uniqueness
庆琏的与众不同

- 一体波浪式刀口设计，剪切轻松，防止枝叶滑脱，修剪快速高效。
  Wavy blade design for effortless cutting and preventing branch slippage.
- 手柄伸缩设计，长度随意调节，剪切更便捷。
  Adjustable handle with extendable design for effortless and convenient cutting.
- 握把符合人体工程学设计，握持更舒适。
  Ergonomically designed handle for a comfortable grip.
- 刀片采用精选碳钢，强韧锋利，防锈耐磨。
  Crafted from premium carbon steel, strong, resilient, sharp, rust-resistant, and wear-resistant.

灌木切割 Shrub Triming | 防震动 Shock-absorber | 齿轮结构 Gear Mechanism | 可伸缩 Extendable | 烤漆 Coating | 电镀 Chrome Plated | 专用钢材 Exclusive Steel | 专利产品 Patented | 人体工程学握把 Ergonomic Handle

LD-1605

整篱剪 HEDGE SHEARS

刀片采用优质钢材，强韧锋利，防锈耐磨；缓冲垫片设计，减少震动和噪音，使用不易疲劳；手柄采用铝合金管，重量轻量化，握把采用PP和TPR材料，柔软缓震，有效防滑，不易伤手。

Crafted from premium steel, the blades are strong, sharp, rust-resistant, and wear-resistant. With a shock-absorbing design to reduce vibration and noise, fatigue-free use is guaranteed. The lightweight aluminum alloy handle, combined with PP and TPR materials for a soft non-slip grip, ensures safe and comfortable handling.

GH-87129
尺寸 / Size: **23-1/2 inch (595mm)** 重量 / Weight: **827g**
刀头尺寸 / Tool head size: **9 inch**

GH-76115
尺寸 / Size: **25 inch (630mm)** 重量 / Weight: **1025g**
刀头尺寸 / Tool head size: **8 inch**

GH-77154
尺寸 / Size: **25 inch - 31-1/2 inch (638-805mm)** 重量 / Weight: **1163g**
刀头尺寸 / Tool head size: **9 inch**

GH-52154
尺寸 / Size: **26 inch- 32-1/2 inch (657-825mm)** 重量 / Weight: **1308g**
刀头尺寸 / Tool head size: **8 inch**

整篱剪 HEDGE SHEARS

GH-31128
尺寸 / Size: **23 inch (590mm)** 重量 / Weight: **1030g**
刀头尺寸 / Tool head size: **9 inch**

GH-31151
尺寸 / Size: **23 inch (590mm)** 重量 / Weight: **1025g**
刀头尺寸 / Tool head size: **9 inch**

GH-32128
尺寸 / Size: **23 inch (590mm)** 重量 / Weight: **1020g**
刀头尺寸 / Tool head size: **9 inch**

GH-48151
尺寸 / Size: **22-3/4 inch (578mm)** 重量 / Weight: **1015g**
刀头尺寸 / Tool head size: **9 inch**

GH-86135
尺寸 / Size: **24-1/2 inch - 30-1/2 inch (625-775mm)**
刀头尺寸 / Tool head size: **8 inch** 重量 / Weight: **1035g**

GH-48152
尺寸 / Size: **26-1/2 inch - 33-1/2 inch (670-850mm)**
刀头尺寸 / Tool head size: **9 inch** 重量 / Weight: **1386g**

伸缩手柄设计 Extendable Handle Design

剪刀柄部的伸缩按钮设计，使它能修剪更高的篱笆墙，很多情况下使用者无需再额外搬来凳子或梯子来辅助了。

The expandable handle design allows you to trim higher shrubs without the need for extra stools or ladders.
Say goodbye to the hassle of fetching additional tools!

GH-49151
尺寸 / Size: **23 inch (580mm)** 重量 / Weight: **1000g**
刀头尺寸 / Tool head size: **8 inch**

GH-51151
尺寸 / Size: **22-1/2 inch (570mm)** 重量 / Weight: **1038g**
刀头尺寸 / Tool head size: **8 inch**

整篱剪 HEDGE SHEARS

GH-3134
尺寸 / Size: **22-3/4 inch (585mm)** 重量 / Weight: **1020g**
刀头尺寸 / Tool head size: **9 inch**
尺寸 / Size: **24 inch(610mm)** 重量 / Weight: **1050g**
刀头尺寸 / Tool head size: **9 inch**

GH-3514
尺寸 / Size: **22 inch (565mm)** 重量 / Weight: **955g**
刀头尺寸 / Tool head size: **8 inch**

GH-41156
尺寸 / Size: **27-1/2 inch (695mm)** 重量 / Weight: **1010g**
刀头尺寸 / Tool head size:**10 inch**

GH-4628
尺寸 / Size: **26 inch-33 inch (660-845mm)** 重量 / Weight: **1334g**
刀头尺寸 / Tool head size: **9 inch**

GH-4734
尺寸 / Size: **24-1/ 2 inch (620mm)** 重量 / Weight: **1000g**
刀头尺寸 / Tool head size:**9 inch**

GH-52156
尺寸 / Size: **23-3/4 inch (605mm)** 重量 / Weight: **1025g**
刀头尺寸 / Tool head size:**8 inch**

GH-5537
尺寸 / Size: **23 inch (585mm)** 重量 / Weight: **910g**
刀头尺寸 / Tool head size:**10 inch**

GH-6786
尺寸 / Size: **23-1/2 inch (593mm)** 重量 / Weight: **1135g**
刀头尺寸 / Tool head size: **9 inch**

GH-6896
尺寸 / Size: **26 inch - 30-1/4 inch (660-770mm)** 重量 / Weight: **1245g**
刀头尺寸 / Tool head size:**8 inch**

GH-7099
尺寸 / Size: **24-1/4 inch (616mm)** 重量 / Weight: **987g**
刀头尺寸 / Tool head size:**10 inch**

整篱剪 HEDGE SHEARS

GH-8410
尺寸 / Size: **21-1/2 inch (550mm)** 重量 / Weight: **820g**
刀头尺寸 / Tool head size: **9 inch**

GH-97156
尺寸 / Size: **24 inch (605mm)** 重量 / Weight: **1016g**
刀头尺寸 / Tool head size:**9 inch**

GH-97158
尺寸 / Size: **23-1/2 inch (595mm)** 重量 / Weight: **1015g**
刀头尺寸 / Tool head size: **9 inch**

大口径设计 Large diameter design

贴心的多杠杆设计，极大的扩张了刀头口径，使它能剪切更多的枝叶，提高了约一倍的剪切效率，劳作将会更轻松愉快。

With its thoughtful multi-lever design, the blade angle is significantly expanded, enabling the shears to cut through more branches. This innovation doubles cutting efficiency, making your work much easier and more enjoyable.

GH-3311
尺寸 / Size: **22 inch (560mm)** 重量 / Weight: **923g**
刀头尺寸 / Tool head size: **8 inch**

GH-6137
尺寸 / Size: **21 inch (535mm)** 重量 / Weight: **795g**
刀头尺寸 / Tool head size:**8 inch**

GH-6261
尺寸 / Size: **22 inch (555mm)** 重量 / Weight: **803g**
刀头尺寸 / Tool head size: **8 inch**
尺寸 / Size: **20 inch(508mm)** 重量 / Weight: **711g**
刀头尺寸 / Tool head size: **8 inch**

GH-62113
尺寸 / Size: **18 inch (460mm)** 重量 / Weight: **696g**
刀头尺寸 / Tool head size:**8 inch**

GH-32113
尺寸 / Size: **19-3/4 inch (500mm)** 重量 / Weight: **875g**
刀头尺寸 / Tool head size:**9 inch**

GH-9009
尺寸 / Size: **18 inch (455mm)** 重量 / Weight: **750g**
刀头尺寸 / Tool head size:**7 inch**

草剪
GRASSSHEARS

Our uniqueness
庆琏的与众不同

- 刀片采用优质钢材，强韧锋利，防锈耐磨。
  Crafted from high-quality steel, these blades are strong, sharp, rust-resistant, and wear-resistant.
- 握把设计符合人体工程学，握感舒服，防滑不脱手。
  Designed with ergonomic handles, ensuring a comfortable, secure and non-slip holding.
- 旋转刀头设计，修剪更便捷，边角修剪更精准。
  Featuring a rotating blade head design for effortless trimming and precise corner cuts.
- 安全锁扣，收纳安全，使用更放心。
  Secure locking mechanism for safe storage, providing more at ease use.

切割草皮 Lawn Trimming
安全锁扣 Secured Locking
防滑设计 Anti-Slip Design
齿轮结构 Gear Mechanism
不锈钢材料 Stainless Steel
专用钢材 Exclusive Steel
专利产品 Patented
旋转角度 Rotation Angle

LD-1605

草剪 GRASS SHEARS

刀片采用优质钢材，强韧锋利，防锈耐磨；握把设计符合人体工程学，握感舒服，防滑不脱手。
Crafted from high-quality steel, the blades are strong, sharp, rust-resistant, and durable. The handle design conforms to ergonomic principles, providing a comfortable and non-slip grip.

GS-2001
尺寸 / Size: **13 inch (320mm)** 重量 / Weight: **250g**

GS-2002
尺寸 / Size: **12 inch (310mm)** 重量 / Weight: **298g**

GS-2003
尺寸 / Size: **13 inch (330mm)** 重量 / Weight: **260g**

GS-2004
尺寸 / Size: **13 inch (330mm)** 重量 / Weight: **386g**

GS-2005
尺寸 / Size: **13 inch (330mm)** 重量 / Weight: **282g**

草剪 GRASS SHEARS

GS-2010
尺寸 / Size: 13 inch (335mm)　重量 / Weight: 255g

GS-2012
尺寸 / Size: 14 inch (345mm)　重量 / Weight: 323g

GS-2018
尺寸 / Size: 14 inch (345mm)　重量 / Weight: 320g

GS-2014
尺寸 / Size: 13 inch (335mm)　重量 / Weight: 310g

旋转头设计 Rotatable Design:

试想一下当你发现角落有特殊角度的草药剪，但是传统草剪无法解决问题的时候你会很懊恼的，这款可旋转设计的草剪使能解决你的烦恼，刀身可360度旋转，无死角作业更便捷。
Imagine the frustration when you come across those hard-to-reach angles where traditional grass shears fall short. Say goodbye to your worries with this revolutionary rotating grass shear. With a 360-degree swiveling blade, it ensures seamless operation from every angle, making your work a breeze.

GS-2025
尺寸 / Size: 14 inch (355mm)　重量 / Weight: 325g

GS-2026
尺寸 / Size: 14 inch (350mm)　重量 / Weight: 298g

GS-2032
尺寸 / Size: 14 inch (340mm)　重量 / Weight: 316g

GS-2035
尺寸 / Size: 15 inch (370mm)　重量 / Weight: 265g

GL-2201-37单色
尺寸 / Size: 38-1/2 inch(980mm)　重量 / Weight: 990g

GL-2202-37双色
尺寸 / Size: 40 inch(1020mm)　重量 / Weight: 1266g

花卉工具
HANDTOOLS

Our uniqueness
庆琏的与众不同

- 符合人体工程学设计的握把，使用更舒服。
  Ergonomically designed handle for enhanced comfort during use.
- 多种头部选择，针对各类作业场景。
  Multiple head options for various work scenarios.
- 本体采用精选钢材和铝材，坚固耐磨，防水防锈。
  Head part is made from premium steel and aluminum, ensuring durability, wear resistance, and protection against water and rust.
- 挂孔设计，手柄可穿绳索，收纳更便捷。
  Hang-Hole design, handle with cord pass-through for effortless storage.

用于盆栽植物 Used for Potted Plants
人体工学握把 Ergonomic Handle
防滑设计 Anti-Slip Design
可伸缩 Extendable
不锈钢材料 Stainless Steel
专用钢材 Exclusive Steel
优质铝材 Premium Aluminum
优质木材 Premium Wood
专利产品 Patented

LD-1605

花卉工具 HAND TOOLS

适用于户外、家庭等园艺栽培工作（松土/挖坑/起苗/栽植/拌肥/移土/割草/清扫/收集这些工作都能胜任）。
Suitable for outdoor and household gardening tasks, such as loosening soil, digging holes, transplanting seedlings, planting, mixing fertilizer, moving soil, mowing, sweeping, and collecting debris.

GT-935A
尺寸 / Size: 13 inch (330mm)　重量 / Weight: 230g

GT-935A6
尺寸 / Size: 13 inch (335mm)　重量 / Weight: 222g

GT-935B
尺寸 / Size: 12 inch (315mm)　重量 / Weight: 192g

GT-935C
尺寸 / Size: 11 inch (290mm)　重量 / Weight: 195g

GT-935D
尺寸 / Size: 12 inch (308mm)　重量 / Weight: 141g

花卉工具 HAND TOOLS

GT-935E
尺寸 / Size: 9 inch (233mm)　重量 / Weight: 210g

GT-935G
尺寸 / Size: 12 inch (310mm)　重量 / Weight: 205g

GT-935H
尺寸 / Size: 12 inch (293mm)　重量 / Weight: 215g

GT-935I
尺寸 / Size: 10 inch (265mm)　重量 / Weight: 210g

GT-935I1
尺寸 / Size: 13 inch (332mm)　重量 / Weight: 221g

GT-935K
尺寸 / Size: 11 inch (280mm)　重量 / Weight: 250g

GT-935M
尺寸 / Size: 10 inch (255mm)　重量 / Weight: 196g

GT-935O
尺寸 / Size: 10 inch (262mm)　重量 / Weight: 188g

GT-935R
尺寸 / Size: 16 inch (395mm)　重量 / Weight: 204g

GT-935Q
尺寸 / Size: 12 inch (305mm)　重量 / Weight: 141g

GT-935U
尺寸 / Size: 13 inch (333mm)　重量 / Weight: 168g

碳钢铁线系列 CARBON STEEL WIRE SERIES

以下是碳钢铁线不同手柄的其他系列，工具头部与GT-935系列一致。
Here are other series of carbon steel wire tools with different handles, featuring tool heads identical to the GT-935 series.

GT-941

GT-957

GT-966

花卉工具 HAND TOOLS

GT-938A
尺寸 / Size: 13 inch(342mm)　重量 / Weight: 265g

GT-938B
尺寸 / Size: 12 inch(310mm)　重量 / Weight: 197g

GT-938G
尺寸 / Size: 12 inch(295mm)　重量 / Weight: 227g



GT-938K
尺寸 / Size: 11 inch(278mm)　重量 / Weight: 279g

GT-938C
尺寸 / Size: 13 inch(336mm)　重量 / Weight: 261g

GT-938R
尺寸 / Size: 15 inch (380mm)　重量 / Weight: 200g

GT-938O
尺寸 / Size: 11 inch (284mm)　重量 / Weight: 196g

GT-938F
尺寸 / Size: 12 inch (302mm)　重量 / Weight: 150g

GT-938U
尺寸 / Size: 14 inch (345mm)　重量 / Weight: 150g

碳钢方管系列 CARBON STEEL TUBULAR SERIES

以下是碳钢方管不同手柄的其他系列，工具头部与GT-938系列一致。

Here are additional series of carbon steel tubular tools with different handles, all featuring tool heads identical to the GT-938 series.

GT-818

GT-833

GT-835

GT-988

GT-971

GT-8701
尺寸 / Size: 8 inch (202mm)　重量 / Weight: 51g

花卉工具 HAND TOOLS

GT-800A
尺寸 / Size: 10 inch (250mm)　重量 / Weight: 97g

GT-800B
尺寸 / Size: 10 inch (255mm)　重量 / Weight: 76g

GT-800G
尺寸 / Size: 10 inch (252mm)　重量 / Weight: 83g

GT-800D
尺寸 / Size: 11 inch (285mm)　重量 / Weight: 84g

GT-800C
尺寸 / Size: 9 inch (232mm)　重量 / Weight: 130g

GT-800I
尺寸 / Size: 10 inch (245mm)　重量 / Weight: 184g



GT-800M
尺寸 / Size: 9 inch (230mm)　重量 / Weight: 160g

GT-803A
尺寸 / Size: 12 inch (305mm)　重量 / Weight: 204g

GT-803B
尺寸 / Size: 12 inch (312mm)　重量 / Weight: 171g

GT-803O
尺寸 / Size: 12 inch (306mm)　重量 / Weight: 188g

GT-803K
尺寸 / Size: 12 inch (303mm)　重量 / Weight: 270g

GT-803E
尺寸 / Size: 16 inch (395mm)　重量 / Weight: 226g

GT-803R
尺寸 / Size: 16 inch (418mm)　重量 / Weight: 185g

加长花卉工具 EXTENDED HAND TOOLS

GT-914A
尺寸 / Size: 17 inch(425mm) 重量 / Weight: 291g

GT-914B
尺寸 / Size: 17 inch(435mm) 重量 / Weight: 263g

GT-914U
尺寸 / Size: 18 inch(465mm) 重量 / Weight: 238g

GT-914E
尺寸 / Size: 19 inch(485mm) 重量 / Weight: 312g

GT-914G
尺寸 / Size: 16 inch(410mm) 重量 / Weight: 272g

GT-914Q-S
尺寸 / Size: 18 inch (450mm) 重量 / Weight: 224g

GT-914C
尺寸 / Size: 20 inch(500mm) 重量 / Weight: 279g

GT-914S
尺寸 / Size: 22 inch(565mm) 重量 / Weight: 330g

GT-914R
尺寸 / Size: 20 inch(505mm) 重量 / Weight: 262g

GT-914O
尺寸 / Size: 15 inch(385mm) 重量 / Weight: 250g

GT-914L
尺寸 / Size: 15 inch(380mm) 重量 / Weight: 313g

GT-914K
尺寸 / Size: 15 inch(385mm) 重量 / Weight: 321g

伸缩花卉工具 EXTENDABLE HAND TOOLS

GT-913A
尺寸 / Size: 28 inch - 40 inch(695-1005mm)
重量 / Weight: 653g

GT-913B
尺寸 / Size: 28 inch - 40 inch(705-1015mm)
重量 / Weight: 624g

GT-913U
尺寸 / Size: 29 inch - 41 inch(735-1045mm)
重量 / Weight: 595g

GT-913E
尺寸 / Size: 30 inch - 42 inch(750-1060mm)
重量 / Weight: 673g

GT-913G
尺寸 / Size: 26.5 inch -39 inch(675-985mm)
重量 / Weight: 631g

GT-913QS
尺寸 / Size: 28 inch - 40.5 inch(720-1030mm)
重量 / Weight: 585g



GT-920C
尺寸 / Size: 30.5 inch - 42 inch(775-1075mm)
重量 / Weight: 460g

GT-920S
尺寸 / Size: 33 inch - 45 inch(840-1140mm)
重量 / Weight: 510g



GT-920R
尺寸 / Size: 30 inch - 42 inch(770-1070mm)
重量 / Weight: 450g



GT-920O
尺寸 / Size: 26 inch - 38 inch(660-960mm)
重量 / Weight: 450g

GT-920L
尺寸 / Size: 26 inch - 38 inch(660-970mm)
重量 / Weight: 500g

GT-920K
尺寸 / Size: 26 inch - 38 inch(660-955mm)
重量 / Weight: 510g

花卉工具 HAND TOOLS

GT-965A-S
尺寸 / Size: 13 inch (340mm)　重量 / Weight: 258g

GT-965B1-S
尺寸 / Size: 13 inch (335mm　重量 / Weight: 250g

GT-965B-S
尺寸 / Size: 13 inch (328mm)　重量 / Weight: 215g

GT-965A6-S
尺寸 / Size: 13 inch (337mm)　重量 / Weight: 264g

GT-965D-S
尺寸 / Size: 12 inch (315mm)　重量 / Weight: 175g

GT-965E-S
尺寸 / Size: 12 inch (315mm)　重量 / Weight: 226g

GT-965C-S
尺寸 / Size: 11 inch (275mm)　重量 / Weight: 240g

GT-965I-S
尺寸 / Size: 10 inch (262mm)　重量 / Weight: 248g

GT-965K-S
尺寸 / Size: 10 inch (252mm)　重量 / Weight: 230g

GT-965M-S
尺寸 / Size: 10 inch (252mm)　重量 / Weight: 230g

GT-965O-S
尺寸 / Size: 10 inch (255mm)　重量 / Weight: 220g

GT-965Q-S
尺寸 / Size: 12 inch (305mm)　重量 / Weight: 164g

花卉工具 HAND TOOLS

GT-965G-S
尺寸 / Size: 12 inch (315mm)　重量 / Weight: 226g

GT-965H-S
尺寸 / Size: 12 inch (298mm)　重量 / Weight: 233g

GT-839A-S
尺寸 / Size: 12 inch (295mm)　重量 / Weight: 174g

GT-839B-S
尺寸 / Size: 11 inch (290mm)　重量 / Weight: 141g

不锈钢系列 STAINLESS STEEL SERIES

以下是不锈钢不同手柄的其他系列，工具头部与GT-965系列一致。

Here are additional stainless steel series with different handles, all featuring tool heads identical to the GT-965 series.

GT-930

GT-935

GT-957

GT-977

GT-831A
尺寸 / Size: 13 inch (318mm)　重量 / Weight: 170g

GT-831B
尺寸 / Size: 12 inch (312mm)　重量 / Weight: 181g

GT-831C
尺寸 / Size: 12 inch (312mm)　重量 / Weight: 195g

GT-831D
尺寸 / Size: 12 inch (315mm)　重量 / Weight: 165g

GT-831G
尺寸 / Size: 12 inch (308mm)　重量 / Weight: 200g

GT-842A
尺寸 / Size: 12 inch (302mm)　重量 / Weight: 180g

花卉工具 HAND TOOLS

GT-842B
尺寸 / Size: 12 inch(297mm) 重量 / Weight: 162g

GT-842C
尺寸 / Size: 12 inch(295mm) 重量 / Weight: 199g

GT-842D
尺寸 / Size: 12 inch(295mm) 重量 / Weight: 173g

GT-900A
尺寸 / Size: 12 inch(300mm) 重量 / Weight: 180g

GT-900B
尺寸 / Size: 12 inch(295mm) 重量 / Weight: 166g

GT-926A
尺寸 / Size: 12 inch (300mm) 重量 / Weight: 166g

GT-900C
尺寸 / Size: 12 inch(295mm) 重量 / Weight: 202g

GT-900D
尺寸 / Size: 12 inch(298mm) 重量 / Weight: 175g

GT-900G
尺寸 / Size: 11 inch (290mm) 重量 / Weight: 202g

GT-917A
尺寸 / Size: 12 inch(306mm) 重量 / Weight: 229g

GT-917C
尺寸 / Size: 10 inch(262mm) 重量 / Weight: 196g

GT-926B
尺寸 / Size: 12 inch (300mm) 重量 / Weight: 175g

花卉工具 HAND TOOLS

GT-928C
尺寸 / Size: 12 inch(300mm) 重量 / Weight: 214g

GT-956A
尺寸 / Size: 13 inch (327mm) 重量 / Weight: 205g

GT-956B
尺寸 / Size: 13 inch (325mm) 重量 / Weight: 220g

GT-956G
尺寸 / Size: 13 inch (320mm) 重量 / Weight: 240g

GT-956D
尺寸 / Size: 13 inch (325mm) 重量 / Weight: 208g

GT-956C
尺寸 / Size: 13 inch (322mm) 重量 / Weight: 240g

GT-961A
尺寸 / Size: 12 inch(310mm) 重量 / Weight: 196g

GT-961B
尺寸 / Size: 12 inch(303mm) 重量 / Weight: 190g

GT-983A
尺寸 / Size: 10 inch (254mm) 重量 / Weight: 151g

GT-983C
尺寸 / Size: 10 inch (243mm) 重量 / Weight: 140g

GT-983B
尺寸 / Size: 10 inch (250mm) 重量 / Weight: 120g

花卉工具 HAND TOOLS

GT-926C
尺寸 / Size: 12 inch (298mm)　重量 / Weight: 185g

GT-926D
尺寸 / Size: 12 inch (300mm)　重量 / Weight: 158g

GT-926G
尺寸 / Size: 12 inch (295mm)　重量 / Weight: 195g

GT-928A
尺寸 / Size: 12 inch(305mm)　重量 / Weight: 186g

GT-928B
尺寸 / Size: 12 inch(305mm)　重量 / Weight: 177g

木柄花卉工具 WOODEN HANDLE TOOLS

GT-806A
尺寸 / Size: 12 inch (295mm)　重量 / Weight: 176g

GT-806B
尺寸 / Size: 12 inch (300mm)　重量 / Weight: 141g

GT-806D
尺寸 / Size: 12 inch (300mm)　重量 / Weight: 120g

GT-806G
尺寸 / Size: 11 inch (278mm)　重量 / Weight: 140g

GT-806C
尺寸 / Size: 11 inch (278mm)　重量 / Weight: 180g

木柄花卉工具 WOODEN HANDLE TOOLS

GT-806O
尺寸 / Size: 10 inch (260mm)　重量 / Weight: 180g

GT-806I
尺寸 / Size: 10 inch (257mm)　重量 / Weight: 207g

GT-806M
尺寸 / Size: 10 inch (260mm)　重量 / Weight: 176g

GT-806K
尺寸 / Size: 11 inch (275mm)　重量 / Weight: 250g

GT-806R
尺寸 / Size: 16 inch (395mm)　重量 / Weight: 199g

GT-903A
尺寸 / Size: 22 inch (550mm)　重量 / Weight: 333g

GT-903B
尺寸 / Size: 21 inch (535mm)　重量 / Weight: 310g

GT-903G
尺寸 / Size: 21 inch (525mm)　重量 / Weight: 305g

GT-903I
尺寸 / Size: 19 inch (487mm)　重量 / Weight: 330g

GT-903C-S
尺寸 / Size: 20 inch (510mm)　重量 / Weight: 335g

GT-903O-S
尺寸 / Size: 19 inch (485mm)　重量 / Weight: 333g

GT-903K-S
尺寸 / Size: 20 inch (505mm)　重量 / Weight: 393g

木柄花卉工具 WOODEN HANDLE TOOLS

GT-910A-S
尺寸 / Size: 13 inch (325mm)　重量 / Weight: 230g

GT-910A6-S
尺寸 / Size: 13 inch (325mm)　重量 / Weight: 255g

GT-910B-S
尺寸 / Size: 12 inch (310mm)　重量 / Weight: 193g

GT-910B1-S
尺寸 / Size: 13 inch (323mm)　重量 / Weight: 228g

GT-910D-S
尺寸 / Size: 12 inch (300mm)　重量 / Weight: 158g

GT-910G-S
尺寸 / Size: 12 inch (302mm)　重量 / Weight: 208g

GT-910C-S
尺寸 / Size: 11 inch (274mm)　重量 / Weight: 219g

GT-910I-S
尺寸 / Size: 10 inch (250mm)　重量 / Weight: 228g

GT-910K-S
尺寸 / Size: 11 inch (272mm)　重量 / Weight: 273g

GT-910O-S
尺寸 / Size: 10 inch (245mm)　重量 / Weight: 198g

GT-910Q-S
尺寸 / Size: 12 inch (293mm)　重量 / Weight: 148g

GT-910R-S
尺寸 / Size: 15 inch (382mm)　重量 / Weight: 193g

其他木柄花卉工具 OTHER WOODEN HANDLE TOOLS

GM-7001（披覆）
尺寸 / Size: 15 inch(370mm)　重量 / Weight: 505g

GT-8901
尺寸 / Size: 11 inch (290mm)　重量 / Weight: 165g

GT-8901-S
尺寸 / Size: 11 inch (290mm)　重量 / Weight: 165g

DL-0003
尺寸 / Size: 17.5 inch(446mm)　重量 / Weight: 487g

木柄系列 WOODEN HANDLE SERIES

以下是木柄不同手柄的其他系列，工具头部与GT-910一致。
Here are additional series with different wooden handles, all featuring tool heads identical to the GT-910.

GT-902

GT-945

塑胶花卉工具 PLASTIC HAND TOOLS

GT-922A（条纹）
尺寸 / Size: 12 inch(302mm)　重量 / Weight: 70g

GT-922B（条纹）
尺寸 / Size: 12 inch(305mm)　重量 / Weight: 60g

GT-922C（条纹）
尺寸 / Size: 11 inch(276mm)　重量 / Weight: 75g

GT-922G（条纹）
尺寸 / Size: 11 inch(270mm)　重量 / Weight: 73g

GT-925A
尺寸 / Size: 12 inch (298mm)　重量 / Weight: 102g

GT-925B
尺寸 / Size: 12 inch (300mm)　重量 / Weight: 105g

GT-925C
尺寸 / Size: 11 inch (285mm)　重量 / Weight: 120g

GT-708A

尺寸 / Size: **11 inch(290mm)** 重量 / Weight: **217g**

儿童花卉工具 CHILDREN'S TOOLS

我们发现，从小培养的园艺兴趣，能更长久的融入我们的美好生活中。
Nurturing a interest for gardening from a young age can lead to a fulfilling and lasting hobby in our lives. Discover the joy of gardening today.

GT-707A（圆形）

尺寸 / Size: **7 inch(185mm)** 重量 / Weight: **77g**

GT-707A（方形）

尺寸 / Size: **7 inch(185mm)** 重量 / Weight: **77g**

GT-707C

尺寸 / Size: **6 inch(165mm)** 重量 / Weight: **67g**

套装花卉工具 1 HAND TOOLS KIT 1

美丽的鲜花是这套花卉工具的设计灵感，设计师也是一位园艺爱好者，
他说：鲜花是美好生活最好的伴侣。

The beautiful flowers inspired the design of this floral tool set. The designer, who is also a gardening enthusiast, believes that flowers are the perfect companion to a beautiful life.

GT-917A+B+C

尺寸 / Size: **N/A** 重量 / Weight: **579g**

GT-917A

尺寸 / Size: **11 inch(278mm)** 重量 / Weight: **212g**

GT-917B

尺寸 / Size: **11 inch(278mm)** 重量 / Weight: **201g**

GT-917C

尺寸 / Size: **9 inch(233mm)** 重量 / Weight: **166g**

套装花卉工具 2 HAND TOOLS KIT 2

我们始终关注如何培养儿童和青少年对植物的爱好，我想，给他们送一套园艺工具应该是一个很不错的主意。

We're committed to inspiring a passion for plants in kids and teens. Giving them a garden tool set would be a wonderful way to encourage their interest.

GT-983A

尺寸 / Size: **10 inch(254mm)** 重量 / Weight: **151g**

GT-983B

尺寸 / Size: **10 inch(250mm)** 重量 / Weight: **120g**

GT-983C

尺寸 / Size: **10 inch(243mm)** 重量 / Weight: **140g**

GP-1359

尺寸 / Size: **8 inch(200mm)** 重量 / Weight: **167g**

GT-983GB

尺寸 / Size: **10 inch(250mm)** 重量 / Weight: **124g**

套装花卉工具 3 HAND TOOLS KIT 3

当你和孩子在海滩踏浪的时候，是否会感觉缺了些什么?没错，带上这套沙滩玩具的话，你的孩子一定会爱死你的。铲、叉、耙、桶一应俱全，激发孩子的创造天赋，可组合收纳的设计完全不占车厢空间。

Do you feel like something is missing when you're at the beach with your child and playing in the waves? With this set of beach toys, your child will absolutely love you. It includes a shovel, rake, fork, and bucket, providing endless opportunities for creativity, and the compact design allows for easy storage without taking up too much room in your car.

GM-7154

尺寸 / Size: **8 inch(200mm)** 重量 / Weight: **251g**

GM-7154

尺寸 / Size: **6.5 inch(163mm)** 重量 / Weight: **28g**

GM-7154

尺寸 / Size: **6.5 inch(157mm)** 重量 / Weight: **16g**

GM-7154

尺寸 / Size: **6.5 inch(165mm)** 重量 / Weight: **17g**

套装花卉工具 4 HAND TOOLS KIT 4

我们知道你的盆栽可能非常小，这套工具完全能满足你超精细的栽种需求。

We know your potted plants may be very small, and this set of tools is perfect for your ultra-fine planting needs.

GT-801A

尺寸 / Size: **7.5 inch(195mm)** 重量 / Weight: **24g**

GT-801B

尺寸 / Size: **8 inch(205mm)** 重量 / Weight: **23g**

GT-801N

尺寸 / Size: **6.5 inch(168mm)** 重量 / Weight: **24g**

其他工具 OTHER TOOLS

GT-8801

尺寸 / Size: **9 inch (235mm)**

重量 / Weight: **293g**

GT-8802

尺寸 / Size: **9 inch (230mm)**

重量 / Weight: **303g**

其他工具 OTHER TOOLS

GM-7304

尺寸 / Size: **7 inch(176mm)** 重量 / Weight: **248g**

GT-9215

尺寸 / Size: **12 inch(305mm)** 重量 / Weight: **单只375g**

跪垫

尺寸 / Size: **16 inch(410mm)** 重量 / Weight: **117g**

锯类
PRUNINSSAWS

Our uniqueness
庆琏的与众不同

- 锯片采用优质钢材，强韧锋利，防锈耐磨，切割流畅不卡顿。
  Crafted from high-quality steel, ensuring robust sharpness, rust resistance, and long-lasting durability, guaranteeing smooth, snag-free cutting.
- 防滑手柄设计，使用更安全。
  Anti-slip handle design for a safer and more secure grip.
- 螺母加固，锯片稳固不晃动。
  Nuts securely fastened for a stable and wobble-free saw blade.
- 附带锯套，收纳方便，安全携带。
  Comes with a saw sheath for convenient storage and safe carriage.

锯活树 Live Wood
锯枯木头 Dry Wood
锯钢管 Steel Tube
防滑设计 Anti-Slip Design
冲齿 Fine Teeth
三面磨齿 Triple Teeth
不锈钢材料 Stainless Steel
SK5 SK5
专利产品 Patented
护手工具 Hand Guard
人体工学握把 Ergonomic Handle
可折叠 Foldable
优质木材 Premium Wood
优质铝材 Premium Aluminum
可伸缩 Extendable
三合一 3 In 1

LD-1605

折叠锯剪 FOLDING SAWS

锯片采用优质钢材，强韧锋利，防锈耐磨，切割流畅不卡顿；防滑手柄设计，握持更舒适；可折叠或收缩收纳，收纳更安全，携带更便捷；安全锁扣，防夹手，使用更安全。

Our high-quality steel saw blade offers exceptional strength and sharpness, with rust-resistant and wear-resistant properties, ensuring smooth, uninterrupted cutting. The anti-slip handle design provides a comfortable grip. What's more, it's foldable or retractable for secure and convenient storage. With a safety locking mechanism to prevent accidents, your safety is our priority.

TE31-160T
尺寸 / Size: 6 inch 重量 / Weight: 125g

TE32-255T
尺寸 / Size: 10 inch 重量 / Weight: 225g

FL19-180T
尺寸 / Size: 7 inch 重量 / Weight: 205g

FL91-180T
尺寸 / Size: 7 inch 重量 / Weight: 190g

FL29-180
尺寸 / Size: 7 inch 重量 / Weight: 170g

FL65-180T
尺寸 / Size: **7 inch** 重量 / Weight: **210g**

FL66-150T
尺寸 / Size: **6 inch** 重量 / Weight: **183g**

FL7-150PK
尺寸 / Size: **6 inch** 重量 / Weight: **174g**

FL81-180PT
尺寸 / Size: **7 inch** 重量 / Weight: **190g**

FL92-180
尺寸 / Size: **7 inch** 重量 / Weight: **158g**

FL20-220T
尺寸 / Size: **9 inch** 重量 / Weight: **365g**

FL86-180T
尺寸 / Size: **7 inch** 重量 / Weight: **224g**

FL69-180T
尺寸 / Size: **7 inch** 重量 / Weight: **268g**

FL74-230T
尺寸 / Size: **9 inch** 重量 / Weight: **376g**

FL74-260T
尺寸 / Size: **10 inch** 重量 / Weight: **400g**

折叠护手锯 FOLDING SAW WITH HAND GUARD

我们的锯片采用高品质的钢材制成，锋利耐磨，不易生锈。切割过程流畅无卡顿，特别是对于大树干可以更加方便地切割。手柄设计防滑且护手，握持更加安全舒适，使用时手感不易疲劳。我们致力于为您提供更好的产品体验。

The saw blades are crafted from high-quality steel, ensuring sharpness, durability, and rust resistance. They offer smooth, hassle-free cutting, especially for larger tree trunks. The handle design features anti-slip properties and a hand guard, providing a secure and comfortable grip while minimizing hand fatigue during use. We are committed to delivering an enhanced product experience for you.

长锯类 PRUNING SAW

部分单手锯有锯鞘 Some single-handed saws come with a saw sheath

附带锯套，锯套的耳环可挂在腰带或挂钩上，收纳更安全且方便携带。
Comes with a saw sheath that has earrings to hang on the belt or hook for secure storage and easy carrying. Perfect for customers who value convenience and safety.

PR16-330T
尺寸 / Size: 13 inch 重量 / Weight: 430g

PR87-300T
尺寸 / Size: 12 inch 重量 / Weight: 300g

PR12-350T
尺寸 / Size: 14 inch 重量 / Weight: 390g

RT59-160T
尺寸 / Size: 6 inch 重量 / Weight: 123g

PR71-330TS
尺寸 / Size: 13 inch 重量 / Weight: 260g

HP55-330F
尺寸 / Size: 13 inch 重量 / Weight: 205g

HP34-300PF
尺寸 / Size: 12 inch 重量 / Weight: 225g

HP35-330T
尺寸 / Size: 13 inch 重量 / Weight: 267g

HP51-360TH
尺寸 / Size: 14 inch 重量 / Weight: 337g

板锯类 HAND SAW

锯片采用优质钢材，锋利耐磨，切割流畅，不卡锯；握把符合人体工程学设计，握持舒适；适用于较大较宽木板切割。

The saw blades are made from high-quality steel, ensuring sharpness and durability for smooth and effortless cutting without getting stuck. The handle is ergonomically designed to provide comfortable grip. Ideal for cutting larger and wider wooden boards.

HA75-510T

尺寸 / Size: **18inch / 20 inch / 22inch / 24inch / 26inch**

HA83-560T

尺寸 / Size: **22 inch**

HA52-400T

尺寸 / Size: **16 inch / 20inch / 22inch / 24inch / 26inch**

HA83-260T

尺寸 / Size: **10 inch**

木柄锯类 SAWS WITH WOODEN HANDLE

锯片采用优质钢材，锋利耐磨，切割流畅，不卡锯；握把采用木质材料，环保更美观。

The saw blade is made of high-quality steel, ensuring sharpness, durability and smooth cutting with no jams. The handle is crafted from eco-friendly wooden materials for a more attractive appearance.

PR14-330PF

尺寸 / Size: **13 inch** 重量 / Weight: **232g**

PR14-330F

尺寸 / Size: **13 inch** 重量 / Weight: **250g**

PR33-300T

尺寸 / Size: **12 inch** 重量 / Weight: **240g**

PR33-330TS

尺寸 / Size: **13 inch** 重量 / Weight: **272g**

FL17-240T

尺寸 / Size: **12 inch** 重量 / Weight: **267g**

木柄锯类 SAWS WITH WOODEN HANDLE

DU19-400PBW
尺寸 / Size: **18 inch** 重量 / Weight: **400g**

WA24-160P
尺寸 / Size: **6 inch** 重量 / Weight: **72g**

弓形锯类 BOW SAWS

锯条采用优质钢材，锋利耐磨，切割流畅，不卡锯；握把符合人体工程学设计，防滑不脱手，握持舒适；锯条可更换，使用更方便，多种尺寸选择。

The saw blade is made of high quality steel, ensuring sharpness, durability, and smooth cutting without jamming. The handle is ergonomically designed, providing a non-slip, comfortable grip. The saw blade is replaceable, making it more convenient to use, and available in a variety of sizes for selection.

HC75-305
尺寸 / Size: **12 inch** 重量 / Weight: **566g**

BW39-280
尺寸 / Size: **12 inch** 重量 / Weight: **505g**

BW41-260
尺寸 / Size: **12 inch / 21inch / 24inch / 30inch**
重量 / Weight: **460g / 541g / 700g / 835g**

BW41-480
尺寸 / Size: **21 inch / 24inch / 30inch**
重量 / Weight: **540g / 690g / 825g**

三合一组合锯类 3 in 1 COMBINATION SAWS

组合锯：一把顶三把，组装拆卸简单，可在弓形锯/板锯/手锯切换，满足各类使用场景，使用方便。

3 in 1 Combination Saw: One Handle, Three Blades. Easy assembly and disassembly allow you to switch between bow saw, panel saw, and hand saw configurations effortlessly, catering to various usage scenarios for utmost convenience.

HA77-475T
尺寸 / Size: **12 inch / 15 inch / 11 inch**
重量 / Weight: **647g / 529g / 404g**
备注 / remarks: 1-组合1; 2-组合2;3-组合3

HA78-475T
尺寸 / Size: **12 inch / 15 inch / 11 inch**
重量 / Weight: **510g / 392g / 267g**
备注 / remarks: 1-组合1; 2-组合2;3-组合3

TREE PRUNERS
高空剪

Why our light high-altitude scissors are different:
我们的轻型高空剪与众不同的原因:

- 可锯可剪，可伸缩高空轻松修枝
  It can be sawed and sheared, and it can be retracted and easily pruned at high altitude
- 修枝平滑快速，剪口平滑不伤枝
  Smooth and fast pruning, smooth cutting without damaging branches
- 巧妙的滑槽杠杆设计，剪切更省力
  Ingenious chute lever design, cutting more labor-saving
- 刀片采用精选优质良钢，易宝龙涂层，剪切锋利耐磨
  The blade is made of selected high-quality good steel and coated with EPRON, which is sharp and wear-resistant

旋转角度　齿轮结构　可伸缩　剪切直径　专利产品

LD-1605

高空剪 TREE PRUNERS

刀片采用精选优质良钢，易宝龙涂层，剪切锋利耐磨，可锯可剪，可伸缩高空轻松修枝，巧妙的滑槽杠杆设计，剪切更省力，修枝平滑快速，剪口平滑不伤枝。

The blades are made of high-quality steel and coated with ILAFLON, providing sharpness and wear resistance for both cutting and sawing. With the ability to extend and retract, this tool can easily trim branches at heights. The cleverly designed sliding groove lever reduces effort while ensuring a smooth and fast pruning process, leaving the branches undamaged and providing a smooth cutting edge.

GS-2114
尺寸 / Size: **80 inch(2030mm)**　重量 / Weight: **1650g**

GS-2117
尺寸 / Size: **80 inch(2013mm)**　重量 / Weight: **1800g**

GS-2118
尺寸 / Size: **63 inch(1600mm)**　重量 / Weight: **1026g**

GM-7404
尺寸 / Size: **63 inch(1600mm)**　重量 / Weight: **1275g**

超大剪切直径+旋转设计 Extra-Large Cutting Diameter + Rotating Design

高枝即使很粗也不用担心，因为我们有超大的剪切直径。

Even if the branches are thick, there's no need to worry because we have an oversized cutting diameter.

巧妙的可旋转设计，使原本因树枝遮挡和角度问题等原因而无法剪切的树枝也能被剪切，也为使用者节省来回调整角度的时间。

The smart designed rotating feature allows even previously inaccessible branches, obstructed by other branches or awkward angles, to be pruned. This saves the user time in constantly adjusting their cutting angle.

可更换管类 INTERCHANGEABLE TUBES FOR OPTION

我们专门为不同的使用者设计出可更换长管的高空剪，通过更换长管，我们可以得到更符合自己使用习惯的高空剪。以下是各种可用于更换的长管和高空剪刀头。

We have specifically designed high-altitude shears with interchangeable extension tubes for different users. By swapping out the extension tubes, you can get a high-altitude shear that better suits your personal usage habits. Below are various extension tubes and shear heads that can be used for replacement.

GS-2102
重量 / Weight: **410g**

GS-2106
重量 / Weight: **940g**

GS-2103
重量 / Weight: **750g**

GS-2108
重量 / Weight: **480g**

GS-2104
重量 / Weight: **790g**

GS-2105
重量 / Weight: **700g**

高空剪 TREE PRUNERS

可换管设计 Interchangeable tube design

GS-2113

重量 / Weight: **940g**

GS-2115

重量 / Weight: **680g**

HP51-360TH

尺寸 / Size: **24 inch(605mm)** 重量 / Weight: **337g**

A-2

尺寸 / Size: **50 inch - 96 inch(1250-2410mm)**
重量 / Weight: **1000g**

B-2

尺寸 / Size: **70 inch - 142 inch(1800-3600mm)**
重量 / Weight: **1400g**

C-2

尺寸 / Size: **50 inch - 96 inch(1250-2410mm)**
重量 / Weight: **520g**

C-3

尺寸 / Size: **38 inch - 96 inch(950-2410mm)**
重量 / Weight: **700g**

可换管设计 Interchangeable tube design

长柄工具
LONG HANDLE TOOLS

Our uniqueness
庆琏的与众不同

- 软胶握把设计，握感舒适防滑
  Featuring a soft rubber grip for a comfortable and non-slip hold.
- 轻量化玻璃纤维管设计，坚固又轻便
  Designed with lightweight fiberglass tubing for durability and ease of use.
- 模内镶嵌铁管一体化设计，坚固更耐用
  Integrated design with embedded steel tube for enhanced durability and sturdiness.
- 轻量化设计，工作更轻松
  Lightweight design for easier work.

优质木材 Premium Wood
人体工学握把 Ergonomic Handle
烤漆 Coating
不锈钢材料 Stainless Steel
专用钢材 Exclusive Steel
优质铝材 Premium Aluminum
齿轮结构 Gear Mechanism

长柄工具 LONG HANDLE TOOLS

FL-0163
尺寸 / Size: 60 inch(1510mm)　重量 / Weight: 1705g

LM-0102A
尺寸 / Size: 60 inch(1510mm　重量 / Weight: 1538g

DP-0161
尺寸 / Size: 42 inch(1050mm)　重量 / Weight: 1950g

DP-0112
尺寸 / Size: 44 inch(1120mm)　重量 / Weight: 2348g

DP-0113
尺寸 / Size: 27 inch(680mm)　重量 / Weight: 830g

长柄工具 LONG HANDLE TOOLS

GM-7301
尺寸 / Size: 37 inch(940mm) 重量 / Weight: 1200g

GM-7504
尺寸 / Size: 40 inch(1020mm) 重量 / Weight: 1800g

GT-7260
尺寸 / Size: 45 inch(1155mm) 重量 / Weight: 1300g

GS-2205BS
尺寸 / Size: 45 inch(1135mm) 重量 / Weight: 1150g

TP-0602
尺寸 / Size: 40 inch(1000mm) 重量 / Weight: 1500g

GT-8805
尺寸 / Size: 39 inch(985mm) 重量 / Weight: 1200g

DP-0311
尺寸 / Size: 37 inch(950mm) 重量 / Weight: 1550g

DF-0301-S
尺寸 / Size: 42 inch(1058mm) 重量 / Weight: 1810g

DP-0101-S
尺寸 / Size: 38 inch(965mm) 重量 / Weight: 1600g

DF-0101-S
尺寸 / Size: 42 inch(1062mm) 重量 / Weight: 1990g

LF-1251
尺寸 / Size: 55.5 inch(1410mm) 重量 / Weight: 680g

长柄工具 LONG HANDLE TOOLS

TP-0601-S
尺寸 / Size: 36 inch(916mm)　重量 / Weight: 780g

LM-1201-S
尺寸 / Size: 57 inch(1440mm)　重量 / Weight: 927g

LM-0901-S
尺寸 / Size: 55.5 inch(1410mm)　重量 / Weight: 950g

LM-0701
尺寸 / Size: 61 inch(1540mm)　重量 / Weight: 978g

DW-0301-S
尺寸 / Size: 40.5 inch(1030mm)　重量 / Weight: 2050g

LW-0911
尺寸 / Size: 61 inch(1545mm)　重量 / Weight: 1330g

LW-0701
尺寸 / Size: 63.5 inch(1608mm)　重量 / Weight: 1150g

LW-0701-S
尺寸 / Size: 67 inch(1705mm)　重量 / Weight: 1100g

LW-0402
尺寸 / Size: 58 inch (1470mm)　重量 / Weight: 2165g

LW-0403
尺寸 / Size: 60 inch(1510mm)　重量 / Weight: 1885g

LW-0404
尺寸 / Size: 63.5 inch(1610mm)　重量 / Weight: 1810g

CONTRACTOR GRADE TOOLS I

- Logo stick out from the blade
- Large reversed patterned stamped steps for better leverage
- Double dipped TPR non slip grips
- Fiberglass handle

CGR001-24FL-H
• Size 580×400×1510

CRM001-16FL-H
• Size 400×80×230×1660

MR07-16FL-H
• Size 403×85×210×1480

MR02-16FL-H
• Size 400×80×210×1480

MHO-6FL-H
• Size 155×120×1480

MF05-6FD-H
• Size 245×287×534×1050

MJ05-6FD-H
• Size 220×298×533×1050

MF39FL-H
• Size 242×280×645×1480

MJ40FL-H
• Size 231×288×647×1480

MJ33-3FL-H
• Size 102×295×485×1480

MJ11-2-2FL-H
• Size 102×226×490×1480

MF38-3FL-H
• Size 243×280×585×1480

MF05-6FL-H
• Size 245×287×634×1480

AQ01-4FL-H
• Size 195×270×431×1480

AF01-3FL-H
• Size 100×300×438×1480

MJ05-6FL-H
• Size 220×296×533×1480

FIBERGLASS HANDLE TOOLS I

- Tempered, heat treated steel heads for greater strength and longer life
- Molded cushion grip
- Fiberglass handle
- Center foam grip

FIBERGLASS HANDLE TOOLS II

- Tempered, heat treated steel heads for greater strength and longer life
- Strong, lightweight fiberglass handle
- Comfort grip reduces fatigue and improve leverage

MJ10-2FD-O
• Size: 217×290×498×1050

MF03-3FD-O
• Size: 238×282×490×1050

MF32FD-O
• Size: 185×305×535×1050

OH08FD-O
• Size: 212×265×380×1050

OF03-4FD-O
• Size: 177×295×600×1050

MQ03FD-O
• Size: 148×361×604×1050

CFR009FL-O
• Size: 120×100×1460

CFR014FL-O
• Size: 130×120×1460

MH11FL-O
• Size: 118×150×273×1350

CFR010FL-O
• Size: 90×140×1460

MH0-1FL-O
• Size: 90×230×1460

MH0-2FL-O
• Size: 155×120×1460

MH04FL-O
• Size: 90×230×160×1460

MR03-14FL-O
• Size: 350×80×1460

MJ13FD-O
• Size: 147×212×377×670

MF46FD-O
• Size: 160×200×377×670

CFS007FD-O
• Size: 180×295×530×1050

OH06FD
• Size: 250×270×325×1280

OJ11FD
• Size: 198×295×500×1280

AQ01-1FL-O
• Size: 196×273×432×1480

MF03-3FL-O
• Size: 238×282×490×1480

MJ10-2FL-O
• Size: 217×290×498×1480

CONTRACTOR GRADE TOOLS II

- Heavy gauge, High carbon steel Blade
- Large steps with non-slip designing for better leverage
- closed back design protects handle
- Extended socket length strengthen the shovel

Large steps with non-slip designing

Welded closed back design

CONTRACTOR GRADE TOOLS III

- The shovel with lacquered finish and forward steps features a black collar and a lacquered ash handle with 6" yellow grip. for landscaping and gardening
- End grip make it more comfortable and easy to control

Ideal For: Scraping and cleanup
Ideal For: Digging soil

- ergonomic fiberglass long-handle shovel features a 9" end grip.
- Ergonomic shaped handle for comfort
- 9" hard rubber end grip
- Large steel collar for strength when digging

Ideal For: Clean up or moving soil or rock

- 9" end grip for control
- Strong ergonomic handle
- Roof ripper shovel with serrated blade for prying nails

Ideal For: Ripping shingles

V－OVAL FIBERGLASS LONG HANDLED TOOLS

- The most rugged fiberglass handle tools available for maximum duty construction,industrial,and commercial applications.
- Tempered steel head
- Textured handle
- Ergonomically designed handle
- Textured step
- Soft comfort grip handle

MJ06-4SL-O
• Size: 204×284×485×1415

MR15-14L-O
• Size: 345×69×1400

CGH005SL-O
• Size: 125×175×1470

MHO-5L-O
• Size: 155×120×1370

CGH002PFL-MN
• Size: 178×140×1470

MHO-12SL-MN
• Size: 155×120×1470

MR12-19L-MN
• Size: 355×90×1480

MR13-16SL-MN
• Size: 460×95×1535

MR14-16PFL-MN
• Size: 413×63×1575

CZ000190
• Size: 914×127×1670

CZ000180
• Size: 609×127×1670

MJ10-3VOFD
• Size: 217×290×490×1050

MF03-4VOFD
• Size: 238×282×486×1050

MF17-6VOFD
• Size: 178×285×500×1050

CFS007-2VOFD
• Size: 180×295×530×1050

MF03-4VOFL
• Size: 238×282×486×1500

MJ10-3VOFL
• Size: 217×290×490×1500

MR04-14VOFL
• Size: 350×80×1500

NON-SLIP STEP

MHO-7VOFL
• Size: 155×120×1500

V-oval Shaped Handles

CFR010VOFL
• Size: 95×140×130×1500

MF49FD
• Size: 188×305×555×1050

CFS007-3PD
• Size: 185×300×520×1050

OF08-1PD
• Size: 180×290×520×1050

CFS007PD-H
• Size: 180×290×530×1050

CFS007-5MPD-2
• Size: 180×290×530×1015

OF08-1MPO-2
• Size: 180×290×520×1075

CFS006-3MPD
• Size: 140×230×445×930

CFS007-3MPD
• Size: 185×300×520×1000

OF03-2-1MPD
• Size: 138×240×475×960

OF03MPO
• Size: 180×300×535×1015

MR06-20FL-TPR
• Size: 510×80×110×1450

CFR015-2SL
• Size: 110×130×230×1450

MJ41SL
• Size: 228×295×518×1500

AF01-1SL
• Size: 100×300×438×1500

AQ01-1SL
• Size: 195×270×431×1500

MF50PD
• Size: 152×255×500×1000

CFS006-3PD
• Size: 140×230×445×1000

OF08-2PD
• Size: 140×230×460×1000

CFS006-5PD
• Size: 135×240×470×1000

MJ10-2PD
• Size: 217×290×490×1050

MF03-3PD
• Size: 238×282×486×1050

MQ01PD
• Size: 150×355×640×1050

MQ05-6PD-H
• Size: 150×358×640×1080

CFS007PY
• Size: 190×295×530×1050

MJ19PD
• Size: 152×215×377×700

MF46PD
• Size: 155×200×377×700

ASH WOOD HANDLE TOOLS

- Tempered, heat treated steel for greater strength and longer life.
- Logo stick out from the blade
- Large reversed patterned stamped steps for better leverage

CFR012SL-H
• Size: 24×185×310×1460

CFR009SL-H
• Size: 120×100×175×1350

CFR007SL-H
• Size: 130×100×1350

MH10L
• Size: 181×145×235

CGH009SL-H
• Size: 180×155×325×1480

MHO-3SL-H
• Size: 160×78×237×1500

CGH016-1SL-H
• Size: 226×145×315×1400

MR01-14SL-H
• Size: 350×80×300×1460

MR01-16SL-H
• Size: 400×85×300×1460

CFR009-3L
• Size: 128×130×340

MHO-12L-H
• Size: 240×120×1350

CGH005SL-H
• Size: 125×175×220×1380

G114SL-H
• Size: 157×75×243×1380

MHO-5SL-H
• Size: 155×120×217×1430

CFR006SL-H
• Size: 242×345×535×1500

CFR005SL-H
• Size: 220×330×530×1500

CFR016-2SL
• Size: 135×220×290×1280

CFS010Y-H
• Size: 210×300×520×1100

CFR016-1SL
• Size: 60×180×255×1240

CFR005-1PY-H
• Size: 220×330×530×1050

PHD006T-H
• Size: 215×325×1030

CFS007WY-H
• Size: 180×295×530×1050

OH09L-H
• Size: 240×120×1000

HARD WOOD HANDLE TOOLS

FORGED Scraper/Chopper

- Forged, one piece tempered steel head for maximum strength and durability
- Resharpenable blade for digging,edging, root chopping and sod cutting.

VALUE WOOD HANDLE TOOLS

MJ06-4PD-V
• Size: 204×284×485×1050

MJ06-4SL-V
• Size: 204×284×485×1480

MF03-3PD-V
• Size: 238×282×486×1050

MF03-3SL-V
• Size: 238×282×486×1480

CFS007PD-V
• Size: 180×295×530×1050

MR01-14L-V
• Size: 350×60×300×1480

CGH012L-V
• Size: 72×227×108×1250

MHO-5L-V
• Size: 155×120×1370

POST HOLE DIGGER

MT01-2FL
• Size: 145×255×345×1480

MT01-1L
• Size: 145×255×345×1480

MT03-2FL
• Size: 142×230×385×1480

MT03-3SQL
• Size: 142×230×385×1480

NB2-YM01
• Size: 140×250×365×1450

MT02-1FL
• Size: 133×250×350×1480

MT02-1L
• Size: 133×250×350×1480

MT07FL
• Size: 120×250×340×1400

MT06SL
• Size: 170×247×332×1450

- Used for digging holes for fences and posts
- Can also be used to dig holes for trees, shrubs and flowers
- Contractor grade

ERGONOMIC TOOLS II

- Steel reinforced ABS handle
- Tempered, heat treated steel for greater strength and longer life.
- Comfort cushion grip
- Handle designed for maximum leverage

HANDLE TOOLS FOR SOUTH AMERICA

SNOW SHOVEL

H1-6FU
• Size: 375×480×615×1200

H1-6PY
• Size: 375×480×615×1200

MH03PU
• Size: 379×474×614×1200

MH01PU
• Size: 375×500×655×1200

MH03FU
• Size: 379×474×614×1200

MH01FU
• Size: 375×500×655×1200

Ergonomic Tools I

- Ideal for digging in tough soil, with an angled D-handle to reduce wrist strain and provide a secure grip
- Welded 14-gauge steel blade and 17-gauge steel shaft provide durability that far outlasts wood-handled tools and won't flex like fiberglass
- Sharpened shovel blade makes it easy to penetrate tough soil and a foot platform helps maximize force when driving the shovel blade into the soil
- D-handle,mid grip and Ergonomical handle for easy to handle

MJ27MD
• Size: 198×288×1200

MF27MD
• Size: 197×289×1200

MJ29MD
• Size: 221×297×1200

MF29MD
• Size: 240×286×1200

MH05MD
• Size: 224×317×1200

MH04MD
• Size: 235×272×1200

CFS010MD
• Size: 200×290×1200

CFR001MD
• Size: 215×310×1200

MF31MD
• Size: 290×350×440×1200

MH06MD
• Size: 250×276×334×1200

MF30MD
• Size: 192×296×372×1200

MJ39MD
• Size: 224×308×425×1200

HANDLE TOOLS FOR EUROPE

- Tempered, heat treated steel for greater strength and longer life.
- Easy penetration of a variety of materials,designed for efficient moving and lifting.

HANDLE TOOLS FOR EUROPE

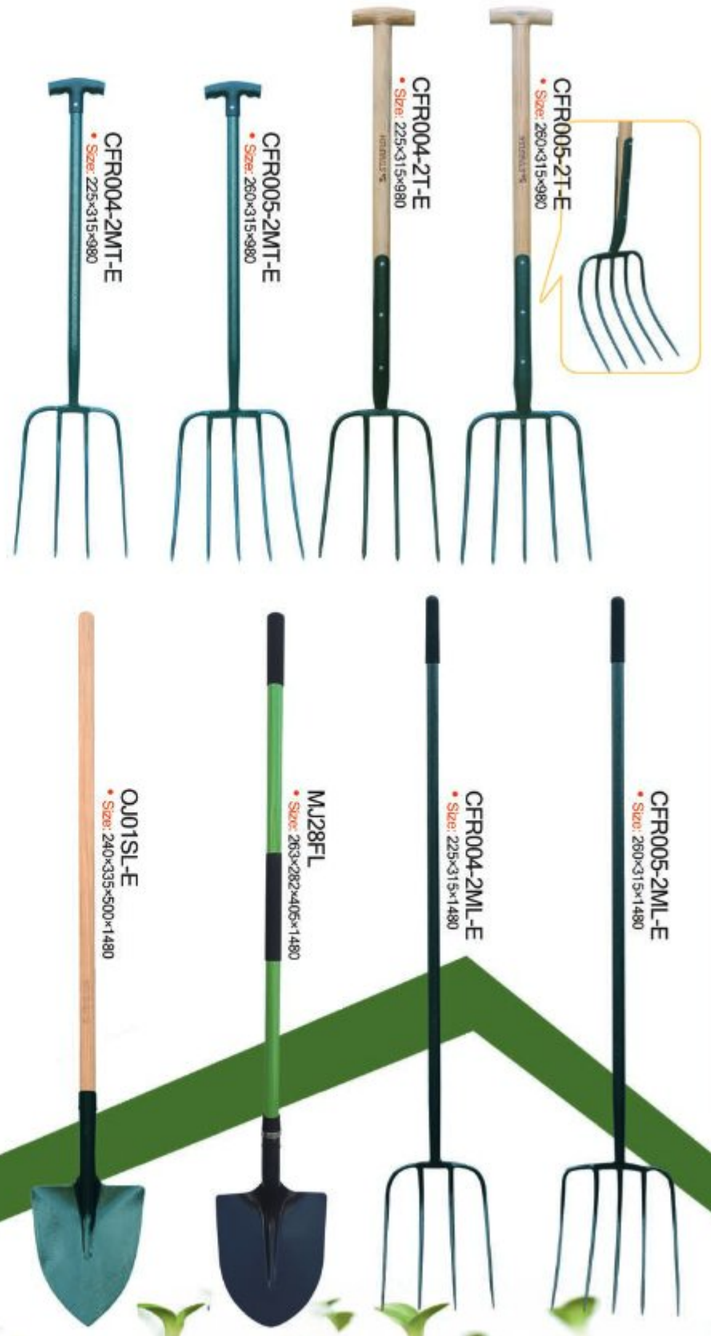

METAL HANDLE TOOLS

OF03MPD
• Size: 180×300×535×1000

OF03-2-1MPD
• Size: 138×240×475×930

CFS007-3MPD
• Size: 180×300×530×1000

CFS006-3MPD
• Size: 140×225×440×930

MJ55MPD
• Size: 180×300×530×1000

MH11ML
• Size: 118×160×1500

CFR015-1ML
• Size: 102×133×1470

MHO-11ML
• Size: 152×90×1490

MJ10-2ML
• Size: 217×290×490×148

MF18-2ML
• Size: 280×350×538×

CFR006ML
• Size: 250×340×1480

CGH009ML
• Size: 180×155×325×1480

CGH008-2ML
• Size: 170×358×1480

CFR004ML
• Size: 230×310×1480

MF03-3ML
• Size: 238×282×496×1480

MJ05-7ML
• Size: 220×298×533×1480

HANDLE TOOLS FOR ASIA AND MIDDLE EAST

RF01-1FD
Size:185x225x800MM
RJ01-1FD
Size:175x235x800MM
RF01-2MPD
Size:185x225x800MM
RJ01-2MPD
Size:175x235x800MM
RF01-2MY
Size:185x225x800MM
RJ01-2MY
Size:175x235x800MM
RF01-3Y
Size:180x225x310x800MM
RJ01-3Y
Size:170x230x310x800MM
RF02-1FD
Size:245x285x970MM
RJ02-1FD
Size:216x285x970MM
RF02-2MPD
Size:245x285x970MM
RJ02-2MPD
Size:216x285x970MM
RF02-2MY
Size:245x285x970MM
RJ02-2MY
Size:216x285x970MM
RF03-1Y
Size:260x300x426x970MM
RJ03-1Y
Size:230x295x410x970MM
RJ02-3MY
Size:216x285x970MM

MR13-3L
Size:100x110x350MM
MR13-1L
Size:252x110x1200MM
MR13-3L
Size:100x110x1200MM
MR13-3-1L
Size:100x110x300MM
MR13-2L
Size:190x110x1200MM
MR13-2AL
Size:190x110x1200MM

PATENTED MULTIFUNCTIONAL SHOVEL

ROOT SLAYER

- ✔ Patented all steel shaft
- ✔ Severs tough roots with ease

PATENT SHOVELS

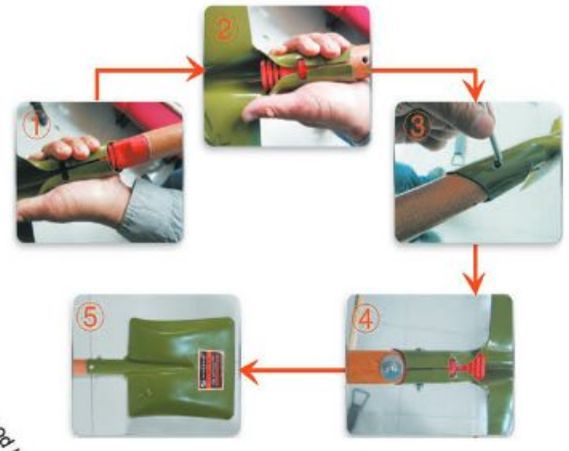

- New connecting structure of shovels and handles.
- 50% stronger than normal connecting methods
- One handle can be used on different heads
- One head can be used on different handles
- Simple connection, assembly and disassembly by hand easily

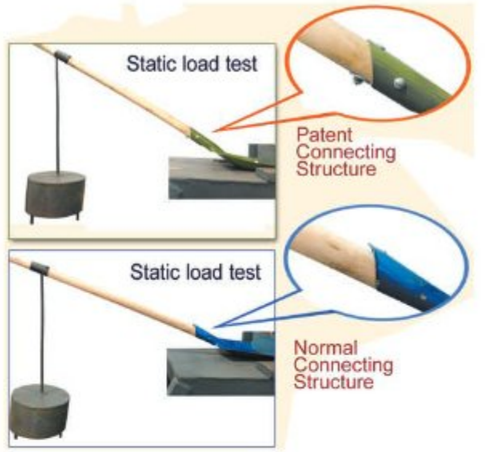

PATENT DIGGING SPADES

- Tempered, heat treated steel for greater strength
- Separable handle and head can be freely combined
- Different heads can be installed different length handle for digging different holes
- All steel material longer using life
- Sharp head easier for digging
- T grip easier to use with two hands

NB3-L01-2
Size:85x345MM

NB3-L01-1
Size:85x345MM

NB3-L01-4
Size:85x345MM

NB3-L01-3
Size:85x345MM

NB3-L02-2
Size:50x355MM

NB3-L02-1
Size:50x355MM

NB3-L02-4
Size:50x355MM

NB3-L02-3
Size:50x355MM

PATENT TOOLS:

- One handle does the job
- Patented, Tested, Durable
- Metal handle: 40% stronger than wood and 30% cheaper than fiberglass
- Simple connection,disassembly & assembly by hand easily

NB2-CZ01
Size: 200x300x400

NB2-QJ01-1
Size:225x275x380

NB2-QW01
Size:190x300x410

NB2-B01-1
Size:245x290x400

NB2-QW03
Size:135x320x430

NB2-QW02
Size:165x330x440

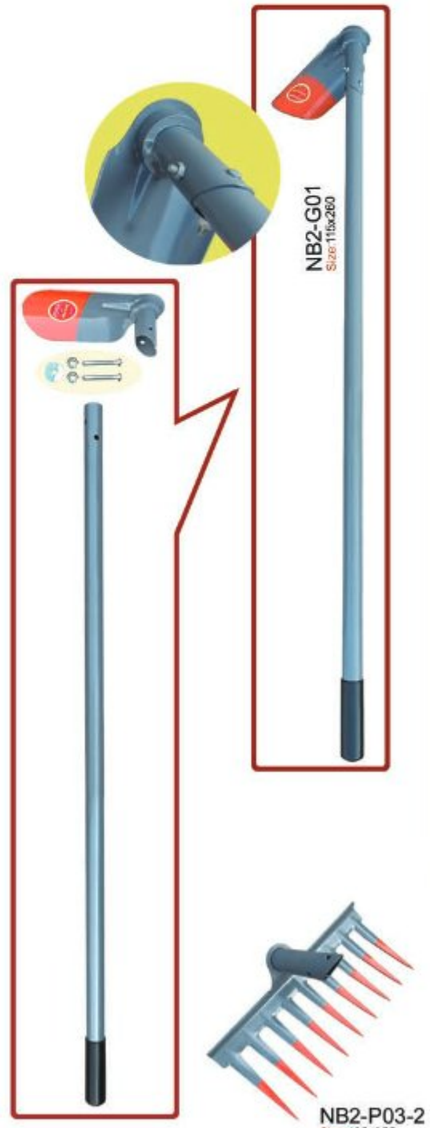

NB2-P03-2
Size:165x355

NB2-G02-1
Size:147x300

NB2-C02-3
Size:75x250

NB2-C04
Size:185x90

NB2-C05-1
Size:175x250

NB2-C03-3
Size:110x200

NB2-C03-1
Size:150x250

NB2-G03-1
Size:160x230

NB2-C06
Size:150x215

NB2-C02-3
Size:175x210

NB2-C02-1
Size:210x270

NB2-P04
Size:95x250

NB2-G04
Size:150x305

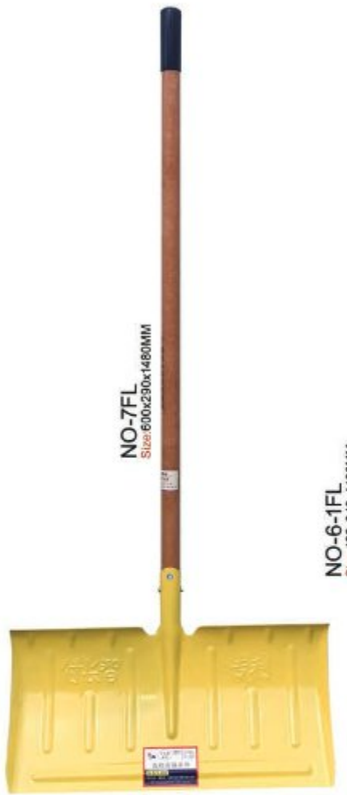

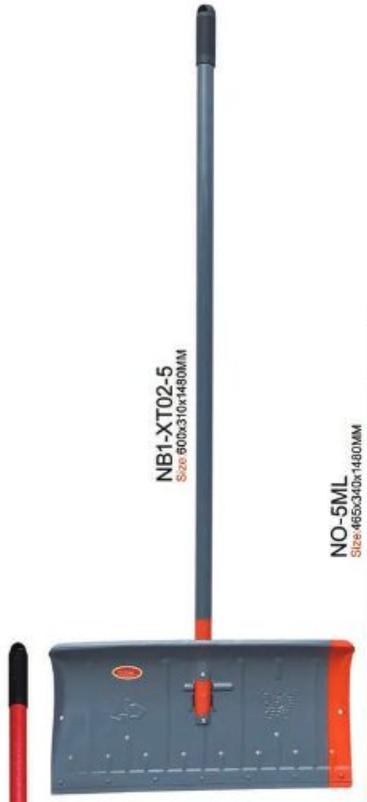

HAY INSERTER

- All steel materials.
- Buried hay in the desert to prevent sand loss.



FRUIT HARVESTER

FRUIT HARVESTER

Replaceable Head
Telescopic Tools

185 in. reach
Replaceable head
3 section pole
Fiberglass handle
PVC grip

RopelessTree Pruner

185 in. reach
Rotatable Head
3 section pole
Fiberglass handle
PVC grip
Nylon cable

Manual impactor

SNOW RAKE

ONE HANDLE DOES THE JOB

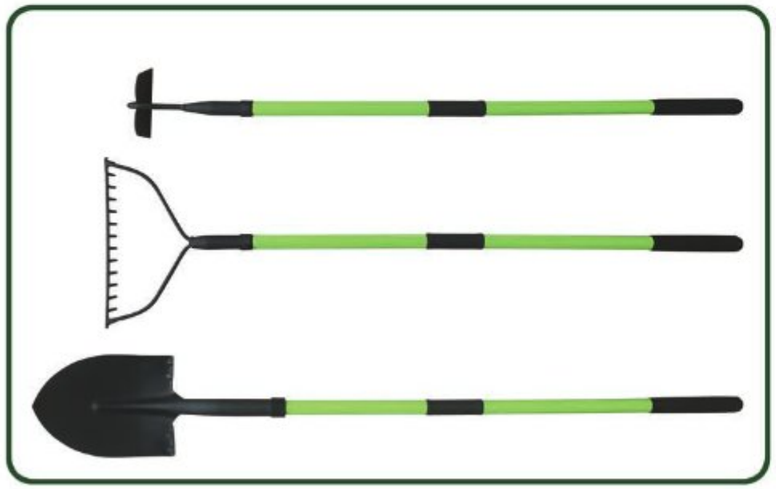

- Easy twist and lock systerm
- Patented, Tested, and Durable
- Perfect for home owners and contrators alike
- Fiberglass handle-40% stronger than wood

Display

MINI D HANDLE SHOVEL PDQ

LONG HANDLE TOOLS DISPLAY

- LONG HANGLE SHOVELS
- BOW RAKES
- HOES

LONG HANDLE TOOLS DISPLAY

- POST HOLE SHOVELS
- BOW RAKES
- HOES

SHOVEL HEAD I

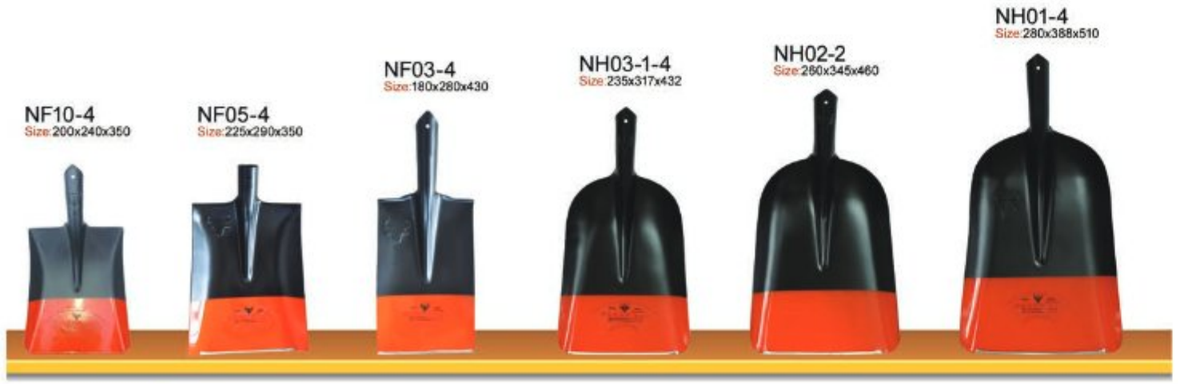

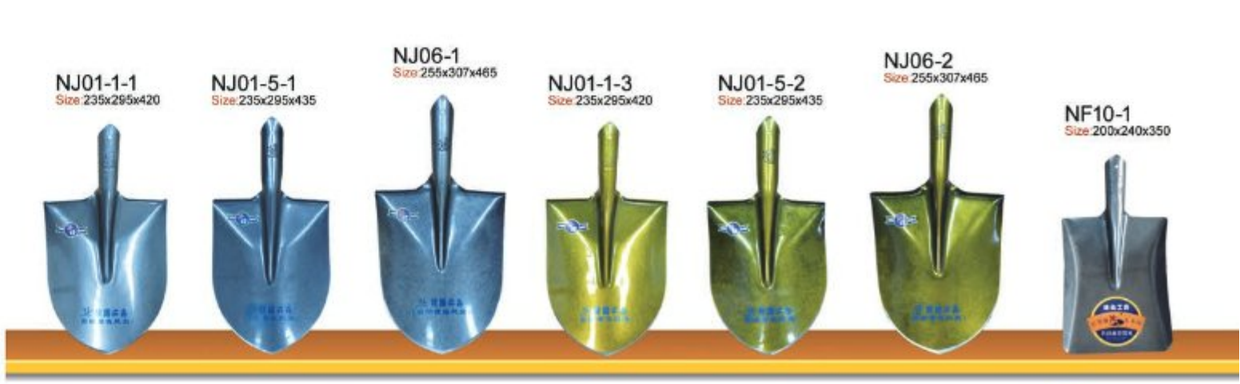

SHOVEL HEAD II

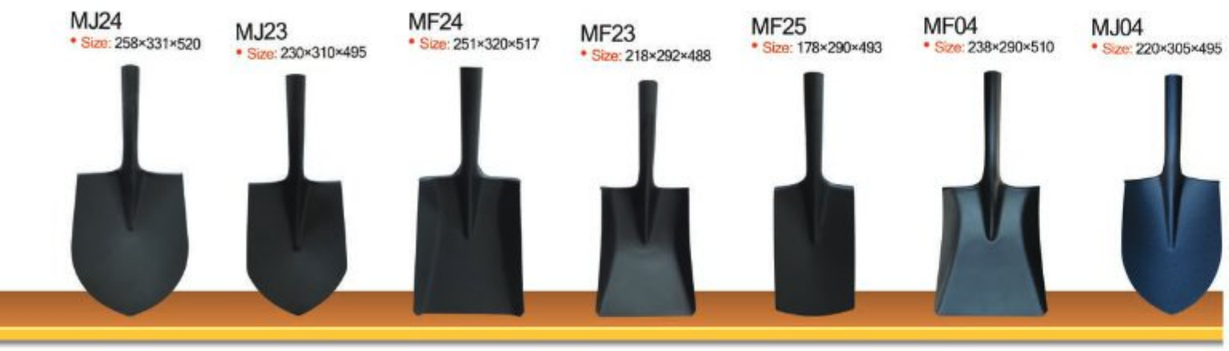

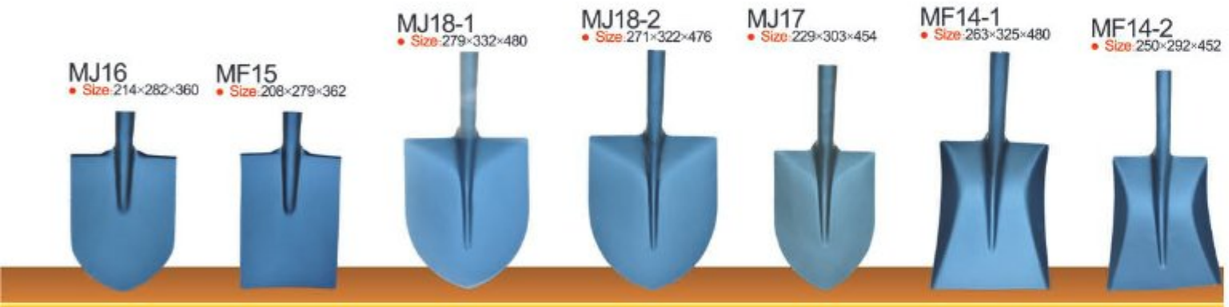

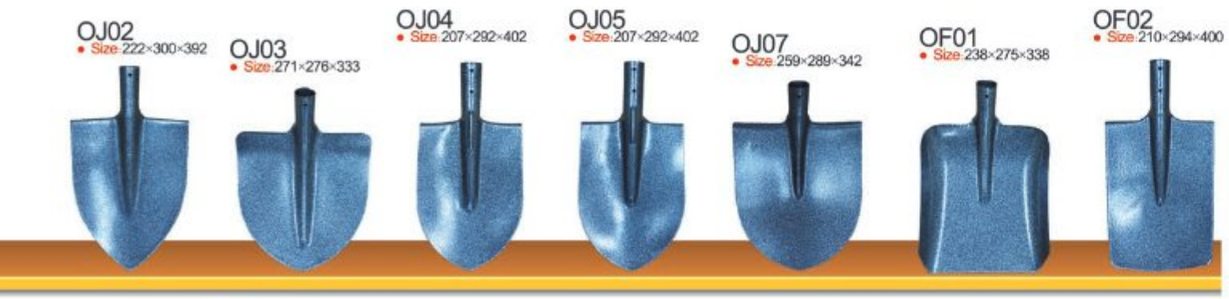

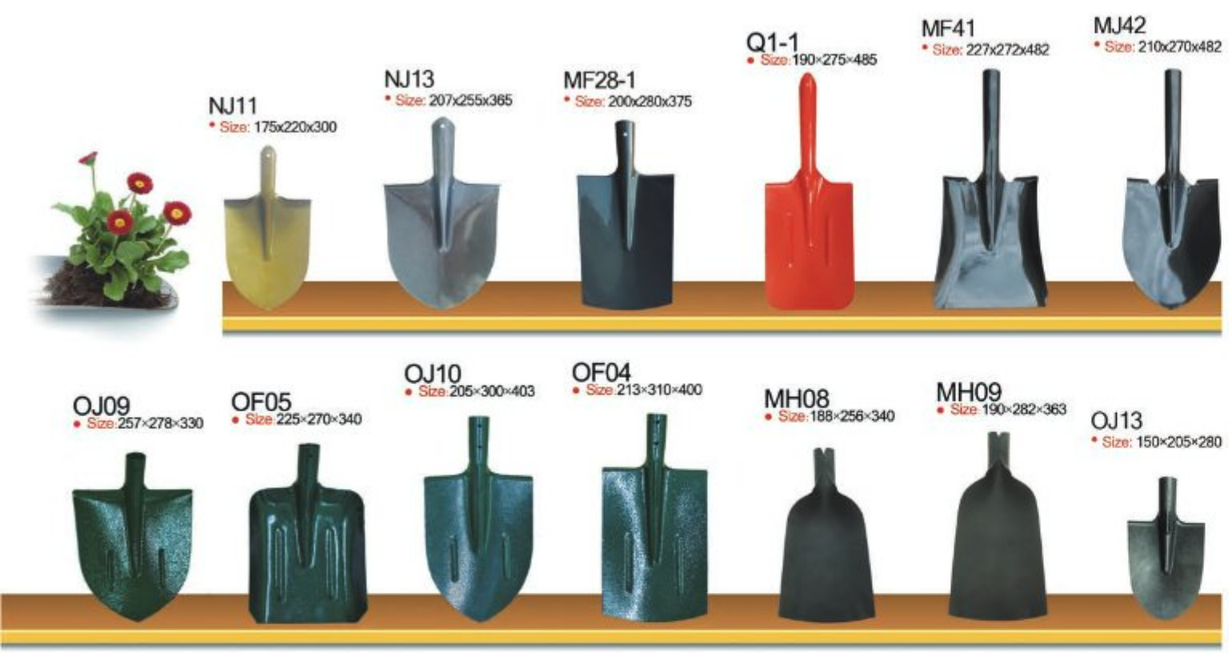
NJ11
• Size: 175x220x300
NJ13
• Size: 207x255x365
MF28-1
• Size: 200x280x375
Q1-1
• Size:190×275×485
MF41
• Size: 227x272x482
MJ42
• Size: 210x270x482
OJ09
• Size:257×278×330
OF05
• Size:225×270×340
OJ10
• Size:205×300×403
OF04
• Size:213×310×400
MH08
• Size:188×256×340
MH09
• Size:190×282×363
OJ13
• Size: 150×205×280
OH01
• Size:243×277×345
OH02
• Size:255×292×345
OH03
• Size:230×280×340
OH04
• Size:215×272×333
OH05
• Size:186×272×348
OH07
• Size:232×275×327
OH10
• Size: 280x265x325
OJ01
• Size:240×335×499
MJ56
• Size: 247×337×505
MJ35
• Size: 229×312×515
MF26
• Size: 246×288×480
MF32
• Size: 185×305×535
MH02
• Size: 315×410×580
MQ01
• Size: 150×355×640

PICKS

CZP401
• Weight:5LBS;5.5LBS
CZP409
• Weight:2.25KG
CZP406
• Weight:4.5LBS; 5LBS; 5.5LBS
CZP402
• Weight:1.8KG;2.0KG; 2.25KG;6.5LBS;7.0LBS
CZP409-1
• Weight:1.1KG
CZP406R
• Weight:5LBS
CZP410
• Weight:1.5KG;2.0KG; 2.5KG;3.0KG
CZP403
• Weight:5LBS;5.5LBS
CZP407
• Weight:4.5LBS;5LBS
CZP406I
• Weight:2.0KG;2.20KG
CZP404
• Weight:1.8KG;2.0KG; 2.5KG
CZP430
• Weight:1.7KG
CZP434
• Weight:1.5KG;2.6KG
CZP415
• Weight:3.0KG;7LBS
Pick with wood handle
CZP406S
Fiberglass handle are 40% stronger than wood
CZP406FH
Pick with wood handle
CZP407WH
Pick with fiberglass handle
CZP402FH

Wooden Trellis & Wooden Fence

KIMPORT

Picket Fence
171Z
W60 x D3.5 x H28 cm
40'GP:7424

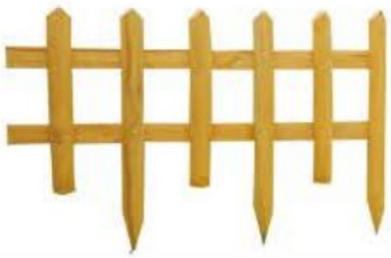

Picket Fence
171M
W84 x D3 x H50 cm
40'GP:3815

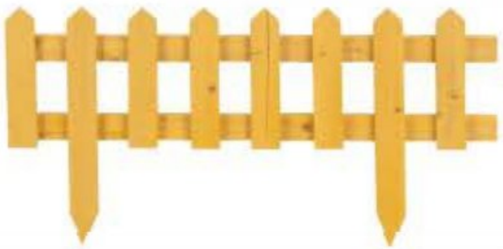

Picket Fence
171I
W60 x D2 x H34 cm
40'GP:15591

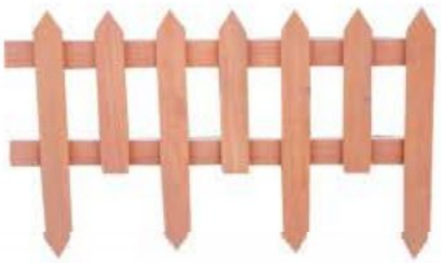

Picket Fence
171D
W60 x D2 x H42 cm
40'GP:18224

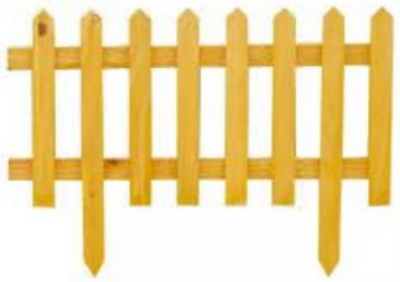

Picket Fence
171BW
W61 x D2 x H46 cm
40'GP:9133

Picket Fence
171X
W60 x D3 x H43 cm
40'GP:8095

Riveted Wooden Trellis
W18 xT5 mm Section

Code	Size	40'GP
001B-2A	180 x 30 cm	64606
002B-2A	180 x 45 cm	51299
003B-2A	180 x 60 cm	39506
004B-2A	180 x 90 cm	24370
005B-2A	180 x 120 cm	18695
010B-2A	200 x 100 cm	21324
011B-2A	300 x 100 cm	17569

W18 xT8 mm Section

Code	Size	40'GP
001D-2A	180 x 30 cm	26919
002D-2A	180 x 45 cm	21375
003D-2A	180 x 60 cm	20308
004D-2A	180 x 90 cm	16461
005D-2A	180 x 120 cm	15579
010D-2A	200 x 100 cm	17770
011D-2A	300 x 100 cm	14641

Riveted Wooden Trellis
W18 xT5 mm Section

Code	Size	40'GP
001E-2A	180 x 30 cm	64606
002E-2A	180 x 45 cm	51299
003E-2A	180 x 60 cm	39506
004E-2A	180 x 90 cm	24370
005E-2A	180 x 120 cm	18695
010E-2A	200 x 100 cm	21324
011E-2A	300 x 100 cm	17569

W18 xT8 mm Section

Code	Size	40'GP
001F-2A	180 x 30 cm	26919
002F-2A	180 x 45 cm	21375
003F-2A	180 x 60 cm	20308
004F-2A	180 x 90 cm	16461
005F-2A	180 x 120 cm	15579
010F-2A	200 x 100 cm	17770
011F-2A	300 x 100 cm	14641

Wooden Roll Border
49189
L150 x D3 x H17.5 cm
40'GP:6800

Wooden Flat Top Roll Border
251N-1 L180 x D3 x H15 cm 40'GP:5256
251N-2 L180 x D3 x H22 cm 40'GP: 4061
251N-3 L180 x D3 x H30 cm 40'GP: 2792

Wooden Sharp Top Roll Border
251I-1 L180 x D3 x H15 cm 40'GP:6048
251I-2 L180 x D3 x H22 cm 40'GP:3718
251I-3 L180 x D3 x H30 cm 40'GP:3122

Wooden Roll Border
N220905-1
W90 x D6 x H17.5 cm 40'GP:5230
N220905-2
W156 x D6 x H17.5 cm 40'GP: 3090

Brass Pinned Wooden Trellis
W18 xT3 mm Section

Code	Size	40'GP
001C-2A	180 x 30 cm	102609
002C-2A	180 x 45 cm	81475
003C-2A	180 x 60 cm	62745
004C-2A	180 x 90 cm	43005
005C-2A	180 x 120 cm	32990
010C-2A	200 x 100 cm	37630
011C-2A	300 x 100 cm	31004

W18 xT5 mm Section

Code	Size	40'GP
001A-2A	180 x 30 cm	64606
002A-2A	180 x 45 cm	51299
003A-2A	180 x 60 cm	39506
004A-2A	180 x 90 cm	24370
005A-2A	180 x 120 cm	18695
010A-2A	200 x 100 cm	21324
011A-2A	300 x 100 cm	17569

Reveted Expanding Triangle Trellis

W18 xT5 mm Section

Code	Size	40'GP
031BA	90 x 90 cm	60924
032BA	180 x 90 cm	34500
033BA	75 x 150 cm	44240
034BA	90 x 180 cm	32573
035BA	120 x 240 cm	20628

W18 xT8 mm Section

Code	Size	40'GP
031CA	90 x 90 cm	36103
032CA	180 x 90 cm	21083
033CA	75 x 150 cm	26728
034CA	90 x 180 cm	19001
035CA	120 x 240 cm	11934

Accordion Fence
131D
W150 x H89 cm
40'GP:4927

Accordion Fence
131K
W150 x H102 cm
40'GP:3283

Accordion Fence
131C-1
W120 x H80 cm
40'GP:3283

Accordion Fence
171R
W110 x H44 cm
40'GP:12008

WOODEN LATTICE & ARCH

拱门系列

LD-0545

Round-Top Lattice

CODE	SIZE
092B-1A	90 x 60 cm
093B-1A	120 x 60 cm
094B-1A	150 x 60 cm
095B-1A	180 x 60 cm
096B-1A	90 x 90 cm
097B-1A	120 x 90 cm
098B-1A	150 x 90 cm
099B-1A	180 x 90 cm

Round-Top Lattice

CODE	SIZE
092G-1A	96 x 60 cm
093G-1A	126 x 60 cm
094G-1A	156 x 60 cm
095G-1A	186 x 60 cm
096G-1A	96 x 90 cm
097G-1A	126 x 90 cm
098G-1A	156 x 90 cm
099G-1A	186 x 90 cm

Wooden Picket Fence

176F-1: 105 x 60 cm 40'GP:7095
176F-2: 180 x 60 cm 40'GP:3898

Wooden Fixed Fence

176S-1: 180 x 30 cm 40'GP:7796
176S-2: 180 x 60 cm 40'GP:3898

Wooden Lattice

CODE	SIZE	40'GP
092A-1A	90 x 60 cm	2607
093A-1A	120 x 60 cm	1966
094A-1A	150 x 60 cm	1578
095A-1A	180 x 60 cm	1318
096A-1A	90 x 90 cm	1757
097A-1A	120 x 90 cm	1325
098A-1A	150 x 90 cm	1063
099A-1A	180 x 90 cm	888

KIMPORT

wooden lattice & Arch

拱门Arch

Wooden Arch
158D
W170 x D67 x H202 cm
40'GP:470

Wooden Arch
158B
W107 x D64 x H200 cm
40'GP:483

Wooden Arch
158049
W162 x D66 x H203 cm
40'GP:496

Wooden Arch
07713
L113 x D40 x H221 cm
40'GP:1054

Wooden Arch
158013
W160 x D45 x H230 cm
40'GP:431

Wooden Arch
158035
W122 x D61 x H213 cm
40'GP:426

Wooden Arch
158031
W133 x D46 x H240 cm
40'GP:308

Wooden Arch
158010
W145 x D70 x H206 cm
40'GP:325

Wooden Lattice Planter

带盆花架

Lattice Planter & Plant Stand

带盆花架

LD-0545

Lattice Planter
H109FB-1KD
45x30x135cm
40'GP:1100

Large Lattice Planter
109FB-3
W80 x D30 x H120 cm
40'GP:776

Lattice Planter with wheels
H109FB-TR22
W45 x D30 x H154cm
40'GP:1450

Lattice Planter
DS4528
W45 x D28.5 x H80 cm
40'GP:2320

Lattice Planter
QS1704-2
W60 x D28.5 x H100cm
40'GP:1858

Lattice Planter
D628
W75 x D30 x H150 cm
40'GP:640

Lattice Planter
D628S
W45 x D30 x H150 cm
40'GP:1060

Lattice Planter
H109FB-1B
W45 x D30 x H135 cm 40'GP:1180
H109FB-3B
W90 x D30 x H135 cm 40'GP:580

Lattice Planter
H158N-1
W34 x D34 x H135 cm
40'GP:1734

Lattice Planter
P31012
W35 x D35 x H135cm
40'GP:1490

Lattice Planter
106FA-1
W60 x D28.5 x H100 cm
40'GP:1411

Lattice Planter
P31017
W116 x D42 x H130 cm
40'GP:362

Lattice Planter
158V
W90 x D45 x H154 cm
40'GP:645

Lattice Planter
P31019
W60 x D30 x H100 cm

Wooden Plant stand
151115-N
W100 x D35 x H110CM
40'GP:1258

Wooden planter
L210423-2
W58 x D38 x H75cm
40'GP:1760

Wooden Plant stand
FR11018
W84 x D59 x H56 cm
40'GP:3401

Wooden Plant stand
C06
W85 x D62 x H70 cm
40'GP:1106

Wooden Raised planter
P31014
W60.5 x D40 x H150cm
40'GP:1460

Wooden Plant stand
FR33001
W45 x D42 x H120cm
40'GP:1620
FR33002
W45 x D42 x H120cm
40'GP:1410
FR33003
W45 x D38 x H138cm
40'GP:1000

Wooden Plant stand
13014
W38 x D62 x H94 cm
40'GP:1551

wooden raised planter
13007
W60 x D70 x H128 cm
40'GP:2415

Lattice Plant Stand
DSR7550b
W75xD50xH166CM
40'GP:620
DSR6050b
W60xD50xH166CM
40'GP:763

Lattice Plant Stand
DSR7550
W75xD50xH166CM
40'GP:551
DSR6050
W60xD50xH166CM
40'GP:679

Lattice Plant Stand
DSR6069b
W60xD69xH193CM
40'GP:588
DSR7569b
W75xD69xH193CM
40'GP:551

Lattice Plant Stand
DSR6069
W60xD69xH196CM
40'GP:529
DSR7569
W75xD69xH196CM
40'GP:497

Wooden Plant stand
FR33007
W54 x D18 x H41 cm
40'GP:6590

Wooden Plant stand
FR33008
W60 x D24 x H56 cm
40'GP:6300

Wooden Plant stand
DS-9731
W97 x D31 x H87 cm
40'GP:1968

Wooden Plant stand
59012
W107 x D40 x H110 cm
40'GP:1271

Wooden Plant stand
DS3973
W39 x D41 x H73 cm
40'GP:2772

Wooden Plant stand
DS5824
W88 x D24 x H71 cm
40'GP:2271

Wooden Plant stand
DS5033
W50 x D33 x H59 cm
40'GP:3540

Wooden Plant stand
DS5035
W50 x D35 x H91 cm
40'GP:1467

Wooden Raised Planter
FR33006
W58xD38.5xH118cm
40'GP:852

Wooden Lattice Plant stand
120PE-1 W61 x D43 x H110 cm 40'GP:1027
120PE-2 W51 x D36 x H90 cm 40'GP:1487
120PE-3 W40 x D33 x H75 cm 40'GP:2242

Hanging flower shelves
643953
W80 x D50 x H22 cm
40'GP:1679

Wooden Plant stand
FR33005
W36.5xD34xH110cm
40'GP:1360

WOODEN RAISED PLANTER

种菜盆

Wooden Raise Planter

Wooden Planter
WP220208
W86.5 x D46 x H81 cm
40'GP:1930

Wooden Planter
P31001
W85.5 x D45 x H81cm
40'GP:1374

Wooden Planter
P31004
60x30x73.5cm 40'GP:2230
P31005
60x30x45cm 40'GP:2760

Wooden Planter
P31006
W81.5 x D59.5 x H80cm
40'GP:1160

Wooden Planter
WP0113
W84 x D40 x H98cm
40'GP:1400

Wooden Planter
WP220905-3
W66 x D30 x H50 cm
40'GP:2320

Wooden Planter
SP35003
W93.5 x D70 x H49.5
40'GP:2475

Wooden Planter
P31016
W92 x D92 x H35cm
40'GP:3410

Wooden Planter
GB210527-2
W120 x D80 x H20 CM
40'GP:2760

Wooden Planter
13WP-01
W89 x D33 x H76 cm
40'GP:2040

Wooden Planter
622029
W80 x D40 x H75 cm
40'GP:1549

Wooden Planter
P31011
D107.5 x D40 x D75cm
40'GP:1650

Wooden Planter
WP220905-1
W100 x D25 x H90 cm
40'GP:687

Wooden Planter
P31008
W80 x D40 x H130cm
40'GP:898

Wooden Planter
P31003
W64.5 x D64.5 x H73cm
40'GP:2020

Wooden Growing Bed
10866
W123 x D114 x H25 cm
40'GP:1390

Wooden Growing Bed
10867
W100 x D100 x H22 cm
40'GP:2585

WOODEN BARREL & PLANTER

花盆&花箱

KIMPORT

Wooden Barrel & Planter

圆桶&花盆

Wooden Planter

P31020
W60 x D29.5 x H25cm 40'GP:3515
P31021
W45 x D39 x H25cm 40'GP:2900

Wooden Planter

110131 W30 x D30 x H41.8 cm 40'GP:3630
110132 W60 x D20 x H33.5 cm 40'GP:3055

Wooden Planter
P31013
W30 x D30 x H30cm
40'GP:5480

Wooden Raised Planter
P31010
W80 x D62 x H99 cm
40'GP:1620

Wooden Raised Planter
P31022
W50 x D30 x H78cm
40'GP:3052

Wooden Raised Planter
P31007
W79.5 x D66 x H70cm
40GP:1664

300C
Wooden Barrel set of 4
XL: Φ50 x H26 cm
L: Φ44 x H23 cm
M: Φ38 x H20 cm
S: Φ32 x H17 cm
40'GP:794

300FV
Wooden Barrel set of 3
L: Φ42 x H28 cm
M: Φ36 x H24 cm
S: Φ30 x H19 cm
40'GP:1033m

300F
Wooden Barrel set of 3
L: Φ42 x H32 cm
M: Φ36 x H27 cm
S: Φ30 x H23 cm
40'GP:908

300FQ
Wooden Barrel set of 3
L: W46 x D27 x H20 cm
M: W40 x D23 x H17 cm
S: W33 x D19 x H14 cm
40'GP:2055

306A
Wooden Barrel set of 4
XL: Φ35 x H44 cm
L: Φ29 x H40 cm
M: Φ24 x H33 cm
S: Φ19 x H26 cm
40'GP:1029

305
Wooden Barrel set of 3
L: W51 x D28 x H20 cm
M: W45 x D23 x H16 cm
S: W39 x D18 x H12 cm
40'GP:1832

234A
Wooden Barrel set of 4
XL:W46 x D29 x H18 cm
L: W41 x D25 x H16 cm
M: W35 x D21 x H14 cm
S: W30 x D17 x H12 cm
40'GP:2120

300FQ-M14
Wooden Barrel set of 2
L: W33 x D19 x H14 cm
S: W29 x D15 x H11 cm
40'GP:6178

Wooden Planter set of 2
158VL
W76xD35xH30cm 40'GP:1530
158VS
W58xD27xH20cm 40'GP:2655

140402
Wooden Planter
L: W34 x D23 x H12 cm
M: W29 x D19 x H11 cm
S: W24 x D15 x H9.8 cm
40'GP:4603

P31023
Wooden Planter set of 4
XL:W40 x D35 x H21 cm
L: W35 x D30 x H18 cm
M: W30 x D25 x H15 cm
S: W25 x D20 x H12 cm
40'GP:1750

345R
Wooden Planter set of 3
L: W41 x D31 x H22 cm
M: W36 x D26 x H20 cm
S: W31 x D21 x H18 cm
40'GP:1778

Wooden Planter
110131b
W30 x D30 x H38 cm
40'GP:4260

Wooden Planter
110132b
L60 x D20 x H30 cm
40'GP:3312

Wall Barrel
318
W22 x D15 x H25 cm
40'GP:8424

Wooden Planter
335-HB14
W33 x D33 x H33 cm
40'GP:3945

Wooden Barrel
306
L80xW32xH25cm
40'GP:1728

Wooden Planter
P372018
L37 x D20 x H18 cm
40'GP:11830

Wooden Raised Planter
WP0112
W70 x D40.5 x H115cm
40'GP:1763

Wooden Raised Planter
P31002
W65 x D50 x H78 cm
40'GP:1450

Wooden Planter
70302
W35 x D35 x H40 cm 40'GP:3729
70402
W40 x D40 x H46 cm 40'GP:2740
70415
W51 x D51 x H56 cm 40'GP:1787

WOODEN DECORATION

装饰系列

Wooden Decoration

装饰系列

Garden Obelisk

54003
W42 x D42 x H190cm
40'GP:1095
54006
W34 x D34 x H150cm
40'GP:1827
54120
W29 x D29 x H120cm
40'GP:1562

Windmill
335A
W42 x D28 x H60 cm
40'GP:981

Bridge
B34001
W149 x D65.5 x H60cm
40'GP:580

Wishing Well
M323H-SM19
W84 X D49 X H37.5cm
40'GP:2150

Wheel Barrow Planter
142B-M14
W83 x D32 x H33cm
40'GP:4909

Bridge
B34002
W100 x D50 x H41 cm
40'GP:906

Hanging Planter
13009
W36xD21xH23cm
40'GP:2807

Wagon Wheel
GL07-1
ϕ30 x T3cm
40'GP:11328
GL07-2
ϕ45 x T3cm
40'GP:5251
GL07-3
ϕ60 x T3cm
40'GP:3017

Wheel Barrow Planter
DS4421
W44 x D21 x H16.5cm
40'GP:10283

Wishing Well
DS6832
W32 x D30 x H68cm
40'GP:480

Wishing Well
M323H
W41 x D41 x H84cm
40'GP:3055

Wishing Well
DS-5511
W55 x D55 x H116cm
40'GP:1086

Train Planter
DT02-1
W49xD19xH26
40'GP:2239

Wooden Mover
09095
W30 x D30 x H8.5 cm
40'GP:9200

Wooden Mover
09096
30x30x8.5cm
40'GP:9200

Wooden Mover
09097
W60 x D30 x H8.5cm
40'GP:5200

Wooden Mover
09090
W30 x D30 x H8.5 cm
40'GP:9200

Wooden Panel
181DG-1
W30xD30xH2.6cm
40'GP: 20200
182DG-1
W45xD45xH2.6cm
40'GP: 9300



Wooden Panel
181CG-1
W30xD30xH2.6cm
40'GP: 20200
182CG-1
W45xD45xH2.6cm
40'GP: 9300



Wooden Panel
181BG-1
W30xD30xH2.6cm
40'GP: 20200
182BG-1
W45xD45xH2.6cm
40'GP: 9300

Wooden Panel
Q183-1
W30xD30xH2.4cm
40'GP: 23000
Q183-1
W45xD45xH2.4cm
40'GP: 10000

Wooden Pathway
181MG-1
L120 x W38cm
40'GP: 6780

Wooden Pathway
181MG-2
L120 x W38cm
40'GP: 7436

GREEN HOUSE

阳光房系列

Green House

阳光房

Green House
GH10780
W120 x D80 x H58cm
40'GP:840

Green House
10779-QS19
W69 x D49 x H120cm
40'GP:502

Green House
GH10779
W69 x D49 x H120cm
40'GP:454

Green House
P31009/GH38001
102x50x120cm
40GP:651

Green House
GH14001
W92.5xD50xH90cm
40'GP:660

Green House
08895-QS19
64.2x100x40cm
40'GP:1100

Wooden Growing Bed
P31018
L100 x D64 x H20cm
40'GP:3130

Green House
GH14002
W90xD44xH28cm
40'GP:1800

Green House
GH11772
W120xD60xH142cm
40'GP:186

Green House
GH10778
W89 x D82 x H59cm
40'GP:980

Green House
GH10782
W98xD98xH62.5cm
40'GP:401

Green House
GH10781
W82xD82xH40cm
40'GP:925

WORK BENCH & TOOL CASE

工作台&
工具箱

Work Bench & Tool Case

工作台&工具箱

Work Bench
WB32002
W76 x D37 x H90cm
40'GP:1090

Work Bench
QS1704-3N
76X37X92cm
40'GP:1053

Work Bench
376321
78x38x92cm
40'GP:1120

Work Bench
WB0076
W86xD50xH100cm
40'GP:1162

Work Bench
WB32001
82X40X126cm
40'GP:1000

Work Bench
WB0073
W93xD60xH152cm
40'GP:443

Work Bench
WB0075
W70xD41xH87cm
40'GP:1539

Work Bench
SM0074
W100xD51xH87cm

Air-conditioner Cover
117PC-1
W90xD45xH75cm
40'GP:744

Work Bench
WB32004
W117 x D48 x H121cm
40'GP：590

Work Bench
WB32003
W112 x D45.5 x H124.5cm
40'GP:487

Tool Case
T36002
W72 x D46.5 x H91.5cm
40'GP：630
Tool Case (H)
T36003
W45 x D45 x H160cm
40'GP：467
Tool Case (M)
T36004
W76 x D55 x H117cm
40'GP：580

Bin Cover
ST-1
W67 x D81 x H120 cm
40'GP:364

Bin Cover
ST-2
W134 x D81 x H120 cm
40'GP:253

Wooden Log Store
CB001-N
W116 x D64 x H123cm
40'GP:425

Bin Cover
ST-4
W53 x D66 x H102cm
40'GP:580

Tool Case
451-YC
W77 x D50 x H193cm
40'GP:230

Tool Case
T36001
W83 x D45.5 x H168cm
40'GP：364

OUTDOOR GARDEN FOR KID

儿童户外系列

Outdoor Gardening for Kids
儿童户外系列

Kids Picnic Table

PT35006
W127 x D127 x H49 cm
40'GP:850

Kids Picnic Table

PT1201
W120xD120xH50cm
40'GP:644

Sand Pit

SP200227-1
L199 x W112 x H134cm
40'GP:465

Picnic table

TC37005
Table:W120 x D120 x H57 cm
Chair:W23 x D22 x H27 cm
40'GP:680

Play House

PH210615-1
W136 x D97 x H150 cm
40'GP:233

Play House
PH289
W125 x D126 x H170 cm
40'GP:177

Play House
PH290
W127 x D122 x H165 cm
40'GP:110

Play House
PH292
W140 x D140 x H148 cm
40'GP:175

Play House
PH303MB
W133 x D175 x H207 cm
40'GP:86

Sand Pit
SWB0411-1
118x118x118cm
40'GP:852

Sand Pit
SP35001
W150 x D45 x H20cm
40’ GP:960

Sand Pit
SP35005
120x120x23.5cm
40'GP:2410

Sand Pit
SP35004
W118 x D118 x H20cm
40'GP:1208

Sand Pit
SB0615-1
L90xW90xH16
40'GP:3410

Sand Pit
SP35002
135x125x20.5cm
40'GP:1074

Sand Pit
SB002
W120 x D120 x H22 cm
40'GP:697

Kids Picnic Table
GL010-L
L89 x D79 x H50cm
40'GP:1790

Kids Picnic Table
DS-8979
L89 x D78 x H50cm
40'GP:2565

Kids Picnic Table
PT1301
W105 x D89 x H49.5cm
40'GP:737

Children's four person table and Bench
TC37006
Table:W107 x D58 x H48 cm
Bench:W90.5 x D29.5 x H27 cm
40'GP:426

Sand Pit
SB006
W130 x D103 x H135 cm
40'GP:290

Play House
PH301MB
W145 x D180 x H225 cm
40'GP:91

Kids lounge chair
TC37008
Chair:W91 x D48 x H51cm
Table:W30.9 x D27 x H31cm
40'GP:805

Kids lounge chair
TC37007
W92.5 x D81.5 x H88 cm
40'GP:670

Adirondack Chair for Children
TC37004
W54 x D48 x H62 cm
40'GP:1610

OUTDOOR FURNITURE
户外家具

Grape Trellis with Bench
DSPT300
W300 x D130 x H210
40'GP:210

Grape Trellis with Bench
C0070
W160xD50xH198cm
40'GP:553

Grape Trellis with Bench
DSPT182
W182 x D86.5 x H192
40'GP:191

Outdoor Furniture
户外家具

Garden Leisure Chair
DSY14155
W141 x D55 x H83 cm
40'GP:340

Garden table with 8 seats
DSYZ179
W179 x D179 x H74.5cm
40'GP:285

Garden Leisure Chair with Box
DSY12559
W125 x D59.5 x H88 cm
40'GP:570

Garden table with 4 seats
DS-7369
Table:ϕ73 x H69 cm
Seat:ϕ30 x H37 cm
40'GP:381

Garden Bench
DS5033
W103 x D55 x H75 cm
40'GP:491

Wooden Table with 4 Chairs
TC401N
Table size: W75 x D75 x H73 cm
Chair size: W48 x D43 x H79 cm

Wooden Table with 2 Chairs
TC201
Table size: W64.5 x D64.5 x H71 cm
Chair size: W43.5 x D54 x H82 cm

Kid Bench
FR33004
63x30x53cm

Leisure Chair
WC37010
W63 x D83 x H102cm

Adirondack Chair
WC37009
W85 x D72 x H86cm

Adirondack Chair
PT1302
L92 x W79 x H90 cm

Garden Table with 2 benches
010027
150x120x75cm
40'GP:395

Garden Table with 2 benches
TC37001
164.5x120x71.5cm
40'GP:600

Adirondack Chair
BH1610
L160 x W69.5 x H86 cm

Adirondack Chair
FC101
L142 x W77.5 x H93 cm

Wooden Swing
DS-1512
W165 x D112 x H159cm
40'GP:364

Wooden Swing
DS-1914
W214 x D141 x H162cm
40'GP:229

Garden Bench
WC1803-3
W120 x D57 x H92cm
40'GP:415

Garden Leisure Chair
C202
L160 x D55.5 x H89 cm

BIRD & INSECT HOUSE
鸟屋&昆虫房

Bird House
426694-B
L17xW17xH17cm
40'GP:9870

Bird House
B91532
L21xW18.5xH20cm
40'GP:6307

Bird House
B91533
L20xW20xH17cm
40'GP:8113

Bird House
B91537
W14xD15xH30cm
40'GP:7087

Bird House
BH39004
W16xD16xH26cm
40'GP:6393

Bird House
B91505
W16xD12xH22.5cm
40'GP:12802

Bird House
14226
W16xD15.5xH30.5cm
40'GP:7576

Bird House
B13016
W16xD14xH23cm
40'GP:3196

Bird House
B91536-M20
W20xD15.5xH28cm
40'GP:5716

Bird House
B13008
W18xW15xH30cm
40'GP:3282

Bird House
B13001
W19xW15xH25cm
40'GP:3486

Bird House
B13013
W19xW14xH25cm
40'GP:7055

Bird House
B13018
W14.5xW10xH21cm
40'GP:14555

Bird House
B13015
W21xW15xH27cm
40'GP:5610

Bird House
1B0228-SS18
W19xW11xH31cm
40'GP:11300

Bird House
B13011
W20xW15xH32.5cm
40'GP:4930

Bird House
B91531
W9xW12xH20cm
40'GP:16651

Bird House
B91541
W17xW17xH27cm
40'GP:6119

Bird House
B91533
W20xW20xH17cm
40'GP:8113

Bird House
B91536
W20xW15.5xH28cm
40'GP:5716

Bird House
140925
W13.5xW13xH16cm
40'GP:17840

Bird House
150116
W18xW13xH20.5cm
40'GP:10175

Bird House
150109
W18xW17.5xH28cm
40'GP:5610

Bird House
150123
W12xW12xH16cm
40'GP:15816

Bird House
SM0608C-23AL
W15.3xW15xH22.5cm
40'GP:9280

Bird House
422694-D
W15.5xW15.5xH24cm
40'GP:9660

Bird House
422694-E
W15.5xW15.5xH24cm
40'GP:9660

Bird House
150214
W15xW12xH27cm
40'GP:10230

Bird House
B13003
W19xW17xH18.5cm
40'GP:4348

Bird House
B91505
W16xD12xH22.5cm
40'GP:12802

Bird House
B91507-W16
W15xD15.5xH24.5cm
40'GP:12803

Bird House
BH39001
W18xD18xH28.5cm
40'GP:5430

Bird Feeder
A03539
W26xD28xH22cm
40'GP:6230

Bird Feeder
B0602-WL21
W25xD21xH21cm
40'GP:4212

Bird Feeder
426695-A
W19xD18.8xH15.5cm
40'GP:9280

Bird Feeder
B13014
W16xW15xH22.5cm
40'GP:7055

Bird Feeder
B14009
W14.5xW10xH16.5cm
40'GP:19034

Bird Feeder
B14014
W17xW16xH20.5cm
40'GP:13859

Bird Feeder
B14016
W14xW14xH23cm
40'GP:11034

Bird Feeder
B0628-Y1
W19xD7.7xH28cm
40'GP:11520

Bird Feeder
B0628-Y2
W20.5xD20.5xH25.5cm
40'GP:4760

Bird Feeder
426695-B
W26xD11.5xH22cm
40'GP:7732

Bird Feeder
B13004
W32xW32xH32cm
40'GP:807

Bird Feeder
B14020
W30xW26xH3.4cm
40'GP:17800

Bird Feeder
B14001-1
W30xD26xH22cm
40'GP:3077

Bird Feeder
B14002
W22.5×D22×H21.5cm
40'GP:2887

Bird Feeder
B14004
W23xD20xH23.5cm
40'GP:4513

Bird Feeder
B14019
W30xD4xH26cm
40'GP:2897

Bird Table
B14072
W38xD48xH114cm
40'GP:2897

Bird Table
B91525-M14
W48xD48xH116cm
40'GP:5272

Bird Table
B14022
W43xD34xH135cm
40'GP:749

Bird Table
BT39002
W37.5 x D27.5 x H101cm

Bird Table
B91544
W48xD48xH116cm
40'GP:822

Insect House
141019-10
W21xD18xH6cm
40'GP:15204

Insect House
141019-9
W21xD18xH6cm
40'GP:15204

Insect House
141019-8
W21xD18xH6cm
40'GP:15204

Insect House
621591
14.5x13x14.5cm
40'GP:15100

Insect House
131019
W19.5xD11xH20.5cm
40'GP:10199

Insect House
B11703
W16xD13.5xH22.5cm
40'GP:10357

Insect House
B11706
W16xD13.5xH22.5cm
40'GP:10357

Insect House
150110
W20xD10xH30cm
40'GP:8280

Insect House
IH14007
W18.5xD10xH15.5cm
40'GP:16343

Insect House
IH14008-BN
W18xD8xH20cm
40'GP:16519

Insect House
131005
W18xD14xH20cm
40'GP:9091

Insect House
131015
W23xD14.5xH27cm
40'GP:5333

Insect House
131018
W19xD11xH20.5cm
40'GP:10199

Insect House
M131022—WL19
W19xD7xH21cm
40'GP:16970

Insect House
131020
W15xD15xH21cm
40'GP:13414

Insect House
131022-QS1
W25.5xD11xH30.5CM
40'GP:4764

Insect House
131013
W24xD12xH32.5cm
40'GP:5173

Insect House
131003
W21xD7xH34cm
40'GP:9340

Insect House
131014
W19.5xD8xH26.5cm
40'GP:11136

Insect House
131019
W19.5xD11xH20.5cm
40'GP:10199

Insect House
22050303
W25xD10.5xH30CM
40'GP:6350

Insect House
IH150912
W26xD10xH37CM
40'GP:4600

Insect House
I220310-WL22
W21 x D7 x H31cm
40'GP:10545

Insect House
IH220726-1
W33xD13xH29CM
40'GP:4000

Insect House
IH220726-2
W30xD9xH28.5CM
40'GP:6440

Insect House
131011
W23.5xD8xH32.5cm
40'GP:7756

Insect House
131002
W27.5xD10xH40.5cm
40'GP:4406

Insect House
IH150912-XLX
W26 x D10 x H37cm
40'GP:4680

Insect House
IH131009
W15.5 x D9 x H31cm
40'GP:36521

Insect House
I190419-M20
W18 x D15 x H24cm
40'GP:7560

Insect House
IH220830
W13.5 x D8.5 x H26 cm
40'GP:15670

Insect House
131021
W28 x D10 x H33.5 cm
40'GP:5313

Insect House
150110
W20 x D10 x D30cm
40'GP:8280

Insect House
IH1302QG
W28 x D8.5 x H40cm
40'GP:5261

Insect House
621590
W23 x D8 x H30cm
40'GP:7130

Insect House
E131022
W25 x D9.5 x H30cm
40'GP:6690

Insect House
171021
W17.5 x D10 x H31cm
40'GP:9060

Insect House
131007
W21 x D7 x H31.5 cm
40'GP:10037

Insect House
IH14002
W27 x D15 x H60 cm
40'GP:2315

Bat House
131026
W24 x D11.5 x H41.5 cm
40'GP:2315

Bat House
131025
W21 x D15 x H39 cm
40'GP:3968

Insect House
IH14009
W43 x D42.5 x H136 cm
40'GP:3333

Hedgehog House
HH2200916-1
W35 x D20.5 x H17 cm
40'GP:4020

Hedgehog House
HB21IH03
W38xL40xH22.5cm
40'GP:725

Hedgehog House
H39003
W34.5 x D26.5 x H24.5 cm
40'GP:7830

Hedgehog House
PH230113
50x42x43cm
40'GP:1700

Butterfly House
B190418-M20
18x15x24cm
40'GP:7560

PET HOUSE

宠物系列

Dog House
D35
W60 x D45 x H48 cm
40'GP:1488

Dog House
D36
W66 x D76 x H71 cm
40'GP:636

Dog House
D310001
W72x D83 x H71 cm

Dog House
HK20220418-1
L 45 x W 45 x H 65 cm
40'GP:1480

Dog House
D310002
W71x D79 x H69 cm

Hen House
H310003
W112x D66 x H102 cm
40' GP:3401

Rabbit House
RB1601-SG
L118 x D50 x H45cm

Rabbit House
R310004
L155 x D77.5 x H97 cm

Dog House
D47
W56 x D66 x H60 cm
40'GP:1111

Hen house
H310005
W113x D50 x H101 cm

1001001

1001111

1001004

1001011D

1001010

1001353

1001009M

1001002

1001021M

1001010

1001291

1001241LG

1001009S

1001009

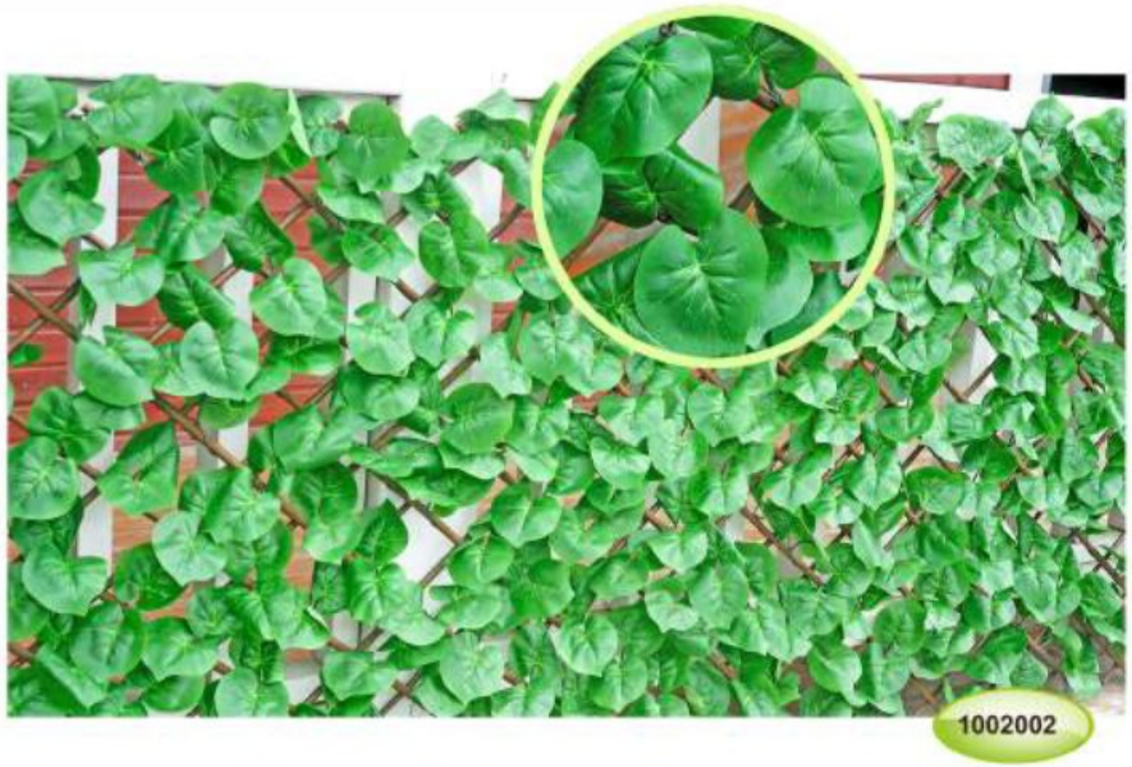

1002181G

1002181R

1002305

1003001

1002305Y

1003262

1003262Y

1003300

1003301

1003302

1003310

1003912

1003912Y

1003251G

1003221R

1003261

1003262R

1003905

1003431

103391

1004001

1004001M

1004012

1004221G

1004221R

1004009S2

1004301

1004705

1004731

1004732

1004803B

1004803C

1004806

1004807

NEW
1004903

1004904

1004011

1004004

1004701

1004711

1004711S

1004010

1004011Y

1004305

Artificial hedge with realistic
leaves and flowers.

WITH FLOWER

1001002F032

1001009F031

1001010F005

1001010F041

1001010F042

1001011F005

1001303F303

1001306F002

1001901F051

1002306F010

1002004F

1001901F030

NEW
1002002F035

1002010F042LED

1004281LED



6050007LED

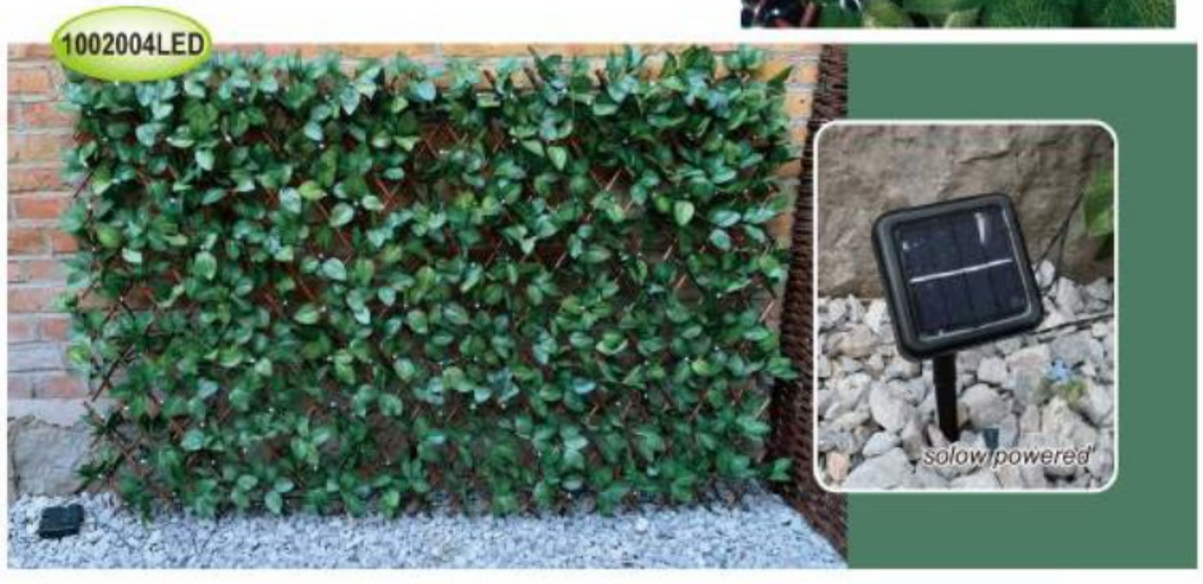
1002004LED
solow powered

With longer petiole, the new leaves stretched out from the trellis, more vivid in your garden.

NEW WPC TRELLIS

ARTIFICIAL LEAF/ GRASS HEDGE FENCE

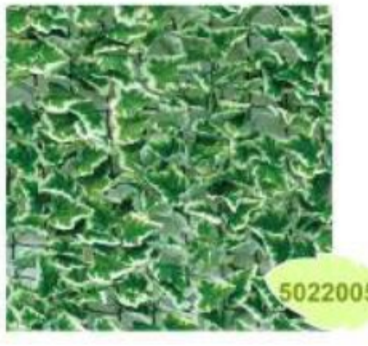

5022792

5030791

5022793

5022794

5030891

GREEN WALL

0.5m×0.5m

6050671

6050755

6050061

6050242

6050261

6050752

6050462F

6050462

6050842

6050759

6050757

6050842

6050235

6050236

6050239

6050240

6050238

6050237

6050246

6050244

6050800AC

6050745

6050763

6050248

6050249

GREEN WALL

0.5m×1m

6015011

6015262R

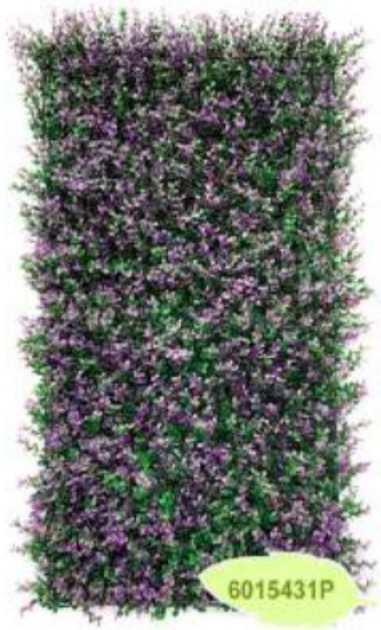

6015431P

6015251

6015146

6015145

GREEN WALL

1m×1m

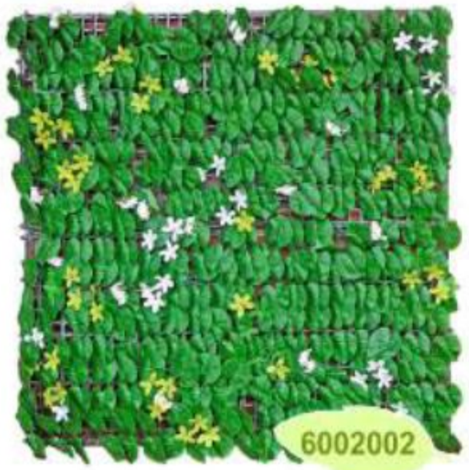
6002002

6002305

6002004

6002308

6002303

6002803

6004004

6004002

6004005

6004308

6004001

6004004

GARLAND & WREATH

3001001

3001003

3001007

3001002

3001009

3001277L

3001277

3001181

3001221

3001569

3001025

3010158

3002001

3002002

3002003

3002004

3002007

3002018

3002005

3002006

3003001

3003002

3003003W

3007045

3004001

3004002

3004004

3007067

3005001

3005007

3005800

3008037

3008040

3008903

3007030

3007034

3007033

3007045

3007075

3007038

3007084

3007087

3007110

3007093

3007003

KIMPORT

3007025

3007113

3008016

3008015

3008026

3007100

3007022

3008028

3008018

3007104

3007023

3008031

3008032

3008033
3008037

2001020

2001201

2003301

2003302

2003303

KIMPORT

2003304

2003305

2003306

2003307

2002020

2002021

2001098

2002011

2002013

PLANT DECO

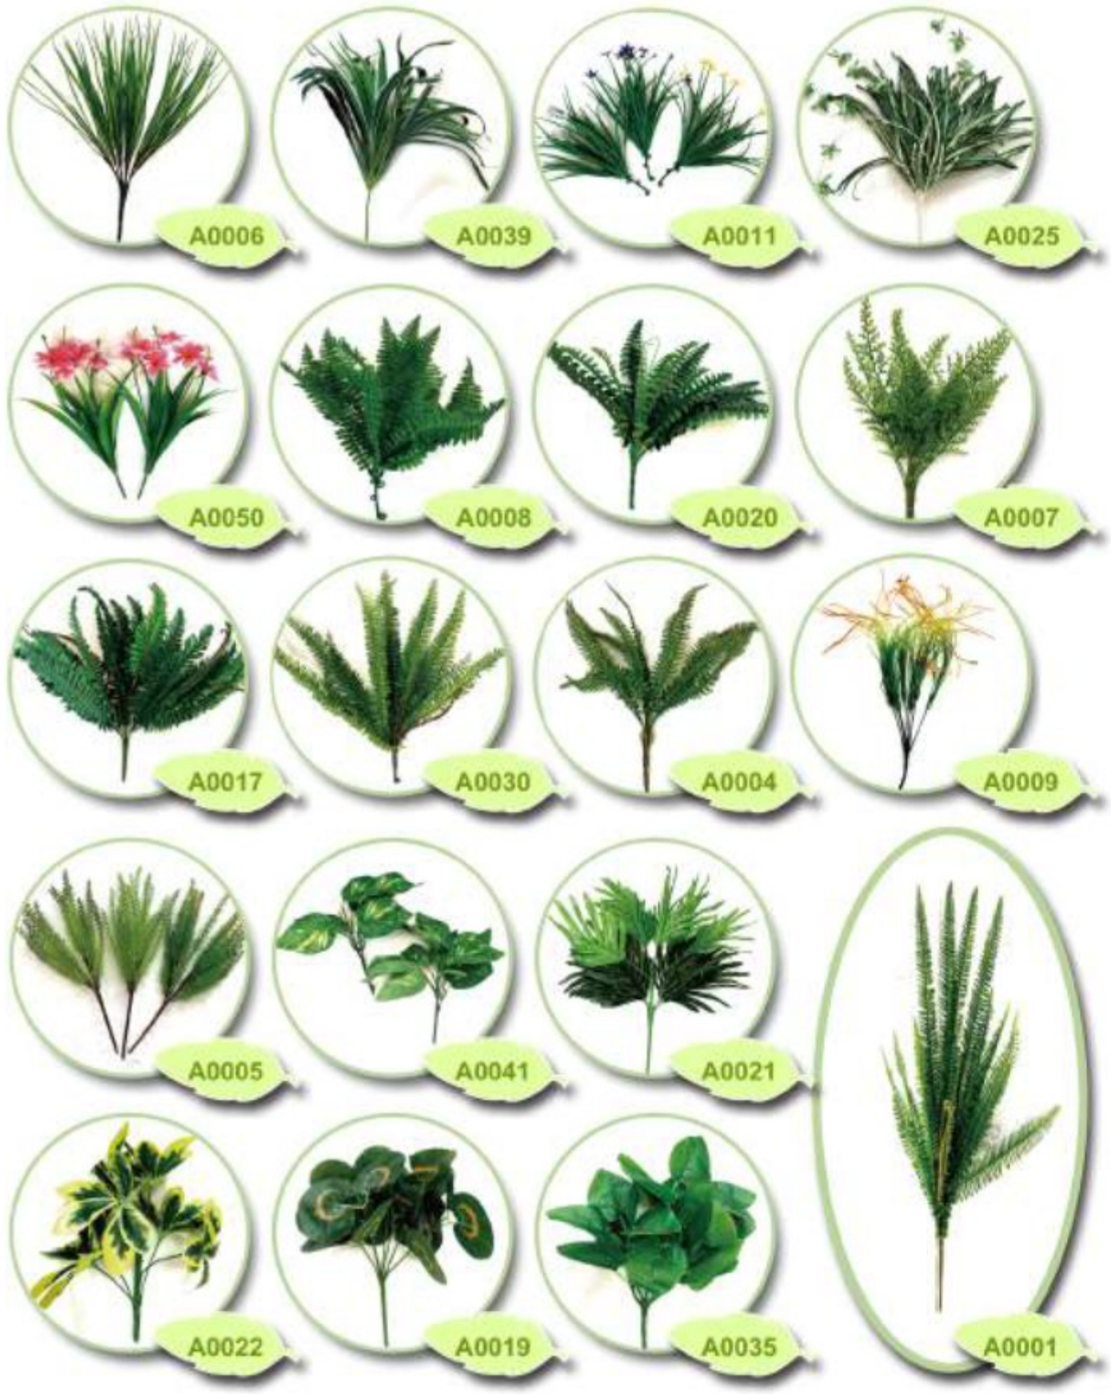
A0006
A0039
A0011
A0025
A0050
A0008
A0020
A0007
A0017
A0030
A0004
A0009
A0005
A0041
A0021
A0001
A0022
A0019
A0035

A0028
A0043
A0027
A0024
A0037
A0042
A0013
A0038
A0026
A0036
A0045
A0044
A0023
A0153
A0152
A0154
A0100
A0040
A0155
END

Recyclable, Low-carbon

Willow fence

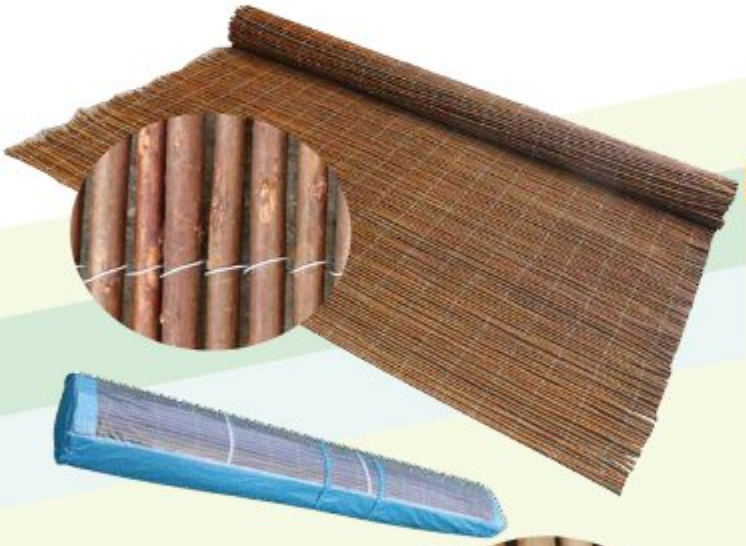

Recyclable, Low-carbon

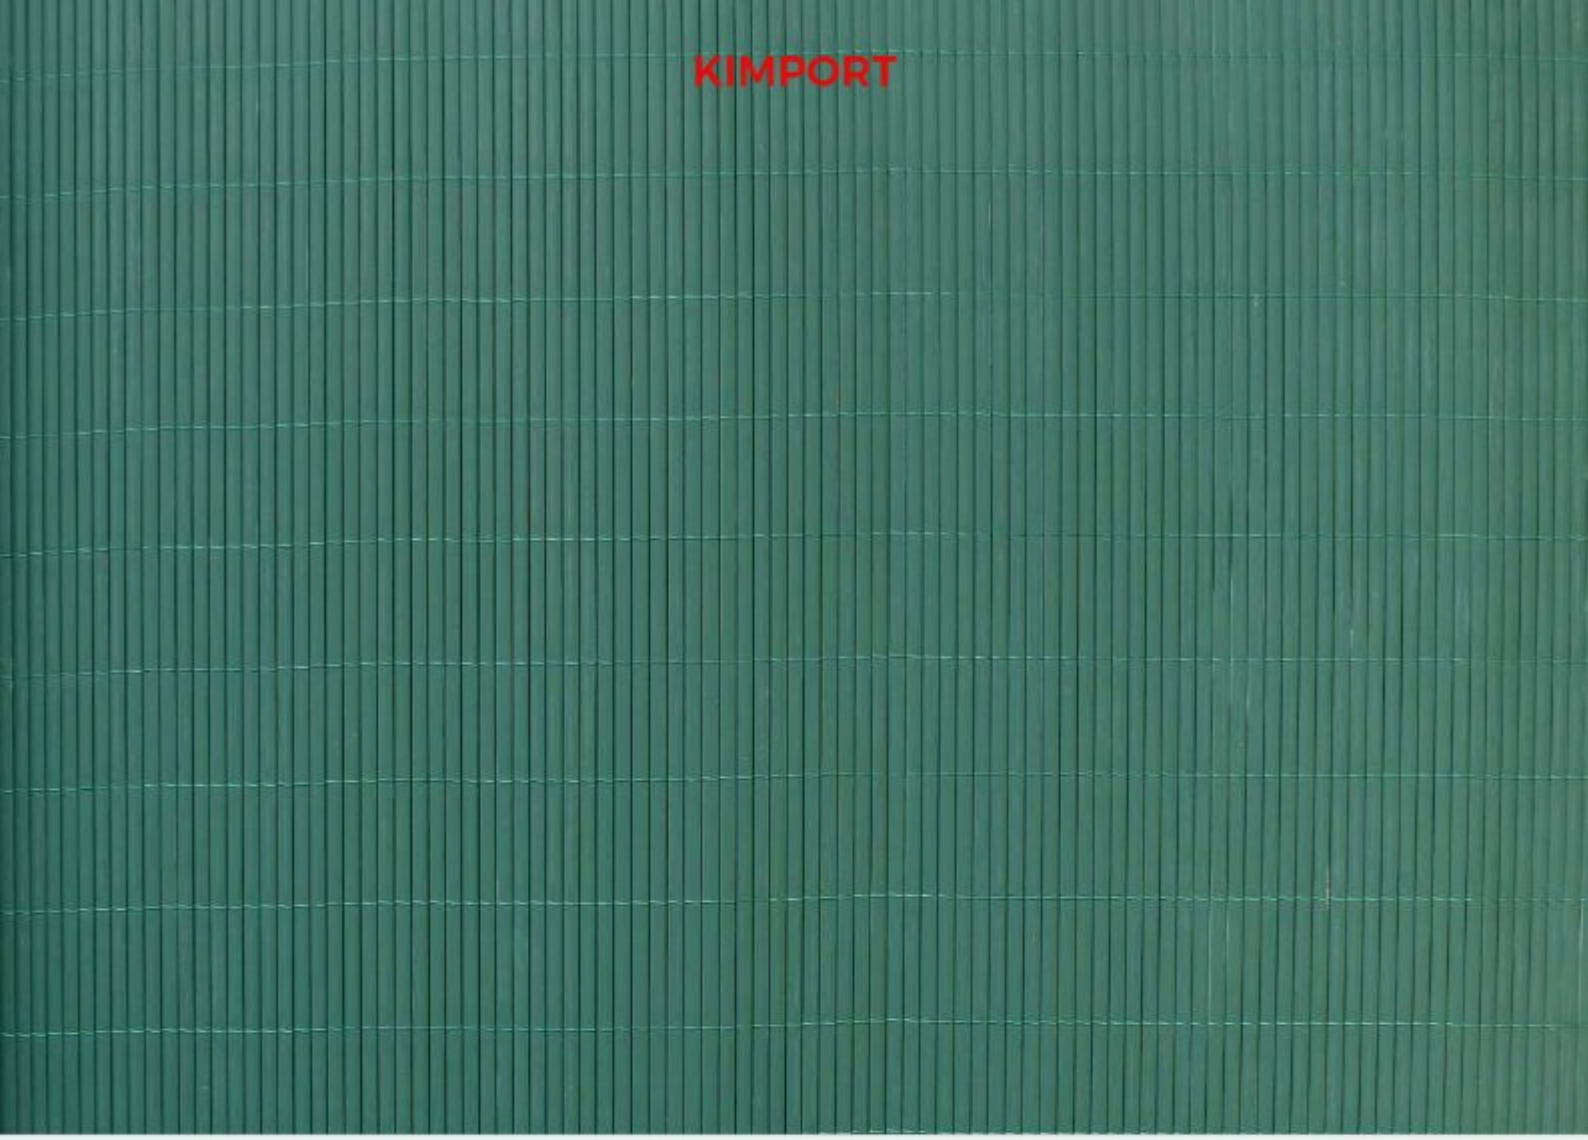

Plastic fences

Recyclable, Low-carbon

Willow expanding trellis

Recyclable, Low-carbon

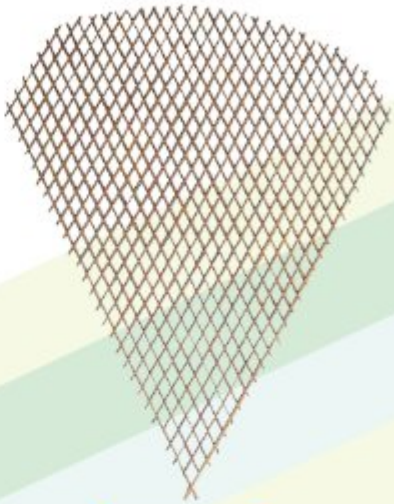

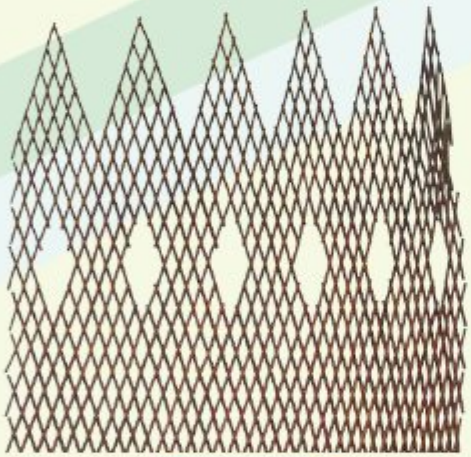

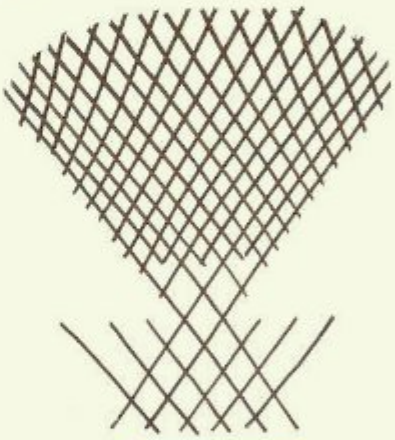

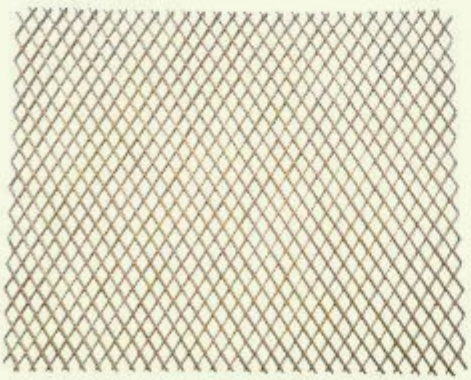

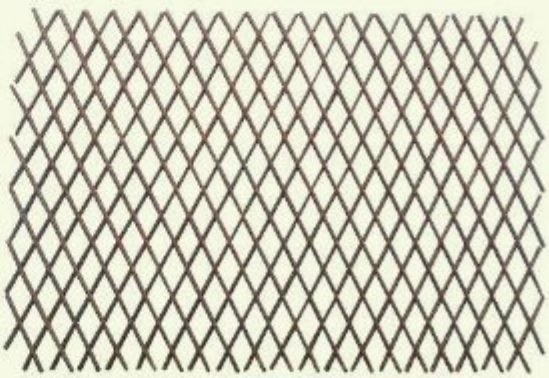

Recyclable, Low-carbon

Expanding willow trellis with leaves decoration

LD-0636

Recyclable, Low-carbon

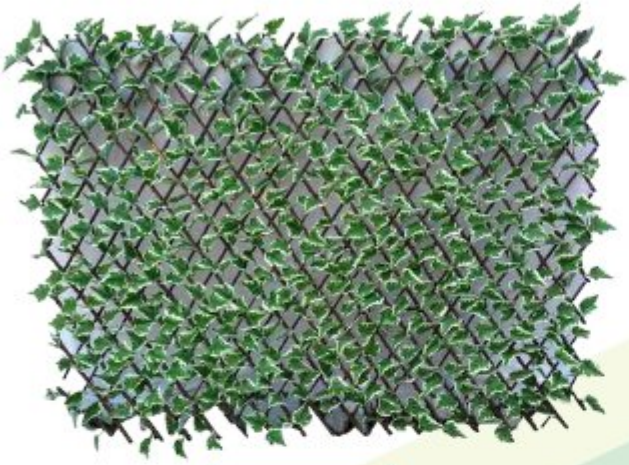

KIMPORT

Do gardening with Golden Building

Recyclable, Low-carbon

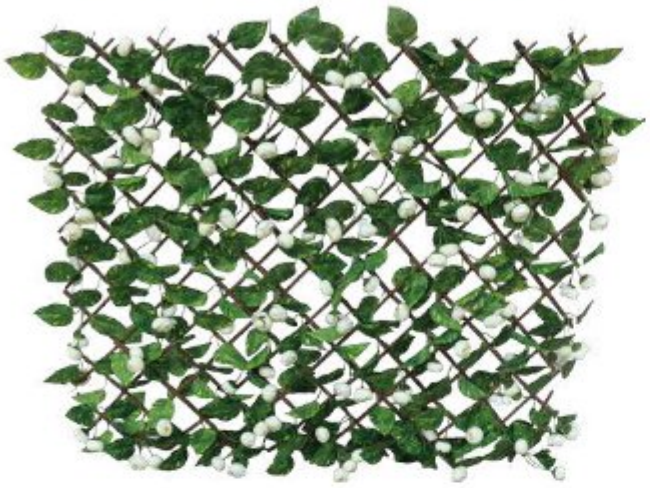

LD-0636

Recyclable, Low-carbon

KIMPORT
Do gardening with Golden Building

Recyclable, Low-carbon

Garden mesh / Plastic netting fencing

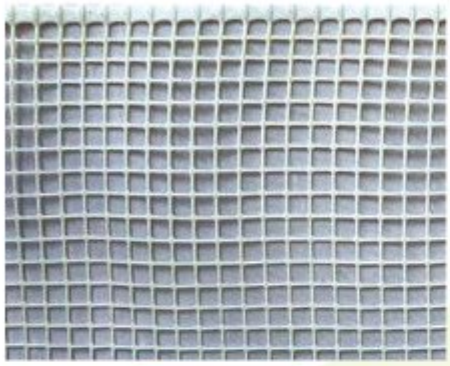

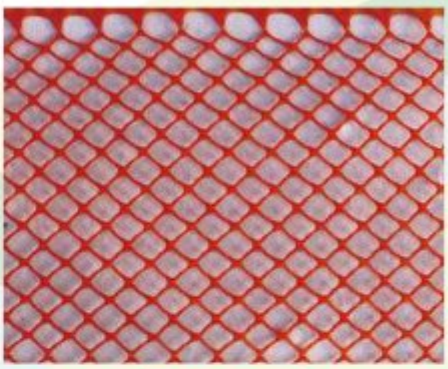

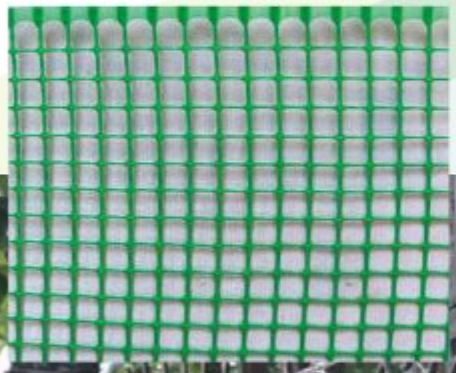

LD-0636

Recyclable, Low-carbon

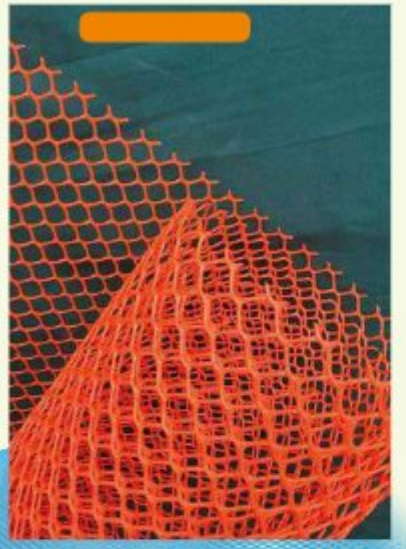

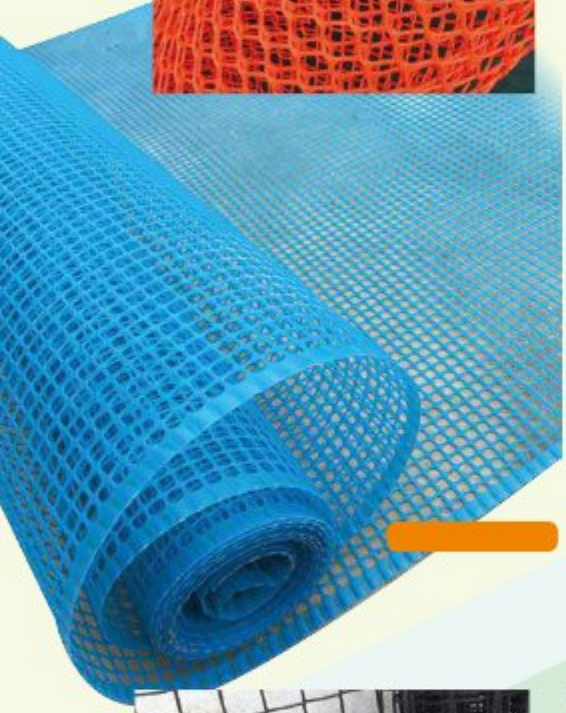

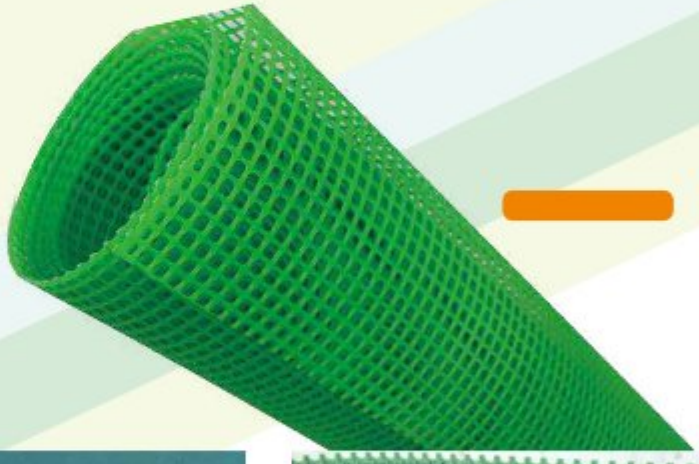

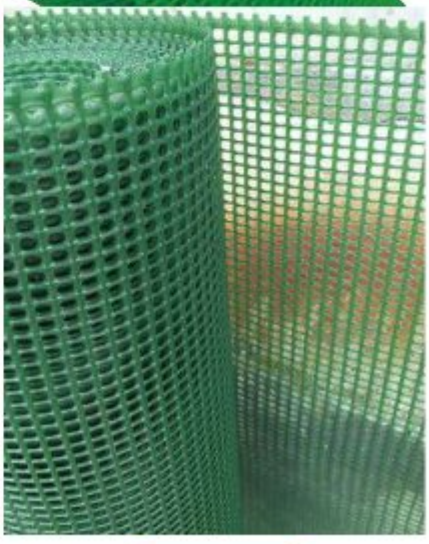

KIMPORT

Do gardening with Golden Building

Recyclable, Low-carbon

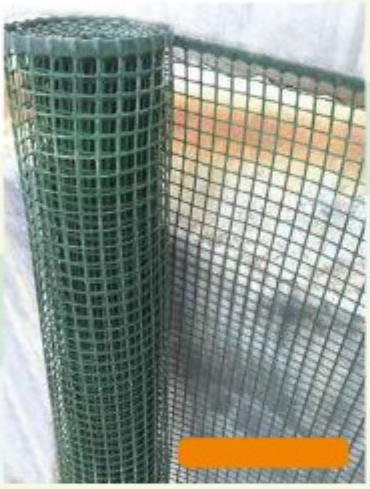

LD-0636

KIMPORT

Do gardening with Golden Building

Recyclable, Low-carbon

Safety fence / Barrier fencing mesh

LD-0636

Recyclable, Low-carbon

Insect mesh / Fine screening

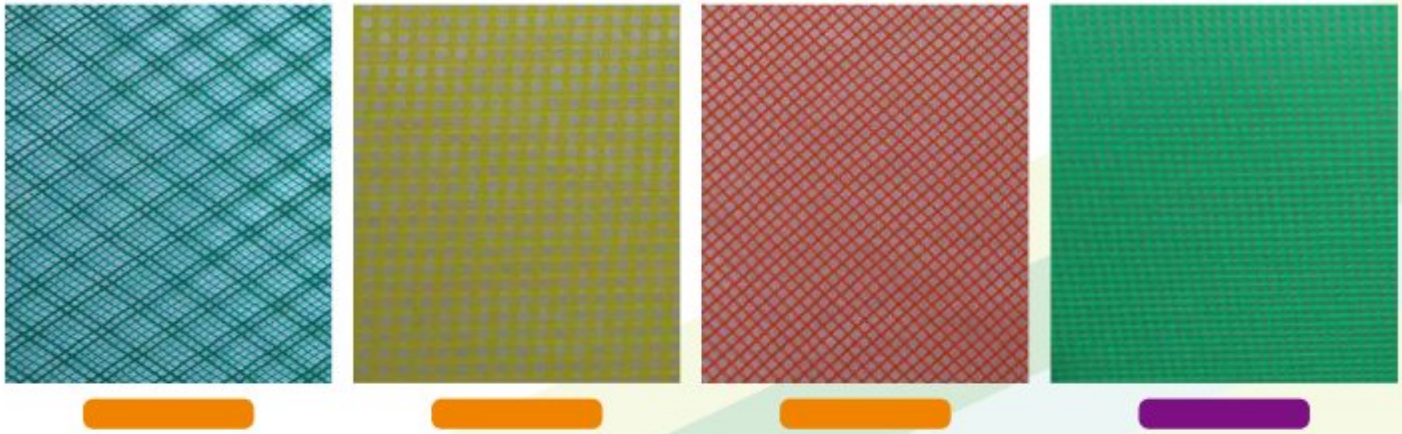

Recyclable, Low-carbon

Plastic anti-bird netting

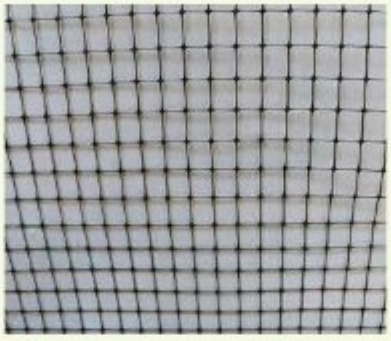

Climbing support netting / Pea and bean climbing mesh

Recyclable, Low-carbon

Deer fence / Deer fencing netting

KIMPORT

Do gardening with Golden Building

Recyclable, Low-carbon

Multi-Purpose Fencing Netting

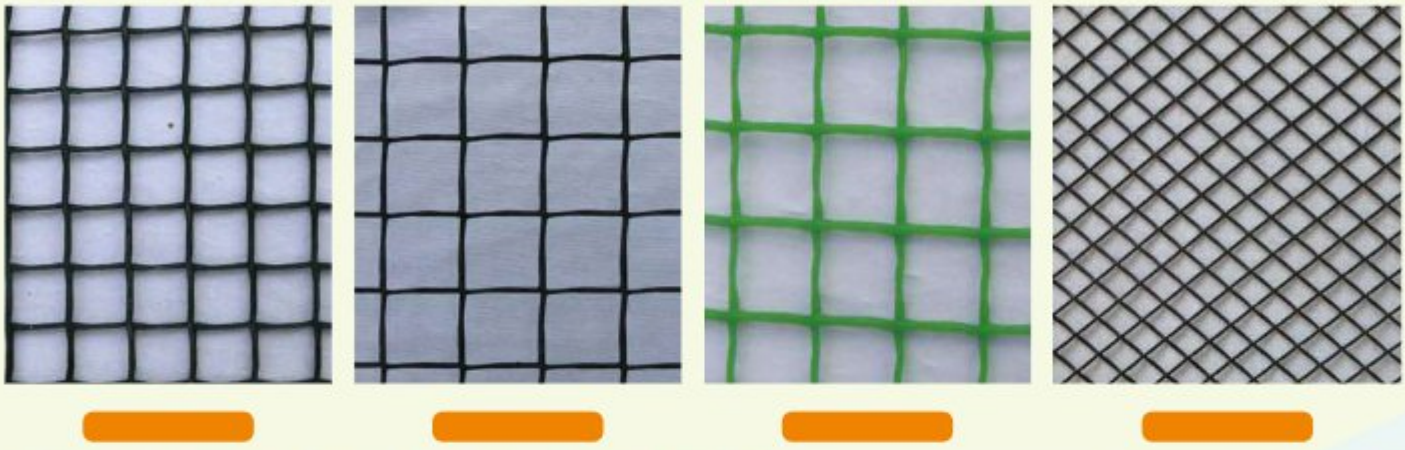

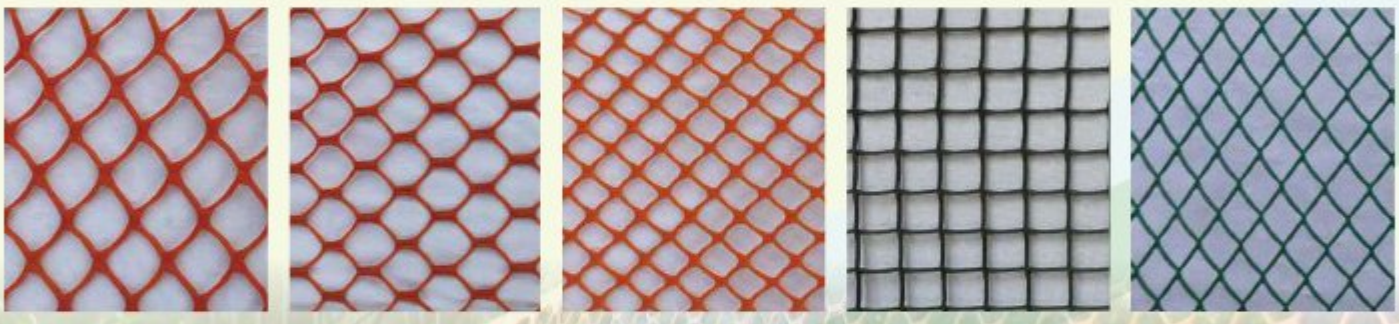

LD-0636

Recyclable, Low-carbon

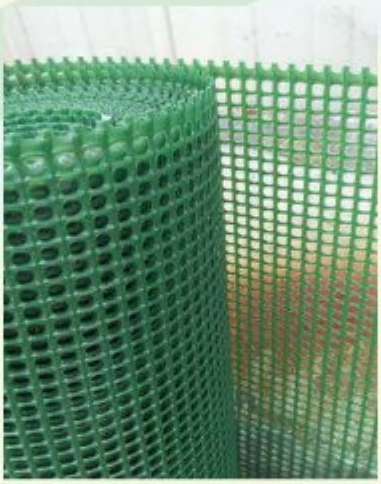

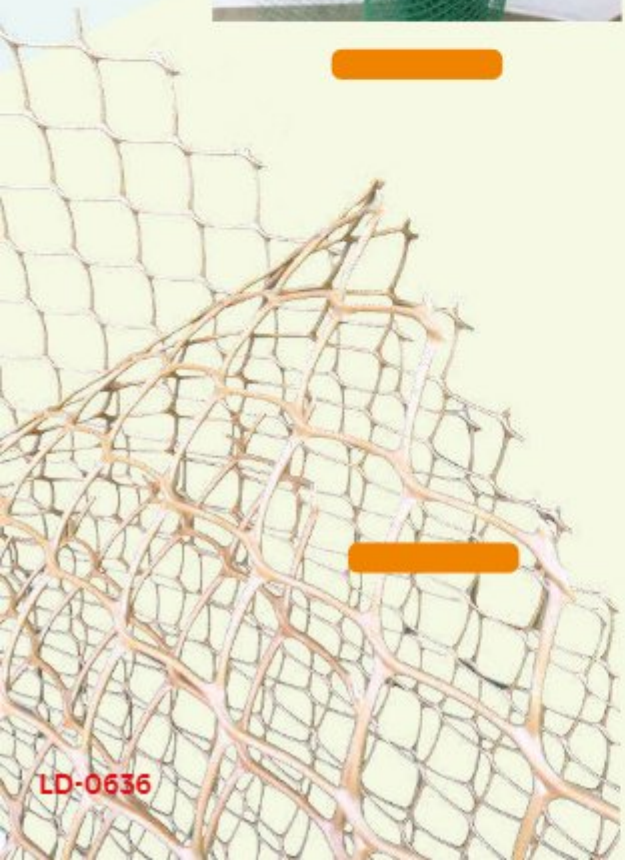

LD-0636

Recyclable, Low-carbon

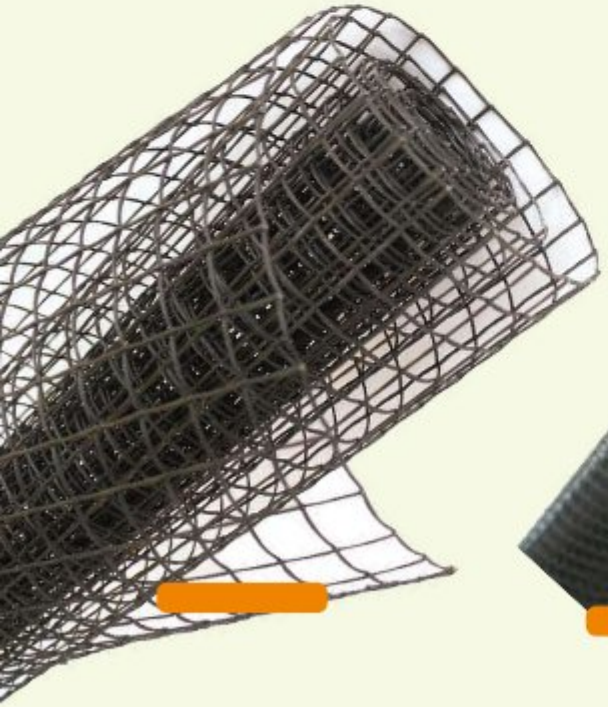

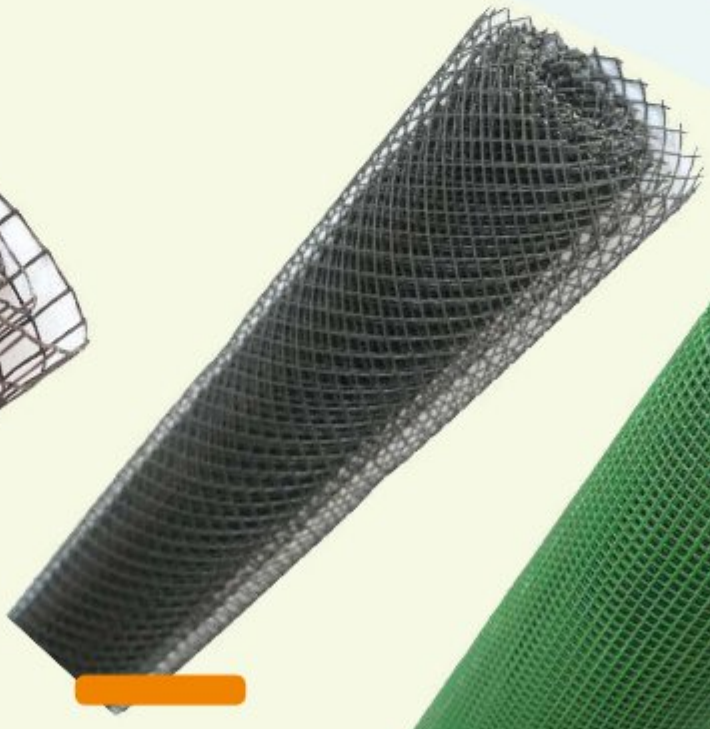

Recyclable, Low-carbon

HDPE plastic mesh combined with a PP geotetile fabric

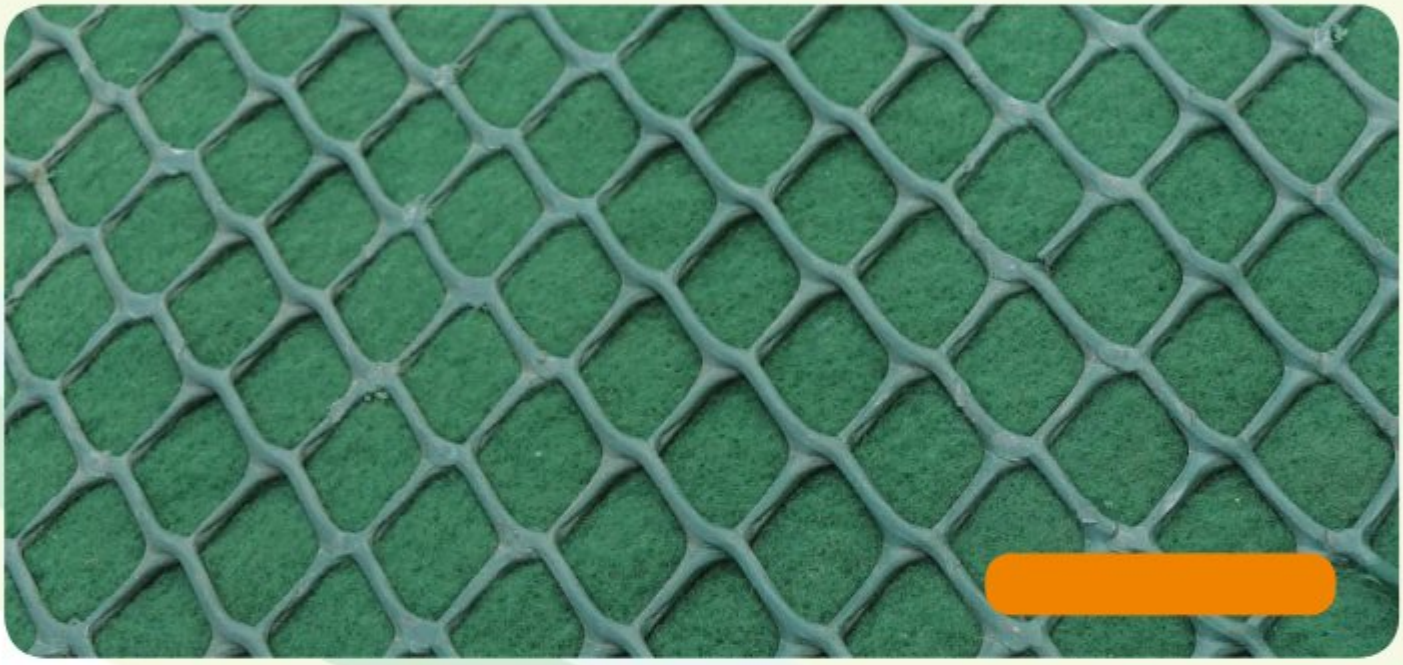

Grass reinforcement matting

Recyclable, Low-carbon

Windbreak Fencing Mesh / Wind break Cladding



Grass Reinforcement Mesh / Grass Protection Mesh

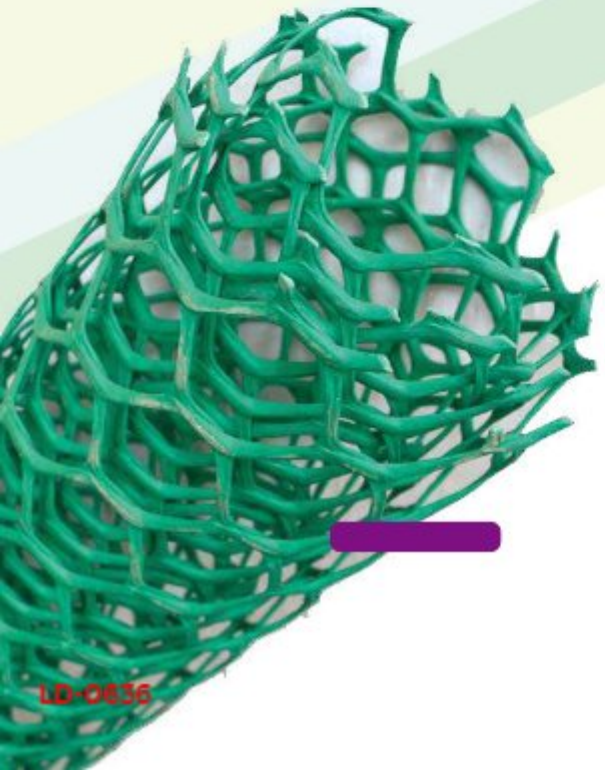



LD-0636

Plastic Stillage Separator Mesh

Recyclable, Low-carbon

Filtration Mesh / Media

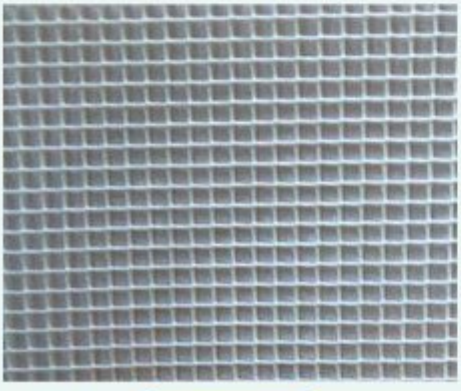

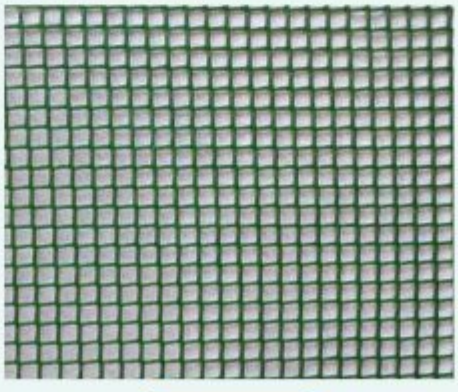

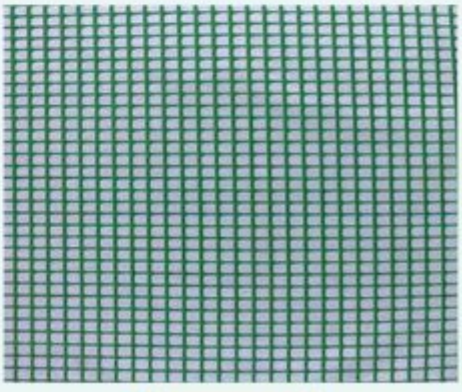

Speed control lever

Easy electric start

Humanization design

New appearance of front face

Premium seat for maximum comfort

Item Name	YH107	YH107D
Engine Model	Loncin 546cc EU V	Loncin 546cc EU V
Max. Output Power	10 kw(13.60HP)	10 kw(13.60HP)
Cutting Width(mm)	1070(21.5") 2 Messer	1070(21.5") 2 Messer
Cutting Height(mm)	35-75(5 shifts)	35-75(5 shifts)
Battery type	12V 12AH	12V 12AH
Blade clutch:	Electromagnetic clutch	Electromagnetic clutch
Gasoline Capacity	5L	5L
Driving Speed	5 (shifts)+N+R	5 (shifts)+N+R
Wheel Diameter(mm)	Front 15" Rear 17"	Front 15" Rear 17"
Grass Capacity	220L	/
Side Discharge	NO	YES
Packing Dimension	170*110*83	170*110*83
Net Weight(kg)	188.5	173.5
Gross Weight(kg)	222.5	207.5
20FT/40FT/40HQ	12/28/42	12/28/42

Item Name	YH107A	YH107AD
Engine Model	Loncin 546cc EU V	Loncin 546cc EU V
Max. Output Power	10 kw(13.60HP)	10 kw(13.60HP)
Driving Speed	Hydraulic stepless speed	Hydraulic stepless speed

Double blades

Premium seat for maximum comfort

Easy electric start

Humanization design

Engine

38 inch

Item Name	YH96	YH96D
Engine Model	452cc EU V	452cc EU V
Max. Output Power	8.0kw(10.90HP)	8.0kw(10.90HP)
Cutting Width(mm)	960(38")	960(38")
Cutting Height(mm)	35-75(5 shifts)	35-75(5 shifts)
Battery type	12V 12AH	12V 12AH
Blade clutch:	Electromagnetic clutch	Electromagnetic clutch
Gasoline Capacity	5L	5L
Driving Speed	5 (shifts)+N+R	5 (shifts)+N+R
Wheel Diameter(mm)	Front 13" Rear 17"	Front 13" Rear 17"
Grassbox Capacity	220L	/
Side Discharge	NO	YES
Packing Dimensions	170*110*83	170*110*83
Net Weight(kg)	179	165
Gross Weight(kg)	213	199
20FT/40FT/40HQ	12/28/42	12/28/42

Speed control lever

Easy electric start

Soft and comfortable steering wheel

5 adjustable mowing heights

Rear-wheel drive

Item Name	YH84	YH84D
Engine Model	352cc EU V	352cc EU V
Max. Output Power	5.8kw(7.90HP)	5.8kw(7.90HP)
Cutting Width(mm)	840(33")	840(33")
Cutting Height(mm)	35-75(5 shifts)	35-75(5 shifts)
Battery type	12V 12AH	12V 12AH
Blade clutch:	Electromagnetic clutch	Electromagnetic clutch
Gasoline Capacity	5L	5L
Driving Speed	5 (shifts)+N+R	5 (shifts)+N+R
Wheel Diameter(mm)	Front 13" Rear 15"	Front 13" Rear 15"
Grassbox Capacity	220L	/
Side Discharge	NO	YES
Packing Dimensions	170*110*83	170*110*83
Net Weight(kg)	163	148
Gross Weight(kg)	197	182
20FT/40FT/40HQ	12/28/42	12/28/42

Item Name	YH84H	YH84HD
Engine Model	452cc EU V	452cc EU V
Max. Output Power	8.0kw(10.90HP)	8.0kw(10.90HP)

27 inch

Side discharge

Double blades

Premium seat for maximum comfort

Easy electric start

Item Name	YH69	YH69D
Engine Model	224cc5.0kw(6.80HP)	224cc5.0kw(6.80HP)
Max. Output Power	224cc5.0kw(6.80HP)	224cc5.0kw(6.80HP)
Cutting Width(mm)	685(27")	685(27")
Cutting Height(mm)	35-75(5 shifts)	35-75(5 shifts)
Battery type	12V 12AH	12V 12AH
Blade clutch:	Electromagnetic clutch	Electromagnetic clutch
Gasoline Capacity	1.4L	1.4L
Driving Speed	5 (shifts)+N+R	5 (shifts)+N+R
Wheel Diameter(mm)	Front 13" Rear 15"	Front 13" Rear 15"
Grassbox Capacity	220L	/
Side Discharge	NO	YES
Packing Dimensions	170*110*83	170*110*83
Net Weight(kg)	147	132
Gross Weight(kg)	181	166
20FT/40FT/40HQ	12/28/42	12/28/42

YH63R
YH63A
LH63

Humanization design

YH63RD
YH63AD

24 inch

Feature	YH63R	YH63RD	YH63A	YH63AD	LH63
Engine Model	OHV 4 stroke/196cc	OHV 4 stroke/196cc	OHV 4 stroke/196cc	OHV 4 stroke/196cc	OHV stroke 224CC
Max. Output Power	4.8KW	4.8KW	4.8KW	4.8KW	5.0KW
Cutting Width(mm)	610(24")	610(24")	610(24")	610(24")	610(24")
Cutting Height(mm)	35-75 (5shifts)	35-75 (5shifts)	35-75 (5shifts)	35-75 (5shifts)	35-75(5 shifts)
Driving Speed	4 (Shifts)+N+R	4 (Shifts)+N+R	Hydraulic stepless speed	Hydraulic stepless speed	4 (Shifts)+N+R
Wheel Diameter(mm)	Front 10" Rear 13"	Front 10" Rear 13"	Front 10" Rear 13"	Front 10" Rear13"	Front 10" Rear 13"
Grassbox Capacity	150L	/	150L	/	150L
Side Discharge	NO	YES	NO	YES	NO
Net Weight(kg)	112	105	112	105	113
Gross Weight(kg)	133	126	133	126	134
Packing Dimension(mm)	1480*760*830	1480*760*830	1480*760*830	1480*760*830	1480*760*830
20FT/40FT/40HQ Volume	24/48/72PCS	24/48/72PCS	24/48/72 PCS	24/48/72 PCS	24/48/72 PCS

Comfortable steering wheel

Easy electric start

Discharge or collector

Premium seat for maximum comfort

DC 52V Lithium Battery Riding Lawn Mower

5 adjustable mowing heights

Easy charging

Humanization design

One button for forward and reverse

Double blades

Rear-wheel drive

Feature	LL72	LL72D
Power of Mowing Motor	1600w	1600w
Speed of Mowing Motor	3700r/min	3700r/min
Power of Traveling Motor	500w	500w
Battery Capacity	20.80 Ah Lithium battery	20.80 Ah Lithium battery
Operating Voltage	52V Li-on	52V Li-on
Driving Speed	0-9km/h R:0-2km/h	0-9km/h R: 0-2km/h
Cutting Width(mm two blades)	685(27")	685(27")
Cutting Height(mm)	35-75(5 shifts)	35-75(5 shifts)
Grassbox Capacity	110L	/
Side Discharge	/	YES
Packing Dimension(mm)	1480*760*650	1480*760*650
Net Weight(kg)	110	106
Gross Weight(kg)	129	125
20FT/40FT/40HQ Volume	30/72/92PCS	30/72/92PCS
Endurance on a Single Charge	60-90mins	60-90mins
Mowing Area	3000-4000m^2	3000-4000m^2
Mowing Efficiency	35-50m^2/min	35-50m^2/min
Charger	54V 7A(3.5h)	54V 7A(3.5h)

22 inch

Self-propelled

Langhui's gear box qualification rate: 99.99%

New front shield

12" high rear wheel

Adjustable side discharge

Feature	LH58SDH	LH58SHC	LH58ESDH	LH58ESHC
Engine Model	Loncin V200/196cc	Loncin V200/196cc	Loncin V200/196cc	Loncin V200/196cc
Electric Start	No	No	Yes	Yes
Max. Output Power	3.7KW(5.03HP)/2900rpm	3.7KW(5.03HP)/2900rpm	3.7KW(5.03HP)/2900rpm	3.7KW(5.03HP)/2900rpm
Lawn Mower Model	Self-propelled Type	Self-propelled Type	Self-propelled Type	Self-propelled Type
Cutting Width(mm)	550(22")	550(22")	550(22")	550(22")
Cutting Height(mm)	25-75	25-75	25-75	25-75
Height Adjustment Type	6 position central height adjustment	6 position central height adjustment	6 position central height adjustment	6 position central height adjustment
Side Discharge	YES	YES	YES	YES
Grassbox Capacity	65L	65L	65L	65L
Wheel Diameter(mm)	200(8")/300(12")	175(7")/300(12")	200(8")/300(12")	175(7")/300(12")
Net Weight(kg)	36.9	36.6	39.8	39.4
Gross Weight(kg)	40.9	39.9	43.1	42.7
Packing Dimension(mm)	850*595*437	850*595*437	850*595*437	850*595*437
20ft/40ft/40HQ Volume	120/255/311	120/255/311	120/255/311	120/255/311

20 inch

Tool box is available

With Lang-hui's gear box(99.99% qualification rate)

New front shield

Adjustable side discharge

Feature	LH53SDH	LH53SHC	LH53ESDH	LH53ESHC
Engine Model	Loncin V200/196cc	Loncin V200/196cc	Loncin V200/196cc	Loncin V200/196cc
Electric Start	No	No	Yes	Yes
Max. Output Power	3.7KW(5.03HP)/2900rpm	3.7KW(5.03HP)/2900rpm	3.7KW(5.03HP)/2900rpm	3.7KW(5.03HP)/2900rpm
Lawn Mower Model	Self-propelled Type	Self-propelled Type	Self-propelled Type	Self-propelled Type
Cutting Width(mm)	508(20")	508(20")	508(20")	508(20")
Cutting Height(mm)	25-75	25-75	25-75	25-75
Height Adjustment Type	6 position central height adjustment	6 position central height adjustment	6 position central height adjustment	6 position central height adjustment
Side Discharge	YES	YES	YES	YES
Grassbox Capacity	65L	65L	65L	65L
Wheel Diameter(mm)	200(8")/300(12")	175(7")/300(12")	200(8")/300(12")	175(7")/300(12")
Net Weight(kg)	34.9	35.6	37.7	38.4
Gross Weight(kg)	38.2	38.9	41	41.7
Packing Dimension(mm)	805*570*437	805*570*437	805*570*437	805*570*437
20ft/40ft/40HQ Volume	140/290/348	140/290/348	140/290/348	140/290/348

* More models for ZH53 series , welcome to mail consultation~

LD-0844

18 inch

LZ48 series

LD-0844

Feature	LZ48DT	LZ48T	LZ48	LZ48-ECO	
Lawn Mower Model	Hand-pushType	Hand-pushType	Hand-pushType	Hand-pushType	Hand-pushType
Engine Model	"NP150 /150cc"	"NP150 /150cc"	"NP150 /150cc"	"NP150 /150cc"	"NP150 /150cc"
Max. Output Power	2.5kW/3000rpm	2.5kW/3000rpm	2.5kW/3000rpm	2.5kW/3000rpm	2.5kW/3000rpm
Carter Width(mm)	480(19") Steel	480(19") Steel	480(19") Steel	480(19") Steel	480(19") Steel
Cutting Width(mm)	456(18")	456(18")	456(18")	456(18")	456(18")
Cutting Height(mm)	25/43/70	25/43/70	25/35/45/55/65/75	25/43/70	25/35/45/55/65/75
Height Adjustment Type	Individual height adjustment	Individual height adjustment	Central height adjustment	Individual height adjustment	Central height adjustment
Wheel Diameter(mm)	2*175/2*175	2*175/2*175	2*175/2*200	2*175/2*175	1*175/2*200
Grassbox Capacity	/	40L (nylon)	40L (nylon)	40L (nylon)	40L (nylon)
Packing Dimensions	82/54/44	82/54/44	82/54/44	82/54/44	82/54/44
Net Weight(kg)	23.6	18.6	19.6	20.6	20.6
Gross Weight(kg)	26	21	22	23	23
20FT/40FT/40HQ volume	168/280/336	168/280/336	168/280/336	168/280/336	168/280/336

LZ48C-ECO	LZ48CDT	LZ48S	LZ48SD	LZ48SC	LZ48SHC
Hand-pushType	Hand-pushType	Self-propelled Type	Self-propelled Type	Self-propelled Type	Self-propelled Type
"NP150 /150cc"	"NP150 /150cc"	"NP150 /150cc"	"NP150 /150cc"	"NP150 /150cc"	"NP150 /150cc"
2.5kW/3000rpm	2.5kW/3000rpm	2.5kW/3000rpm	2.5kW/3000rpm	2.5kW/3000rpm	2.5kW/3000rpm
480(19") Steel	480(19") Steel	480(19") Steel	480(19") Steel	480(19") Steel	480(19") Steel
456(18")	456(18")	456(18")	456(18")	456(18")	456(18")
25/43/70	25/43/70	25/35/45/55/65/75	25/35/45/55/65/75	25/35/45/55/65/75	25/35/45/55/65/75
Individual height adjustment	Individual height adjustment	Central height adjustment	Central height adjustment	Central height adjustment	Central height adjustment
1*175/2*175	1*175/2*175	2*175/2*200	2*175/2*200	1*175/2*200	1*175/2*250
40L (nylon)	/	40L (nylon)	40L (nylon)	40L (nylon)	40L (nylon)
82/54/44	82/54/44	82/54/44	82/54/44	82/54/44	82/54/44
24.1	19.6	21.6	20.6	20.6	21.6
26.5	22	24	23	23	24
168/280/336	168/280/336	168/280/336	168/280/336	168/280/336	168/280/336

16 inch

ZZ43 Series

The front wheel can be replaced with caster wheel

LD-0844

Feature	ZZ43T	ZZ43	ZZ43-ECO	ZZ43C	ZZ43C-ECO
Lawn Mower Model	Hand-pushType	Hand-pushType	Hand-pushType	Hand-pushType	Hand-pushType
Engine Model	NP130 /132cc	NP130 /132cc	NP130 /132cc	NP130 /132cc	NP130 /132cc
Max. Output Power	2.2kW/3000rpm	2.2kW/3000rpm	2.2kW/3000rpm	2.2kW/3000rpm	2.2kW/3000rpm
Electric Starter	/	/	/	/	/
Carter Width(mm)	430(17") Steel	430(17") Steel	430(17") Steel	430(17") Steel	430(17") Steel
Cutting Width(mm)	405(16")	405(16")	405(16")	405(16")	405(16")
Cutting Height(mm)	25/43/70	25/35/45/55/65/75	25/43/70	25/35/45/55/65/75	25/43/70
Height Adjustment Type	Individual height adjustment	Central height adjustment	Individual height adjustment	Central height adjustment	Individual height adjustment
Wheel Diameter(mm)	2*175/2*175	2*175/2*200	2*175/2*175	1*175/2*200	1*175/2*175
Grassbox Capacity	40L (nylon) 50L(plastic nylon)	40L (nylon)	40L (nylon)	40L (nylon)	40L (nylon)
Packing Dimensions	70/49/37	74/52/37	65/49/37	67/52/37	65/49/37
Net Weight(kg)	18.2	19	17.25	17.1	17.25
Gross Weight(kg)	20	21	19	19	19
20FT/40FT/40HQ volume	210/444/518	204/420/490	228/504/588	210/444/518	228/504/588

ZZ43CDT	ZZ43S	ZZ43SD	ZZ43SC	ZZ43SDC	ZZ43ESD	ZZ43ESDC
Hand-pushType	Self-propelled Type	Self-propelled Type	Self-propelled Type	Self-propelled Type	Self-propelled Type	Self-propelled Type
NP130 /132cc	NP130 /132cc	NP130 /132cc	NP130 /132cc	NP130 /132cc	NP130 /132cc	NP130 /132cc
2.2kW/3000rpm	2.2kW/3000rpm	2.2kW/3000rpm	2.2kW/3000rpm	2.2kW/3000rpm	2.2kW/3000rpm	2.2kW/3000rpm
/	/	/	/	/	YES	YES
430(17") Steel	430(17") Steel	430(17") Steel	430(17") Steel	430(17") Steel	430(17") Steel	430(17") Steel
405(16")	405(16")	405(16")	405(16")	405(16")	405(16")	405(16")
25/43/70	25/35/45/55/65/75	25/35/45/55/65/75	25/35/45/55/65/75	25/35/45/55/65/75	25/35/45/55/65/75	25/35/45/55/65/75
Individual height adjustment	Central height adjustment	Central height adjustment	Central height adjustment	Central height adjustment	Central height adjustment	Central height adjustment
1*175/2*175	2*175/2*200	2*175/2*200	1*175/2*200	1*175/2*200	2*175/2*200	1*175/2*200
/	40L (nylon)	40L (nylon) 50L(plastic nylon)	40L (nylon)	40L (nylon) 50L(plastic nylon)	40L (nylon) 50L(plastic nylon)	40L (nylon)
65/49/37	74/52/37	74/52/37	67/52/37	67/52/37	67/52/37	67/52/37
16.25	20	20	19.1	19.1	19.1	19.1
18	22	22	21	21	21	21
228/504/588	204/420/490	204/420/490	210/444/518	210/444/518	210/444/518	210/444/518

18 inch

The front wheel can be replaced with caster wheel

Discharge or collector

7"+8"/7"+10"
Two kinds of wheel option

2.5 AH Battery Pack

Feature	LE48	LE48-ECO	LE48SD	LE48HD	LE48H
One Battery Pack	40V 2.5AH	40V 2.5AH	40V 2.5AH	40V 2.5AH	40V 2.5AH
Lawn Mower Model	Hand-Pushed type	Hand-Pushed type	Self-Propelled type	Hand-Pushed type	Hand-Pushed type
Cutting Width(mm)	456(18")	456(18")	456(18")	456(18")	456(18")
Cutting Height(mm)	25-75	25-70	25-75	25-75	25-75
Height Adjustment Type	6 position height central height adjustment	3 position height individual height adjustment	6 position height central height adjustment	6 position height central height adjustment	6 position height central height adjustment
Side Discharge	NO	NO	YES	YES	NO
Grass Collection Bag	YES	YES	YES	YES	YES
Brushless Motor Power	800W	800W	800W	800W	800W
Plastic Wheel(mm)	175(7")/200(8")	175(7")/175(7")	175(7")/200(8")	175(7")/250(10")	175(7")/250(10")
Net Weight(kg)	19.4	19.4	20.5	19.4	19.4
Weight(kg)	21.5	21.5	22.8	21.5	21.5
Packing Dimension(mm)	710*540*370	710*540*370	820*540*370	710*540*370	710*540*370
20ft/40ft/40HQ Volume	192/390/520	192/390/520	162/384/392	192/390/520	192/390/520

LD-0844

Feature	LE48SDH	LE48DT	LE48C	LE48HC	LE48SHC
One Battery Pack	40V 2.5AH	40V 2.5AH	40V 2.5AH	40V 2.5AH	40V 2.5AH
Lawn Mower Model	Self-Propelled type	Hand-Pushed type	Hand-Pushed type	Hand-Pushed type	Self-Propelled type
Cutting Width	456mm(18")	456mm(18")	456mm(18")	456mm(18")	456mm(18")
Cutting Height	25-75	25-70	25-75	25-75	25-75
Height Adjustment Type	6 position height central height adjustment	3 position height individual height adjustment	6 position height central height adjustment	6 position height central height adjustment	6 position height central height adjustment
Side Discharge	YES	YES	NO	YES	YES
Grass Collection Bag	YES	NO	YES	YES	YES
Brushless Motor Power	800W	800W	800W	800W	800W
Plastic Wheel(mm)	175(7")/250(10")	175(7")/175(7")	175(7")/200(8")	175(7")/250(10")	175(7")/250(10")
Net Weight(kg)	21	19.4	19.4	19.4	21
Weight(kg)	22.8	21.5	21.5	21.5	22.8
Packing Dimension(mm)	820*540*370	710*540*370	710*540*370	710*540*370	820*540*370
20ft/40ft/40HQ Volume	162/384/392	192/390/520	192/390/520	192/390/520	162/384/392

2.5 AH Battery Pack

16 inch

Feature	LE43
One Battery Pack	40V 2.5AH
Lawn Mower Model	Hand-Pushed type
Cutting Width(mm)	405(16")
Cutting Height(mm)	25-75
Height Adjustment Type	6 position height central height adjustment
Side Discharge	NO
Grass Collection Bag	YES
Brushless Motor Power	750W
Plastic Wheel(mm)	175(7")/200(8")
Weight(kg)	16 W/O battery
Packing Dimension(mm)	740*520*370
20ft/40ft/40HQ Volume	198/402/493

Feature	LE43-ECO	LE43DT	LE43S
One Battery Pack	40V 2.5AH	40V 2.5AH	40V 2.5AH
Lawn Mower Model	Hand-Pushed type	Hand-Pushed type	Self-Propelled type
Cutting Width(mm)	405(16")	405(16")	405(16")
Cutting Height(mm)	25-70	25-70	25-75
Height Adjustment Type	3 position height individual height adjustment	3 position height individual height adjustment	6 position height central height adjustment
Side Discharge	NO	YES	NO
Grass Collection Bag	YES	NO	YES
Brushless Motor Power	800W	800W	800W
Plastic Wheel(mm)	175(7")/175(7")	175(7")/175(7")	175(7")/200(8")
Weight(kg)	16 W/O battery	16 W/O battery	16 W/O battery
Packing Dimension(mm)	700*455*330	650*455*330	740*520*330
20ft/40ft/40HQ Volume	246/504/672	252/540/720	198/402/536

TWO BATTERY SLOTS

16 inch

Feature	LE43DH	LE43SDH	LE43C
One Battery Pack	40V 2.5AH	40V 2.5AH	40V 2.5AH
Lawn Mower Model	Hand-Pushed type	Self-Propelled type	Hand-Pushed type
Cutting Width(mm)	405(16")	405(16")	405(16")
Cutting Height(mm)	25-75	25-75	25-75
Height Adjustment Type	6 position height central height adjustment	6 position height central height adjustment	6 position height central height adjustment
Side Discharge	YES	YES	NO
Grass Collection Bag	YES	YES	YES
Brushless Motor Power	800W	800W	800W
Plastic Wheel(mm)	175(7")/250(10")	175(7")/250(10")	175(7")/200(8")
Weight(kg)	16 W/O battery	16 W/O battery	16 W/O battery
Packing Dimension(mm)	760*530*380	760*540*330	670*520*370
20ft/40ft/40HQ Volume	180/384/396	180/384/512	216/444/532

Feature	LE43SC	LE43HC	LE43SHC
One Battery Pack	40V 2.5AH	40V 2.5AH	40V 2.5AH
Lawn Mower Model	Self-Propelled type	Hand-Pushed type	Self-Propelled type
Cutting Width(mm)	405(16")	405(16")	405(16")
Cutting Height(mm)	25-75	25-75	25-75
Height Adjustment Type	6 position height central height adjustment	6 position height central height adjustment	6 position height central height adjustment
Side Discharge	NO	YES	YES
Grass Collection Bag	YES	YES	YES
Brushless Motor Power	750W	750W	750W
Plastic Wheel(mm)	175(7")/200(8")	175(7")/250(10")	175(7")/250(10")
Weight(kg)	16 W/O battery	16 W/O battery	16 W/O battery
Packing Dimension(mm)	670*520*330	690*540*330	690*540*330
20ft/40ft/40HQ Volume	216/444/592	204/408/544	204/408/544

2.5 AH Battery Pack

Lithium battery sweeper is available

16 inch

Lithium battery Scarifier

Feature	LE40P	LE40PH	LE40C	LE40CH
Max Power Output	800w	800w	800w	800w
Rotate Speed	2200rpm	2200rpm	2200rpm	2200rpm
Battery	DC40V 2.5AH	DC40V 2.5AH	DC40V 2.5AH	DC40V 2.5AH
Lawn Mower Model	Hand-Pushed type	Hand-Pushed type	Hand-Pushed type	Hand-Pushed type
Cutting Width(mm)	400	400	400	400
Wheel Diameter(mm)	175(7")/175(7")	175(7")/250(10")	175(7")/175(7")	175(7")/250(10")
Working Depth(mm)	9/0/-3/-6/-9(5 position)	9/0/-3/-6/-9(5 position)	9/0/-3/-6/-9(5 position)	9/0/-3/-6/-9(5 position)
Grassbox Capacity	50L	50L	40L	40L
Net Weight(kg)	18.9	19.1	19.1	19.1
Gross Weight(kg)	20.8	21	21	21
Packing Dimension(mm)	660*530*330	660*530*330	660*530*330	660*530*330
20ft/40ft/40HQ Volume	216/465/532	216/465/532	216/465/532	216/465/532

LD-0844

Specifications	602300
Housing	Die-cast Aluminium + PA6
Axle Diameter	12mm
Input bearings	ball bearings
Input speeds(Maximum)	1000~1800 rpm
Input shaft diameter	8mm
Max. weight over axle	132 Lbs(60kg)
Tire diameter(Maximum)	14"(356mm)
Lubricating oil	Gear oil
Gears	sintered metal gears
Gears ratios	1 3.2
Design life	600 hrs+
Durability clutch times	50000 Seconds+
Sales years in Europe	12 years
The amount sales quantity	800,000 pcs
Qualified rate	>99.99%
N.W	920g

Mechanical Transmission rear axle

Specifications	630000
Housing	Die-cast Aluminium
Output Torque	148 ft.lbs(200N.M)
Axle Diameter	3/4"(19.05mm)
Axle Bearings	optional ball bearing
Differential	standard
Forward speeds(Maximum)	four/five
Reverse speeds	one
Input speeds(Maximum)	2000 rpm
Input shaft diameter	5/8"(15.9mm)
Input bearings	needle bearings
Neutral switch	optional
Service brake	provision either side
Max. weight over axle	530 Lbs(24+F14:F21
Tire diameter(Maximum)	19"(485mm)
Lubrication	85w 140 or formulated grease
Gears	sintered metal gears
Gears ratios	consult factory
Axle ends	consult factory
Axle Forward Rotation	consult factory
N.W	12kg

230V
Electric Grass Trimmer

A05-002A

Rated vol:	230V 250W
Motor:	brush motor
No load speed:	12500rpm
Cutting width:	22cm
Cutting system:	nylon line
Line diameter:	1.2mm round
Carton measurement (mm):	395*440*370 (6 pcs included)
G.W/N.W(Kg):	7.8/8.8
Pcs. per 20' FCL:	2520
Pcs. per 40' FCL:	5400
Pcs. Per 40' HQ FCL:	6300

LD-0077

230V
Electric Hedge Trimmer

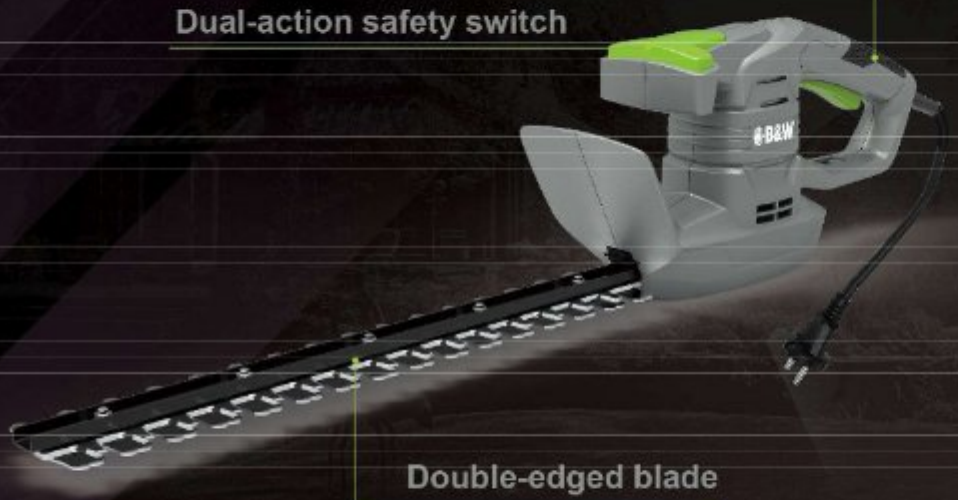

A04-001A

Rated vol:	230V
Motor:	brush motor
No load speed:	1700rpm
Power:	450W
Tooth distance:	16mm
Maximum stated cutting diameter:	15mm
Blade length:	45cm
Cutting length:	41cm
Carton measurement (mm):	780*240*255 (4 pcs included)
G.W/N.W(Kg):	9.7/9
Pcs. per 20' FCL:	2412
Pcs. per 40' FCL:	5148
Pcs. Per 40' HQ FCL:	5720

LD-0077

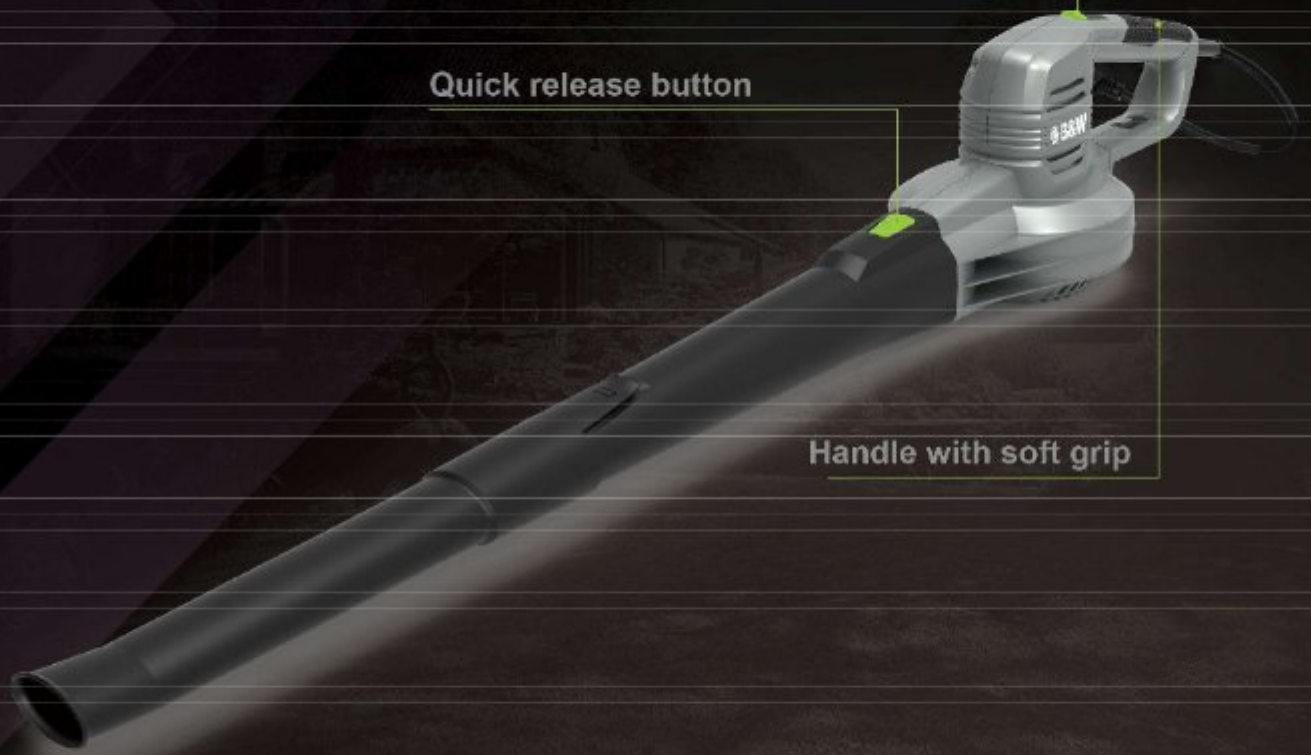

230V Electric Blower

A02-002A

Rated vol:	230V
Motor:	brush motor
No load speed:	13000rpm(High)/9000rpm(Low)
Power:	400W
Air speed:	120MPH(High) / 50MPH(Low)
Output wind flow:	110CFM
Carton measurement (mm):	415*495*380 (6 pcs included)
G.W/N.W(Kg):	10/9
Pcs. per 20' FCL:	2196
Pcs. per 40' FCL:	4752
Pcs. Per 40' HQ FCL:	5544

LD-0077

Electric Vacuum Blower

Handle with soft grip

Volute cover
Easy to clean internal waste

Auxiliary handle
Angle adjustment,suitable
for different heights

Air volume adjustable switch

Rake
Angle adjustment,
easy to collect leaves

Blow/Vacuum selection lever

Front support wheel
Easy for manoeuverability
and energy saving

A02-003A

Rated vol:	230V-240V~/50Hz
Rated power:	2800w-3300 W
No load speed:	14000 RPM
Single speed:	Blow air speed 270km/h
Collection bag:	45L
Mulching ratio:	10:1
Carton measurement (mm):	465*175*350
G.W/N.W(Kg):	4.3/3.7
Pcs. per 20' FCL:	1075
Pcs. per 40' FCL:	2100
Pcs. Per 40' HQ FCL:	2425

LD-0077

230V Electric Chain Saw

A07-001E

Voltage/Frequency:	230-240V~/50Hz
Rated power:	2400W
No load speed:	7,000/min
Chain/bar length:	400mm/16"
Chain speed:	13.5m/s
Power plug:	2x1.5mm² with VDE plug
Length:	35cm
Carton measurement (mm):	470*275*420 (2PCS/CTN)
G.W/N.W(Kg):	12.1/10.6
Pcs. per 20' FCL:	1080
Pcs. per 40' FCL:	2060
Pcs. Per 40' HQ FCL:	2400

LD-0077

230V
Electric Pole Saw

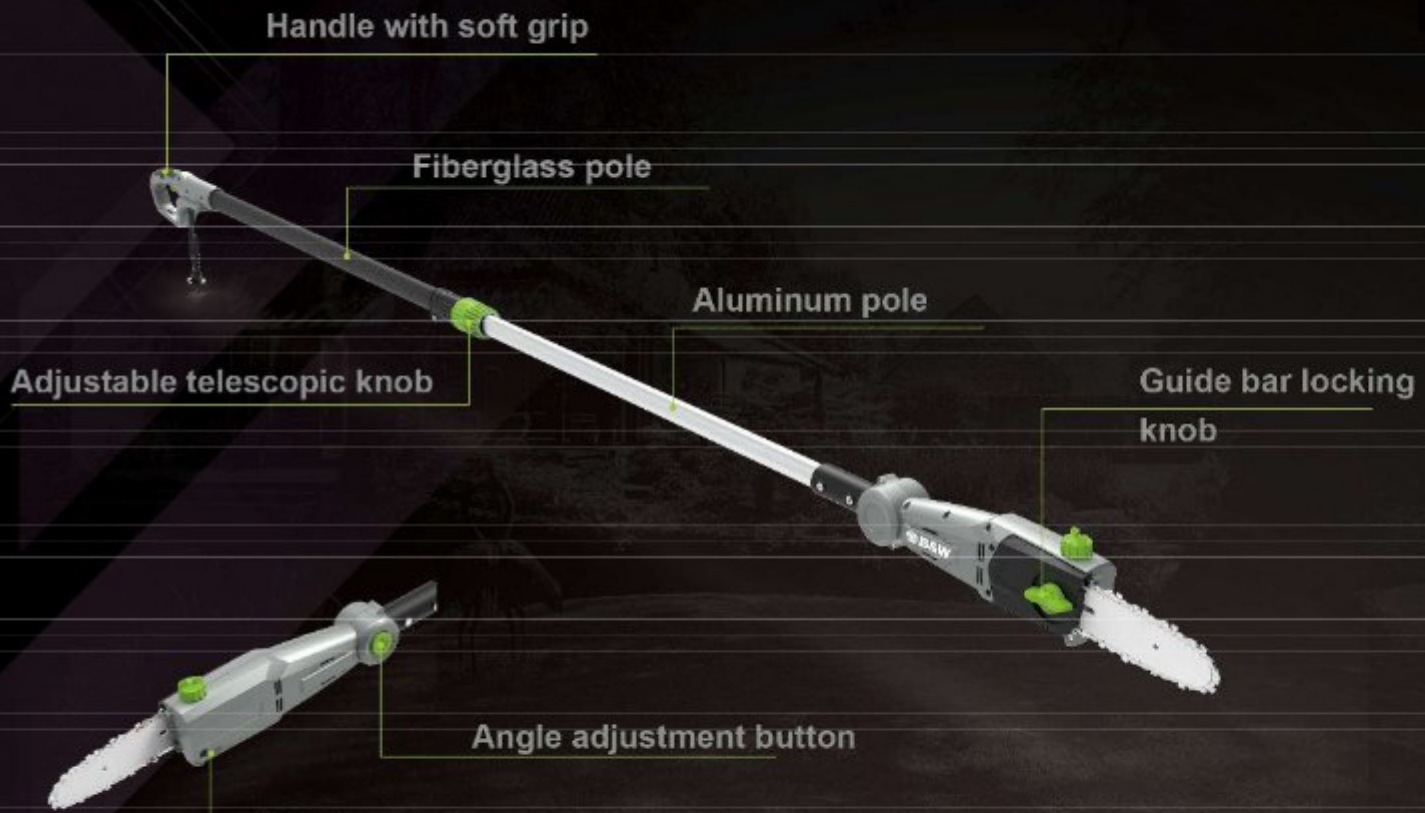

A12-003A

Rated vol:	230V
Motor:	brush motor
Chain Speed:	8m/s
Power:	750W
Cutting diameter:	200mm(8")
Oil tank capacity:	60ml
Max length:	2.5 m
Min length:	1.9 m
Carton measurement (mm):	1320*335*165 (2 pcs included)
G.W/N.W(Kg):	8/7
Pcs. per 20' FCL:	812
Pcs. per 40' FCL:	1736
Pcs. Per 40' HQ FCL:	1984

LD-0077

KIMPORT

Single handle switch

Dual-action switch, easy to control, safe and more thoughtful

Lock knob

Foldable handle, stable and reliable

Full plastic grass box

High strength, convenient for cleaning shredded grass

Handle

Easy to transport after folding

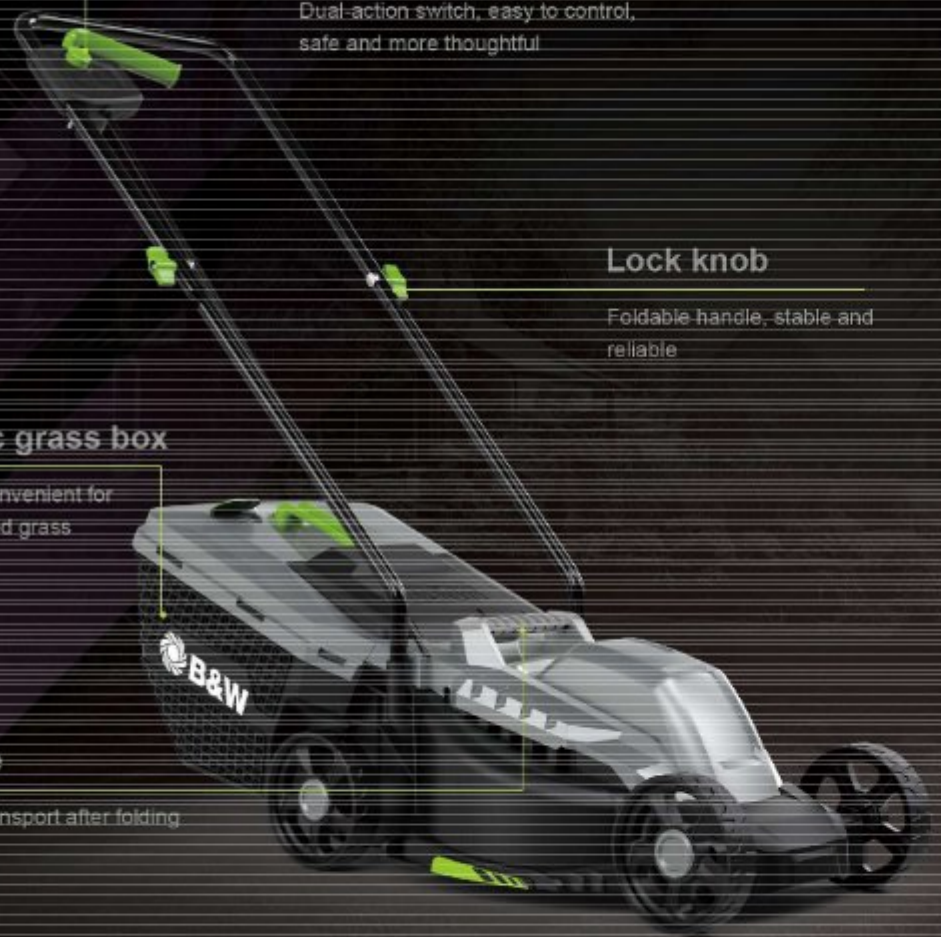

LD-0077

230V 50Hz

NEW AESTHETIC design

1200W Brush Motor

1200W 32CM Electric Lawn Mower

A01-004C

No-load speed:	3400rpm
Height adjustment:	30-50-70mm with 3 position, single
Cutting width:	32cm
Drive type:	hand push
Wheel:	front 140mm & rear 140mm
Grass box:	all plastic （30L）
Noise level (dB):	96db
Carton measurement (mm):	570×387×295
G.W/N.W(Kg):	7.1/6.2
Pcs. per 20' FCL:	480
Pcs. per 40' FCL:	992
Pcs. Per 40' HQ FCL:	1100

KIMPORT

Single handle switch

Dual-action switch, easy to control, safe and more thoughtful

Lock knob

Foldable handle, stable and reliable

Full plastic grass box

High strength, convenient for cleaning shredded grass

Handle

Easy to transport after folding

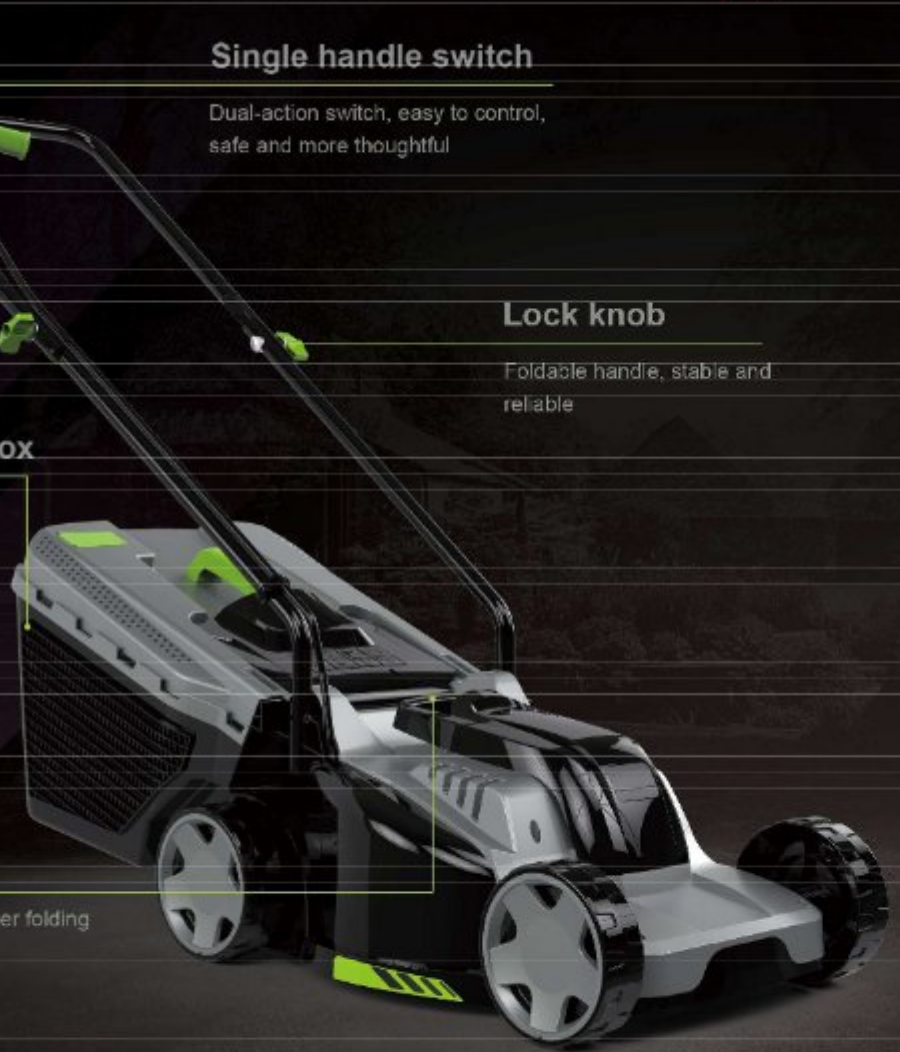

1200W 32CM Electric Lawn Mower

EAL-21008-4

No-load speed:	3400rpm
Height adjustment:	20-38-56mm with 3 position, single
Cutting width:	32cm
Drive type:	hand push
Wheel:	front 140mm & rear 140mm
Grass box:	all plastic （30L）
Noise level (dB):	96db
Carton measurement (mm):	570×387×295
G.W/N.W(Kg):	8.2/7.3
Pcs. per 20' FCL:	480
Pcs. per 40' FCL:	992
Pcs. Per 40' HQ FCL:	1100

LD-0077

KIMPORT

Soft grip

Ergonomic design

Single handle switch

Dual-action switch, easy to control, safe and more thoughtful

Quick clamp

Foldable handle for easy transport and compact storage

Full plastic grass box

High strength, convenient for cleaning shredded grass

Handle

Convenient for transport after folding

Handle adjustment

Choose height that suits oneself

1200W 32CM Electric Lawn Mower

EAL-21008-4A

No-load speed:	3400rpm
Height adjustment:	20-38-56mm with 3 position, single
Cutting width:	32cm
Drive type:	hand push
Wheel:	front 140mm & rear 140mm
Grass box:	all plastic （30L）
Noise level (dB):	96db
Carton measurement (mm):	570×387×295
G.W/N.W(Kg):	8.5/7.5
Pcs. per 20' FCL:	480
Pcs. per 40' FCL:	992
Pcs. Per 40' HQ FCL:	1100

LD-0077

KIMPORT

1400W 33CM Electric Lawn Mower

EAL-21008-7

No-load speed:	3400rpm
Height adjustment:	25-70mm with 5 position, central
Cutting width:	33cm
Drive type:	hand push
Wheel:	front 140mm & rear 200mm
Grass box:	all plastic （35L）
Noise level (dB):	96db
Carton measurement (mm):	700×400×340
G.W/N.W(Kg):	11/9.9
Pcs. per 20' FCL:	276
Pcs. per 40' FCL:	582
Pcs. Per 40' HQ FCL:	679

Full handle switch

Dual-action switch, easy to control, safe and more thoughtful

Soft grip

Ergonomic design

Handle

Convenient for transport after folding

Lock knob

Foldable handle for easy transport and compact storage

Big collection box

35L Big grass catcher, for efficient working

Central height adjustment

25-70mm with 5 position, central

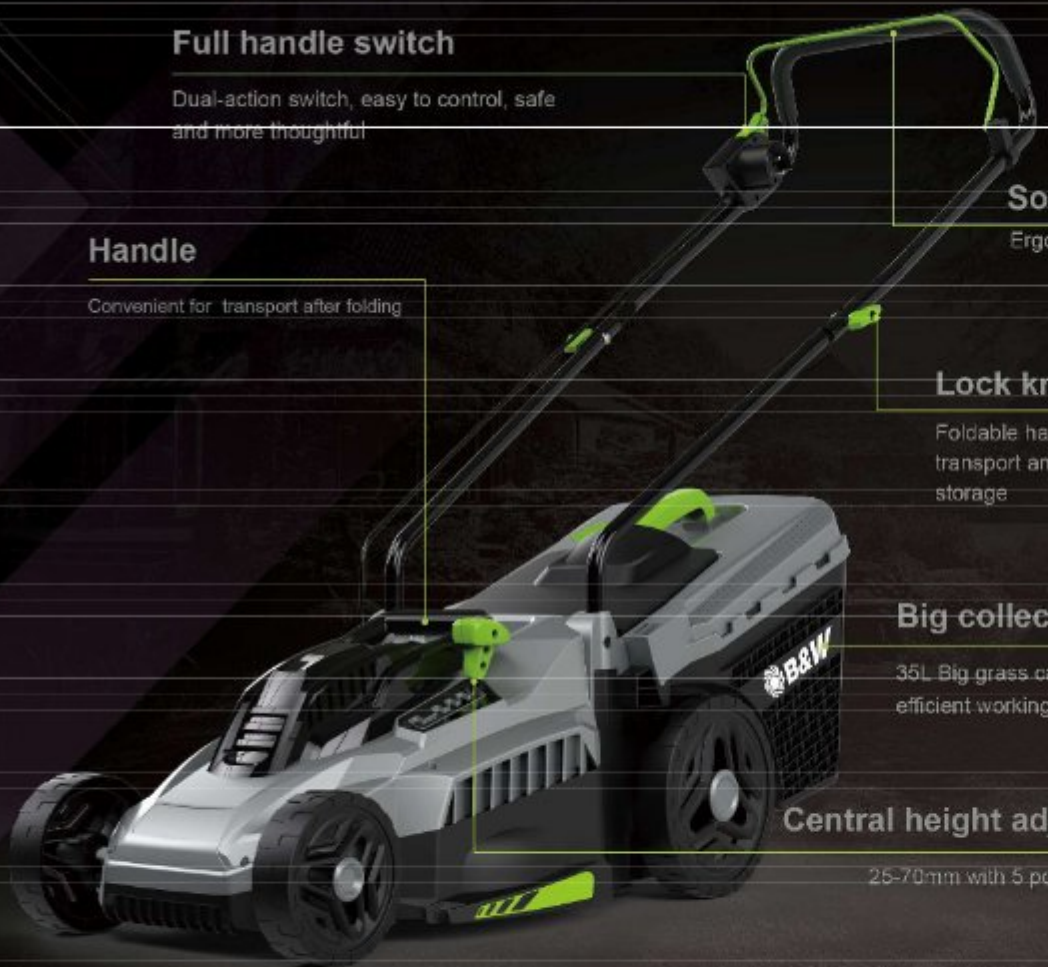

LD-0077

230V 50Hz

NEW AESTHETIC design

1400W Brush Motor

582

KIMPORT

1600W 38CM Electric Lawn Mower

A01-007D

No-load speed:	3400rpm
Height adjustment:	30-75mm with 5 position, central
Cutting width:	38cm
Drive type:	hand push
Wheel:	front 140mm & rear 200mm
Grass bag:	plastic top + fabric （42L）
Noise level (dB):	96db
Carton measurement (mm):	675×430×330
G.W/N.W(Kg):	13/11.5
Pcs. per 20' FCL:	287
Pcs. per 40' FCL:	609
Pcs. Per 40' HQ FCL:	696

Full handle switch

Dual-action switch, easy to control, safe and more thoughtful

Soft grip

Ergonomic design

Handle

Convenient for transport after folding

Lock knob

Foldable handle for easy transport and compact storage

Big collection bag

42L Big grass catcher, for efficient working

Large wheels

For easy pushing

Foldable handle

Easy to transport and storage after folding

Central height adjustment

30-75mm with 5 position, central

LD-0077

230V 50Hz

NEW AESTHETIC design

Brush Motor

383

KIMPORT

1800W 43CM Electric Lawn Mower

A01-002B

No-load speed:	3400rpm
Height adjustment:	30-75mm with 5 position, central
Cutting width:	43cm
Drive type:	hand push
Wheel:	Front 178mm & rear 235mm
Grass bag:	plastic top + fabric （50L）
Noise level (dB):	96db
Carton measurement (mm):	790×510×370
G.W/N.W(Kg):	15/13
Pcs. per 20' FCL:	192
Pcs. per 40' FCL:	408
Pcs. Per 40' HQ FCL:	476

Soft grip

Ergonomic design

Full handle switch

Dual-action switch, easy to control, safe and more thoughtful

Quick clamp

Foldable handle for easy transport and compact storage

Handle

Convenient for transport after folding

Big collection bag

50 Big grass catcher, for efficient working

Large wheels

For easy pushing

Handle adjustment

Choose height that suits oneself

Central height adjustment

30-75mm with 5 position, central

230V

NEW AESTHETIC design

2000W Brush Motor

LD-0077

384

1300W 32cm Electric Scarifier and Aerator 2-in-1

Suitable for two options

31001-07

No-load speed:	3600rpm
Height adjustment:	-3-6-9-12×10mm with 5 position, central
Cutting width:	32cm
Drive type:	hand push
Wheel:	front 178mm & rear 140mm
Grass bag:	all fabric （40L）
Noise level (dB):	95db
Carton measurement (mm):	600×490×300
G.W/N.W(Kg):	13/11
Pcs. per 20' FCL:	294
Pcs. per 40' FCL:	637
Pcs. Per 40' HQ FCL:	726

LD-0077

Soft grip

Ergonomic design

Full handle switch

Dual-action switch, easy to control, safe and more thoughtful

Quick clamp

Foldable handle for easy transport and compact storage

Central height adjustment

Easy to adjust cutting height

Large wheels

For easy pushing

45L Big grass catcher

For efficient working

Handle adjustment

Choose height that suits oneself

LD-0077

230V 50Hz

NEW AESTHETIC design

Brush Motor

1500W 36cm
Electric Scarifier and Aerator and Sweeper 3-in-1

Suitable for three options

A03-002A

No-load speed:	3600rpm
Height adjustment:	3-6-9-12+10mm with 5 position, central
Cutting width:	36cm
Drive type:	hand push
Wheel:	front 200mm & rear 165mm
Grass bag:	all fabric （45L）
Noise level (dB):	99db
Carton measurement (mm):	615×535×275
G.W/N.W(Kg):	13.5/11.5
Pcs. per 20' FCL:	304
Pcs. per 40' FCL:	656
Pcs. Per 40' HQ FCL:	738

230V 2400W Electric Garden Shredder

Push rod
Auxiliary tool

Practical handle
Makes it so easy to move

Safety lock knob
Machine stops working after releasing the lock knob,enhance safety

Detachable collection bag
For a no-mess solution to collect chippings

Start switch
With waterproof cover ,to reduce the risk of electric shock and short

Large wheels
For easy pushing,and enhance working stability

HS-GT1817

Rated vol:	230V-240V ~/50Hz
Rated power:	2400W
No-load speed:	4,800rpm
Max.cutting diameter:	45mm
Collection bag:	50L
Carton measurement (mm):	655*285*380
G.W/N.W(Kg):	11/10
Pcs. per 20' FCL:	410
Pcs. per 40' FCL:	820
Pcs. Per 40' HQ FCL:	1000

LD-0077

230V 2800/3000W
Electric Silent Garden Shredder

Practical handle
Makes it so easy to move

Push rod
Auxiliary tool

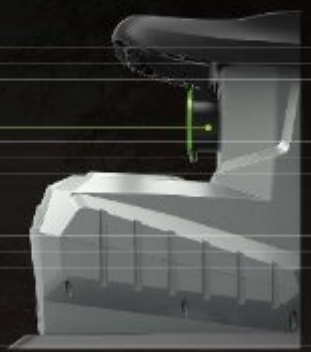

Waterproof socket
Enhance safety of users

Large container
Reduce to empty waste,
extend working time

Large wheels
For easy pushing,and enhance
working stability

HS-GT1813

Rated vol:	230V-240V ~/50Hz
Rated power:	2800/3000W
No-load speed:	4,500/min-1
Max.cutting diameter:	45mm
Collection bag:	60L
Carton measurement (mm):	560*405*510
G.W/N.W(Kg):	13/11.5
Pcs. per 20' FCL:	224
Pcs. per 40' FCL:	484
Pcs. Per 40' HQ FCL:	605

230V 50Hz

Brushless Motor

LD-0077

3.6V 2-in-1 Cordless Hedge Trimmer & Grass Shear

L21-003A

Voltage:	3.6V
Motor:	brush motor
No-load speed（rpm）:	1200rpm
Battery capacity:	1300 mAh
Maximum stated cutting diameter:	8.0mm
Cutting width of the scissors:	80mm
Cutting length of the trimmer:	120mm
Blade material	hardened carbon steel
Carton measurement (mm):	385×435×260（6pcs included）
G.W/N.W(Kg):	8.2(8pcs) / 7.2(8pcs)
Pcs. per 20' FCL:	4212
Pcs. per 40' FCL:	8748
Pcs. Per 40' HQ FCL:	9720

LD-0077

LI-ION 3.6V

Brush Motor

7.2V 2-in-1 Cordless Hedge Trimmer & Grass Shear

L21-004A

Voltage:	7.2V
Motor:	brush motor
No-load speed（rpm）:	1200rpm
Battery capacity:	1500 mAh
Maximum stated cutting diameter:	8.0mm
Cutting width of the scissors:	80mm
Cutting length of the trimmer:	120mm
Blade material	hardened carbon steel
Carton measurement (mm):	385×435×260（6pcs included）
G.W/N.W(Kg):	8.2(8pcs) / 7.2(8pcs)
Pcs. per 20' FCL:	4212
Pcs. per 40' FCL:	8748
Pcs. Per 40' HQ FCL:	9720

LD-0077

Auxiliary handle

Angle adjustment,
comfortable use experience

Soft grip

Ergonomic handle

Telescopic, angle adjustment function

Suits different height and trim

Telescopic distance:0-275mm

Angle adjustment function

Trimming wheel

Sturdy protector

Automatic outgoing trimmer line

20V 23CM Cordless Grass Trimmer

L05-001A

No-load speed:	9000rpm
Cutting width:	23cm
Line diameter:	1.6mm round
Line length:	4m
Tilta adjustment:	0°— 180°
Cutting system:	nylon line
Line feed system:	auto feed
Shaft material:	aluminium
Adjustable pole total length:	840mm to 1070mm
Noise level (dB):	96db
Carton measurement (mm):	835×375×215（4pcs included）
G.W/N.W(Kg):	10.6(4pcs) / 9.3(4pcs)
Pcs. per 20' FCL:	1862
Pcs. per 40' FCL:	3828
Pcs. Per 40' HQ FCL:	4176

LD-0077

LI-ION 20V

NEW AESTHETIC design

Brush Motor

20V 2-in-1 Cordless Hedge Trimmer & Grass Shear

L21-001A

Voltage:	20V
Motor:	brush motor
No-load speed（rpm）:	1200rpm
Maximum stated cutting diameter:	8.0mm
Cutting width of the scissors:	100mm
Cutting length of the trimmer:	200mm
Blade finish	precision ground double-edged
Carton measurement (mm):	385×435×260（6pcs included）
G.W/N.W(Kg):	8.2(6pcs) / 7.2(6pcs)
Pcs. per 20' FCL:	4212
Pcs. per 40' FCL:	8748
Pcs. Per 40' HQ FCL:	9720

LD-0077

20V 2-in-1 Cordless Hedge Trimmer & Grass Shear

L21-001B

Voltage:	20V
Motor:	brush motor
No-load speed（rpm）:	1200rpm
Maximum stated cutting diameter:	8.0mm
Cutting width of the scissors:	100mm
Cutting length of the trimmer:	200mm
Blade finish	precision ground double-edged
Carton measurement (mm):	910×280×400（4pcs included）
G.W/N.W(Kg):	10(4pcs) / 9(4pcs)
Pcs. per 20' FCL:	960
Pcs. per 40' FCL:	2080
Pcs. Per 40' HQ FCL:	2340

LI-ION 20V

Brush Motor

LD-0077

20V 45CM Cordless Hedge Trimmer

Protection plate

Improve safety

Soft grip

Ergonomic handle

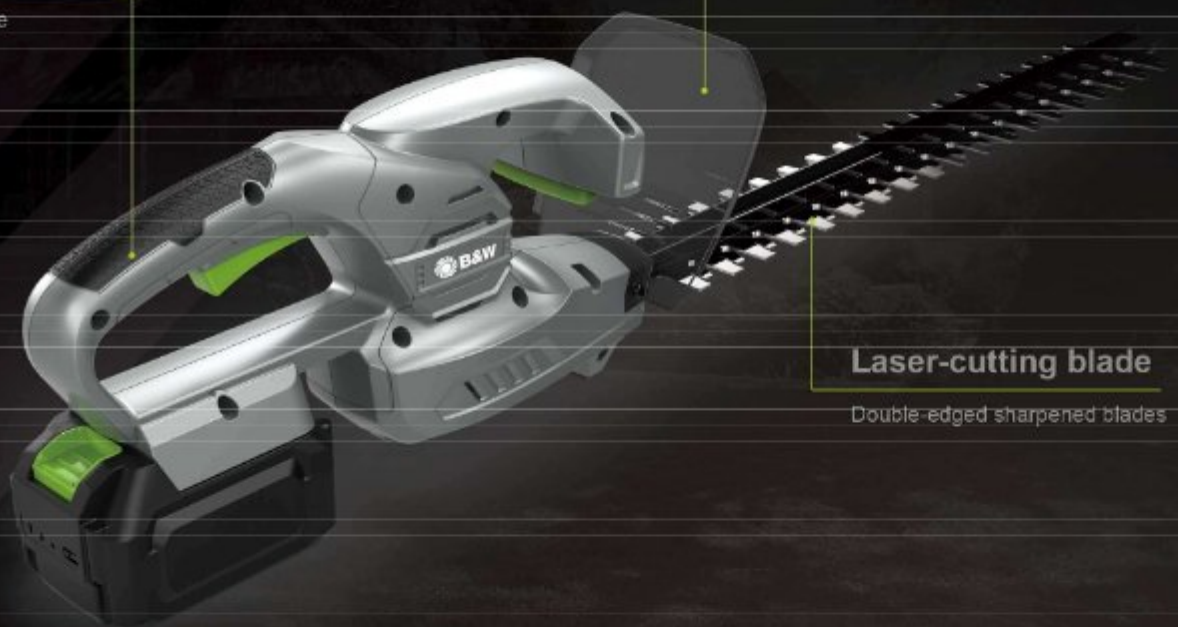

Laser-cutting blade

Double-edged sharpened blades

L04-001A

No-load speed:	1250rpm
Blade length :	45cm
Cutting width:	41cm
Tooth distance:	16mm
Maximum stated cutting diameter:	15mm
Noise level (dB):	96db
Carton measurement (mm):	865×260×255 (4pcs included)
G.W/N.W(Kg):	12.3(4pcs)/11.2(4pcs)
Pcs. per 20' FCL:	2088
Pcs. per 40' FCL:	4356
Pcs. Per 40' HQ FCL:	4840

LD-0077

LI-ION 20V

NEW AESTHETIC design

Brush Motor

20V
Cordless Blower

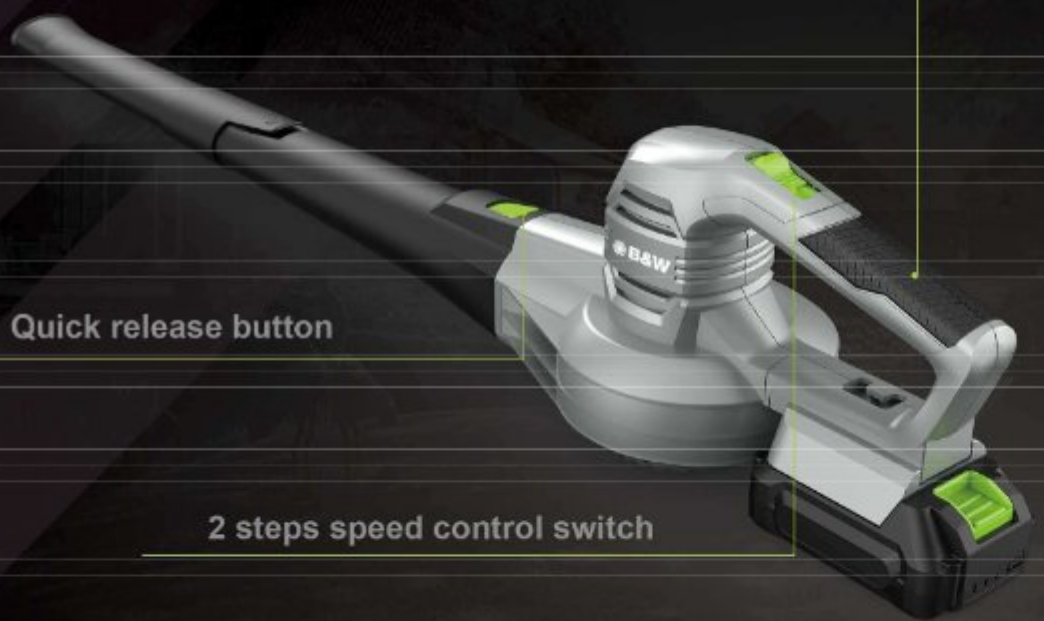

L02-007A

Motor:	brush motor
Voltage:	20V
No load speed:	13000rpm(High)/9000rpm(Low)
Power:	300W
Air speed:	120MPH(High) / 50MPH(Low)
Output wind flow:	110CFM
Carton measurement (mm):	385×335×380 (4pcs included)
G.W/N.W(Kg):	8.2/7.2
Pcs. per 20' FCL:	2520
Pcs. per 40' FCL:	5220
Pcs. Per 40' HQ FCL:	5800

LD-0077

LI-ION 20V

NEW AESTHETIC design

Brush Motor

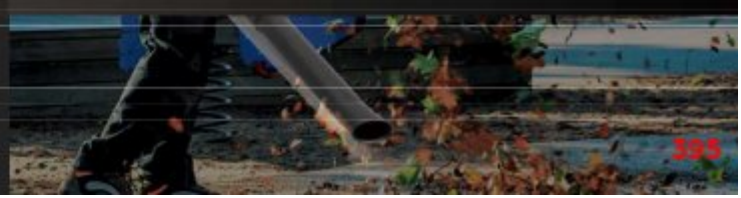

20V Mini Chainsaw

Protective baffle

keeps you away from sawdust or other dirty

Powerful power system

The mini electric saw uses a very powerful pure copper motor, which has higher cutting performance, faster speed, quick heat dissipation, and prevents the machine from burning

Safety system

Press and hold the safety lock and trigger at the same time to start the saw to prevent accidental starting

Hand tool

The machine is equipped with a chain tensioning tool

Soft grip

The handle adopts non-slip design, and the grip feels comfortable

L07-005A

Voltage:	20V
Motor:	Brush motor
Power:	500W
Line speed:	4.8m/s
Chain &guide bar:	5 inch
Brake function:	Electronic brake
Carton Measurement (mm):	425×375×230 (4PCS)
G.W/N.W(Kg):	10.5/8.8 (4PCS)
Pcs. per 20' FCL:	3320
Pcs. per 40' FCL:	6840
Pcs. Per 40' HQ FCL:	7524

LD-0077

LI-ION 20V

Brush Motor

20V Mini Chainsaw

Protective baffle

Keeps you away from sawdust or other dirty

with SDS

Hand tool

The machine is equipped with a chain tensioning tool

Oil Tank Capacity

50 ml

Powerful power system

The mini electric saw uses a very powerful pure copper motor, which has higher cutting performance, faster speed, quick heat dissipation, and prevents the machine from burning

Safety system

Press and hold the safety lock and trigger at the same time to start the saw to prevent accidental starting

Soft grip

The handle adopts non-slip design, and the grip feels comfortable

L07-006A

Voltage:	20V
Motor:	Brushless Motor（700W）
Chain Speed:	8.5m/s
Chain & Guide bar:	5 inch
Brake Function:	Electronic Brake
Automatic Oil System Incl. Oil Window	
Oil Tank Capacity：	50 ml
Carton Measurement (mm):	425×375×230 (4PCS)
G.W/N.W(Kg):	10.5/8.8 (4PCS)
Pcs. per 20' FCL:	3320
Pcs. per 40' FCL:	6840
Pcs. Per 40' HQ FCL:	7524

LD-0077

LI-ION 20V

Brushless Motor

Soft grip

Ergonomic handle

Quick release button

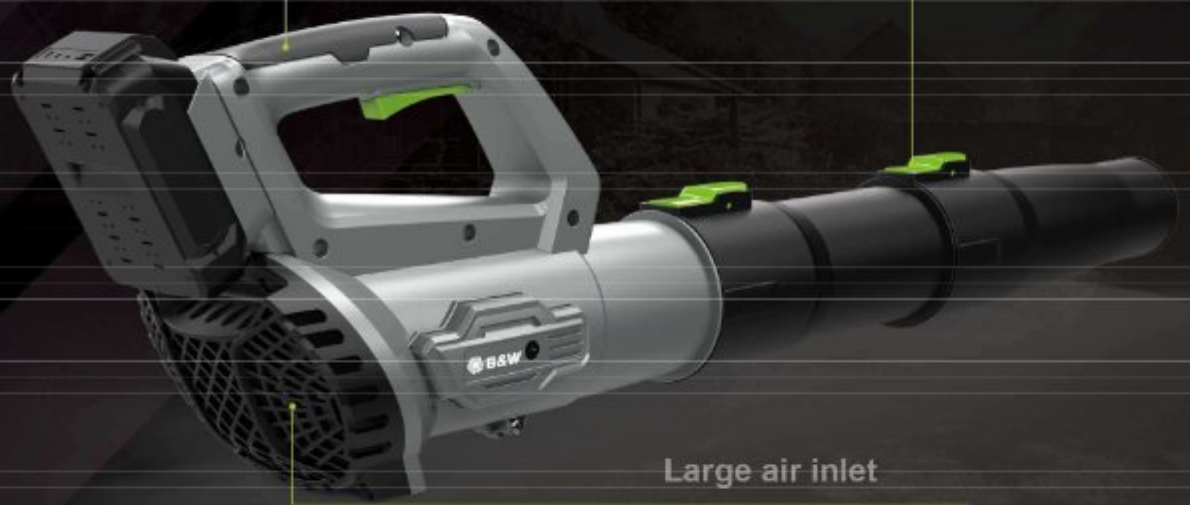

Large air inlet

High efficiency axial flow design, high speed, big airflow

20V Cordless Blower

L02-002A

No-load speed:	15000rpm±500
Power:	300W
Electrical current:	15A
Outlet speed:	80MPH（36.4M/S）
Output wind flow:	250CFM（7.1m³/min）
Discharge time:	2AH: 8 minutes,4AH :16 minutes
Noise level (dB):	96db
Carton measurement (mm):	460×410×250 (2pcs included)
G.W/N.W(Kg):	5.4/4.2
Pcs. per 20' FCL:	1260
Pcs. per 40' FCL:	2610
Pcs. Per 40' HQ FCL:	2900

LD-0077

LI-ION 20V

NEW AESTHETIC design

Brush Motor

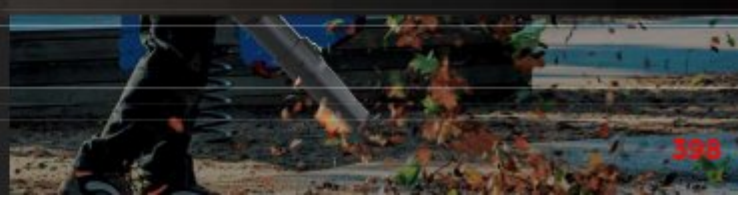

20V Cordless Chain Saw

Brake

Quick brake ,improve safety

Guide bar & chain saw

High performance chain,
make working a pleasure

Soft grip

Ergonomic handle

Lock rotary knob

Tool-free chain tensioning

L07-001

Rated Vol:	20V
Gearbox:	metal gear
Chain speed:	6.5m/s
Chain length:	10" bar and chain
Oil tank capacity:	270 ml (incl. oil window)
G.W/N.W(Kg):	11/8.8
Pcs. per 20' FCL:	1062
Pcs. per 40' FCL:	2214
Pcs. Per 40' HQ FCL:	2460

LD-0077

LI-ION 20V

NEW AESTHETIC design

Brush Motor

20V
Cordless Pole Saw

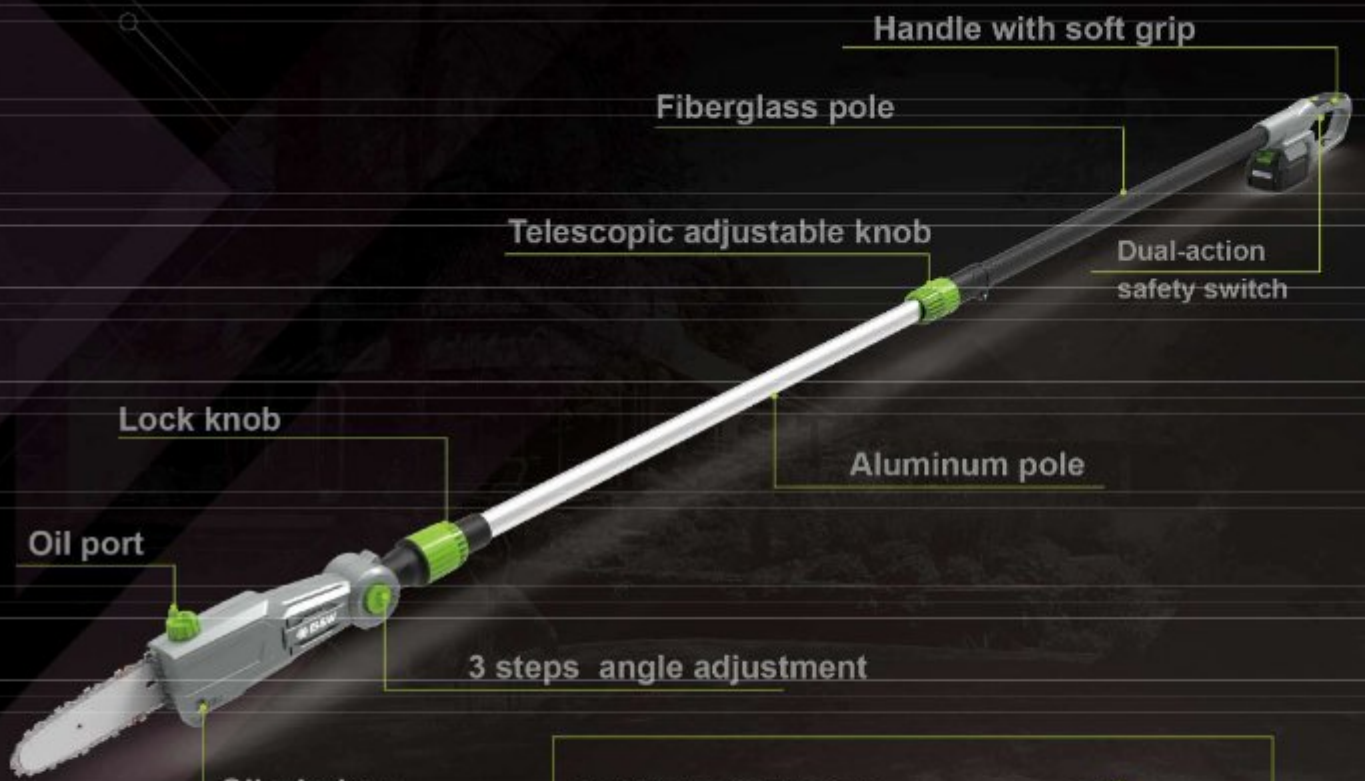

L12-001A

Voltage:	20V
Motor:	brush motor
Chain speed:	4.5m/s
Cutting diameter:	200mm(8")
Oil Tank capacity:	60ml
Material of telescopic tube:	glass fiber
Max length	2.5 m
Min length	1.9 m
Carton measurement (mm):	1320×335×165 （2pcs included）
G.W/N.W(Kg):	8(2pcs) / 7(2pcs)
Pcs. per 20' FCL:	812
Pcs. per 40' FCL:	1736
Pcs. Per 40' HQ FCL:	1984

LI-ION 20V

Brush Motor

LD-0077

20V
Cordless Pole Hedge Trimmer

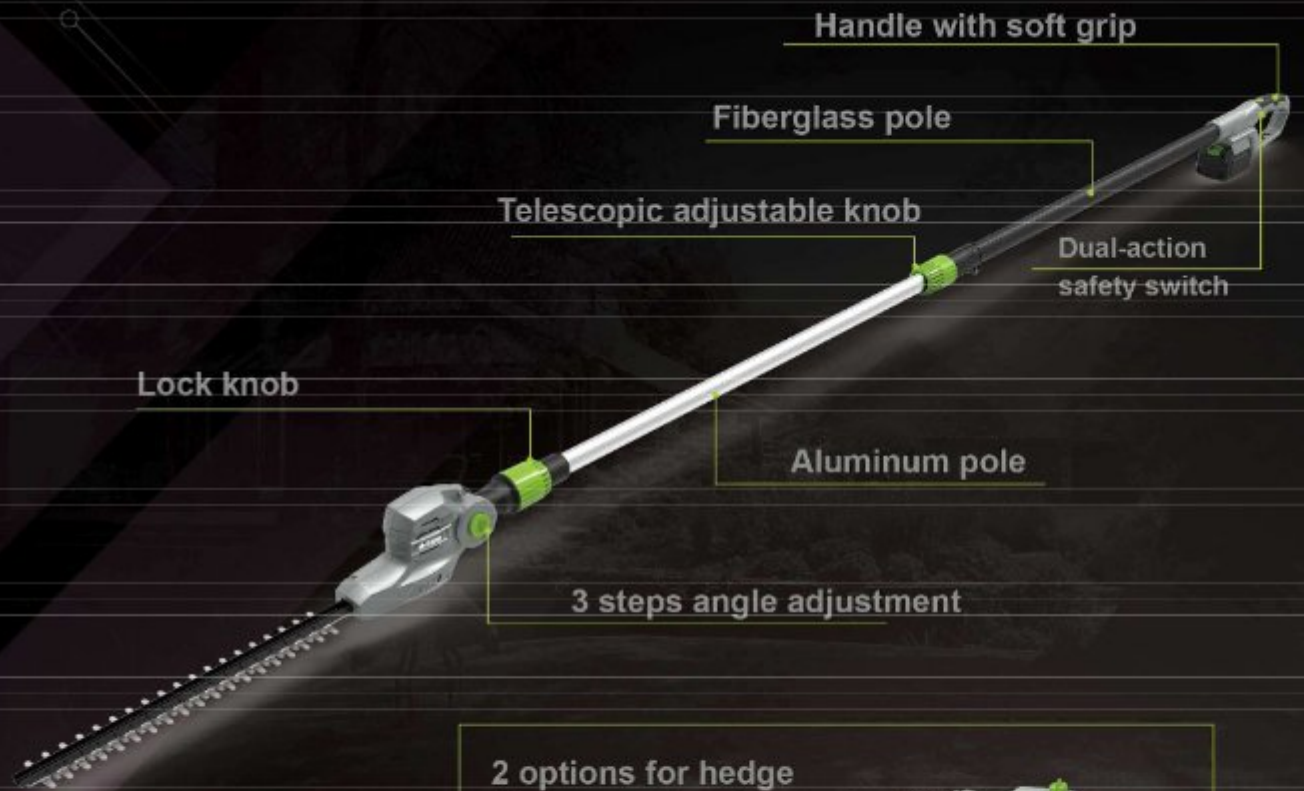

L11-001A

Voltage:	20V
Motor:	brush motor
No-load speed （rpm）:	1250rpm
Maximum stated cutting diameter:	15mm
Blade length:	45cm
Blade material:	hardened carbon steel
Cutting length	41cm
Max length	2.5 m
Min length	1.9 m
Carton measurement (mm):	1320×335×165（2pcs included）
G.W/N.W(Kg):	8(2pcs) / 7(2pcs)
Pcs. per 20' FCL:	812
Pcs. per 40' FCL:	1736
Pcs. Per 40' HQ FCL:	1984

2 options for hedge trimmer and pole saw

LD-0077

LI-ION 20V

Brush Motor

20V Mini Lawn Mower

Push rod vertical placement

Wall hanging function

L01-014A

Voltage:	20V
Cutting height:	30-50mm (3 steps)
Motor:	Brush motor
Rated power:	600W
Working speed:	5500rpm
Mowing diameter:	25cm
Rear wheel diameter 50mm; Front wheel diameter 140mm	
Carton Measurement (mm):	550×370×205
G.W/N.W(Kg):	4.5/3.8
Pcs. per 20' FCL:	690
Pcs. per 40' FCL:	1478
Pcs. Per 40' HQ FCL:	1700

The push rod can be 0-90 ° infinitely adjustable angle

LD-0077

LI-ION 20V

Brush Motor

20V 32CM Cordless Lawn Mower

Single handle switch

Dual-action switch, easy to control, safe and more thoughtful

Lock knob

Foldable handle, stable and reliable

Full plastic grass box

High strength, Convenient for cleaning shredded grass

Battery compartment

Handle

Easy to transport after folding

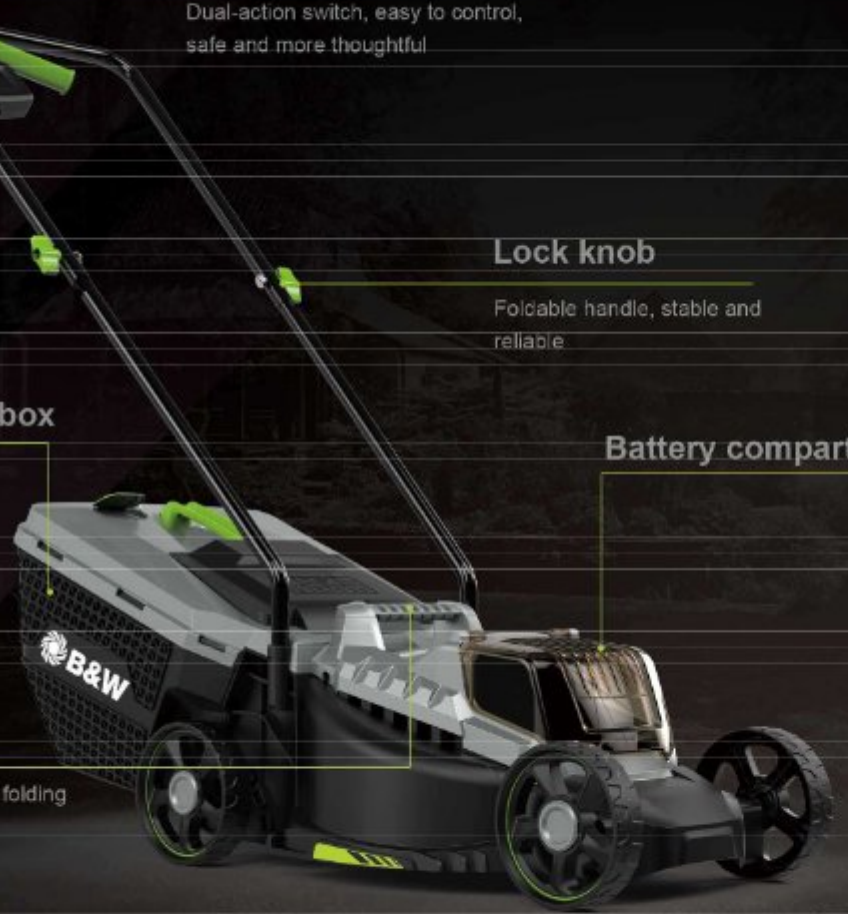

L01-001B

No-load speed:	3400rpm
Height adjustment:	30-50-70mm with 3 position, single
Cutting width:	32cm
Drive type:	hand push
Wheel:	front 140mm & rear 140mm
Grass box:	all plastic （30L）
Noise level (dB):	96db
Carton measurement (mm):	570×395×300
G.W/N.W(Kg):	7.7/6.6
Pcs. per 20' FCL:	399
Pcs. per 40' FCL:	854
Pcs. Per 40' HQ FCL:	976

LD-0077

LI-ION 20V

NEW AESTHETIC design

Brush Motor

KIMPORT

Single handle switch

Dual-action switch, easy to control, safe and more thoughtful

Soft grip

Ergonomic design

Lock knob

Foldable handle, stable and reliable

Full plastic grass box

High strength, convenient for cleaning shredded grass

Battery compartment

Handle

Easy to transport after folding

LD-0077

LI-ION 20V

NEW AESTHETIC design

Brush Motor

20V 33CM Cordless Lawn Mower

L01-002A

No-load speed:	3400rpm
Height adjustment:	30-50-70mm with 3 position, single
Cutting width:	33cm
Drive type:	hand push
Wheel:	front 140mm & rear 140mm
Grass box:	all plastic （30L）
Noise level (dB):	96db
Carton measurement (mm):	580×410×330
G.W/N.W(Kg):	7.7/6.6
Pcs. per 20' FCL:	392
Pcs. per 40' FCL:	812
Pcs. Per 40' HQ FCL:	910

20V 32CM Cordless Lawn Mower

Single handle switch

Dual-action switch, easy to control, safe and more thoughtful

Lock knob

Foldable handle, stable and reliable

Full plastic grass box

High strength, convenient for cleaning shredded grass

Battery compartment

Handle

Easy to transport after folding

L01-003B

No-load speed:	2800-3400rpm
Height adjustment:	30-50-70mm with 3 position, single
Cutting width:	32cm
Drive type:	hand push
Wheel:	front 140mm & rear 140mm
Grass box:	all plastic （30L）
Noise level (dB):	96db
Carton measurement (mm):	570×395×300
G.W/N.W(Kg):	7.7/6.6
Pcs. per 20' FCL:	399
Pcs. per 40' FCL:	854
Pcs. Per 40' HQ FCL:	976

LD-0077

LI-ION 20V

NEW AESTHETIC design

Brushless Motor

KIMPORT

Single handle switch

Dual-action switch, easy to control, safe and more thoughtful

Soft grip

Ergonomic design

Lock knob

Foldable handle, stable and reliable

Full plastic grass box

High strength, convenient for cleaning shredded grass

Battery compartment

Handle

Easy to transport after folding

LD-0077

LI-ION 20V

NEW AESTHETIC design

Brushless Motor

20V 33CM Cordless Lawn Mower

L01-004A

No-load speed:	3400rpm
Height adjustment:	30-50-70mm with 3 position, single
Cutting width:	33cm
Drive type:	hand push
Wheel:	front 140mm & rear 140mm
Grass box:	all plastic （30L）
Noise level (dB):	96db
Carton measurement (mm):	580×410×330
G.W/N.W(Kg):	7.7/6.5
Pcs. per 20' FCL:	392
Pcs. per 40' FCL:	812
Pcs. Per 40' HQ FCL:	910

40V(20Vx2) Cordless Axial Flow Blower

Handle with soft grip

Ergonomic handle

Soft button control panel

Transparent air tube, highlight deflector

Fast release button, easy for fast detachable tube

Dual Battery Compartment

Honeycomb shaped design

Enhance the strength

L02-005A

No-load speed:	14000/16000/18000/20000rpm
Power:	1000W
Voltage:	40V (20Vx2)
Wind speed (m/s):	33.5/38.5/42.5/45.5 M/S
Wind volume(cfm):	220/250/280/320 cfm
Noise level (dB):	102db
Carton measurement (mm):	500×452×552 (4pcs included)
G.W/N.W(Kg):	5/3.8
Pcs. per 20' FCL:	756
Pcs. per 40' FCL:	1596
Pcs. Per 40' HQ FCL:	1862

LD-0077

LI-ION 20V+20V

NEW AESTHETIC design

Brushless Motor

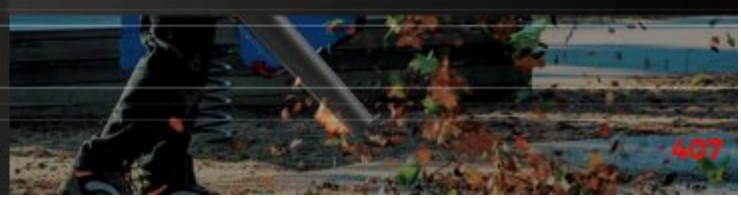

KIMPORT

Dual-action
safety switch

Handle with Soft Grip

Bicycle handle

Dual battery
compartment

Handle angle
adjustable rotary knob

2 options for D handle
and bicycle handle

Brush cutter & grass
trimmer ,2 in 1 function

Tap&go trimmer line

40V(20Vx2) Cordless Brush Cutter & Grass Trimmer 2 in 1

L05-004A

Voltage:	40V（20Vx2）
Rated power:	650W
No-load speed（rpm）:	5000rpm(Low)/6500rpm(High)
Grass trimmer cutting width:	400mm
Cutting line diameter:	2.0mm
Brush cutter cutting width:	255mm
Blade thickness:	2.0mm
Noise level (dB):	96db
Carton measurement (mm):	970*225*270（2pcs included）
G.W/N.W(Kg):	7(2pcs) / 5.2(2pcs)
Pcs. per 20' FCL:	944
Pcs. per 40' FCL:	2000
Pcs. Per 40' HQ FCL:	2240

LD-0077

LI-ION 20V+20V

NEW AESTHETIC design

Brushless Motor

40V(20Vx2) 32CM Cordless Lawn Mower

Single handle switch

Dual-action switch, easily control,safe and convenient, safe and more thoughtful

Lock knob

Foldable handle, stable and reliable

Full plastic grass box

High strength, convenient for cleaning shredded grass

Battery compartment

Handle

Easy to transport after folding

L01-005B-1

No-load speed:	2800-3400rpm
Height adjustment:	30-70mm with 5 position, central
Cutting width:	32cm
Drive type:	hand push
Wheel:	front 140mm & rear 140mm
Grass box:	all plastic （30L）
Noise level (dB):	96db
Carton measurement (mm):	570×395×320
G.W/N.W(Kg):	8.3/7.2
Pcs. per 20' FCL:	399
Pcs. per 40' FCL:	854
Pcs. Per 40' HQ FCL:	976

LD-0077

LI-ION 20V+20V

NEW AESTHETIC design

Brushless Motor

KIMPORT

Single handle switch

Dual-action switch, easy to control,
safe and more thoughtful

Soft grip

Ergonomic design

Lock knob

Foldable handle
stable and reliable

Full plastic grass box

High strength, convenient for
cleaning shredded grass

Dual battery compartment

Handle

Easy to transport after folding

LD-0077

LI-ION 20V+20V

NEW AESTHETIC design

Brushless Motor

40V(20Vx2) 33CM Cordless Lawn Mower

L01-006A-1

No-load speed:	2800-3400rpm
Height adjustment:	30-70mm with 5 position, central
Cutting width:	33cm
Drive type:	hand push
Wheel:	front 140mm & rear 140mm
Grass box:	all plastic （30L）
Noise level (dB):	96db
Carton measurement (mm):	580×410×330
G.W/N.W(Kg):	8.3/7.2
Pcs. per 20' FCL:	392
Pcs. per 40' FCL:	812
Pcs. Per 40' HQ FCL:	910

KIMPORT

Soft grip

Ergomonic design

Full handle switch

Dual-action switch, easy to control, safe and more thoughtful

Quick clamp

Foldable handle for easy transport and compact storage

Full plastic grass box

High strength, convenient for cleaning shredded grass

Battery compartment

Handle

Easy to transport after folding

Handle adjustment

Choose height that suits oneself

LD-0077

LI-ION 40V

NEW AESTHETIC design

Brushless Motor

40V 32CM Cordless Lawn Mower

LIL21009-1

No-load speed:	3300rpm
Height adjustment:	20-38-56mm with 3 position, single
Cutting width:	32cm
Drive type:	hand push
Wheel:	front 140mm & rear 140mm
Grass box:	all plastic （30L）
Noise level (dB):	96db
Carton measurement (mm):	580×410×330
G.W/N.W(Kg):	11.2/9.3
Pcs. per 20' FCL:	392
Pcs. per 40' FCL:	812
Pcs. Per 40' HQ FCL:	928

KIMPORT

40V(20Vx2) 38CM Cordless Lawn Mower

L01-007B

Soft grip
Ergonomic design

Full handle switch
Dual-action switch, easy to control, safe and more thoughtful

Lock knob
Stable and reliable

Handle
Convenient for transport after folding

Big collection bag
42 Big grass bag, for effective working

Dual battery compartment

Large wheels
For easy pushing

Handle with foldable function
Easy to storage and transport

Central height adjustment
Easy to adjust cutting height, improve working efficiency

No-load speed:	2800-3400rpm
Height adjustment:	30-75mm with 5 position, central
Cutting width:	38cm
Drive type:	hand push
Wheel:	front 140mm & rear 178mm
Grass bag:	plastic top + fabric （42L）
Noise level (dB):	96db
Carton measurement (mm):	685×430×330
G.W/N.W(Kg):	13/11.5
Pcs. per 20' FCL:	294
Pcs. per 40' FCL:	616
Pcs. Per 40' HQ FCL:	704

LD-0077

LI-ION 20V+20V

NEW AESTHETIC design

Brushless Motor

KIMPORT

40V(20Vx2) 43CM Cordless Lawn Mower

L01-008B

Soft grip

Ergonomic design

Full handle switch

Dual-action switch, easy to control, safe and more thoughtful

Quick clamp

Foldable handle for easy transport and compact storage

Handle

Convenient for transport after folding

Dual battery compartment

Big collection bag

52 Big grass catcher, for effective working

Large wheels

For easy pushing

Handle adjustment

Choose height that suits oneself

Central height adjustment

Easy to adjust cutting height, improve working efficiency

No-load speed:	2800-3400rpm
Height adjustment:	30-75mm with 5 position, central
Cutting width:	43cm
Drive type:	hand push
Wheel:	front 178mm & rear 235mm
Grass bag:	plastic top + fabric （52L）
Noise level (dB):	96db
Carton measurement (mm):	790×510×370
G.W/N.W(Kg):	14.5/12.5
Pcs. per 20' FCL:	192
Pcs. per 40' FCL:	408
Pcs. Per 40' HQ FCL:	476

LD-0077

LI-ION 20V+20V

NEW AESTHETIC design

Brushless Motor

KIMPORT

Qucik clamp

Easy to fold handle

4- Battery compartment

Provide extra power and longer runtime

Dual-action safety switch

Enhance safety

Front carry handle

Convenient for transport

3-Position angle adjustment

Suitable for users of different Height

Central height adjustment

Easy to adjust cutting height enhance working efficiency

LD-0077

LI-ION 20V+20V

NEW AESTHETIC design

Brushless Motor

40V(20Vx2) 46CM Cordless Lawn Mower

L01-010A

Voltage:	40V(20Vx2)
No-load speed:	2800-3200rpm
Height adjustment:	25-75mm with 8 position, central
Cutting width:	46cm
Drive type:	hand push
Wheel:	front 178mm & rear 250mm
Grass bag:	65L
Noise level (dB):	96db
Insert 4pcs batteries at the same time , each 2 pcs batteries in a group;the first group batteries discharged, then automatically switches to the second group	
Carton measurement (mm):	775*560*430
G.W/N.W(Kg):	22/20
Pcs. per 20' FCL:	150
Pcs. per 40' FCL:	315
Pcs. Per 40' HQ FCL:	378

KIMPORT

40V(20Vx2) 46CM Cordless Self-Propelled Lawn Mower

L01-010B

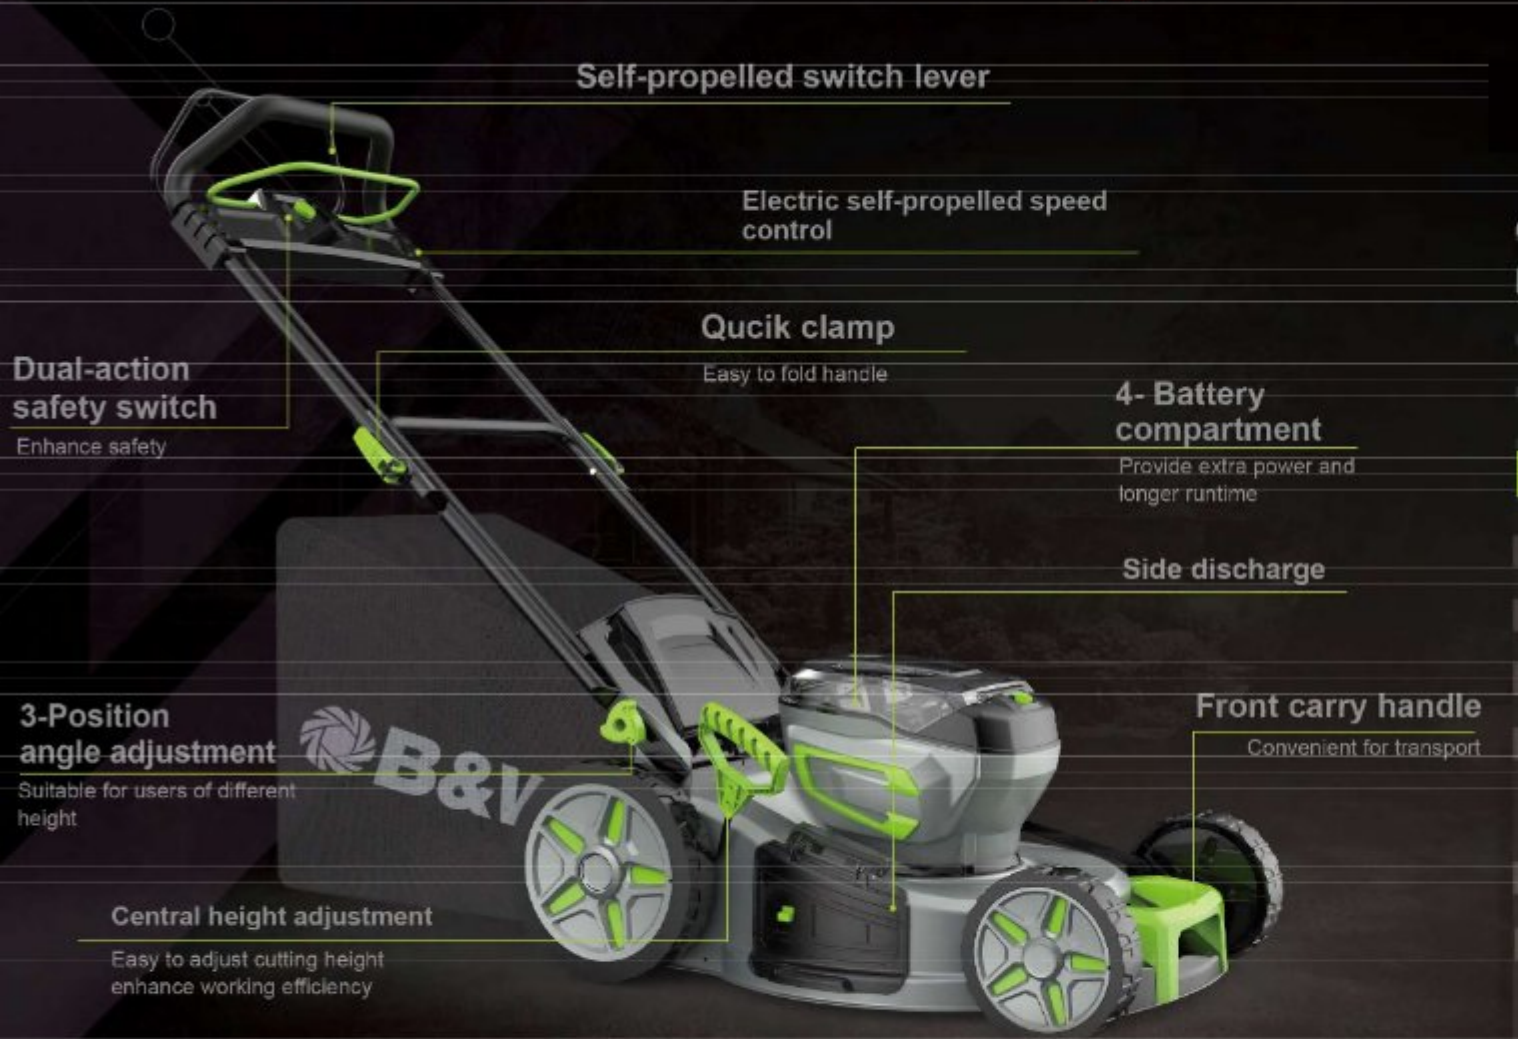

Voltage:	40V(20Vx2)
No-load speed:	2800-3200rpm
Height adjustment:	25-75mm with 8 position, central
Cutting width:	46CM
Drive type:	self-propelled
Wheel:	front 178mm & rear 250mm
Grass bag:	65L
Noise level (dB):	96db
Insert 4pcs batteries at the same time , each 2 pcs batteries in a group;the first group batteries discharged, then automatically switches to the second group	
Carton measurement (mm):	775*560 *430
G.W/N.W(Kg):	22/20
Pcs. per 20' FCL:	150
Pcs. per 40' FCL:	315
Pcs. Per 40' HQ FCL:	378

LD-0077

LI-ION 20V+20V

NEW AESTHETIC design

Brushless Motor

KIMPORT

40V(20Vx2) 51CM Cordless Lawn Mower

Qucik clamp
Easy to fold handle

4- Battery compartment
Provide extra power and longer runtime

Dual-action safety switch
Enhance safety

Front carry handle
Convenient for transport

3-Position angle adjustment
Suitable for users of different height

Central height adjustment
Easy to adjust cutting height enhance working efficiency

L01-011A

Voltage:	40V(20Vx2)
No-load speed:	2800-3200rpm
Height adjustment:	25-75mm with 8 position, central
Cutting width:	51cm
Drive type:	Hand push
Wheel:	front 178mm & rear 250mm
Grass bag:	65L
Noise level (dB):	96db
Insert 4pcs batteries at the same time , each 2 pcs batteries in a group;the first group batteries discharged, then automatically switches to the second group	
Carton measurement (mm):	825*570*430
G.W/N.W(Kg):	18.5/20.5
Pcs. per 20' FCL:	140
Pcs. per 40' FCL:	280
Pcs. Per 40' HQ FCL:	336

LD-0077

LI-ION 20V+20V

NEW AESTHETIC design

Brushless Motor

KIMPORT

40V(20Vx2) 51CM Cordless Self-Propelled Lawn Mower

L01-011B

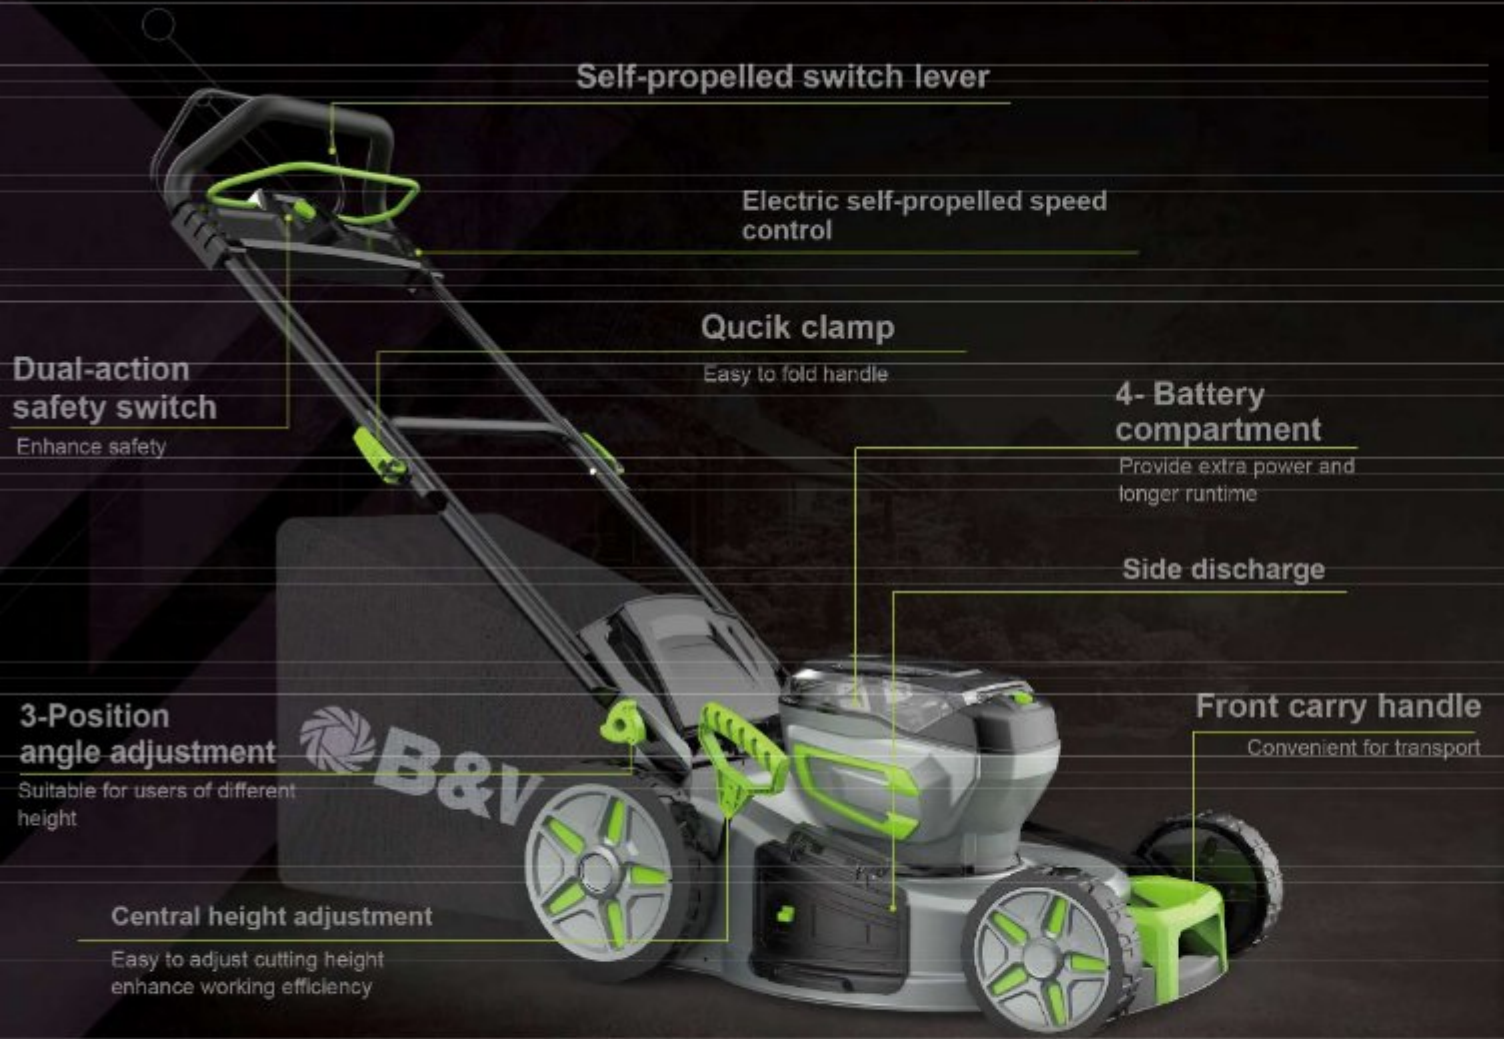

Voltage:	40V(20Vx2)
No-load speed:	2800-3200rpm
Height adjustment:	25-75mm with 8 position, central
Cutting width:	51CM
Drive type:	self-propelled
Wheel:	front 178mm & rear 250mm
Grass bag:	65L
Noise level (dB):	96db
Insert 4pcs batteries at the same time , each 2 pcs batteries in a group;the first group batteries discharged, then automatically switches to the second group	
Carton measurement (mm):	825*570*430
G.W/N.W(Kg):	23/21
Pcs. per 20' FCL:	140
Pcs. per 40' FCL:	280
Pcs. Per 40' HQ FCL:	336

LD-0077

LI-ION 20V+20V

NEW AESTHETIC design

Brushless Motor

Soft grip

Ergonomic design

Full handle switch

Dual-action switch, easy to control, safe and more thoughtful

Quick clamp

Foldable handle for easy transport and compact storage

Central height adjustment

Easy to adjust cutting height, improve working efficiency

45L Big grass catcher

For efficient working

Large wheels

For easy pushing

Handle adjustment

Choose height that suits oneself

Dual battery compartment

LD-0077

LI-ION 20V+20V

NEW AESTHETIC design

Brushless Motor

40V(20Vx2) 37CM Cordless Scarifier and Aerator and Sweeper 3-in-1

Suitable for three options

L03-002A

No-load speed:	3600rpm
Height adjustment:	-3-6-9-12+10mm with 5 position, central
Cutting width:	37cm
Drive type:	hand push
Wheel:	front 200mm & rear 165mm
Grass bag:	all fabric （45L）
Noise level (dB):	99db
Carton measurement (mm):	640×540×300
G.W/N.W(Kg):	12.2/10.2
Pcs. per 20' FCL:	238
Pcs. per 40' FCL:	525
Pcs. Per 40' HQ FCL:	600

40V(20Vx2) Cordless Sweeper

L18-001A

Rated Vol:	40V (20Vx2)
Disk brush working speed:	200rpm
Cylindrical brush working speed:	500rpm
Sweeper width:	680mm
Disk brush diameter:	270mm X 2 pcs
Rear wheel:	200mm PVC rubberised wheel
Front castor wheel:	50mm PVC rubberised wheel
Waste container capacity:	24L
Carton measurement (mm):	630×550×290
G.W/N.W(Kg):	12.5/11
Pcs. per 20' FCL:	296
Pcs. per 40' FCL:	616
Pcs. Per 40' HQ FCL:	693

LD-0077

LI-ION 20V+20V

NEW AESTHETIC design

Brush Motor

KIMPORT

LD-0772

PETROL LAWN MOWERS

THE IDEAL MOWERS FOR YOUR LAWN CARE

Comfort Series

16"18"20"

Page 10-19

Quality Series

16"18"20"22"

Page 20-29

Premium Series

17"18"20"21"22"

Page 30-43

Premium Honda Power Series

18"20"21"

Page 44-47

Trike Mower Series

17"18"20"21"22"

Page 48-55

Aluminium Deck Series

20"

Page 56-59

Engines

Page 60-61

HONDA Page 61

B&S Page 62-63

KIMPORT

COMFORT LINE
PETROL LAWN MOWERS

You are sure to find your ideal lawn mower in the Comfort Series. Petrol fuelled and with various cutting widths and feature configurations, all these lawn mowers have one thing in common - they are compact, easy to operate and incorporate advanced, environment friendly technology to make sure you can enjoy your lawn even more.

The COMFORT LINE SERIES in brief:

- Reliable and durable
- Easy operation and maintenance
- Relatively light weight thanks to a hybrid housing
- Low vibration

Comfort Line Series
DYM1560N

SELF-PROPELLED DRIVE SYSTEM
The self-propelled drive system takes all the effort out of pushing your Lawn mower, means you can maintain your lawn and not feel exhausted when the grass cutting is complete.

POWERFUL ENGINES
Briggs & Stratton Engines provide dependable power and a long service life; easy to start and simple to operate

60L GRASS CATCHER
60L nylon grass catcher

WHEELS
Large wheels with double bearings for easy running

STEEL DECK
Compact and robust

Quick-Release
For folding down the handlebar in seconds without tools for compact storage and transport.

Central Height Adjustment
The cutting height is easily adjustable by using a central lever.

High Wheels
Large wheels with double bearing for easy running

KIMPORT

Specifications	Description	DYM161702	DYM1651PF	DYM1652EF
Cutting width	mm	400	410	410
No load speed	RPM	2800	3000	3000
Engine	Model	DG300	DG350	DG300
	Displacement, cc	79.8	98.5	79.8
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	6	7	7
Discharge		Rear	Rear	Rear
Grass bag capacity	litre	50	50	50
Drive type		Hand push	Hand push	Self propelled
Start system		Pull	Pull	Pull
Handlebar	Feature	-	-	-
Deck	Material	Plastic	Plastic	Plastic
Wheels	Diameter front/rear, inch	6" / 7"	6" / 8"	6" / 8"
Net weight	kg	16	19.6	19.7
Pcs/20'/40'/40HQ'		240/504/587	160/335/402	160/335/402

Specifications	Description	DYM1653EF	DYM1653F	DYM1654F
Cutting width	mm	410	410	410
No load speed	RPM	3000	3000	3000
Engine	Model	DG300	DG350	DG350
	Displacement, cc	79.8	98.5	98.5
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		Rear	Rear	Rear
Grass bag capacity	litre	50	50	50
Drive type		Hand push	Hand push	Self propelled
Start system		Pull	Pull	Pull
Handlebar	Feature	-	-	-
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	6" / 8"	6" / 8"	6" / 8"
Net weight	kg	19.6	22.2	25.4
Pcs/20'/40'/40HQ'		160/335/402	160/335/402	160/335/402

Specifications	Description	DYM1652F	DYM1651P	DYM1652
Cutting width	mm	410	410	410
No load speed	RPM	3000	2800	2800
Engine	Model	DG350	DYM1P64FA	DYM1P64FA
	Displacement, cc	98.5	135	135
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		Rear	Rear	Rear
Grass bag capacity	litre	50	50	50
Drive type		Self propelled	Hand push	Self propelled
Start system		Pull	Pull	Pull
Handlebar	Feature	-	-	-
Deck	Material	Plastic	Plastic	Plastic
Wheels	Diameter front/rear, inch	6" / 8"	6" / 8"	6" / 8"
Net weight	kg	22.5	22.9	25.6
Pcs/20'/40'/40HQ'		160/335/402	160/335/402	160/335/402

Specifications	Description	DYM1553N	DYM1554N
Cutting width	mm	410	410
No load speed	RPM	2800	2800
Engine	Model	B&S 450E Series	B&S 450E Series
	Displacement, cc	125	125
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	7	7
Discharge		Rear	Rear
Grass bag capacity	litre	50	50
Drive type		Hand push	Self propelled
Start system		Pull	Pull
Handlebar	Feature	-	-
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	6" / 8"	6" / 8"
Net weight	kg	20.6	23.8
Pcs/20'/40'/40HQ'		160/335/402	160/335/402

Specifications	Description	DYM1663F	DYM1664F	DYM1663E
Cutting width	mm	410	410	410
No load speed	RPM	3000	3000	2800
Engine	Model	DG350	DG350	DYM1P64FA
	Displacement, cc	98.5	98.5	135
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		Rear	Rear	Rear
Grass bag capacity	litre	45	45	50
Drive type		Hand push	Self propelled	Hand push
Start system		Pull	Pull	Pull
Handlebar	Feature	-	-	-
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	6" / 8"	6" / 8"	6" / 8"
Net weight	kg	24.5	26.5	28
Pcs/20'/40'/40HQ'		155/330/396	155/330/396	155/330/395

Specifications	Description	DYM1664E	DYM1563N	DYM1564N
Cutting width	mm	410	410	410
No load speed	RPM	2800	2800	2800
Engine	Model	DYM1P64FA	B&S 450E Series	B&S 450E Series
	Displacement, cc	135	125	125
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		Rear	Rear	Rear
Grass bag capacity	litre	50	50	50
Drive type		Self propelled	Hand push	Self propelled
Start system		Pull	Pull	Pull
Handlebar	Feature	-	-	-
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	6" / 8"	6" / 8"	6" / 8"
Net weight	kg	31.5	24	25.8
Pcs/20'/40'/40HQ'		155/330/395	155/330/396	155/330/396

Specifications	Description	DYM1655F	DYM1656F	DYM1656
Cutting width	mm	460	460	460
No load speed	RPM	3000	3000	2800
Engine	Model	DG350	DG350	DYM1P64FA
	Displacement, cc	98.5	98.5	135
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		Rear	Rear	Rear
Grass bag capacity	litre	60	60	60
Drive type		Hand push	Self propelled	Self propelled
Start system		Pull	Pull	Pull
Handlebar	Feature	-	-	-
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	6" / 8"	6" / 8"	6" / 8"
Net weight	kg	23.3	26.5	30.1
Pcs/20'/40'/40HQ'		140/300/360	140/300/360	140/300/360

Specifications	Description	DYM1555N	DYM1555EN	DYM1556N
Cutting width	mm	460	460	460
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 450E Series	B&S 500E Series	B&S 500E Series
	Displacement, cc	125	140	140
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		Rear	Rear	Rear
Grass bag capacity	litre	60	60	60
Drive type		Hand push	Hand push	Self propelled
Start system		Pull	Pull	Pull
Handlebar	Feature	-	-	-
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	6" / 8"	6" / 8"	6" / 8"
Net weight	kg	21.9	22.4	25.6
Pcs/20'/40'/40HQ'		140/300/360	140/300/360	140/300/360

Specifications	Description	DYM1666F	DYM1665	DYM1666
Cutting width	mm	460	460	460
No load speed	RPM	3000	2800	2800
Engine	Model	DG350	DYM1P64FA	DYM1P64FA
	Displacement, cc	98.5	135	135
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		Rear	Rear	Rear
Grass bag capacity	litre	55	55	55
Drive type		Self propelled	Hand push	Self propelled
Start system		Pull	Pull	Pull
Handlebar	Feature	-	-	Soft grip
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	7" / 8"	7" / 8"	7" / 8"
Net weight	kg	28.5	32	33
Pcs/20'/40'/40HQ'		140/300/360	140/300/359	140/300/359

Specifications	Description	DYM1668	DYM1668C
Cutting width	mm	510	510
No load speed	RPM	2700	2800
Engine	Model	DG600	DG600
	Displacement, cc	173	173
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	10	10
Discharge		Rear	3 in 1 Mulching, rear, side
Grass bag capacity	litre	65	65
Drive type		Self propelled	Self propelled
Start system		Pull	Pull
Handlebar	Feature	Soft grip	Soft grip
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	7" / 9"	7" / 9"
Net weight	kg	36.5	36.2
Pcs/20'/40'/40HQ'		140/290/290	140/290/290

Specifications	Description	DYM1565N	DYM1566N
Cutting width	mm	460	460
No load speed	RPM	2800	2800
Engine	Model	B&S 450E Series	B&S 500E Series
	Displacement, cc	125	140
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	10	10
Discharge		Rear	Rear
Grass bag capacity	litre	60	55
Drive type		Hand push	Self propelled
Start system		Pull	Pull
Handlebar	Feature	-	Soft grip
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	7" / 8"	7" / 8"
Net weight	kg	25.6	28.2
Pcs/20'/40'/40HQ'		140/300/360	140/300/360

Specifications	Description	DYM1568EN	DYM1560CN	DYM1560N
Cutting width	mm	510	510	510
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 625EXi Series, ReadyStart	B&S 625EXi Series, ReadyStart	B&S 650EXi Series, ReadyStart
	Displacement, cc	150	150	163
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		Rear	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled	Self propelled	Self propelled
Start system		Pull	Pull	Pull
Handlebar	Feature	Soft grip	Soft grip	Soft grip
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	7" / 9"	8" / 11"	8" / 11"
Net weight	kg	30.3	31.9	32.2
Pcs/20'/40'/40HQ'		130/280/336	120/260/312	120/260/312

Specifications	Description	DYM1669	DYM1569N
Cutting width	mm	560	560
No load speed	RPM	2700	2700
Engine	Model	DG600	B&S 675EXi Series, ReadyStart
	Displacement, cc	173	163
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	10	10
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	75	75
Drive type		Self propelled	Self propelled
Start system		Pull	Pull
Handlebar	Feature	Soft grip	Soft grip
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"
Net weight	kg	40	34
Pcs/20'/40'/40HQ'		100/210/210	100/210/251

Specifications	Description	DYM1405FL	DYM1405L	DYM1405H
Cutting width	mm	510	510	510
No load speed	RPM	3000	2800	2800
Engine	Model	DG350	DYM1P64FA	DYM1P64FA
	Displacement, cc	98.5	135	135
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	5	5	5
Discharge		Side, Mulching	Side, Mulching	Side, Mulching
Grass bag capacity	litre	N/A	N/A	N/A
Drive type		Hand push	Hand push	Hand push
Start system		Pull	Pull	Pull
Handlebar	Feature	-	-	-
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	7" / 7"	7" / 7"	8" / 11"
Net weight	kg	22.7	27	28.3
Pcs/20'/40'/40HQ'		168/360/420	140/300/360	130/270/324

Specifications	Description	DYM1401LN	DYM1401HN
Cutting width	mm	510	510
No load speed	RPM	2800	2800
Engine	Model	B&S 500E Series	B&S 500E Series
	Displacement, cc	140	140
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	10	10
Discharge		Side, Mulching	Side, Mulching
Grass bag capacity	litre	N/A	N/A
Drive type		Hand push	Hand push
Start system		Pull	Pull
Handlebar	Feature	-	-
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	7" / 7"	8" / 11"
Net weight	kg	22.3	23.5
Pcs/20'/40'/40HQ'		168/360/420	156/324/378

KIMPORT

Quality Series
DYM1660AQ

SELF-PROPELLED DRIVE SYSTEM
The self-propelled drive system takes all the effort out of pushing your Lawn mower, means you can maintain your lawn and not feel exhausted when the grass cutting is complete

CUTTING HEIGHT ADJUSTMENT
The cutting height is easily adjustable by using a central lever.

Powerful engine with DG600 for excellent mowing performance

60L GRASS CATCHER
60L large nylon grass catcher

WHEELS
Large wheels with double bearings for easy running

STEEL DECK
Compact and robust

3 IN 1 function :
Mulching, collecting and side discharge

The 3 in 1 mower deck lets you switch between mulching, collecting for side discharge in seconds, providing you with full versatility for maintaining your lawn.

Grass Window
The perfectly balanced grass catcher has a transparent window to check grass collection level

Camlock
The camlocks make the ergonomic handless easier and faster to adjust in height, with a simple click. The handle comes with a soft handgrip.

Ergonomic Grass Catcher
Easy attachment and removal

Specifications	Description	DYM1663EQ	DYM1664EQ	DYM1563QN
Cutting width	mm	400	400	400
No load speed	RPM	2800	2800	2800
Engine	Model	DYM1P64FA	DYM1P64FA	B&S 450E Series
	Displacement, cc	135	135	125
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		Rear	Rear	Rear
Grass bag capacity	litre	50	50	50
Drive type		Hand push	Self propelled	Hand push
Start system		Pull	Pull	Pull
Handlebar	Feature	Soft grip	Soft grip	Soft grip
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	6" / 8"	6" / 8"	6" / 8"
Net weight	kg	28.3	31	24.2
Pcs/20'/40'/40HQ'		128/264/330	128/264/330	155/330/395

Specifications	Description	DYM1564QN	DYM1665Q	DYM1666Q
Cutting width	mm	400	460	460
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 450E Series	DYM1P64FA	DYM1P64FA
	Displacement, cc	125	135	135
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		Rear	Rear	Rear
Grass bag capacity	litre	50	60	60
Drive type		Self propelled	Hand push	Self propelled
Start system		Pull	Pull	Pull
Handlebar	Feature	Soft grip	Soft grip	Soft grip
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	6" / 8"	7" / 8"	7" / 8"
Net weight	kg	26	30.7	33.3
Pcs/20'/40'/40HQ'		155/330/395	112/240/300	112/240/300

Specifications	Description	DYM1625Q	DYM1625CQ	DYM1626Q
Cutting width	mm	460	460	460
No load speed	RPM	2800	2800	2800
Engine	Model	DYM1P64FA	DYM1P64FA	DYM1P64FA
	Displacement, cc	135	135	135
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		Rear	3 in 1 Mulching, rear, side	Rear
Grass bag capacity	litre	60	60	60
Drive type		Hand push	Hand push	Self propelled
Start system		Pull	Pull	Pull
Handlebar	Feature	Soft grip	Soft grip	Soft grip
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8” / 11”	8” / 11”	8” / 11”
Net weight	kg	31.7	32.3	34.4
Pcs/20'/40'/40HQ'		112/232/290	112/232/290	112/232/290

Specifications	Description	DYM1626CQ	DYM1565QN	DYM1566EQN
Cutting width	mm	460	460	460
No load speed	RPM	2800	2800	2800
Engine	Model	DYM1P64FA	B&S 450E Series	B&S 450E Series
	Displacement, cc	135	125	125
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		3 in 1 Mulching, rear, side	Rear	Rear
Grass bag capacity	litre	60	60	60
Drive type		Self propelled	Hand push	Self propelled
Start system		Pull	Pull	Pull
Handlebar	Feature	Soft grip	Soft grip	Soft grip
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8” / 11”	7” / 8”	7” / 8”
Net weight	kg	35	26.2	28.3
Pcs/20'/40'/40HQ'		112/232/290	112/240/300	112/240/300

Specifications	Description	DYM1566QN	DYM1565HQN	DYM1565HCQN
Cutting width	mm	460	460	460
No load speed	RPM	2700	2800	2800
Engine	Model	B&S 500E Series	B&S 450E Series	B&S 450E Series
	Displacement, cc	140	125	125
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		Rear	Rear	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled	Hand push	Hand push
Start system		Pull	Pull	Pull
Handlebar	Feature	Soft grip	Soft grip	Soft grip
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	7” / 8”	8” / 11”	8” / 11”
Net weight	kg	28.5	27	27.8
Pcs/20'/40'/40HQ'		112/240/300	112/232/290	112/232/290

Specifications	Description	DYM1566HCQN	DYM1525CQN	DYM1526QN
Cutting width	mm	460	460	460
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 450E Series	B&S 500E Series	B&S 500E Series
	Displacement, cc	125	140	140
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	Rear
Grass bag capacity	litre	60	60	60
Drive type		Self propelled	Hand push	Self propelled
Start system		Pull	Pull	Pull
Handlebar	Feature	Soft grip	Soft grip	Soft grip
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8” / 11”	8” / 11”	8” / 11”
Net weight	kg	30.7	27.3	30
Pcs/20'/40'/40HQ'		112/232/290	112/232/290	112/232/290

		DYM1526CQN	DYM1526EDQ	DYM1525D
Specifications	**Description**			
Cutting width	mm	460	460	460
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 500E Series	B&S 475iS	B&S 575iS Series
	Displacement, cc	140	140	150
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled	Self propelled	Hand push
Start system		Pull	Lithium-ion,E-start	Lithium-ion, E-start
Handlebar	Feature	Soft grip	Soft grip	Soft grip
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"	8" / 11"
Net weight	kg	30	32.2	28.3
Pcs/20'/40'/40HQ'		112/232/290	112/232/290	140/290/290

		DYM1526D	DYM1526SD
Specifications	**Description**		
Cutting width	mm	460	460
No load speed	RPM	2800	2800
Engine	Model	B&S 575iS Series	B&S 575iS Series
	Displacement, cc	150	150
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	10	10
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60
Drive type		Self propelled	Self propelled, 3 speed, GT clutch
Start system		Lithium-ion, E-start	Lithium-ion, E-start
Handlebar	Feature	Soft grip	Soft grip
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"
Net weight	kg	31.1	33.2
Pcs/20'/40'/40HQ'		140/290/290	140/290/290

Easiest ever starting

instartis
INSTANT STARTING TECHNOLOGY

Starting at the touch of a button

Effortless starting with InStart® Lithium-Ion battery power.

		DYM1666D	DYM1666DQ
Specifications	**Description**		
Cutting width	mm	460	460
No load speed	RPM	2800	2800
Engine	Model	DYM1P64FE	DYM1P64FE
	Displacement, cc	135	135
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	10	10
Discharge		Rear	Rear
Grass bag capacity	litre	60	60
Drive type		Self propelled	Self propelled
Start system		Electric start / Pull	Electric start / Pull
Handlebar	Features	Soft grip, control panel	Soft grip, control panel
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	7" / 8"	7" / 8"
Net weight	kg	37.7	38
Pcs/20'/40'/40HQ'		120/250/300	96/200/250

		DYM1626CDQ	DYM1626SDQ
Specifications	**Description**		
Cutting width	mm	460	460
No load speed	RPM	2800	2800
Engine	Model	DYM1P64FE	DYM1P64FE
	Displacement, cc	135	135
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	10	10
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60
Drive type		Self propelled	Self propelled, 4 speed, GT clutch
Start system		Electric start / Pull	Electric start / Pull
Handlebar	Features	Soft grip, control panel	Soft grip, control panel
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"
Net weight	kg	39.4	40
Pcs/20'/40'/40HQ'		96/200/250	96/200/250

Specifications	Description	DYM1668Q	DYM1660AQ	DYM1560CQN
Cutting width	mm	510	510	510
No load speed	RPM	2700	2700	2800
Engine	Model	DG600	DG600	B&S 625EXi Series, ReadyStart
	Displacement, cc	173	173	150
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		Rear	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled	Self propelled	Self propelled
Start system		Pull	Pull	Pull
Handlebar	Feature	Soft grip	Soft grip	Soft grip
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	7" / 9"	8" / 11"	8" / 11"
Net weight	kg	36.4	37.3	32.2
Pcs/20'/40'/40HQ'		112/232/290	96/208/260	120/260/260

Specifications	Description	DYM1560QN	DYM1520QN
Cutting width	mm	510	510
No load speed	RPM	2800	2800
Engine	Model	B&S 650EXi Series, ReadyStart	B&S 675EXi Series, Ready start
	Displacement, cc	163	163
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	10	10
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60
Drive type		Self propelled	Self propelled
Start system		Pull	Pull
Handlebar	Feature	Soft grip	Soft grip
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"
Net weight	kg	32.4	32.6
Pcs/20'/40'/40HQ'		120/260/260	120/260/260

Specifications	Description	DYM1560EDQ	DYM1560ESDQ	DYM1560E1AQ
Cutting width	mm	510	510	510
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 575iS Series	B&S 575iS Series	B&S 775iS Series
	Displacement, cc	150	150	161
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled	Self propelled, 3 speed, GT clutch	Self propelled
Start system		Lithium-ion, E-start	Lithium-ion, E-start	Lithium-ion, E-start
Handlebar	Feature	Soft grip	Soft grip	Soft grip
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"	8" / 11"
Net weight	kg	33.7	34	35.6
Pcs/20'/40'/40HQ'		120/260/260	120/260/260	96/208/260

Specifications	Description	DYM1560ESQ	DYM1660DQ	DYM1660SDQ
Cutting width	mm	510	510	510
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 775iS Series	DYM1P70FE	DYM1P70FE
	Displacement, cc	161	170	170
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled, 3 speed, GT clutch	Self propelled	Self propelled, 4 speed, GT clutch
Start system		Lithium-ion, E-start	Electric start / Pull	Electric start / Pull
Handlebar	Features	Soft grip	Soft grip, control panel	Soft grip, control panel
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"	8" / 11"
Net weight	kg	35.3	42.6	43.5
Pcs/20'/40'/40HQ'		96/208/260	96/208/260	96/208/260

		DYM1520DQ	DYM1520SDQ	DYM1560DQ
Specifications	**Description**			
Cutting width	mm	510	510	510
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 675iS Series	B&S 675iS Series	B&S675iS Series, MOW 'N' STOW
	Displacement, cc	163	163	163
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled	Self propelled, 3 speed, GT clutch	Self propelled
Start system		Lithium-ion, E-start	Lithium-ion, E-start	Lithium-ion, E-start
Handlebar	Feature	Soft grip	Soft grip	Soft grip
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"	8" / 11"
Net weight	kg	34	34.2	34.5
Pcs/20'/40'/40HQ'		96/208/260	96/208/260	96/208/260

		DYM1669Q	DYM1569EQN
Specifications	**Description**		
Cutting width	mm	560	560
No load speed	RPM	2700	2700
Engine	Model	DG600	B&S 650EXi Series, ReadyStart
	Displacement, cc	173	163
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	10	10
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	70	70
Drive type		Self propelled	Self propelled
Start system		Pull	Pull
Handlebar	Feature	Soft grip	Soft grip
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"
Net weight	kg	40.3	34
Pcs/20'/40'/40HQ'		80/168/210	80/168/210

		DYM1569QN	DYM1569QND	DYM1569QNDS
Specifications	**Description**			
Cutting width	mm	560	560	560
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 675EXi Series, ReadyStart	B&S 675iS Series	B&S 675iS Series
	Displacement, cc	163	163	163
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	70	70	70
Drive type		Self propelled	Self propelled	Self propelled, 3 speed, GT clutch
Start system		Pull	Lithium-ion, E-start	Lithium-ion, E-start
Handlebar	Feature	Soft grip	Soft grip	Soft grip
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"	8" / 11"
Net weight	kg	34	35.1	35.4
Pcs/20'/40'/40HQ'		80/168/210	80/168/210	80/168/210

Petrol Lawn Mowers

PREMIUM SERIES
PETROL LAWN MOWERS

Powerful engine and a modular concept: completed lawn mower range can be used and adjusted according to individual needs, to ensure easy and pleasant gardening while focusing on the maximum comfort. The products in Premium range are equipped with ergonomic grips with panel , self-propelled drive, quick fix and release handlebar with height adjustment, easy storage, filling level indicator, high wheel for easier traction ,front handling panel for carrying and much more.

The PREMIUM Series in brief:

- Excellent mowing performance
- Easy operation and maintenance
- For medium sized gardens of up to 2,200 m²
- Ergonomic and effort saving features
- Mulching,collecting and side discharge

PREMIUM SERIES
DYM1578EN-3

COMPACT STORAGE
Lawn mower can be stored in a compact space

CUTTING HEIGHT ADJUSTMENT
Centralized wheels adjustment by one lever for fast setting of the cutting height. you can select among max 7 positions.

DELUXE HANDLE
Ergonomic handle with soft grip, dashboard, hight adjustment with quick release for simple operation and easy handling

60L GRASS CATCHER
Large nylon grass catcher with filling level indicator

WHEELS
Large wheels with double bearings for easily running

FRONT HANDLING PANEL
Makes carrying easier

STEEL DECK
Compact and robust

The friction disc blade system protects the crank-shaft from deformation and damage when running over tree roots.

Filling Lever Indicator
This indicates when your bag is full and ready to be emptied, eliminating grass being spilled onto your lawn.

Handlebar Height Adjustment
5 stage height adjustable handlebar

Ergonomic Grass Catcher
Easy attaching and removal

Specifications	Description	DYM161901	DYM162001
Cutting width	mm	430	430
No load speed	RPM	2900	2900
Engine	Model	DG350	DG350
	Displacement, cc	98.5	98.5
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	7	7
Discharge		Rear	3 in 1 Mulching, rear, side
Grass bag capacity	litre	50	50
Drive type		Hand push	Self propelled
Start system		Pull	Pull
Handlebar	Features	Soft grip, hight adjustment	Soft grip, hight adjustment
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	7" / 8"	7" / 8"
Net weight	kg	27.5	30
Pcs/20'/40'/40HQ'		165/330/396	165/330/396

Specifications	Description	DYM1675-3	DYM1676-3	DYM1676C-3
Cutting width	mm	460	460	460
No load speed	RPM	2800	2800	2800
Engine	Model	DYM1P64FA	DYM1P64FA	DYM1P64FA
	Displacement, cc	135	135	135
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		Rear	Rear	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Hand push	Self propelled, GT clutch	Self propelled, GT clutch
Start system		Pull	Pull	Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"	8" / 11"
Net weight	kg	32.3	35.4	35.6
Pcs/20'/40'/40HQ'		104/216/270	104/216/270	104/216/270

Specifications	Description	DYM162002	DYM151901	DYM152001
Cutting width	mm	430	430	430
No load speed	RPM	2900	2800	2800
Engine	Model	DYM1P56FE	B&S 450E Series	B&S 450E Series
	Displacement, cc	98.5	125	125
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		3 in 1 Mulching, rear, side	Rear	3 in 1 Mulching, rear, side
Grass bag capacity	litre	50	50	50
Drive type		Self propelled	Hand push	Self propelled
Start system		Electric start / Pull	Pull	Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Soft grip, hight adjustment	Soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	7" / 8"	7" / 8"	7" / 8"
Net weight	kg	33.7	27	29.5
Pcs/20'/40'/40HQ'		135/285/341	165/330/396	165/330/396

Specifications	Description	DYM1676S-3	DYM1575N-3	DYM1575CN-3
Cutting width	mm	460	460	460
No load speed	RPM	2800	2800	2800
Engine	Model	DYM1P64FA	B&S 500E Series	B&S 500E Series
	Displacement, cc	135	140	140
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		3 in 1 Mulching, rear, side	Rear	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled, GT clutch, 4 speed	Hand push	Hand push
Start system		Pull	Pull	Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"	8" / 11"
Net weight	kg	36.7	28	28.4
Pcs/20'/40'/40HQ'		104/216/270	104/216/270	104/216/270

		DYM1576N-3	DYM1576CN-3	DYM1576SN-3
Specifications	**Description**			
Cutting width	mm	460	460	460
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 500E Series	B&S 500E Series	B&S 500E Series
	Displacement, cc	140	140	140
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		Rear	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled, GT clutch	Self propelled, GT clutch	Self propelled, GT clutch, 4 speed
Start system		Pull	Pull	Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"	8" / 11"
Net weight	kg	30.7	31.2	32.4
Pcs/20'/40'/40HQ'		104/216/270	104/216/270	104/216/270

		DYM1676CD-3	DYM1676SD-3
Specifications	**Description**		
Cutting width	mm	460	460
No load speed	RPM	2800	2800
Engine	Model	DYM1P64FE	DYM1P64FE
	Displacement, cc	135	135
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60
Drive type		Self propelled, GT clutch	Self propelled, 4 speed, GT clutch
Start system		Electric start / Pull	Electric start / Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"
Net weight	kg	39	39.6
Pcs/20'/40'/40HQ'		104/216/270	104/216/270

		DYM1576CD-3	DYM1576SD-3
Specifications	**Description**		
Cutting width	mm	460	460
No load speed	RPM	2800	2800
Engine	Model	B&S 575iS Series	B&S 575iS Series
	Displacement, cc	150	150
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60
Drive type		Self propelled, GT clutch	Self propelled, 3 speed, GT clutch
Start system		Lithium-ion, E-start	Lithium-ion, E-start
Handlebar	Features	Soft grip, hight adjustment	Soft grip, hight adjustment
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"
Net weight	kg	32.7	33.2
Pcs/20'/40'/40HQ'		130/270/270	130/270/270

Specifications	Description	DYM1678C-3	DYM1678-3	DYM1678S-3
Cutting width	mm	510	510	510
No load speed	RPM	2800	2800	2800
Engine	Model	DG600	DG600	DG600
	Displacement, cc	173	173	173
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		Rear	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled, GT clutch	Self propelled, GT clutch	Self propelled, GT clutch, 4 speed
Start system		Pull	Pull	Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"	8" / 11"
Net weight	kg	37.5	38.1	38.7
Pcs/20'/40'/40HQ'		96/208/260	96/208/260	96/208/260

Specifications	Description	DYM1578CN-3	DYM1578N-3	DYM1578ESN-3
Cutting width	mm	510	510	510
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 625EXi Series, ReadyStart	B&S 625EXi Series, ReadyStart	B&S 625EXi Series, ReadyStart
	Displacement, cc	150	150	150
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		Rear	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled, GT clutch	Self propelled, GT clutch	Self propelled, GT clutch, 4 speed
Start system		Pull	Pull	Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"	8" / 11"
Net weight	kg	32.4	33.2	33.4
Pcs/20'/40'/40HQ'		96/208/260	96/208/260	96/208/260

Specifications	Description	DYM1578EN-3	DYM1578SN-3	DYM1578E1N-3
Cutting width	mm	510	510	510
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 650EXi Series	B&S 650EXi Series	B&S 675EXi Series
	Displacement, cc	163	163	163
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled, GT clutch	Self propelled, GT clutch, 4 speed	Self propelled, GT clutch
Start system		Pull	Pull	Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"	8" / 11"
Net weight	kg	33.3	34	33.4
Pcs/20'/40'/40HQ'		96/208/260	96/208/260	96/208/260

Specifications	Description	DYM1578ED-3	DYM1578ESD-3	DYM1578E2D-3
Cutting width	mm	510	510	510
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 575iS Series	B&S 575iS Series	B&S 675iS Series
	Displacement, cc	150	150	163
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled, GT clutch	Self propelled, 3 speed, GT clutch	Self propelled, GT clutch
Start system		Lithium-ion, E-start	Lithium-ion, E-start	Lithium-ion, E-start
Handlebar	Features	Soft grip, hight adjustment	Soft grip, hight adjustment	Soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"	8" / 11"
Net weight	kg	33.2	33.6	33.8
Pcs/20'/40'/40HQ'		120/260/260	120/260/260	96/208/260

Specifications	Description	DYM1578E2SD-3	DYM1578E1-3	DYM1578E1S-3
Cutting width	mm	510	510	510
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 675iS Series	B&S 775iS Series	B&S 775iS Series
	Displacement, cc	163	161	161
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled, 3 speed, GT clutch	Self propelled, GT clutch	Self propelled, 3 speed, GT clutch
Start system		Lithium-ion, E-start	Lithium-ion, E-start	Lithium-ion, E-start
Handlebar	Features	Soft grip, hight adjustment	Soft grip, hight adjustment	Soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"	8" / 11"
Net weight	kg	34.4	36	36.2
Pcs/20'/40'/40HQ'		96/208/260	96/208/260	96/208/260

NEW

Specifications	Description	DYM1670-3	DYM1670S-3
Cutting width	mm	530	530
No load speed	RPM	2800	2800
Engine	Model	DG600	DG600
	Displacement, cc	173	173
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60
Drive type		Self propelled, GT clutch	Self propelled, 4 speed
Start system		Pull	Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"
Net weight	kg	38	38.5
Pcs/20'/40'/40HQ'		96/200/250	96/200/250

Specifications	Description	DYM1678D-3	DYM1678SD-3
Cutting width	mm	510	510
No load speed	RPM	2800	2800
Engine	Model	DYM1P70FE	DYM1P70FE
	Displacement, cc	173	173
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60
Drive type		Self propelled, GT clutch	Self propelled, 4 speed, GT clutch
Start system		Electric start / Pull	Electric start / Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"
Net weight	kg	41.7	42.3
Pcs/20'/40'/40HQ'		96/208/260	96/208/260

NEW

Specifications	Description	DYM1670D-3	DYM1670SD-3	DYM1570-3
Cutting width	mm	530	530	530
No load speed	RPM	2800	2800	2800
Engine	Model	DYM1P70FE	DYM1P70FE	B&S 675EXi Series
	Displacement, cc	173	173	163
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled, GT clutch	Self propelled, 4 speed, GT clutch	Self propelled, GT clutch
Start system		Electric start / Pull	Electric start / Pull	Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"	8" / 11"
Net weight	kg	41.6	42.1	33.2
Pcs/20'/40'/40HQ'		96/200/250	96/200/250	96/200/250

NEW

Specifications	Description	DYM1570S-3	DYM1570D-3	DYM1570SD-3
Cutting width	mm	530	530	530
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 675EXi Series	B&S 675iS Series	B&S 675iS Series
	Displacement, cc	163	163	163
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled, GT clutch	Self propelled, GT clutch	Self propelled, 3 speed, GT clutch
Start system		Pull	Lithium-ion, E-start	Lithium-ion, E-start
Handlebar	Features	Control panel, soft grip, hight adjustment	Soft grip, hight adjustment	Soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8” / 11”	8” / 11”	8” / 11”
Net weight	kg	33.7	33.7	34.2
Pcs/20’/40’/40HQ’		105/225/270	105/225/270	105/225/270

Specifications	Description	DYM1579N-3	DYM1579SN-3	DYM1579EN-3
Cutting width	mm	560	560	560
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 675EXi Series	B&S 675EXi Series	B&S 875EXi Series
	Displacement, cc	163	163	190
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	70	70	70
Drive type		Self propelled, GT clutch	Self propelled, GT clutch, 4 speed	Self propelled, GT clutch, 4 speed
Start system		Pull	Pull	Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8” / 11”	8” / 11”	8” / 11”
Net weight	kg	36	36	37.2
Pcs/20’/40’/40HQ’		80/168/210	80/168/210	80/168/210

LD-0772

Specifications	Description	DYM1579ESN-3	DYM1579D-3	DYM1579DS-3
Cutting width	mm	560	560	560
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 875EXi Series	B&S 675iS Series	B&S 675iS Series
	Displacement, cc	190	163	163
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	70	70	70
Drive type		Self propelled, GT clutch, 4 speed	Self propelled, GT clutch	Self propelled, 3 speed, GT clutch
Start system		Pull	Lithium-ion, E-start	Lithium-ion, E-start
Handlebar	Features	Control panel, soft grip, hight adjustment	Soft grip, hight adjustment	Soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8” / 11”	8” / 11”	8” / 11”
Net weight	kg	37.9	35.5	35.8
Pcs/20’/40’/40HQ’		80/168/210	80/168/210	80/168/210

		DYM1579E-3	DYM1579ES-3
Specifications	**Description**		
Cutting width	mm	560	560
No load speed	RPM	2800	2800
Engine	Model	B&S 775iS Series	B&S 775iS Series
	Displacement, cc	161	161
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	70	70
Drive type		Self propelled, GT clutch	Self propelled, 3 speed, GT clutch
Start system		Lithium-ion, E-start	Lithium-ion, E-start
Handlebar	Features	Soft grip, hight adjustment	Soft grip, hight adjustment
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"
Net weight	kg	37.6	37.8
Pcs/20'/40'/40HQ'		80/168/210	80/168/210

		DYM1679ES-3	DYM1679D-3	DYM1679ED-3
Specifications	**Description**			
Cutting width	mm	560	560	560
No load speed	RPM	2800	2800	2800
Engine	Model	DG900	DYM1P70FE	DG900E
	Displacement, cc	196	173	196
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	70	70	70
Drive type		Self propelled, GT clutch, 4 speed	Self propelled, GT clutch	Self propelled, GT clutch
Start system		Pull	Electric start / Pull	Electric start / Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"	8" / 11"
Net weight	kg	43.1	45.8	46.1
Pcs/20'/40'/40HQ'		80/168/210	80/168/210	80/168/210

		DYM1679-3	DYM1679E-3	DYM1679S-3
Specifications	**Description**			
Cutting width	mm	560	560	560
No load speed	RPM	2800	2800	2800
Engine	Model	DG600	DG900	DG600
	Displacement, cc	173	196	173
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	7	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	70	70	70
Drive type		Self propelled, GT clutch	Self propelled, GT clutch	Self propelled, GT clutch, 4 speed
Start system		Pull	Pull	Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"	8" / 11"
Net weight	kg	41.5	41.8	42.8
Pcs/20'/40'/40HQ'		80/168/210	80/168/210	80/168/210

		DYM1679SD-3	DYM1679ESD-3
Specifications	**Description**		
Cutting width	mm	560	560
No load speed	RPM	2800	2800
Engine	Model	DYM1P70FE	DG900E
	Displacement, cc	173	173
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	70	70
Drive type		Self propelled, 4 speed, GT clutch	Self propelled, 4 speed, GT clutch
Start system		Electric start / Pull	Electric start / Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"
Net weight	kg	46.3	46.6
Pcs/20'/40'/40HQ'		80/168/210	80/168/210

KIMPORT

PREMIUM-HONDA Engine Series
DYM1778ES

SELF-PROPELLED DRIVE SYSTEM
The self-propelled drive system takes all the effort out of pushing your Lawn mower, meaning you can maintain your lawn and not feel exhausted when the grass cutting is complete

POWERFUL ENGINE
Easy to start Honda engine for excellent mowing performance

DELUXE HANDLE
Ergonomic handle with soft grip, dashboard, hight adjustment with quick release for simple operation and easy handling.

60L GRASS CATCHER
Large nylon grass catcher with filling level indicator

WHEELS
Large wheels with double bearings for easy running

STEEL DECK
Compact and robust

POWERED by HONDA™

GT General Transmissions

Deluxe Operating Panel
The PREMIUM Series is equipped with a functional dashboard of storage box and convenient can holder.

Camlock
The camlocks make the ergonomic handless easier and faster to adjust in height, with a simple click. The handle comes with a soft handgrip.

Cutting Height Adjustment
The cutting height is easily adjustable by using a central lever.

Specifications	Description	DYM1725N	DYM1726N	DYM1726CN
Cutting width	mm	460	460	460
No load speed	RPM	2800	2800	2800
Engine	Model	HONDA GCV145	HONDA GCV145	HONDA GCV145
	Displacement, cc	145	145	145
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	10
Discharge		Rear	Rear	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Hand push	Self propelled, GTclutch	Self propelled, GT clutch
Start system		Pull	Pull	Pull
Handlebar	Feature	Soft grip	Soft grip	Soft grip
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8"/11"	8"/11"	8"/11"
Net weight	kg	30.3	32.2	33.2
Pcs/20'/40'/40HQ'		112/232/290	112/232/290	112/232/290

Specifications	Description	DYM1726CSN	DYM1776EN	DYM1776CEN
Cutting width	mm	460	460	460
No load speed	RPM	2800	2800	2800
Engine	Model	HONDA GCV145	HONDA GCV145	HONDA GCV145
	Displacement, cc	145	145	145
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	7	7
Discharge		3 in 1 Mulching, rear, side	Rear	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled, 3 speed, GT clutch	Self propelled, GT clutch	Self propelled, GT clutch
Start system		Pull	Pull	Pull
Handlebar	Features	Soft grip	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8"/11"	8"/11"	8"/11"
Net weight	kg	33.4	34	35.1
Pcs/20'/40'/40HQ'		112/232/290	104/216/270	104/216/270

Specifications	Description	DYM1776ESN	DYM1776CESN
Cutting width	mm	460	460
No load speed	RPM	2800	2800
Engine	Model	HONDA GCV145	HONDA GCV145
	Displacement, cc	145	145
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	7	7
Discharge		Rear	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60
Drive type		Self propelled, 4 speed, GT clutch	Self propelled, 4 speed, GT clutch
Start system		Pull	Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8"/11"	8"/11"
Net weight	kg	34.5	35.6
Pcs/20'/40'/40HQ'		104/216/270	104/216/270

Specifications	Description	DYM1778E	DYM1778ES
Cutting width	mm	510	510
No load speed	RPM	2800	2800
Engine	Model	HONDA GCV170	HONDA GCV170
	Displacement, cc	167	167
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60
Drive type		Self propelled, GT clutch	Self propelled, 4 speed, GT clutch
Start system		Pull	Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8"/11"	8"/11"
Net weight	kg	36.6	36.8
Pcs/20'/40'/40HQ'		96/208/260	96/208/260

Specifications	Description	DYM1720C	DYM1720CS	DYM1778CE
Cutting width	mm	510	510	510
No load speed	RPM	2800	2800	2800
Engine	Model	HONDA GCV170	HONDA GCV170	HONDA GCV170
	Displacement, cc	167	167	167
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	10	10	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	Rear
Grass bag capacity	litre	60	60	60
Drive type		Self propelled, GT clutch	Self propelled, 3 speed, GT clutch	Self propelled, GT clutch
Start system		Pull	Pull	Pull
Handlebar	Features	Soft grip	Soft grip	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8"/11"	8"/11"	8"/11"
Net weight	kg	35.3	35.5	34.3
Pcs/20'/40'/40HQ'		96/208/260	96/208/260	96/208/260

NEW

Specifications	Description	DYM1770	DYM1770S
Cutting width	mm	530	530
No load speed	RPM	2800	2800
Engine	Model	HONDA GCV170	HONDA GCV170
	Displacement, cc	167	167
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	7	7
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60
Drive type		Self propelled	Self propelled, 4 speed
Start system		Pull	Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8"/11"	8"/11"
Net weight	kg	36.5	37
Pcs/20'/40'/40HQ'		96/200/250	96/200/250

KIMPORT

TRIKE LAWN MOWER SERIES

The trike lawn mower for lawns up to 2,000 m² is designed for easy manoeuvrability. It is easy to cut around bushes, trees and lawn edges. Its unique front wheel locking feature makes this mower ideal for cutting in straight lines. The special lawn mower designed with mulching,collecting and side discharge.

Centrally positioned front wheel locking system.

Difficulties with trees, shrubs and flower beds?
Not anymore! The 360 degree manoeuvrablility of its front caster wheel lets this trike mower take all obstacles in its stride.

CUTTING HEIGHT ADJUSTMENT
Centralized wheels adjustment by one lever for fast setting of the cutting height.
you can select among max 6 positions.

1 One lever height adjustment
2 Manoeuvrable and versatile

The 3 WHEEL MOWER series in brief:

Manoeuvrable and versatile
Easy operation and maintenance
For natural, sustainable lawn care
Mulching,collecting and side discharge

Powerful engine

KIMPORT

DYM152002

DYM162005

DYM162006

DYM162201

DYM162202

Specifications	Description	DYM152002	DYM162005	DYM162006	DYM162201	DYM162202
Cutting width	mm	430	430	430	460	460
No load speed	RPM	2800	3000	3000	2800	2800
Engine	Model	B&S 450E Series	DG350	DYM1P56FE	DYM1P64FA	DYM1P64FE
	Displacement, cc	125	98.5	98.5	135	135
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75	25-75	25-75
	Rear wheel	6 positions/Central	6 positions / Central	6 positions / Central	6 positions / Central	6 positions / Central
	Front wheel	Rotary knob	Rotary knob	Rotary knob	Rotary knob	Rotary knob
Discharge		3 in 1 Mulching,rear,side	3 in 1 Mulching,rear,side	3 in 1 Mulching,rear,side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	50	50	50	60	60
Drive type		Self propelled	Self propelled	Self propelled	Self propelled	Self propelled
Start system		Pull	Pull	Electric start / Pull	Pull	Electric start / Pull
Handlebar	Features	Soft grip, hight adjustment	Soft grip, hight adjustment	Control panel, soft grip, hight adjustment	Soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8"/11"	8"/11"	8"/11"	8" / 11"	8" / 11"
Net weight	kg	29.5	31	34.5	36.1	41.1
Pcs/20'/40'/40HQ'		140/290/346	140/290/346	135/285/285	104/224/280	96/208/260

1 One lever height adjustment

2 Manual height adjustment

DYM152201

DYM152211

DYM152205

DYM162206

DYM162207

Specifications	Description	DYM152201	DYM152211	DYM152205	DYM162206	DYM162207
Cutting width	mm	460	460	460	460	460
No load speed	RPM	2800	2800	2800	2800	2800
Engine	Model	B&S 500E Series	B&S 500E Series	B&S 500E Series	DYM1P64FA	DYM1P64FE
	Displacement, cc	140	140	140	135	135
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75	25-75	25-75
	Rear wheel	6 positions / Central	6 positions/Central	6 positions/Central	6 positions/Central	6 positions/Central
	Front wheel	Rotary knob	Rotary knob	Rotary knob	Rotary knob	Rotary knob
Discharge		Rear	3 in 1 Mulching,rear,side	3 in 1 Mulching,rear,side	3 in 1 Mulching,rear,side	3 in 1 Mulching,rear,side
Grass bag capacity	litre	60	60	60	60	60
Drive type		Self propelled	Self propelled	Self propelled,4 speed,GT clutch	Self propelled,4 speed,GT clutch	Self propelled,4 speed,GT clutch
Start system		Pull	Pull	Pull	Pull	Electric start / Pull
Handlebar	Features	Soft grip, hight adjustment	Soft grip, hight adjustment	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8"/11"	8"/11"	8"/11"	8"/11"
Net weight	kg	31.7	31.5	32.5	37.5	40.5
Pcs/20'/40'/40HQ'		130/280/335	130/280/335	96/260/260	96/208/260	96/208/260

Specifications	Description	DYM162601	DYM162602
Cutting width	mm	510	510
No load speed	RPM	2800	2800
Engine	Model	DG600	DYM1P70FE
	Displacement, cc	173	173
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Rear wheel	6 positions / Central	6 positions / Central
	Front wheel	Rotary knob	Rotary knob
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60
Drive type		Self propelled	Self propelled
Start system		Pull	Electric start / Pull
Handlebar	Features	Soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8” / 11”	8” / 11”
Net weight	kg	39.2	43.3
Pcs/20’/40’/40HQ’		120/259/260	96/208/260

Specifications	Description	DYM1670T	DYM1670ST	DYM1670DT
Cutting width	mm	530	530	530
No load speed	RPM	2800	2800	2800
Engine	Model	DG600	DG600	DYM1P70FE
	Displacement, cc	173	173	173
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Rear wheel	6 positions / Central	6 positions / Central	6 positions / Central
	Front wheel	Rotary knob	Rotary knob	Rotary knob
Discharge		3 in 1 Mulching,rear,side	3 in 1 Mulching,rear,side	3 in 1 Mulching,rear,side
Grass bag capacity	litre	65	65	65
Drive type		Self propelled	Self propelled,4 speed,GT clutch	Self propelled
Start system		Pull	Pull	Electric start / Pull
Handlebar	Features	Soft grip, hight adjustment	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8”/11”	8”/11”	8”/11”
Net weight	kg	37.6	39	41
Pcs/20’/40’/40HQ’		96/200/250	96/200/250	96/200/250

Specifications	Description	DYM162605	DYM162606
Cutting width	mm	510	510
No load speed	RPM	2800	2800
Engine	Model	DG600	DYM1P70FE
	Displacement, cc	173	173
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Rear wheel	6 positions / Central	6 positions / Central
	Front wheel	Rotary knob	Rotary knob
Discharge		3 in 1 Mulching,rear,side	3 in 1 Mulching,rear,side
Grass bag capacity	litre	60	60
Drive type		Self propelled,4 speed,GT clutch	Self propelled,4 speed,GT clutch
Start system		Pull	Electric start / Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8”/11”	8”/11”
Net weight	kg	39	43.5
Pcs/20’/40’/40HQ’		96/208/260	96/208/260

Specifications	Description	DYM1670SDT	DYM1570T	DYM1570ST
Cutting width	mm	530	530	530
No load speed	RPM	2800	2800	2800
Engine	Model	DYM1P70FE	B&S675EXI	B&S675EXI
	Displacement, cc	173	163	163
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Rear wheel	6 positions / Central	6 positions / Central	6 positions / Central
	Front wheel	Rotary knob	Rotary knob	Rotary knob
Discharge		3 in 1 Mulching,rear,side	3 in 1 Mulching,rear,side	3 in 1 Mulching,rear,side
Grass bag capacity	litre	65	65	65
Drive type		Self propelled,4 speed,GT clutch	Self propelled	Self propelled,4 speed,GT clutch
Start system		Electric start / Pull	Pull	Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Soft grip, hight adjustment	Soft grip, hight adjustment
Deck	Material	Steel	Steel	Steel
Wheels	Diameter front/rear, inch	8”/11”	8”/11”	8”/11”
Net weight	kg	42.4	32	33.4
Pcs/20’/40’/40HQ’		96/200/250	96/200/250	96/200/250

		DYM163001	DYM163002
Specifications	**Description**		
Cutting width	mm	560	560
No load speed	RPM	2800	2800
Engine	Model	DG600	DYM1P70FE
	Displacement, cc	173	173
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Rear wheel	6 positions / Central	6 positions / Central
	Front wheel	Rotary knob	Rotary knob
Discharge		3 in 1 Mulching,rear,side	3 in 1 Mulching,rear,side
Grass bag capacity	litre	70	70
Drive type		Self propelled	Self propelled
Start system		Pull	Electric start / Pull
Handlebar	Features	Soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8"/11"	8"/11"
Net weight	kg	40.8	45.8
Pcs/20'/40'/40HQ'		80/168/210	80/168/210

		DYM163003	DYM163004
Specifications	**Description**		
Cutting width	mm	560	560
No load speed	RPM	2800	2800
Engine	Model	DG600	DYM1P70FE
	Displacement, cc	173	173
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Rear wheel	6 positions / Central	6 positions / Central
	Front wheel	Rotary knob	Rotary knob
Discharge		3 in 1 Mulching,rear,side	3 in 1 Mulching,rear,side
Grass bag capacity	litre	70	70
Drive type		Self propelled,4 speed,GT clutch	Self propelled,4 speed,GT clutch
Start system		Pull	Electric start / Pull
Handlebar	Features	Control panel, soft grip, hight adjustment	Control panel, soft grip, hight adjustment
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8"/11"	8"/11"
Net weight	kg	41.1	46.2
Pcs/20'/40'/40HQ'		80/168/210	80/168/210

KIMPORT

ALUMINIUM DECK SERIES
PETROL LAWN MOWERS

Lawn mower with the aluminium deck ensures top stability and durability, torsionally rigid and rust free. The aluminium deck series designed with optimal aerodynamics provide excellent mute effect, vibration damping effect and mowing performance.
The products are also equipped with powerful engine, self-propelled or multistage self-propelled, manual start or electric start, central height adjustment, washing connector, grass windown and ergonomic handlebar to get easy operation and maintenance.

The ALUMINIUM DECK SERIES in brief:

- Top durability and rust free
- Excellent mowing performance
- Easy operation and maintenance
- Central cutting height adjustment
- Mulching, collecting and side discharge

Aluminium Deck Series
DYM1588SN

GRASS WINDOW
The perfectly balanced grass catcher has a transparent window to check grass collection level

ALUMINIUM- THE PREMIER CHOICE FOR DECK
The aluminium deck combines top stability with durability and optimal aerodynamics.
It is also torsionally rigid, rust free and acoustically insulating.

SPEED REGULATOR
5 stage variable speed available

CAMLOCK
The camlocks make the ergonomic handless easier and faster to adjust in height, with a simple click. The handle comes with a soft handgrip.

60L GRASS CATCHER
60L large nylon grass catcher

WHEELS
Large wheels for better traction

3 IN 1 function :
Mulching, collecting and side discharge

The 3 in 1 mower deck lets you switch between mulching, collecting for side discharge in seconds, providing you with full versatility for maintaining your lawn.

5 Speeds Adjustment
The wheel drive makes mowing the lawn easily, and can also be adjusted to the operator's walking pace using the variable speed control.

Quick-Release
For folding down the handlebar in seconds without tools for compact storage and transport.

Washing Connector
A water hose connection makes cleaning deck and blade.

Specifications	Description	DYM1688	DYM1688S	DYM1588EN
Cutting width	mm	510	510	510
No load speed	RPM	2800	2800	2800
Engine	Model	DG600	DG600	B&S 625EXi Series, ReadyStart
	Displacement, cc	173	173	150
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	5	5	5
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled	Self propelled, 5 speed	Self propelled
Start system		Pull	Pull	Pull
Handlebar	Features	Soft grip, hight adjustment	Soft grip, hight adjustment	Soft grip, hight adjustment
Deck	Material	Aluminum	Aluminum	Aluminum
Wheels	Diameter front/rear, inch	8” / 11”	8” / 11”	8” / 11”
Net weight	kg	40.7	41.9	35.7
Pcs/20’/40’/40HQ’		96/208/260	96/208/260	120/260/260

Specifications	Description	DYM1588SEN	DYM1588N	DYM1588SN
Cutting width	mm	510	510	510
No load speed	RPM	2800	2800	2800
Engine	Model	B&S 625EXi Series, ReadyStart	B&S 675EXi Series, ReadyStart	B&S 675EXi Series, ReadyStart
	Displacement, cc	150	163	163
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	5	5	5
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60	60
Drive type		Self propelled, 5 speed	Self propelled	Self propelled, 5 speed
Start system		Pull	Pull	Pull
Handlebar	Features	Soft grip, hight adjustment	Soft grip, hight adjustment	Soft grip, hight adjustment
Deck	Material	Aluminum	Aluminum	Aluminum
Wheels	Diameter front/rear, inch	8” / 11”	8” / 11”	8” / 11”
Net weight	kg	36.9	36	37
Pcs/20’/40’/40HQ’		120/260/260	120/260/260	120/260/260

Specifications	Description	DYM1588D	DYM1588SD
Cutting width	mm	510	510
No load speed	RPM	2800	2800
Engine	Model	B&S 675iS Series	B&S 675iS Series
	Displacement, cc	163	163
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	5	5
Discharge		3 in 1 Mulching, rear, side	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60
Drive type		Self propelled	Self propelled, 5 speed
Start system		Lithium-ion, E-start	Lithium-ion, E-start
Handlebar	Features	Soft grip, hight adjustment	Soft grip, hight adjustment
Deck	Material	Aluminum	Aluminum
Wheels	Diameter front/rear, inch	8” / 11”	8” / 11”
Net weight	kg	37.4	38.4
Pcs/20’/40’/40HQ’		120/260/260	120/260/260

No pulling required, ever!
The battery is recharged while you mowing and easily chargeable with the supplied charger.

KIMPORT

PROFESSIONAL
POWERFUL
DURABLE

Engine Series

Patented Product

POWERED BY DAYE

NSAI Certification

CE DIRECTIVE (EU)2016/1628

NEW

DG350

DG450

DG600

DG900

Specifications	Description				
Start system		Recoil start / pump primer	Recoil - Choke & pull	Recoil - Choke & pull	Recoil - Choke & pull
Engine	Model No.	DG350	DYM1P64FA	DG600	DG900
	Type	Single-cylinder with aircooled, 4 stroke, OHV	Single-cylinder with aircooled, 4 stroke, OHV	Single-cylinder with aircooled, 4 stroke, OHV	Single-cylinder with aircooled, 4 stroke, OHV
	Displacement, cc	98.5	135	173	196
	Bore x Stroke, mm	5640.2	6442	7045	7051
Fuel tank capacity	L	0.8	1.4	1.8	1.8
Engine oil capacity	L	0.4	0.5	0.6	0.6
Dimensions	Lenght x width x height, mm	360320295	392315342	430375350	430375350
Net weight	kg	9.0	12	14.5	14.8

Engine Series

NEW

POWERED BY DAYE

NSAI Certification

CE DIRECTIVE (EU)2016/1628

DG300

DG350

Li-start

DG600Li

Specifications	Description			
Start system		Recoil start / pump primer	Recoil start / pump primer	Electrical start / Auto-choke (16V Li-ion)
Engine	Model No.	DYM1P52FX	DYM1P56FA-1	DYM1P70FE
	Type	Single-cylinder with aircooled, 4 stroke, OHV	Single-cylinder with aircooled, 4 stroke, OHV	Single-cylinder with aircooled, 4 stroke, OHV
	Displacement, cc	79.8	98.5	173
	Bore x Stroke, mm	5237.6	56×40.2	7045
Fuel tank capacity	L	0.6	0.8	1.4
Engine oil capacity	L	0.35	0.4	0.55
Dimensions	Lenght x width x height, mm	308298303	360×320×295	430375350
Net weight	kg	7.5	9.5	13.5

HONDA Engine Series

POWERED by HONDA

GCV145

GCV170

GCV200

Specifications	Description			
Start system		Recoil start / Auto-choke	Recoil start / Auto-choke	Recoil start / Auto-choke
Engine	Type	Single-cylinder,4 stroke, overhead cam	Single-cylinder,4 stroke, overhead cam	Single-cylinder,4 stroke, overhead cam
	Displacement, cc	145	167	202
	Bore x Stroke, mm	5659	6059	6659
Fuel tank capacity	L	0.91	0.91	0.91
Engine oil capacity	L	0.4	0.4	0.4
Dimensions	Lenght x width x height,mm	41532970	41532970	41532970
Net weight	kg	10.3	10.4	10.4

E-start

DYM1P56FE

E-start

DYM1P64FE

E-start

DYM1P70FE

NEW E-start

DG900E

Specifications	Description				
Start system		Electric or Recoil	Electric or Recoil	Electric or Recoil	Electric or Recoil
Engine	Model No.	DYM1P56FE	DYM1P64FE	DYM1P70FE	DYM1P70FE-1
	Type	Single-cylinder with aircooled, 4 stroke, OHV	Single-cylinder with aircooled, 4 stroke, OHV	Single-cylinder with aircooled, 4 stroke, OHV	Single-cylinder with aircooled, 4 stroke, OHV
	Displacement, cc	98.5	135	173	196
	Bore x Stroke, mm	5640.2	6442	7045	7051
Fuel tank capacity	L	0.8	1.4	1.8	1.8
Engine oil capacity	L	0.4	0.5	0.6	0.6
Dimensions	Lenght x width x height, mm	360320295	392315342	430375350	430375350
Net weight	kg	10	14	16	16.3

DG500

DG550

DG650

DG750

Specifications	Description				
Start system		Recoil start / pump primer	Recoil start / Auto-choke	Recoil start / Auto-choke	Recoil start / Auto-choke
Engine	Model No.	DYM1P61FX	DYM1P61FX-1	DYM1P65FX	DYM1P67FX
	Type	Single-cylinder with aircooled, 4 stroke, OHV	Single-cylinder with aircooled, 4 stroke, OHV	Single-cylinder with aircooled, 4 stroke, OHV	Single-cylinder with aircooled, 4 stroke, OHV
	Displacement, cc	131	131	149	171
	Bore x Stroke, mm	6145	6145	6545	6748.4
Fuel tank capacity	L	0.9	0.9	0.9	0.9
Engine oil capacity	L	0.4	0.4	0.4	0.4
Dimensions	Lenght x width x height, mm	324305335	324305335	328305340	328305340
Net weight	kg	7.9	8.0	8.1	8.3

KIMPORT

B&S Engine Series

Specifications	Description	450E-Series™	500E-Series™	550E-Series™	475iSi-Series™ Instart®	575iS-Series™ Instart®	675iS-Series™ Instart®	750EX-Series™ DOV®
Start system		Recoil - Choke & pull	Recoil - Choke & pull	Recoil - Choke & pull	Electric (Lithium-ion) start	Electric (Lithium-ion) start	Electric (Lithium-ion) start	Recoil - Just pull
Engine	Type	Single-cylinder, 4 stroke, air cooled, OHV	Single-cylinder, 4 stroke, air cooled, OHV	Single-cylinder, 4 stroke, air cooled, OHV	Single-cylinder, 4 stroke, air cooled, instart® technology,OHV	Single-cylinder, 4 stroke, air cooled, instart®, OHV	Single-cylinder, 4 stroke, air cooled, instart®, OHV	Single-cylinder, 4 stroke, air cooled, ReadyStart®, DOV
	Gross torque @2600rpm	6.10*	6.78*	7.46*	7.46*	8.48*	9.83*	9.49*
	Displacement, cc	125	140	140	140	150	163	161
	Cylinder	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
	Bore x Stroke, mm	60.044.5	63.444.5	63.444.5	63.444.5	65.644.5	68.344.45	64.050.0
Fuel tank capacity, L		0.8	0.8	0.8	0.8	0.8	1.0	1.0
Engine oil capacity, L		0.47	0.47	0.47	0.47	0.47	0.47	0.6
Dimensions	Lenght x width x height, mm	347/310244	347/310244	347/310244	346342251	349317249	349314264	369325254
Net weight,	kg	8.2	8.2	8.2	9.3	9.3	9.3	11.1
Model number		08P5	09P6	09P7	09P7	092J	104M	1006

*The engine power information is provided by the engine manufacturer to be used for comparison purposes only.

Specifications	Description	775iS-Series™ DOV® Instart®	625EXi-Series™	650EXi-Series™	675EXi-Series™	875EXi Series™
Start system		Electric (Lithium-ion) start	Recoil - Just pull	Recoil - Just pull	Recoil - Just pull	Recoil - Just Pull
Engine	Type	Single-cylinder, 4 stroke, air cooled, instart®, DOV	Single-cylinder, 4 stroke, air cooled, ReadyStart®, OHV	Single-cylinder, 4 stroke, air cooled, ReadyStart®, OHV	Single-cylinder, 4 stroke, air cooled, ReadyStart®, OHV	Single-cylinder, 4 stroke, air cooled, ReadyStart®, OHV
	Gross torque @2600rpm	9.49*	8.48*	9.15*	9.83*	11.87*
	Displacement, cc	161	150	163	163	190
	Cylinder	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
	Bore x Stroke, mm	64.050.0	65.644.5	68.344.5	68.344.5	68.351.8
Fuel tank capacity, L		1.0	0.8	1.0	1.0	1.0
Engine oil capacity, L		0.6	0.47	0.47	0.47	0.6
Dimensions	Lenght x width x height, mm	369320268	347310244	349314253	349314253	399338238
Net weight,	kg	11.3	8.2	8.5	8.5	10.0
Model number		1006	093J	103M	104M	125P

*The engine power information is provided by the engine manufacturer to be used for comparison purposes only.

Engine Service Kit

DYM A26

Specifications	
Oil bottle capacity, L	1.0
Oil pumping tube capacity, L	0.3
Net weight, g	400
Pcs/20'/40'/40HQ'	4560/9840/9840

KIMPORT

Electric motors are relatively quiet and free from exhaust emissions

A high speed power drive motor for excellent cutting of wet or tough grass, and new ergonomic handles for effortless control. Including central height adjustment for easy selection of the desired cutting height. Mulches the grass before shifting it to the lawn sideways or at the back.

ELECTRIC LAWN MOWERS

A Silent Solution

Our Electric Series models are the perfect complement for any lawns - from the smallest garden to the grandest grounds.
Enjoy total, effortless mowing and turn your garden into the most beautiful place on the earth! The electric models will also minimise running noises at full throttle. Durable, reliable and extremely easy to work with - you will never cease to be amazed by the sheer power of their performance!

LD-0772

KIMPORT

ELECTRIC SERIES LAWN MOWERS

COMPACT, ZERO EMISSION, ENDLESS POWER

Be it a small garden with a small lawn, a medium sized garden with flower beds and slopes, or a large and complex garden - no matter what your garden looks like and what convenience you expect, we always have the right mower for you. From small electric mowers with a cutting width of 32 - 46 cm to self-propelled models that make mowing the lawn even easier.

The ELECTRIC SERIES in brief:

- Reliable and durable
- Easy operation and maintenance
- Central cutting height adjustment
- With induction or universal motors
- Available in self-propelled versions

Electric Lawn mower Series DYM1173C-3

COMPACT STORAGE
Optimize your storage space

SELF-PROPELLED DRIVE SYSTEM
The self-propelled drive system takes all the effort out of pushing your Lawn mower, means you can maintain your lawn and not feel exhausted when the grass cutting is complete.

POWER INDICATOR
You are always be aware of the power supply on or off

ADJUSTABLE HANDLE
The strong handlebar is easily adjustable at 5 stages

MOTOR
Induction motor for high performance and durability,Zero Emission

Snail shell-shape deck to improve grass collecting performance

WHEELS
Large wheels with double bearings for easy running

Side Discharge
If you don't want to collect your grass cuttings or your lawn has become overgrown, select a side discharge function.

Cutting Height Adjustment
Centralized wheels adjustment by one lever for accurate and fast setting of the cutting height. you can select among max 7 positions.

Front Handling Panel
Integrated front handle makes carrying easier.

Specifications	Description	DYM1111/ DYM1111E	DYM1112
Cutting width,	mm	320	320
No load speed	RPM	3450 / 2950	3450
Motor	Type	Universal (Aluminium / Copper winding)	Universal (Aluminium winding)
	Rated power, W	1000	1200
	Voltage	230-240V~50Hz	230-240V~50Hz
Cutting height adjustment	Cutting height, mm	30-60	30-60
	Adjustment	Individual	Individual
	Positions	3	3
Discharge		Rear	Rear
Grass bag capacity	litre	27	27
Drive type		Hand push	Hand push
Handlebar	Feature	-	-
Deck	Material	Plastic	Plastic
Wheels	Diameter front/rear, inch	5" / 5"	5" / 5"
Net weight	kg	8.6	8.8
Pcs/20'/40'/40HQ'		468/990/1100	468/990/1100

Specifications	Description	DYM1115B / DYM1115EB	DYM1115 / DYM1115E
Cutting width,	mm	380	380
No load speed	RPM	3450	3450
Motor	Type	Universal (Aluminium / Copper winding)	Universal (Aluminium / Copper winding)
	Rated power, W	1400	1400
	Voltage	230-240V~50Hz	230-240V~50Hz
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	6	6
Discharge		Rear	Rear
Grass bag capacity	litre	40	40
Drive type		Hand push	Hand push
Handlebar	Feature	-	-
Deck	Material	Plastic	Plastic
Wheels	Diameter front/rear, inch	5.5" / 7.5"	5.5" / 7.5"
Net weight	kg	12.8	13
Pcs/20'/40'/40HQ'		246/516/602	246/504/588

Specifications	Description	DYM1183	DYM1184
Cutting width,	mm	320	340
No load speed	RPM	3300	3300
Motor	Type	Universal	Universal
	Rated power, W	1200	1400
	Voltage	230-240V~50Hz	230-240V~50Hz
Cutting height adjustment	Cutting height, mm	25-65	25-75
	Adjustment	Individual	Central
	Positions	3	5
Discharge		Rear	Rear
Grass bag capacity	litre	30	35
Drive type		Hand push	Hand push
Handlebar	Feature	-	Soft grip
Deck	Material	Plastic	Plastic
Wheels	Diameter front/rear, inch	5" / 5"	6" / 9"
Net weight	kg	10	16.3
Pcs/20'/40'/40HQ'		349/700/800	258/540/630

Specifications	Description	DYM1185	DYM1186E	DYM1187
Cutting width,	mm	380	400	430
No load speed	RPM	3300	3300	3300
Motor	Type	Universal	Universal	Universal
	Rated power, W	1600	1800	1800
	Voltage	230-240V~50Hz	230-240V~50Hz	230-240V~50Hz
Cutting height adjustment	Cutting height, mm	25-75	25-75	25-75
	Adjustment	Central	Central	Central
	Positions	5	5	5
Discharge		Rear	Rear	Rear
Grass bag capacity	litre	40	40	50
Drive type		Hand push	Hand push	Hand push
Handlebar	Feature	-	Soft grip	Soft grip
Deck	Material	Plastic	Plastic	Plastic
Wheels	Diameter front/rear, inch	6" / 9"	6" / 9"	6" / 9"
Net weight	kg	16	16.6	16.6
Pcs/20'/40'/40HQ'		228/474/553	216/438/511	165/345/414

KIMPORT

Specifications	Description	DYM1180 / DYM1181	DYM1181C
Cutting width,	mm	410 /460	460
No load speed	RPM	3500 / 3100	3100
Motor	Type	Universal	Universal
	Rated power, W	1600 / 1800	1800
	Voltage	230-240V~50Hz	230-240V~50Hz
Cutting height adjustment	Cutting height, mm	30-75	30-75
	Adjustment	Central	Central
	Positions	7	7
Discharge		2 in 1 Mulching, rear	3 in 1 Mulching, rear, side
Grass bag capacity	litre	50/60	60
Drive type		Hand push	Hand push
Handlebar	Feature	-	-
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	7" / 8"	7" / 8"
Net weight	kg	21.3 / 23.8	24.1
Pcs/20'/40'/40HQ'		174/360/420, 168/342/399	168/342/399

Specifications	Description	DYM1182	DYM1182C
Cutting width,	mm	460	460
No load speed	RPM	3100	3100
Motor	Type	Universal	Universal
	Rated power, W	1800	1800
	Voltage	230-240V~50Hz	230-240V~50Hz
Cutting height adjustment	Cutting height, mm	30-75	30-75
	Adjustment	Central	Central
	Positions	7	7
Discharge		2 in 1 Mulching, rear	3 in 1 Mulching, rear, side
Grass bag capacity	litre	60	60
Drive type		Self propelled	Self propelled
Handlebar	Feature	-	-
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	7" / 8"	7" / 8"
Net weight	kg	26.1	26.4
Pcs/20'/40'/40HQ'		168/342/399	168/342/399

Specifications	Description	DYM1172	DYM1173
Cutting width,	mm	460	460
No load speed	RPM	2900	2900
Motor	Type	Induction	Induction
	Rated power, W	1800	1800
	Voltage	230-240V~50Hz	230-240V~50Hz
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	7	7
Discharge		2 in 1 Mulching, rear	2 in 1 Mulching, rear
Grass bag capacity	litre	60	60
Drive type		Hand push	Self propelled
Handlebar	Features	Soft grip, hight adjustment	Soft grip, hight adjustment
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"
Net weight	kg	29	32.5
Pcs/20'/40'/40HQ'		130/270/324	104/216/270

Specifications	Description	DYM1172-3	DYM1173C-3
Cutting width,	mm	460	460
No load speed	RPM	2900	2900
Motor	Type	Induction	Induction
	Rated power, W	1800	1800
	Voltage	230-240V~50Hz	230V~50Hz
Cutting height adjustment	Cutting height, mm	25-75	25-75
	Adjustment	Central	Central
	Positions	7	7
Discharge		2 in 1 Mulching, rear	3 in 1 Mulching, Rear, Side
Grass bag capacity	litre	60	60
Drive type		Hand push	Self propelled, GT clutch
Handlebar	Features	Soft grip, hight adjustment	Soft grip, hight adjustment
Deck	Material	Steel	Steel
Wheels	Diameter front/rear, inch	8" / 11"	8" / 11"
Net weight	kg	28.5	31.2
Pcs/20'/40'/40HQ'		130/270/324	104/216/270

ELECTRIC & PETROL SCARIFIERS

Sometimes, to gain good results you have to be harsh from the start. And the best start for a nice-looking garden is having a good soil. Earth should be cared of, properly turned in order to make room for oxygen and water to give new life to the grass. scarifiers are meant to do this basic, fundamental job effectively, clearing the roots of the grass and thus, enhancing the quality and appearance of your garden.

LD-0772

Electric Scarifiers
DYM430102

Scarifier Blade /Lawn Rake

Depth Adjustment
Five-stage working depth adjustment with just one hand motion. This is important because the blades should just touch the ground when scarifying, in order to avoid them wearing down unnecessarily quickly and to avoid damaging the grass roots.

COMFORT HANDLE BAR
Ergonomic handle bar with height adjustment, 3 positions foldable with tool less quick-release cam locks

Front Bumper
Change head line from Front bumper to EASY TRANSPORT

Wheels
Wide wheels exert less stress on the lawn

Specifications	Description	DYM430101	DYM430102	DYM430103
Working width	mm	380	380	380
No load speed	RPM	4200	4200	4200
Motor type	Type	Universal	Universal	Universal
	Rated power, W	1600	1800	2000
	Voltage	230-240V~50Hz	230-240V~50Hz	230-240V~50Hz
Grass bag capacity	L	45	45	45
Aerator	pcs	22 Steel Springs	22 Steel Springs	22 Steel Springs
Scarifier	pcs	16 Steel Blades	16 Steel Blades	16 Steel Blades
Working depth adjustment		Central, -10 +5mm, 5-stage	Central, -10 +5mm, 5-stage	Central, -10 +5mm, 5-stage
Wheels	Diameter front / rear, inch	7" / 6"	7" / 6"	7" / 6"
Deck		Plastic	Plastic	Plastic
Net weight	kg	14	14	14
Pcs/20'/40'/40HQ'		234/504/588	234/504/588	234/504/588

Specifications	Description	DYM491701	DYM491702	DYM491703	DYM451701
Working width	mm	400	400	400	400
No load speed	RPM	2800	2800	2800	2800
Engine	Model	ZONGSHEN GNH130	ZONGSHEN GNH150	LONCIN, LC165F-5	B&S CR750 Series
	Displacement, CC	132	149	166	163
Grass bag capacity	L	45	45	45	45
Aerator	pcs	26 Steel Springs	26 Steel Springs	26 Steel Springs	26 Steel Springs
Scarifier	pcs	18 Steel Blades	18 Steel Blades	18 Steel Blades	18 Steel Blades
Working / Transport mode		Optional	Optional	Optional	Optional
Working depth adjustment	Adjustment	Central	Central	Central	Central
	Positions	6	6	6	6
	Scarifying depth,mm	-15 +5	-15 +5	-15 +5	-15 +5
	Raking depth,mm	-5 +15	-5 +15	-5 +15	-5 +15
Wheels	Diameter front / rear, inch	8" / 8"	8" / 8"	8" / 8"	8" / 8"
Deck		Steel	Steel	Steel	Steel
Net weight	kg	31	31	32	35
Pcs/20'/40'/40HQ'		108/228/284	108/228/284	108/228/284	108/228/284

Electric Blower Vacs

ELECTRIC BLOWER VAC SERIES

KEEPING YOUR GARDEN NEAT AND TIDY

The only problem you will have is when the leaves run out.
Our corded garden vacuum will suck up the most stubborn garden waste and turn it into ideal compost material with its shredder function.
Removing fallen leaves from the garden has never been less effort.

The ELECTRIC BLOWER VAC SERIES in brief:

- Reliable and durable
- Easy operation and maintenance
- Low vibration

Electric Blower Vac Series DYM5168

ASSISTANT HANDLE
For comfortable handling in all positions

LONGER WORKING TIME
10:1 shredding ratio - more compact leaves for better composting

POWERFUL PERFORMANCE
2500 W motor power and up to 800 m³/h volume flow rate

GRASS BAG
Large 40 litre collection bag with quick release and zipper feature for easy emptying

BLOWING SPEED
Maximum blowing speed of 270 km/h for removing sticky, wet leaves

Variable Speed Knob
Control the motor speed with knob for more comfortable use

2 Function in 1
Easily and quickly convertible knob from blower to vacuum cleaner.

Second Handle and Padded Shoulder Strap
For comfortable use without pain in shoulders or arms

KIMPORT

DYM5167

DYM5168

DYM5169

Specifications	Description	DYM5167	DYM5168	DYM5169
Max air speed,	km/h	270	270	140-270
Motor	Type	Electric	Electric	Electric
	Rated power, W	2200	2500	2500
	Voltage	230-240V~50Hz	230-240V~50Hz	230-240V~50Hz
No load speed	RPM	13500	13500	6000-13500
Max air volume,	cbm/min	14	14	14
Vacuum bag capacity	L	40	40	40
Mulching ratio		10:1	10:1	10:1
Variable speed		No	No	Yes
Steering wheel		Yes	Yes	Yes
Telescopic tube		No	No	No
Net weight	kg	3.5	3.5	3.5
Pcs/20'/40'/40HQ'		812/1684/1896	812/1684/1896	812/1684/1896

DYM5163A

DYM5164A

DYM5163

Specifications	Description	DYM5163A	DYM5164A	DYM5163
Max air speed,	km/h	270	270	140-270
Motor	Type	Electric	Electric	Electric
	Rated power, W	3000	2500	3000
	Voltage	230-240V~50Hz	230-240V~50Hz	230-240V~50Hz
No load speed	RPM	15000	15000	6000-15000
Max air volume,	cbm/min	14	14	14
Vacuum bag capacity	L	50	40	50
Mulching ratio		10:1	10:1	10:1
Variable speed		No	No	Yes
Steering wheel		Yes	Yes	Yes
Telescopic tube		Yes	Yes	Yes
Net weight	kg	4.3	4.2	4.3
Pcs/20'/40'/40HQ'		368/765/840	368/765/840	368/765/840

DYM5164

DYM5165A

DYM5166A

Specifications	Description	DYM5164	DYM5165A	DYM5166A
Max air speed,	km/h	140-270	270	270
Motor	Type	Electric	Electric	Electric
	Rated power, W	2500	3000	2500
	Voltage	230-240V~50Hz	230-240V~50Hz	230-240V~50Hz
No load speed	RPM	6000-15000	15000	15000
Max air volume,	cbm/min	14	14	14
Vacuum bag capacity	L	40	50	40
Mulching ratio		10:1	10:1	10:1
Variable speed		Yes	No	No
Steering wheel		Yes	Yes	Yes
Telescopic tube		Yes	Yes	Yes
Net weight	kg	4.2	4.7	4.6
Pcs/20'/40'/40HQ'		368/765/840	368/765/840	368/765/840

DYM5165

DYM5166

Specifications	Description	DYM5165	DYM5166
Max air speed,	km/h	140-270	140-270
Motor	Type	Electric	Electric
	Rated power, W	3000	2500
	Voltage	230-240V~50Hz	230-240V~50Hz
No load speed	RPM	6000-15000	6000-15000
Max air volume,	cbm/min	14	14
Vacuum bag capacity	L	50	40
Mulching ratio		10:1	10:1
Variable speed		Yes	Yes
Steering wheel		Yes	Yes
Telescopic tube		Yes	Yes
Net weight	kg	4.7	4.6
Pcs/20'/40'/40HQ'		368/765/840	368/765/840

Petrol Blower Vacs

Petrol Blower Vac Series
DYM535102

POWERFUL AND LIGHT WEIGHT PETROL BLOWERS

Good Power/Weight Performance

handheld petrol blower has a fuel-efficient shredder vac/blower with the convenience of the easy start system, cuts yard waste down to size. Its single-handed operation is easy to control.

Cooling System
Double air inlet makes motor running under comfort temperature.

Less Noise
The muffler in the blower tube reduces noise levels even if you're running at full power.

Specifications	Description	DYM535101(Bower+Vac)	DYM535102(Bower)
Engine	Power, Kw/rpm	0.75/7000	0.75/7000
	Displacement, cc	25.7	25.7
	Carburetor	Diaphragm type	Diaphragm type
Max air speed	km/h	220(Bower)/126(Vac)	220
Max air volume	cbm/min	13(Bower)/22(Vac)	13
Vacuum bag capacity,	L	50	/
Mulching ratio		14:1	/
Fuel Tank Capacity	ml	500	500
Net weight	kg	4.5(Bower)/5.4(Vac)	4.5
Pcs/20'/40'/40HQ'		482/986/1130	688/1432/1611

KIMPORT

Petrol Cultivators

PETROL CULTIVATOR SERIES

EASY LOOSENING OF GROUND AND REMOVAL OF DIRT

The innovative petrol cultivators make cultivating the soil a lot easier and faster. These powerful machines minimise the effort, are simple to operate and ensure highly efficient work with their sturdy design, robust components and precisely adapted blades. Many details of these machines have been thoroughly tested and perfected in extensive trials.

Petrol Cultivators
DYM7505

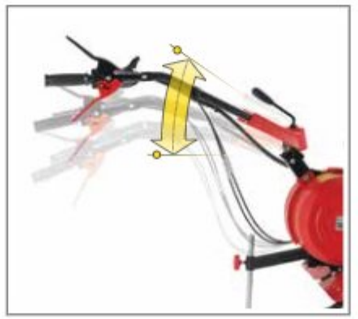

The 3 stage height adjustment of the handlebar is easily and conveniently lockable with one hand and offers suitable settings for all body sizes and soil conditions.

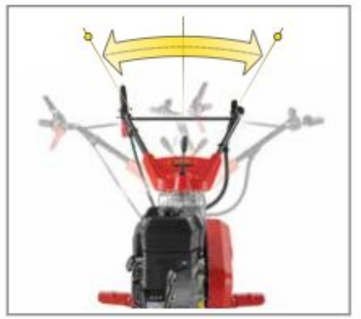

The 3 stage side adjustment of the handlebar is easily and conveniently lockable with one hand and offers suitable settings for all body sizes and soil conditions.

Easy Transport
The transport wheel lifts the tines off the ground without tools.

KIMPORT

Specifications	Description	DYM7401	DYM7502
Tilling width	mm	400	400
No load speed	RPM	3600	3600
Engine	Type	DG350	B&S 500E Series
	Displacement, cc	98.5	140
Tilling depth,	mm	280	280
Blade diameter	Ømm	280	280
Blade quantity		4	4
Drive type		1 forward	1 forward
Net weight	kg	29.7	30.5
Pcs/20'/40'/40HQ'	(Without pallet)	160/328/328	160/328/328
	(With pallet)	-	-

Specifications	Description	DYM7403	DYM7403B
Tilling width	mm	600	600
No load speed	RPM	3600	3600
Engine	Type	DG600	DG600
	Displacement, cc	173	173
Tilling depth,	mm	280	280
Blade diameter	Ømm	280	280
Blade quantity		6	6
Drive type		1 forward, 1 reverse	1 forward
Net weight	kg	46.7	45.6
Pcs/20'/40'/40HQ'	(Without pallet)	90/195/260	90/195/260
	(With pallet)	72/144/144	72/144/144

Specifications	Description	DYM7504	DYM7504B
Tilling width	mm	800	800
No load speed	RPM	3600	3600
Engine	Type	B&S 750E Series	B&S 750E Series
	Displacement, cc	163	163
Tilling depth,	mm	320	320
Blade diameter	Ømm	320	320
Blade quantity		6	6
Drive type		1 forward	1 forward, 1 reverse
Net weight	kg	52.8	53.7
Pcs/20'/40'/40HQ'	(Without pallet)	96/201/201	96/201/201
	(With pallet)	48/104/156	48/104/156

Specifications	Description	DYM7505	DYM7605
Tilling width	mm	800	800
No load speed	RPM	3600	3600
Engine	Type	B&S 900 Series	LONCIN G200F
	Displacement, cc	205	196
Tilling depth,	mm	320	320
Blade diameter	Ømm	320	320
Blade quantity		6	6
Drive type		1 forward, 1 reverse	1 forward, 1 reverse
Net weight	kg	53.8	54.3
Pcs/20'/40'/40HQ'	(Without pallet)	96/201/201	96/201/201
	(With pallet)	48/104/156	48/104/156

KIMPORT

ELECTRIC & PETROL SNOW THROWERS

PERFECTION MADE EASY

Whatever winter throws at you, simply throw it back with snow throwers. This powerful line of snow throwers are designed to quickly and easily cope with extreme snow conditions with unbelievable control, manoeuvrability and performance. You are certain to find the exact level of snow removal power you need, with the performance and quality you require.

Electric
Snow Throwers

Petrol
Snow Throwers

Electric Snow Thrower Series
DYM9103E

LED LIGHT
LED headlight for excellent lighting the working area

HANDLE BAR
Foldable handlebars for easy transportation and storage

GUARD
Impact shell made from high strengthen plastic

WHEELS
2 wheels for stability and easy transportation

Remote Chute Control
Less time and effort required in the cold. Change the snow throwing direction right from where you are. A convenient joystick enables immediate control of the chute with one hand as you walk behind the snow thrower.

Carrying Handle
Useful for transport or storage in a confined space.

Auger Drive System
The auger drive system is made from high impact rubber and reinforced with steel to provide you with an ideal mix of power and dependability in a light weight design.

Specifications	Description	DYM9101	DYM9101E / DYM9101F
Working width	mm	460	460
Motor	Type	Universal, Copper winding	Universal, Aluminum winding
	Rated power, W	1800	1800 / 2000
	Voltage	220-240V~50Hz	220-240V~50Hz
No load speed	RPM	2900	2900
Max. working height	mm	270	270
Throwing	distance, m	0-9	0-9
	height, m	0-5	0-5
	speed, km/h	0~4.5	0~4.5
Rotation	Upper chute	60	60
	Lower chute	190	190
Head Light		Yes, LED/No	Yes, LED/No
Net weight	kg	15.5	15.5
Pcs/20'/40'/40HQ'		220/460/460	220/460/460

Specifications	Description	DYM9111E / DYM9111F	DYM9113 / DYM9113E
Working width	mm	460	510
Motor	Type	Universal, Aluminum winding	Universal, Copper winding / Aluminum winding
	Rated power, W	1800 / 2000	2000
	Voltage	220-240V~50Hz	220-240V~50Hz
No load speed	RPM	2900	2500
Max. working height	mm	270	330
Throwing	distance, m	0-9	0-9
	height, m	0-5	0-5
	speed, km/h	0~4.5	0~4.5
Rotation	Upper chute	60	60
	Lower chute	190	190
Head Light		Yes, LED	Yes, LED
Net weight	kg	15.4	16.8
Pcs/20'/40'/40HQ'		200/420/420	140/300/380

Petrol Snow Thrower Series
DYM952002

The power steering of any petrol snow thrower can be engaged with just one finger

Heating handle for cold condition. Interlock system for free hand control.

Ergonomic multifunction panel

Optimal Driving
The 15" snow wheels ensure perfect grip without snow chains. The manual transmission with 5 forward and 2 reverse gears guarantees optimal traction.

Dual plastic skid shoes minimize pavement scratches.

Professional Auger
The toothed auger also permits efficient removal of compacted or frozen snow.

Snow Discharging Directions
The discharge chute can be raised, lowered and moved to either side to place the removed snow exactly where you want it. The control lever is easily accessible near the handle and can be operated with either hand.

Shoes Height Adjustment
Trailer shoes keep the thrower from digging into the ground and are easily adjustable in height for reliable operation on all surfaces, even gravel!

Push Button Electric Start
A large, powerful four-stroke B&S OHV engine provides you with more power in our snow throwers - at the touch of a button. Just press the start button and off you go.

KIMPORT

DYM222L01

DYM222L02

Specifications	Description		
Working width	mm	560 (22")	560 (22")
Engine	Type	LONCIN G160F	LONCIN 170FS
	Displacement, cc	163	212
No load speed	RPM	3600	3600
Max. working height	mm	530 (21")	530 (21")
Throw distance	m	up to 13	up to 13
Number of gears		6 Forward/2 reverse	6 Forward/2 reverse
Upper chute adjustment angle		60	60
Lower chute turning angle		190	190
Start mode		Manual start	Manual start
Head light		No	No
Driving system		Friction disk	Friction disk
Oil capacity	L	0.6	0.6
Net weight	kg	79.2	81.5
Pcs/20'/40'/40HQ'		59/125/126, pallet	59/125/126, pallet

DYM242L01EP

DYM242L01

DYM242L01E / DYM242L01EP

Specifications	Description		
Working width	mm	610 (24")	610 (24")
Engine	Type	LONCIN G200F	LONCIN G200FD
	Displacement, cc	196	196
No load speed	RPM	3600	3600
Max. working height	mm	530 (21")	530 (21")
Throw distance	m	up to 13	up to 13
Number of gears		6 Forward/2 reverse	6 Forward/2 reverse
Upper chute adjustment angle		60	60
Lower chute turning angle		190	190
Start mode		Manual start	230VAC E-start/manual start
Head light		No	No / Yes
Driving system		Friction disk	Friction disk
Oil capacity	L	0.6	0.6
Net weight	kg	80.3	83.5
Pcs/20'/40'/40HQ'		53/113/114, pallet	53/113/114, pallet

DYM961702

DYM951701

Specifications	Description		
Working width	mm	610 (24")	610 (24")
Engine	Type	LONCIN G200FD	B&S 950 Series
	Displacement, cc	196	208
No load speed	RPM	3600	3600
Max. working height	mm	530(21")	530 (21")
Throw distance	m	up to 13	up to 13
Number of gears		6 Forward/2 reverse	6 Forward/2 reverse
Upper chute adjustment angle		60	60
Lower chute turning angle		180	180
Start mode		230VAC E-start/manual start	230VAC E-start/manual start
Head light		Yes, LED	Yes, LED
Driving system		Friction disk	Friction disk
Oil capacity	L	0.6	0.6
Net weight	kg	88	89
Pcs/20'/40'/40HQ'		53/113/114, pallet	53/113/114, pallet

DYM962001

DYM952002

Specifications	Description		
Working width	mm	690 (27")	690 (27")
Engine	Type	LONCIN G210F(D)S	B&S 1150 Series
	Displacement, cc	212	250
No load speed	RPM	3600	3600
Max. working height	mm	530 (21")	530 (21")
Throw distance	m	up to 13	up to 13
Number of gears		6 Forward/2 reverse	6 Forward/2 reverse
Upper chute adjustment angle		60	60
Lower chute turning angle		180	180
Start mode		230VAC E-start/manual start	230VAC E-start/manual start
Head light		Yes, LED	Yes, LED
Driving system		Friction disk	Friction disk
Oil capacity	L	0.6	0.6
Net weight	kg	92	92
Pcs/20'/40'/40HQ'		28/60/90, pallet	28/60/90, pallet

KIMPORT

Petrol Snow Thrower Series
DYM951702

Ergonomic multifunction panel

The power steering of any petrol snow thrower can be engaged with just one finger

Heating handle for cold condition. Interlock system for free hand control.

Optimal Driving
The 15" snow wheels ensure perfect grip without snow chains. The manual transmission with 5 forward and 2 reverse gears guarantees optimal traction.

Professional Auger
The toothed auger also permits efficient removal of compacted or frozen snow.

Dual plastic skid shoes minimize pavement scratches.

Snow Discharging Directions
The discharge chute can be raised, lowered and moved to either side to place the removed snow exactly where you want it. The control lever is easily accessible near the handle and can be operated with either hand.

Push Button Electric Start
A large, powerful four-stroke B&S OHV engine provides you with more power in our snow throwers - at the touch of a button. Just press the start button and off you go.

		DYM961704	DYM951702	DYM962003
Specifications	**Description**			
Working width	mm	610 (24")	610 (24")	690 (27")
Engine	Type	LONCIN G210F(D)S	B&S 950 Series	LONCIN G250F(D)S
	Displacement, cc	212	208	252cc
No load speed	RPM	3600	3600	3600
Max. working height	mm	23"	23"	23"
Throw distance	m	UP to 10	UP to 10	UP to 16
Number of gears		6 Forward / 2Revers	6 Forward / 2Revers	6 Forward / 2Revers
Upper chute adjustment angle		60°	60°	60°
Lower chute turning angle		180°	180°	180°
Start mode		230VAC E-start/manual start	230VAC E-start/manual start	230VAC E-start/manual start
Head light		Yes,LED	Yes,LED	Yes,LED
Driving system		Friction Disk	Friction Disk	Friction Disk
Oil capacity	L	0.6	0.6	0.7
Net weight	kg	95	95	103
Pcs/20'/40'/40HQ'		40/84/84	40/84/84	36/74/74

DYM962301

Specifications	**Description**	
Working width	mm	/60 (30")
Engine	Type	LONCIN G250F(D)S
	Displacement, cc	252cc
No load speed	RPM	3600
Max. working height	mm	23"
Throw distance	m	UP to 16
Number of gears		6 Forward / 2Revers
Upper chute adjustment angle		60°
Lower chute turning angle		180°
Start mode		230VAC E-start/manual start
Head light		Yes,LED
Driving system		Friction Disk
Oil capacity	L	0.7
Net weight	kg	108
Pcs/20'/40'/40HQ'		28/56/56

KIMPORT

PREMIUM SERIES
PETROL LAWN TRACTOR

42" petrol lawn tractor offers premium performance with quality results. Features such as 13 points height adjustment offers a wider range of cutting, double-blade cutting offers efficient cutting performance, forward/reverse control system offers smooth change of the moving direction, 6 speed manual drive has few faults and long service life, regulating the ground speed of the tractor step by step ensures safety operation, adjustable seat, ergonomic steering wheel and easy step-through design offers comfort and easy operation. Innovative design makes the tractor easy to maneuver and versatile use in every season.

The PREMIUM SERIES in brief:

Excellent mowing performance
Easy opeartion and maintenance
Double-balde cutting
13 points height adjustment
Automatic/Manual transmission
Adjustable seat and ergonomic steering wheel

Petrol Lawn Tractor
DYM336201

NEW

Patented Product

13 POINTS HEIGHT ADJUSTMENT
Provide a wider range of cutting height

FORWARD/REVERSE CONTROL LEVER
Control the direction of moving

INCANDESCENT LIGHT
Provide a better vision

PARKING BRAKE LEVER
Lock the tractor in the braked position

GEARBOX
Regulate the ground speed of the tractor steplessly

500cc ENGINE
13.5 HP Briggs and Stratton intek engine offers powerful and excellent mowing performance

42"DOUBLE-BLADE STEEL DECK
Compact and robust

13 Cutting heights
Cutting heights range from 1 to 4". with 1/4". increments

13"Mid-back seat
Easily adjustable for perfect fit.

2*5" Anti-scalp deck wheels
Offering even and smooth cutting effect.

NEW

Specifications	Description	DYM336201	DYM336206
Engine	Model	B&S E1350	LONCIN 1P91F
Displacement	cc	500	546
Power	HP	13.5	14.8
Cutting width		42" (107 cm)	42" (107 cm)
Front wheel size		15"*6-6	15"*6-6
Rear wheel size		20"*8-8	20"*8-8
Cutting height adjustment		1"-4"/13 positions	1"-4"/13 positions
Drive axle		Manual transmission	Manual transmission
No load speed	km/h	Forward 8.9	Forward 8.9
Reverse speed	km/h	3	3
Minimum turning radius	mm	460	460
Wheelbase	mm	1215	1215
Net weight	kg	N/A	N/A
Dimension	(L*W*H)mm	1700*1150*860	1700*1150*860
Pcs/20'/40'/40HQ'		14/28/42	14/28/42

NEW

Specifications	Description	DYM336601	DYM336606
Engine	Model	B&S 33R8	LONCIN 1P96F
Displacement	cc	540	608
Power	HP	19	15.5
Cutting width		46" (117 cm)	46" (117 cm)
Front wheel size		15"*6-6	15"*6-6
Rear wheel size		20"*8-8	20"*8-8
Cutting height adjustment		1"-4"/13 positions	1"-4"/13 positions
Drive axle		CVT transmission	CVT transmission
No load speed	km/h	Forward 8.9	Forward 8.9
Reverse speed	km/h	5.1	5.1
Minimum turning radius	mm	460	460
Wheelbase	mm	1215	1215
Net weight	kg	N/A	N/A
Dimension	(L*W*H)mm	1700*1260*860	1700*1260*860
Pcs/20'/40'/40HQ'		8/18/27	8/18/27

ACCESSORIES

+ (Option)

NEW

Patented Product

DYMA607

Specifications		
Description	Rear bagger	42" mulching kit
Material	PP,Nylon,Abs	PP,Alloy Steel
Item Weight	12.7 Kg	0.31 kg, 2 x 0.92 kg
Product	42"/46"	42"
Dimension	37" x 22" x 31"	15.5" x 5" x 5.7" , 21" x 2.5" x 1.3"

DYMA606

DYMA608

Specifications		
Description	Utility cart	Snow blower
Material	Polyethylene, Alloy Steel, Rubber	Steel, HDPE
Item Weight	57.6 kg	N/A
Dimension	98" x 54" x 31"	58" x 38" x 30"

Choose the right pump

Types of pumps at a glance

FLUENT provides a wide range of pumps for yours different applications,such as garden irrigation,water supply,water draining.You can always find a right product from here.Reliable, efficient,and easy to use are the main features that run through the product design from entry level to professional level.

Draining

- Pump water from the pool, pond or full excavation pit
- Pump water out of flooded cellars
- Pump water out of the laundry room
- Transfer water e.g. from a pond to a rain water tank

Irrigation

- Irrigate with water from wells, cisterns and rain water tanks
- Increase water pressure of the tap

Supplying water for domestic use

- To pump water for the home (e.g. toilet flushing and washing machine) and garden from alternative water sources

LD-0786

Clear Water Submersible Pumps For Water Draining

Submersible

RoHS BSCI

NINGBO FLUENT TOOLS CO.,LTD.
FLUENTPOWER

It is the ideal device to pump water from laundry room, water barrels, swimming pool, celler, or only slightly contaminated water needs to be pumped out.
They are equiped float swtich to turn off/on automacically regarding to water level, which makes pump can be left unattented. Durable seal structure, full corrosion-resistant shell and thermal protector ensure reliable performance.

Clear Water Submersible Pump

Main Features

- Compact design
- Less space for storage
- More loading quantity

FSPxx36C-1

FSPxx36C-2

Specifications

	FSPxx36C-1 / FSPxx36C-2				
Rated Power	250W	400W	550W	750W	900W
Max. pump rate	5000L/H	7000L/H	9000L/H	11000L/H	12000L/H
Max. delivery Height	6m	7m	8m	9m	9.5m
Max. Deepth	5m	7m	7m	7m	7m
Cable	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²
Minimum starting water level with float switch	180mm	180mm	180mm	180mm	180mm
Minimum starting water level by manual operation	90mm	90mm	90mm	90mm	90mm
Minimum Cutt off water level with float switch	120mm	120mm	120mm	120mm	120mm
Lowest residual water level by manual operation	5mm	5mm	5mm	5mm	5mm

120V/60Hz is also available

Clear Water Submersible Pump

Main Features

- Compact design
- Less space for storage
- More loading quantity
- Cable clamp for manual operation

FSPxx37C-1

FSPxx37C-2

Specifications

	FSPxx37C-1 / FSPxx37C-2				
Rated Power	250W	400W	550W	750W	900W
Max. pump rate	5000L/H	7000L/H	9000L/H	11000L/H	12000L/H
Max. delivery Height	6m	7m	8m	9m	9.5m
Max. Deepth	5m	7m	7m	7m	7m
Cable	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²
Minimum starting water level with float switch	180mm	180mm	180mm	180mm	180mm
Minimum starting water level by manual operation	90mm	90mm	90mm	90mm	90mm
Minimum Cut off water level with float switch	120mm	120mm	120mm	120mm	120mm
Lowest residual water level by manual operation	5mm	5mm	5mm	5mm	5mm

120V/60Hz is also available

Clear Water Submersible Pump

Main Features

Attaching design for continuous manual operatlon

FSPxx31C

FSPxx32C

Specifications

	FSPxx31C / FSPxx32C				
Rated Power	250W	400W	550W	750W	900W
Max. pump rate	5000L/H	7000L/H	9000L/H	11000L/H	12000L/H
Max. delivery Height	6m	7m	8m	9m	9.5m
Max. Deepth	5m	7m	7m	7m	7m
Cable	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²
Minimum starting water level with float switch	180mm	180mm	180mm	180mm	180mm
Minimum starting water level by manual operation	90mm	90mm	90mm	90mm	90mm
Minimum Cutt off water level with float switch	120mm	120mm	120mm	120mm	120mm
Lowest residual water level by manual operation	5mm	5mm	5mm	5mm	5mm

120V/60Hz is also available

Clear Water Submersible Pump

Main Features

Attaching design for continuous manual operatlon

FSPxx33C

FSPxx33CB

Specifications

	FSPxx33CB			
Rated Power	400W	550W	750W	900W
Max. pump rate	7000L/H	9000L/H	11000L/H	12000L/H
Max. delivery Height	7m	8m	9m	9.5m
Max. Deepth	7m	7m	7m	7m
Cable	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²
Minimum starting water level with float switch	180mm	180mm	180mm	180mm
Minimum starting water level by manual operation	90mm	90mm	90mm	90mm
Minimum Cutt off water level with float switch	120mm	120mm	120mm	120mm
Lowest residual water level by manual operation	5mm	5mm	5mm	5mm

120V/60Hz is also available

KIMPORT

Dirty Water Submersible Pumps

CE RoHS BSCI

NINGBO FLUENT TOOLS CO.,LTD.
FLUENTPOWER

This is the ideal companion for all home and garden owners, who have a pond, live in a flooding zone, or generally have problems with dirty water. The pump always bring high performance and low energy consumption, which is also equiped with hardened shaft and double sealing to protect the motor under water

LD-0786

Dirty Water Submersible Pump

CE RoHS BSCI

Main Features

- Compact design
- Less space for storage
- More loading quantity

FSPxx36DW-1

FSPxx36DW-2

Specifications

	FSPxx36DW-1 / FSPxx36DW-2			
Rated Power	400W	550W	750W	900W
Max. pump rate	8000L/H	11000L/H	13000L/H	14000L/H
Max. delivery Height	5m	7m	8m	9m
Max. Deepth	5m	7m	7m	7m
Cable	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²
Minimum starting water level with float switch	180mm	180mm	180mm	180mm
Minimum starting water level by manual operation	90mm	90mm	90mm	90mm
Minimum Cutt off water level with float switch	120mm	120mm	120mm	120mm
Lowest residual water level by manual operation	50mm	50mm	50mm	50mm

120V/60Hz is also available

Dirty Water Submersible Pump

CE RoHS BSCI

Main Features

- Attaching design for continuous manual operatlon

FSPxx31DW

FSPxx32DW

Specifications

	FSPxx31DW / FSPxx32DW			
Rated Power	400W	550W	750W	900W
Max. pump rate	8000L/H	11000L/H	13000L/H	14000L/H
Max. delivery Height	5m	7m	8m	9m
Max. Deepth	5m	7m	7m	7m
Cable	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²
Minimum starting water level with float switch	180mm	180mm	180mm	180mm
Minimum starting water level by manual operation	90mm	90mm	90mm	90mm
Minimum Cutt off water level with float switch	120mm	120mm	120mm	120mm
Lowest residual water level by manual operation	50mm	50mm	50mm	50mm

120V/60Hz is also available

Dirty Water Submersible Pump

CE RoHS BSCI

Main Features

- Compact design
- Less space for storage
- More loading quantity
- Cable clamp for continous manual operation

FSPxx37DW-1

FSPxx37DW-2

Specifications

	FSPxx37DW-1 / FSPxx37DW-2			
Rated Power	400W	550W	750W	900W
Max. pump rate	8000L/H	11000L/H	13000L/H	14000L/H
Max. delivery Height	5m	7m	8m	9m
Max. Deepth	5m	7m	7m	7m
Cable	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²
Minimum starting water level with float switch	180mm	180mm	180mm	180mm
Minimum starting water level by manual operation	90mm	90mm	90mm	90mm
Minimum Cutt off water level with float switch	120mm	120mm	120mm	120mm
Lowest residual water level by manual operation	50mm	50mm	50mm	50mm

120V/60Hz is also available

Submersible Pump

CE RoHS BSCI

Main Features

FSPxx22DW

FSPxx22DWB

Specifications

	FSPxx22DW / FSPxx22DWB				
Rated Power	400W	550W	750W	900W	1100W
Max. pump rate	8000L/H	11000L/H	13000L/H	14000L/H	15000L/H
Max. delivery Height	5m	7m	8m	9m	9.5m
Max. Deepth	5m	7m	7m	7m	7m
Cable	H05RNF3G 0.75mm2	H05RNF3G 0.75mm2	H05RNF3G 0.75mm2	H05RNF3G 0.75mm2	H05RNF3G 0.75mm2
Minimum starting water level with float switch	180mm	180mm	180mm	180mm	180mm
Minimum starting water level by manual operation	90mm	90mm	90mm	90mm	90mm
Minimum Cutt off water level with float switch	120mm	120mm	120mm	120mm	120mm
Lowest residual water level by manual operation	50mm	50mm	50mm	50mm	50mm

120V/60Hz is also available

Submersible Pump
2 in 1 adjustable Base

CE RoHS BSCI

Main Features

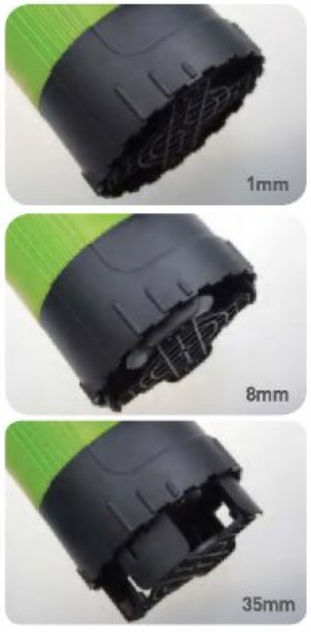

FSPxx18CW

Specifications

	FSPxx18CW			
Rated Power	400W	550W	750W	900W
Max. pump rate	8000L/H	11000L/H	13000L/H	14000L/H
Max. delivery Height	5m	7m	8m	9m
Max. Deepth	5m	7m	7m	7m
Cable	H05RNF3G 0.75mm2	H05RNF3G 0.75mm2	H05RNF3G 0.75mm2	H05RNF3G 0.75mm2
Minimum starting water level with float switch	180mm	180mm	180mm	180mm
Minimum starting water level by manual operation	50mm	50mm	50mm	50mm
Minimum Cutt off water level with float switch	120mm	120mm	120mm	120mm
Lowest residual water level by manual operation	3mm	3mm	3mm	3mm

120V/60Hz is also available

Dirty Water Submersible Pump

CE RoHS BSCI

Main Features

Attaching design for continuous manual operatlon

FSPxx33DW

FSPxx33DWB

Specifications

	FSPxx33DW / FSPxx33DWB				
Rated Power	400W	550W	750W	900W	1100W
Max. pump rate	8000L/H	11000L/H	13000L/H	14000L/H	16000L/H
Max. delivery Height	5m	7m	8m	9m	9.5m
Max. Deepth	5m	7m	7m	7m	7m
Cable	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²
Minimum starting water level with float switch	180mm	180mm	180mm	180mm	180mm
Minimum starting water level by manual operation	90mm	90mm	90mm	90mm	90mm
Minimum Cutt off water level with float switch	120mm	120mm	120mm	120mm	120mm
Lowest residual water level by manual operation	50mm	50mm	50mm	50mm	50mm

120V/60Hz is also available

Automatic Submersible Pump

With Integrated Float Switch

CE RoHS BSCI

Main Features

FSPxx19C

FSPxx29DW

Specifications

	FSPxx19C				FSPxx29DW			
Rated Power	400W	550W	750W	900W	400W	550W	750W	900W
Max. pump rate	7000L/H	9000L/H	11500L/H	12500L/H	8000L/H	11000L/H	13000L/H	14000L/H
Max. delivery Height	7m	8m	9m	9.5m	5m	7m	8m	9m
Max. Deepth	7m	7m	7m	7m	5m	7m	7m	7m
Cable	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²
Min. starting water level with automatic mode	100mm	100mm	100mm	100mm	150mm	150mm	150mm	150mm
Min. starting water level by manual operation	70mm	70mm	70mm	70mm	100mm	100mm	100mm	100mm
Min. Cutt off water level with automatic mode	80mm	80mm	80mm	80mm	120mm	120mm	120mm	120mm
Lowest residual water level by manual operation	10mm	10mm	10mm	10mm	50mm	50mm	50mm	50mm

120V/60Hz is also available

KIMPORT

Automatic Submersible Pump

With Water Sensor Switch

Main Features

- Automatic ON/OFF
- Pump turns on when water is detected at 60mm
- Pump turns off when water is removed at 4mm
- Non-return valve included

FSPxx39C

Specifications

	FSPxx39C		
Rated Power	550W	750W	900W
Max. pump rate	9000L/H	11500L/H	12500L/H
Max. delivery Height	8m	9m	9.5m
Max. Deepth	7m	7m	7m
Cable	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²
Min. starting water level with automatic mode	60mm	60mm	60mm
Min. Cutt off water level with automatic mode	4mm	4mm	4mm

120V/60Hz is also available

LD-0786

Rain Barrel Pump

NINGBO FLUENT TOOLS CO.,LTD.
FLUENTPOWER

With FLUENT Rain Water Tank Pumps, you can easily pump water from rain collector to irrigate your garden with either a connected sprinkler, a nozzle, or a sprayer.

Submersible

Rain Barrel Pump

Main Features



Fits all standard garden hose connector systems

Adjustable securing hook



Integrated easy-to clean dirtfilter

Flexible pipe end piece with kinkprotection and shut-off valve

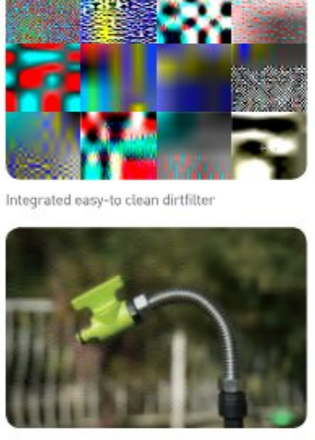

FSP3503CR FSP3504CR

Specifications

	FSP3503CR	FSP3504CR
Rated Power	350W	350W
Max. pump rate	4000L/H	4000L/H
Max. delivery Height	12m	12m
Max. Deepth	7m	7m
Cable	H05RNF3G 0.75mm²	H05RNF3G 0.75mm²
Minimum starting water level with float switch	180mm	180mm
Minimum starting water level by manual operation	90mm	90mm
Minimum Cutt off water level with float switch	120mm	120mm
Lowest residual water level by manual operation	5mm	5mm

110V/60Hz is also available

Rain Barrel Pump
With 2 Bar Pressure

Main Features

- Capable for running sprinkler
- Multiple Impellers
- SS shaft
- Oil chamber seal

Fits all standard garden hose connector systems

FSP750HC

Specifications

	FSP750HC
Rated Power	750W
Max. pump rate	3200L/H
Max. delivery Height	22m
Max. Deepth	10m
Cable	H05RNF3G 0.75mm²
Minimum starting water level with float switch	180mm
Minimum starting water level by manual operation	90mm
Minimum Cutt off water level with float switch	120mm
Lowest residual water level by manual operation	5mm

120V/60Hz is also available

KIMPORT

Battery Pumps

CE RoHS BSCI

NINGBO FLUENT TOOLS CO.,LTD.
FLUENTPOWER

Submersible

For a free and independent water supply

Our pumps are designed to be portable and easy to use, allowing you to water your garden without the hassle of cords or outlets. With a powerful lithium-ion battery, our pumps can provide up to several hours of continuous use on a single charge. Plus, with a lightweight and compact design, our pumps are easy to transport and store, making them ideal for both home gardening and on-the-go watering. Whether you need to water your plants, fill a pond, or irrigate your lawn, our battery-powered water pumps are the perfect tool for the job. Choose our brand for a reliable and convenient way to keep your garden and lawn looking lush and healthy.

LD-0786

Battery Rain Barrel Pump

CE RoHS BSCI

Main Features

DC 18V

- DC brush motor or DC brushless motor
- Battery indicator LED
- Timer function 5/10/15mins
- Running time: Approximate 60 min with 4ah battery

2m garden hose with nozzle (optional)

FSP20DC-1

Specifications

	FSP20DC-1
Voltage	18V
Max. Flow Rate	2000L/H
Max. Height	20M
Max. Deepth	1.8M
Dia. Of Pipe	3/4"
Connection Cable	2m

120V/60Hz is also available

Battery Rain Barrel Pump

CE RoHS BSCI

Main Features

DC 18V | CLEAN WATER MAX | Max Water Temp.35°C

- DC brush motor or DC brushless motor
- Battery indicator LED
- Timer function 5/10/15mins
- Running time: Approximate 60 min with 4ah battery

FSP20DC-2

Specifications

	FSP20DC-2
Voltage	18V
Max. Flow Rate	2000L/H
Max. Height	20M
Max. Deepth	1.8M
Dia. Of Pipe	3/4"
Connection Cable	2m

120V/60Hz is also available

Battery Garden Pump

CE RoHS BSCI

Main Features

DC 36V | IPX4 | DIRTY WATER MAX | Max Water Temp.35°C

- DC brush motor or Dc brushless motor
- Running time: Approximate 80 min at medium mode with 2x4ah batteries
- WORKING MODE — Boost / Medium / ECO

FGP40DC-2

Specifications

	FGP40DC-2
Voltage	36V
Max. Flow Rate	3000L/H
Max. Height	26M
Max. Suction	8M
Certifications	ROHS/CE/OS
Dia. Of Pipe	G1"

120V/60Hz is also available

Submersible Pressure Pump

Inox Automatic With Pressure Sensor

CE RoHS BSCI

Main Features

FSP1300HC-1

AUTOMATIC FUNCTION
Starts and stops the pump automatically when water is needed (automatic version)

BACKFLOW PREVENTER
For immediate water supply

ROBUST STAINLESS STEEL
CONNECTION THREAD
With 19 mm (3/4") / 25 mm (1") hose connector

LEAKAGE DETECTION AND SMALL AMOUNT PROGRAMME
Avoids water damages and enables small amount consumers like washing mashines or Micro-Drip-System

Specifications

	FSP1300HC-1
Rated Power	1100W
Max.Pump Rate	6500L/H
Max. Delivery Height	45m
Max. Depth	12m
Max.Grain Size	2mm
Dia. Of Discharge Port	1"
Min. Water Level	35mm
Pressure Reboosting At	1.5 bar

120V/60Hz is also available .

Submersible Pressure Pump

Inox Automatic With Float Switch

CE RoHS BSCI

Main Features

FSP1300HC-2

FLOAT SWITCH
Automatic cut-in and cut-out levels with dry-running safety that can adjust to water level

BACKFLOW PREVENTER
For immediate water supply

ROBUST STAINLESS STEEL
CONNECTION THREAD
With 19 mm (3/4") / 25 mm (1") hose connector

Specifications

	FSP1300HC-2
Rated Power	1100W
Max.Pump Rate	6500L/H
Max. Delivery Height	45m
Max. Depth	12m
Max.Grain Size	2mm
Dia. Of Discharge Port	1"

120V/60Hz is also available

KIMPORT

Submersible Sewage Pump

CE RoHS BSCI

NINGBO FLUENT TOOLS CO.,LTD.
FLUENTPOWER

Submersible

We are proud to offer a reliable and efficient solution for your basement water removal needs. Our sump pumps feature a durable construction and powerful motor, capable of quickly and effectively removing water from your basement or crawlspace. With their automatic operation and easy installation, our sump pumps provide a hassle-free experience, giving you peace of mind and protecting your home from water damage.

LD-0786

Submersible Sewage Pump

CE RoHS BSCI

Submersible

Main Features

IPX8

- Exteral vertical float switch (optional)

FSPxx35DW

Specifications

	FSPxx35DW
Voltage	230V/50Hz
Rated Power	600W
Max. Flow Rate	16500L/H
Max. Height	7m
Max. Deepth	2.5m
Max Grain Size	18mm
Residual Water Level	50mm
Dia. of discharge Port	2"

120V/60Hz is also available

Garden Pump

CE RoHS BSCI

Main Features

FGPXX5J-1

FGPXX5J-2

FGPXX5JB-1

FGPXX5JB-2

Specifications

FGPXX5JB-1 / FGPXX5JB-2				
Rated Power	400W	600W	800W	1000W
V&Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max. Flow Rate	2500L/H	2700L/H	3000L/H	3200L/H
Max. Height	28M	33M	40M	44M
Max. Deepth	7M	7M	8M	8M
Dia. Of Pipe	1"	1"	1"	1"

110V/60Hz is also available

Garden Pump

CE RoHS BSCI

Main Features

FGPXX8J

FGPXX8JB

Specifications

FGPXX8J / FGPXX8JB				
Rated Power	400W	600W	800W	1000W
V&Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max. Flow Rate	2500L/H	2700L/H	3000L/H	3200L/H
Max. Height	28M	33M	40M	44M
Max. Deepth	7M	7M	8M	8M
Dia. Of Pipe	1"	1"	1"	1"

110V/60Hz is also available

Garden Pump

CE RoHS BSCI

Main Features

FGPXX7

FGPXX7B

Specifications

	FGPXX7 / FGPXX7B			
Rated Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max. Flow Rate	2800L/H	3000L/H	3200L/H	3500L/H
Max. Height	35M	40M	44M	46M
Max. Deepth	7M	8M	8M	8M
Dia. Of Pipe	1"	1"	1"	1"

110V/60Hz is also available

Garden Pump

CE RoHS BSCI

Main Features

FGPXX10J

FGPXX10JB

Specifications

	FGPXX10J / FGPXX10JB		
Rated Power	1000W	1100W	1300W
V&Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max. Flow Rate	4000L/H	4600L/H	4800L/H
Max. Height	42M	45M	48M
Max. Deepth	8M	7M	8M
Dia. Of Pipe	1"	1"	1"

110V/60Hz is also available

Garden Pump With Pressure System

CE RoHS BSCI

Main Features

FGPXX8JD

FGPXX8JBD

Specifications

	FGPXX8JD / FGPXX8JBD		
Rated Power	600W	800W	1000W
V&Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max. Flow Rate	2800L/H	3000L/H	3200L/H
Max. Height	35M	40M	44M
Max. Suction	7M	8M	8M
Bar(min-max)	1.2-2.8	1.2-2.8	1.2-2.8
Dia. Of Pipe	1"	1"	1"

120V/60Hz is also available

Main Features

FSGPxxxC

Specifications

	FSGPxxxC		
Rated Power	1000W	1100W	1300W
V&Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max. Flow Rate	4000L/H	4600L/H	4800L/H
Max. Height	42M	45M	48M
Max. Suction	8M	8M	8M
Bar(min-max)	1.5-3.0	1.5-3.0	1.2-2.8
Dia. Of Pipe	1"	1"	1"
Cable	"H07RNF3G 1.0mm2x1.2"	"H07RNF3G 1.0mm2x1.2"	"H07RNF3G 1.0mm2x1.2"

120V/60Hz is also available

Garden Pump With Pressure System

CE RoHS BSCI

Main Features

FGPxxx7D

Specifications

	FGPxxx7D			
Rated Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max. Flow Rate	2800L/H	3000L/H	3200L/H	3500L/H
Max. Height	35M	40M	44M	46M
Max. Suction	8M	8M	8M	8M
Bar(min-max)	1.5-3.0	1.5-3.0	1.5-3.0	1.5-3.0
Dia. Of Pipe	1"	1"	1"	1"

120V/60Hz is also available

Main Features

FGPxxx7BD

Specifications

	FGPxxx7BD			
Rated Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max. Flow Rate	2800L/H	3000L/H	3200L/H	3500L/H
Max. Height	35M	40M	44M	46M
Max. Suction	8M	8M	8M	8M
Bar(min-max)	1.5-3.0	1.5-3.0	1.5-3.0	1.5-3.0
Dia. Of Pipe	1"	1"	1"	1"

120V/60Hz is also available

SUBMERSIBLE PUMP

-PORTABLE
-ENERRGY SAVING
-LONGER DURATION

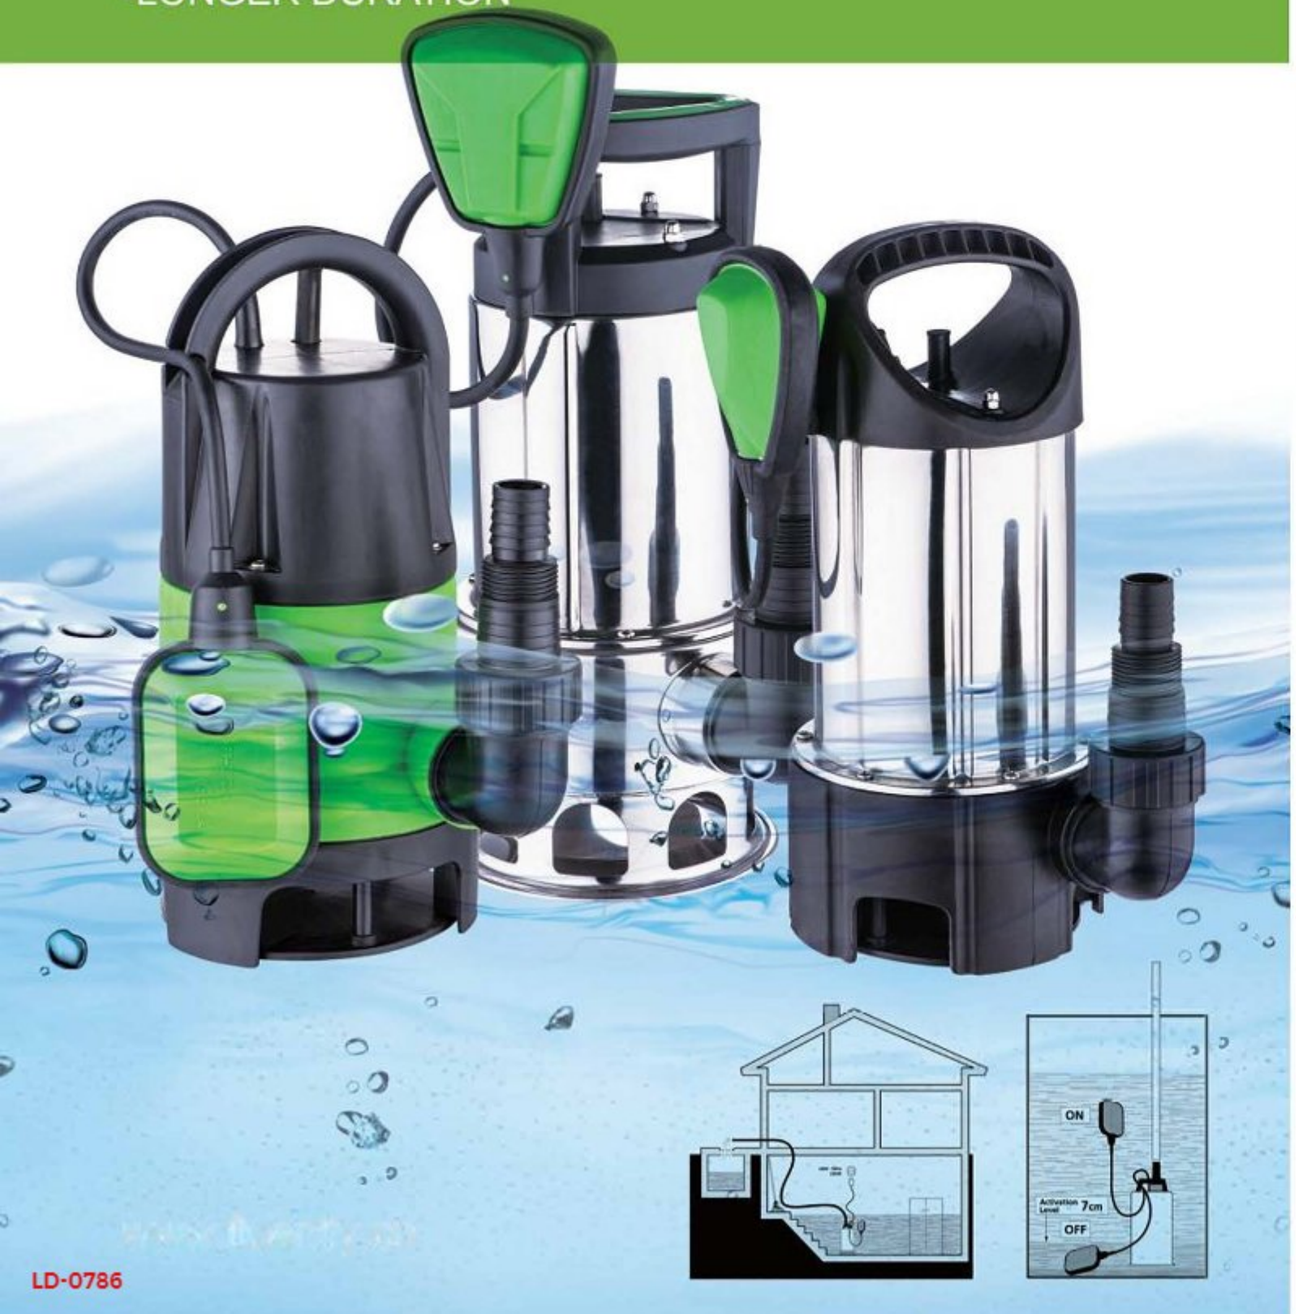

LD-0786

For Clean Water

FSPxx6C

FSPxx6CK



250W

RoHS CB BSCI

FSPxx6C / FSPxx6CK									"xx" standards for power watt
W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm/s
250W	230V/50HZ	4.5	3500	4.5	3	1",19/25	H05 0.75	16×16×31	51×34×33

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

FSPxx25C



250W 400W

RoHS CB BSCI

FSPxx25C									"xx" standards for power watt
W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm/4pcs
250W	230V/50HZ	6	5000	6	5	1",5/8"	H05 0.75	16×16×26	34×34×28
400W	230V/50HZ	7	6000	7	5	1",5/8"	H05 0.75	16×16×26	34×34×28

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

KIMPORT

For Clean Water

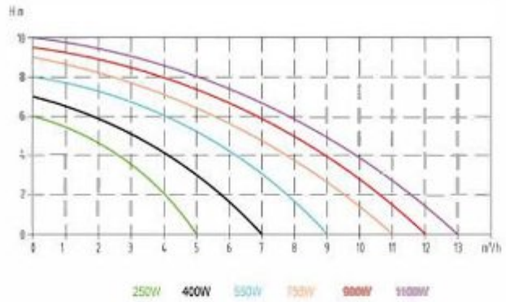

FSPxx1C

FSPxx1CB

For Dirty Water

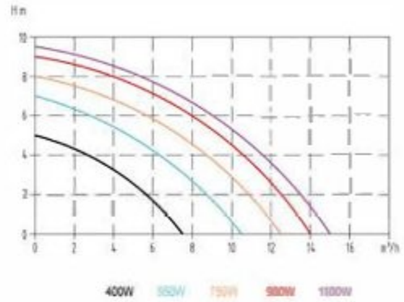

FSPxx1DW

FSPxx1DWB

CE RoHS CB BSCI

FSPxx1C / FSPxx1CB "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axbxh cm	cm/4pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1",G1",1-1/2"	H05RN 0.75	22×16×31	46×34×33	2300
400W	230V/50HZ	7	7000	7	5	1",G1",1-1/2"	H05RN 0.75	22×16×31	46×34×33	2300
550W	230V/50HZ	8	9000	7	5	1",G1",1-1/2"	H05RN 0.75	22×16×31	46×34×33	2300
750W	230V/50HZ	9	11000	7	5	1",G1",1-1/2"	H07RN 1.0	22×16×34	46×34×36	2040
900W	230V/50HZ	9.5	12000	7	5	1",G1",1-1/2"	H07RN 1.0	22×16×34	46×34×36	2040
1100W	230V/50HZ	10	13000	7	5	1",G1",1-1/2"	H07RN 1.0	22×16×34	46×34×36	2040

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

CE RoHS CB BSCI

FSPxx1DW / FSPxx1DWB "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axbxh cm	cm/4pcs	pcs/20'CTN
400W	230V/50HZ	5	7500	5	35	1",G1",1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
550W	230V/50HZ	7	10500	7	35	1",G1",1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
750W	230V/50HZ	8	12500	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	2040
900W	230V/50HZ	9	14000	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900
1100W	230V/50HZ	9.5	15000	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

For Clean Water

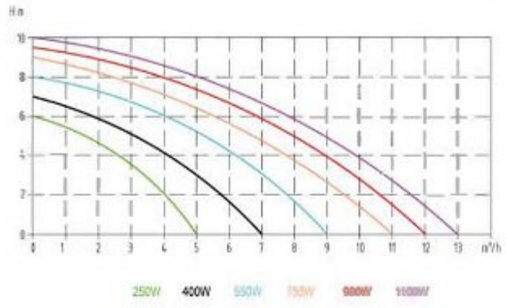

FSPxx2C

FSPxx3C

For Dirty Water

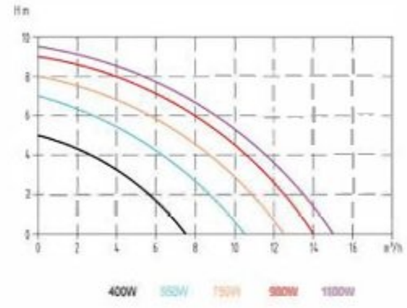

FSPxx2DW

FSPxx3DW

RoHS CB BSCI

FSPxx2C / FSPxx3C "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm/4pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1",G1",1-1/2"	H05RN 0.75	22×16×31	46×34×33	2300
400W	230V/50HZ	7	7000	7	5	1",G1",1-1/2"	H05RN 0.75	22×16×31	46×34×33	2300
550W	230V/50HZ	8	9000	7	5	1",G1",1-1/2"	H05RN 0.75	22×16×31	46×34×33	2300
750W	230V/50HZ	9	11000	7	5	1",G1",1-1/2"	H07RN 1.0	22×16×34	46×34×36	2040
900W	230V/50HZ	9.5	12000	7	5	1",G1",1-1/2"	H07RN 1.0	22×16×34	46×34×36	2040
1100W	230V/50HZ	10	13000	7	5	1",G1",1-1/2"	H07RN 1.0	22×16×34	46×34×36	2040

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

RoHS CB BSCI

FSPxx2DW / FSPxx3DW "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm/4pcs	pcs/20'CTN
400W	230V/50HZ	5	7500	5	35	1",G1",1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
550W	230V/50HZ	7	10500	7	35	1",G1",1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
750W	230V/50HZ	8	12500	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	2040
900W	230V/50HZ	9	14000	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900
1100W	230V/50HZ	9.5	15000	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

KIMPORT

For Clean Water

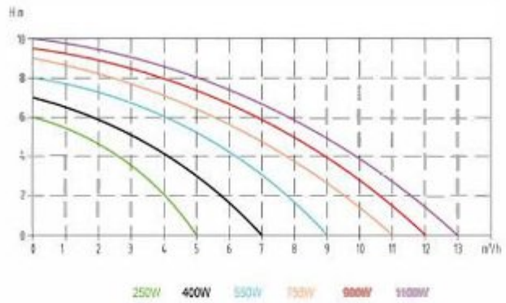

FSPxx4C

FSPxx5C

For Dirty Water

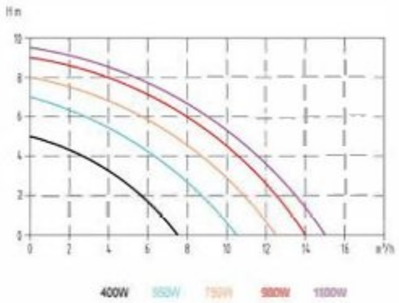

FSPxx4DW

FSPxx5DW

RoHS CB BSCI

FSPxx4C / FSPxx5C

"xx" standards for power watt

W	V/Hz	Hmax m	Qmax l/h	H m	mm	mm	10m	axbxhcm FSPxx4C	axbxhcm FSPxx5C	cm/4pcs FSPxx4C	cm/4pcs FSPxx5C	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1",G1",1-1/2"	H05RN 0.75	22×16×31	22×18×33	46×34×33	46×38×35	2040
400W	230V/50HZ	7	7000	7	5	1",G1",1-1/2"	H05RN 0.75	22×16×31	22×18×33	46×34×33	46×38×35	2040
550W	230V/50HZ	8	9000	7	5	1",G1",1-1/2"	H05RN 0.75	22×16×31	22×18×33	46×34×33	46×38×35	2040
750W	230V/50HZ	9	11000	7	5	1",G1",1-1/2"	H07RN 1.0	22×16×34	22×18×33	46×34×36	46×38×35	2040
900W	230V/50HZ	9.5	12000	7	5	1",G1",1-1/2"	H07RN 1.0	22×16×34	22×18×33	46×34×36	46×38×35	1950
1100W	230V/50HZ	10	13000	7	5	1",G1",1-1/2"	H07RN 1.0	22×16×34	22×18×33	46×34×36	46×38×35	1900

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

RoHS CB BSCI

FSPxx4DW /FSPxx5DW

"xx" standards for power watt

W	V/Hz	Hmax m	Qmax l/h	H m	mm	mm	10m	axbxhcm FSPxx4DW	axbxhcm FSPxx5DW	cm/4pcs FSPxx4DW	cm/4pcs FSPxx5DW	pcs/20'CTN
400W	230V/50HZ	5	7500	5	35	1",G1",1-1/2"	H05RN 0.75	22×16×31	22×18×37	46×34×33	46×38×38.5	2040
550W	230V/50HZ	7	10500	7	35	1",G1",1-1/2"	H05RN 0.75	22×16×31	22×18×37	46×34×33	46×38×38.5	2040
750W	230V/50HZ	8	12500	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×34	22×16×37	46×34×36	46×38×38.5	2040
900W	230V/50HZ	9	14000	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×34	22×16×37	46×34×36	46×38×38.5	1900
1100W	230V/50HZ	9.5	15000	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×34	22×16×37	46×34×36	46×38×38.5	1900

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

For Clean Water

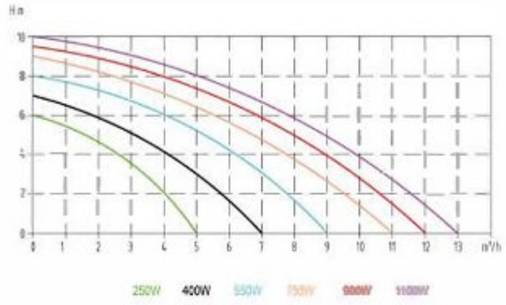

FSPxx8C

FSPxx9C

- Low Cost Design
- Smaller Size
- Stable Performance

For Dirty Water

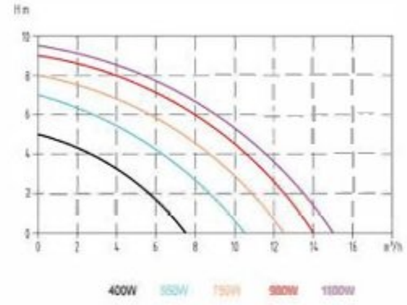

FSPxx8DW

FSPxx9DW

- Low Cost Design
- Smaller Size
- Stable Performance

RoHS CB BSCI

FSPxx8C / FSPxx9C "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H min m	mm	mm	10m	axbxhcm		cm/4pcs		pcs/20'CTN
								FSPxx8C	FSPxx9C	FSPxx8C	FSPxx9C	
250W	230V/50HZ	6	5000	5	5	1",G1",1-1/2"	H05RN 0.75	46×34×33	22×16×31	46×34×33	46×34×33	2040
400W	230V/50HZ	7	7000	7	5	1",G1",1-1/2"	H05RN 0.75	46×34×33	22×16×31	46×34×33	46×34×33	2040
550W	230V/50HZ	8	9000	7	5	1",G1",1-1/2"	H05RN 0.75	46×34×33	22×16×31	46×34×33	46×34×33	2040
750W	230V/50HZ	9	11000	7	5	1",G1",1-1/2"	H07RN 1.0	22×16×37	22×16×34	46×34×38.5	46×34×36	2040
900W	230V/50HZ	9.5	12000	7	5	1",G1",1-1/2"	H07RN 1.0	22×16×37	22×16×34	46×34×38.5	46×34×36	1950
1100W	230V/50HZ	10	13000	7	5	1",G1",1-1/2"	H07RN 1.0	22×16×37	22×16×34	46×34×38.5	46×34×36	1900

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

RoHS CB BSCI

FSPxx8DW / FSPxx9DW "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H min m	mm	mm	10m	axbxhcm		cm/4pcs		pcs/20'CTN
								FSPxx8DW	FSPxx9DW	FSPxx8DW	FSPxx9DW	
400W	230V/50HZ	5	7500	5	35	1",G1",1-1/2"	H05RN 0.75	22×16×31	22×18×37	46×34×33	46×38×38.5	2040
550W	230V/50HZ	7	10500	7	35	1",G1",1-1/2"	H05RN 0.75	22×16×31	22×18×37	46×34×33	46×38×38.5	2040
750W	230V/50HZ	8	12500	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×34	22×16×37	46×34×36	46×38×38.5	2040
900W	230V/50HZ	9	14000	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×34	22×16×37	46×34×36	46×38×38.5	1900
1100W	230V/50HZ	9.5	15000	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×34	22×16×37	46×34×36	46×38×38.5	1900

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

For Dirty Water

FSPxx7DW



400W

RoHS CB BSCI

FSPxx7DW "xx" standards for power watt

w	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axbxh cm
400W	230V/50HZ	5	7500	7	16	1", G1", 1-1/2"	H05 0.75	16×16×31

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

FSPxx13DWB



400W

RoHS CB BSCI

FSPxx13DWB "xx" standards for power watt

w	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axbxh cm
400W	230V/50HZ	5	7500	5	35	1", G1", 1-1/2"	H05 0.75	22×16×31

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

For Dirty Water

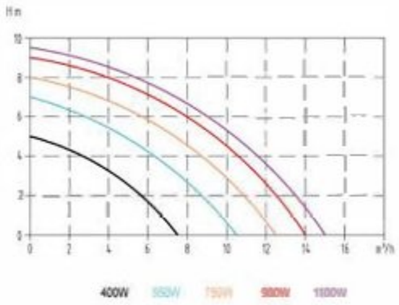

FSPxx18DW

FSPxx18DWB

- Three Levels of Grain Size: 1mm,8mm,35mm
- Clean and Dirty Water 2 in 1 Design

Adjustable Base

RoHS CB BSCI

FSPxx18DW / FSPxx18DWB "xx" standards for power watt

w	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axbxh cm	cm³/pcs	G.W.kg
500W	230V/50HZ	5	7500	5	35	1", G1", 1-1/2"	H05RN 0.75	22×18×34	46×38×36	2040
550W	230V/50HZ	7	10500	7	35	1", G1", 1-1/2"	H05RN 0.75	22×18×34	46×38×36	2040
750W	230V/50HZ	8	12500	7	35	1", G1", 1-1/2"	H07RN 1.0	22×18×37	46×38×38.5	2040
900W	230V/50HZ	9	14000	7	35	1", G1", 1-1/2"	H07RN 1.0	22×18×37	46×38×38.5	1950
1100W	230V/50HZ	9.5	15000	7	35	1", G1", 1-1/2"	H07RN 1.0	22×18×37	46×38×38.5	1900

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

For Clean Water

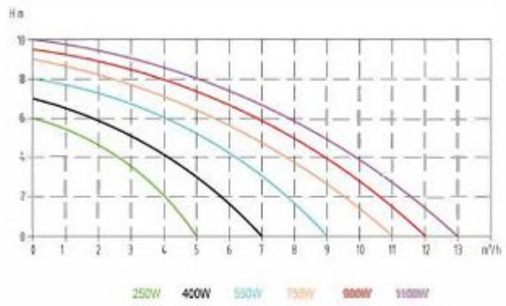

FSPxx26C

FSPxx27C

For Dirty Water

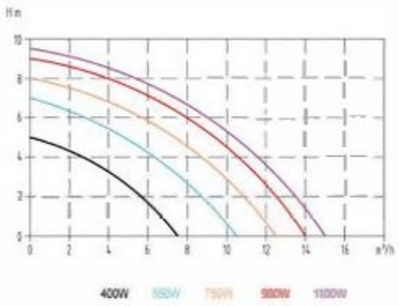

FSPxx26DW

FSPxx27DW

CE RoHS CB BSCI

FSPxx26C / FSPxx27C "xx" standards for power watt

w	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm/4pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×31	46×34×33	2040
400W	230V/50HZ	7	7000	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×31	46×34×33	2040
550W	230V/50HZ	8	9000	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×31	46×34×33	2040
750W	230V/50HZ	9	11000	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×34	46×34×36	2040
900W	230V/50HZ	9.5	12000	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×34	46×34×36	1950
1100W	230V/50HZ	10	13000	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×34	46×34×36	1900

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

CE RoHS CB BSCI

FSPxx26DW / FSPxx27DW "xx" standards for power watt

w	w	Q max l/h	H max m	H max m	mm	mm	10m	a x b x h cm	cm/4pcs	pcs/20'CTN
400W	230V/50HZ	5	7500	5	35	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
550W	230V/50HZ	7	10500	7	35	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
750W	230V/50HZ	8	12500	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	2040
900W	230V/50HZ	9	14000	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900
1100W	230V/50HZ	9.5	15000	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

KIMPORT

For Dirty Water

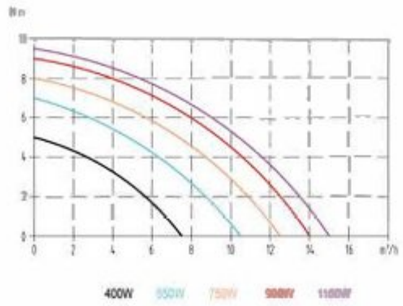

FSPxx27DWB

FSPxx26DWB

CE RoHS CB BSCI

FSPxx26DWB / FSPxx27DWB — "xx" standards for power watt

w	V/Hz	H max m	Q max l/h	H min m	mm	mm	10m	axbxh cm	cm4/pcs	pcs/20'CTN
400W	230V/50HZ	5	7500	5	35	1",G1",1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
550W	230V/50HZ	7	10500	7	35	1",G1",1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
750W	230V/50HZ	8	12500	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	2040
900W	230V/50HZ	9	14000	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900
1100W	230V/50HZ	9.5	15000	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

For Dirty Water

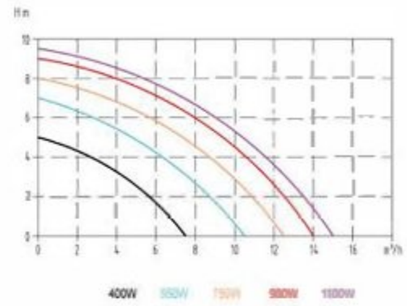

FSPxx27DWS

FSPxx26DWS

CE RoHS CB BSCI

FSPxx26DWS / FSPxx27DWS — "xx" standards for power watt

w	V/Hz	H max m	Q max l/h	H min m	mm	mm	10m	axbxh cm	cm4/pcs	pcs/20'CTN
400W	230V/50HZ	5	7500	5	35	1",G1",1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
550W	230V/50HZ	7	10500	7	35	1",G1",1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
750W	230V/50HZ	8	12500	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	2040
900W	230V/50HZ	9	14000	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900
1100W	230V/50HZ	9.5	15000	7	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

For Clean Water

FSP3501CR

FSP3502CR

Best for Irrigation
from Rain Barrel

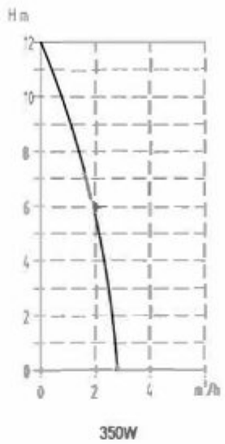

350W

RoHS CB BSCI

FSP3501CR / FSP3502CR — "xx" standards for power watt

W	V/Hz	Hmax m	Qmax l/h	Hmax m	mm	mm	10m	axbxh cm	cm/4pcs	pcs/20'CTN
350W	230V/50HZ	12	2400	7	3	3/4"	H05RN 0.75	22×16×37	46×34×38.5	2100

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

For Clean Water

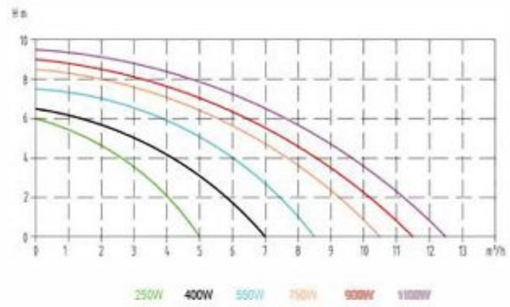

FSPxx3CB

- Top Outlet
- Stainless Body
- Plastic Base

FSPxx4CB

Different Style of Handle

RoHS CB BSCI

FSPxx3CB / FSPxx4CB — "xx" standards for power watt

W	V/Hz	Hmax m	Qmax l/h	Hmax m	mm	mm	10m	axbxh cm	cm/4pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×36×33	2300
400W	230V/50HZ	6.5	7000	7	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×36×33	2300
550W	230V/50HZ	7.5	8500	7	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×36×33	2300
750W	230V/50HZ	8.5	10500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×36×33	2040
900W	230V/50HZ	9	11500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×36×33	2040
1100W	230V/50HZ	9.5	12500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×36×33	2040

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

For Clean Water

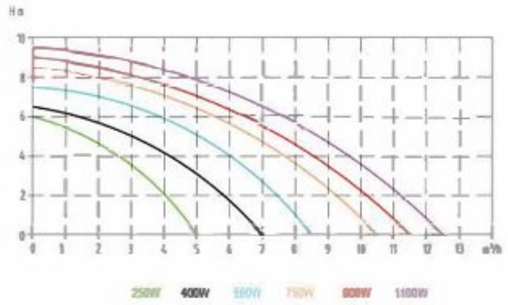

FSPxx1CBX

- Side Outlet
- Stainless Body
- Plastic Base

FSPxx2CBX

Different Style of Handle

RoHS CB BSCI

FSPxx1CBX / FSPxx2CBX "xx" standards for power watt

W	V/Hz	Hmax m	Qmax l/h	Hmax m	mm	mm	10m	axbxh cm	cm/4pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×36×33	2300
400W	230V/50HZ	6.5	7000	7	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×36×33	2300
550W	230V/50HZ	7.5	8500	7	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×36×33	2300
750W	230V/50HZ	8.5	10500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×36×33	2040
900W	230V/50HZ	9	11500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×36×33	2040
1100W	230V/50HZ	9.5	12500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×36×33	2040

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

For Clean Water

FSPxx4CS-4

- Full Stainless

FSPxx3CS-2

Double Layers

RoHS CB BSCI

FSPxx4CS-4 / FSPxx3CS-2 "xx" standards for power watt

W	V/Hz	Hmax m	Qmax l/h	Hmax m	mm	mm	10m	axbxh cm	cm/4pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×36×33	2300
400W	230V/50HZ	6.5	7000	7	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×36×33	2300
550W	230V/50HZ	7.5	8500	7	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×36×33	2300
750W	230V/50HZ	8.5	10500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×36×33	2040
900W	230V/50HZ	9	11500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×36×33	2040
1100W	230V/50HZ	9.5	12500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×36×33	2040

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

KIMPORT

For Clean Water

- Full Stainless

FSPxx1CS-3

FSPxx2CS-4

Different Style of Handle

RoHS CB BSCI

FSPxx1CS-3 / FSPxx2CS-4 "xx" standards for power watt

w	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axbxh cm	cm/4pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×36×33	2300
400W	230V/50HZ	6.5	7000	7	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×36×33	2300
550W	230V/50HZ	7.5	8500	7	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×36×33	2300
750W	230V/50HZ	8.5	10500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×36×33	2040
900W	230V/50HZ	9	11500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×36×33	2040
1100W	230V/50HZ	9.5	12500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×36×33	2040

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

For Clean Water

- Full Stainless

FSPxx5CS-5

FSPxx5CS-6

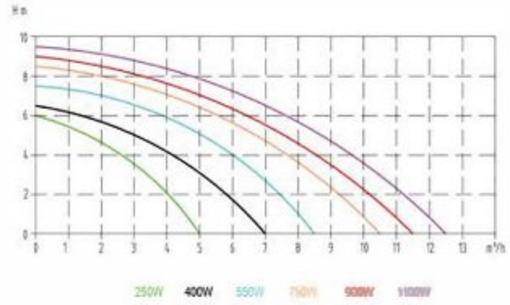

Different Style of Base

RoHS CB BSCI

FSPxx5CS-5 / FSPxx5CS-6 "xx" standards for power watt

w	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axbxh cm	cm/4pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×36×33	2300
400W	230V/50HZ	6.5	7000	7	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×36×33	2300
550W	230V/50HZ	7.5	8500	7	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×36×33	2300
750W	230V/50HZ	8.5	10500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×36×33	2040
900W	230V/50HZ	9	11500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×36×33	2040
1100W	230V/50HZ	9.5	12500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×36×33	2040

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

For Clean Water

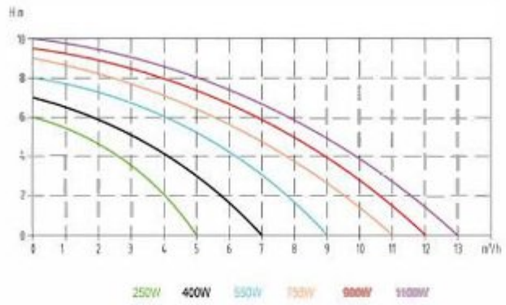

- Side Outlet
- Stainless Body
- Plastic Base

FSPxx1CB-7

FSPxx3CB-7

Different Style of Handle

RoHS CB BSCI

FSPxx1CB-7 / FSPxx3CB-7

"xx" standards for power watt

w	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axbxh cm	cm/4pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1",G1",1-1/2"	H05RN 0.75	22×16×31	46×34×33	2300
400W	230V/50HZ	7	7000	7	5	1",G1",1-1/2"	H05RN 0.75	22×16×31	46×34×33	2300
550W	230V/50HZ	8	9000	7	5	1",G1",1-1/2"	H05RN 0.75	22×16×31	46×34×33	2300
750W	230V/50HZ	9	11000	7	5	1",G1",1-1/2"	H07RN 1.0	22×16×34	46×34×36	2040
900W	230V/50HZ	9.5	12000	7	5	1",G1",1-1/2"	H07RN 1.0	22×16×34	46×34×36	2040
1100W	230V/50HZ	10	13000	7	5	1",G1",1-1/2"	H07RN 1.0	22×16×34	46×34×36	2040

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

For Dirty Water

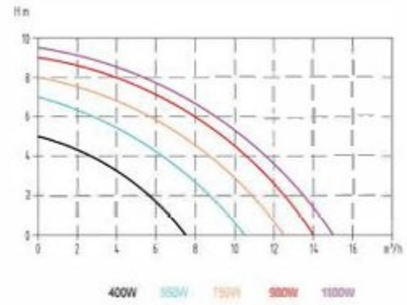

- Stainless Body
- Plastic Base

FSPxx1DWB-6

FSPxx3DWB-7

Different Style of Handle

RoHS CB BSCI

FSPxx1DWB-6 / FSPxx3DWB-7

"xx" standards for power watt

w	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axbxh cm	cm/4pcs	pcs/20'CTN
400W	230V/50HZ	5	7500	5	35	1",G1",1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
550W	230V/50HZ	7	10500	7	35	1",G1",1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
750W	230V/50HZ	8	12500	8	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1950
900W	230V/50HZ	9	14000	8	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900
1100W	230V/50HZ	9.5	15000	8	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

KIMPORT

For Dirty Water

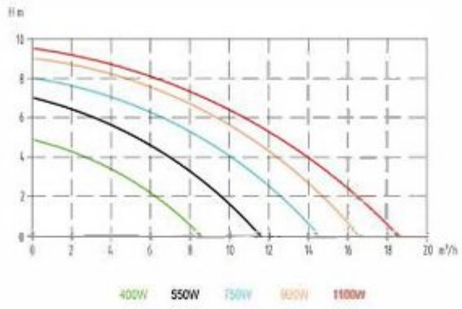

FSPxx1DWB-8

- Two Outlets
- High Flow Rate
- Stainless Body
- Plastic Base

FSPxx2DWB-8

Different Style of Handle

RoHS CB BSCI

FSPxx1DWB-8 / FSPxx2DWB-8 "xx" standards for power watt

w	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm/4pcs	pcs/20'CTN
400W	230V/50HZ	5	9500	5	35	1" ,G1" ,1-1/2"	H05RN 0.75	22.5×22.5×35	46.5×24×37	1440
550W	230V/50HZ	7	12000	7	35	1" ,G 1" ,1-1/2"	H05RN 0.75	22.5×22.5×35	46.5×24×37	1440
750W	230V/50HZ	8	15000	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22.5×22.5×37	46.5×24×39	1440
900W	230V/50HZ	9	17000	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22.5×22.5×37	46.5×24×39	1440
1100W	230V/50HZ	9.5	19000	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22.5×22.5×37	46.5×24×39	1440

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

For Dirty Water

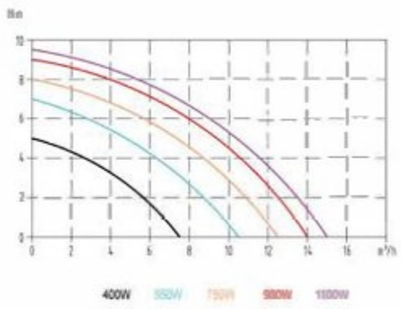

- Stainless Body

FSPxx1DWS-1

- Stainless Body

FSPxx2DWS-2

Different Style of Handle

RoHS CB BSCI

FSPxx1DWS-1 / FSPxx2DWS-2 "xx" standards for power watt

w	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm/4pcs	pcs/20'CTN
400W	230V/50HZ	5	7500	5	35	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
550W	230V/50HZ	7	10500	7	35	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
750W	230V/50HZ	8	12500	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1950
900W	230V/50HZ	9	14000	7	35	1" ,G 1" ,1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900
1100W	230V/50HZ	9.5	15000	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

KIMPORT

For Dirty Water

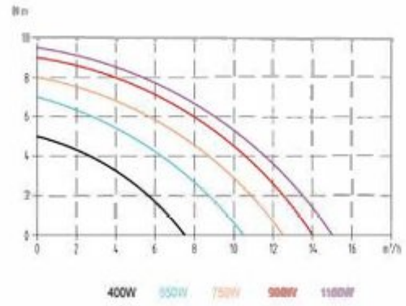

FSPxx3DWS-3

- Full Stainless

FSPxx2DWS-4

Different Style of Handle

RoHS CB BSCI

FSPxx3DWS-3 / FSPxx2DWS-4										"xx" standards for power watt
W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axbxh cm	cm/4pcs	pcs/20'CTN
400W	230V/50HZ	5	7500	5	35	1",G1",1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
550W	230V/50HZ	7	10500	7	35	1",G1",1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
750W	230V/50HZ	8	12500	8	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1950
900W	230V/50HZ	9	14000	8	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900
1100W	230V/50HZ	9.5	15000	8	35	1",G1",1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

For Clean Water

FSPxxHC

- High Lift, Up to 35m
- Stainless Body

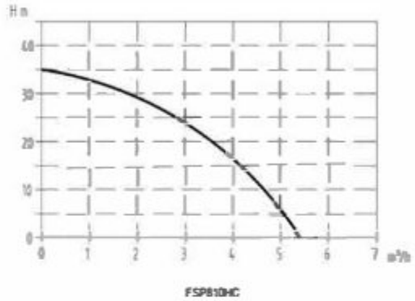

RoHS CB BSCI

FSPxxHC										"xx" standards for power watt
W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axbxh cm	cm/4pcs	pcs/20'CTN
810W	230V/50HZ	35	5400	7	5	1"	H07RN 1.0	22×16×37	46×38×39	1900

FSPxx19C

Built-in Float Switch

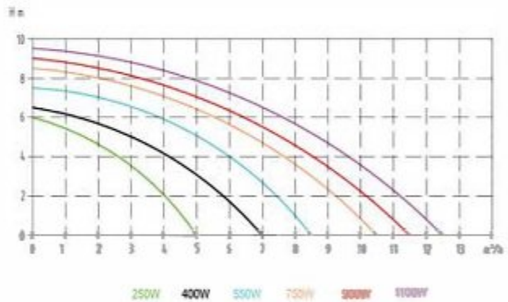

RoHS CB BSCI

FSPxx19C										"xx" standards for power watt
W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axbxh cm	cm/4pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×38×33	2300
400W	230V/50HZ	6.5	7000	7	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×38×33	2300
550W	230V/50HZ	7.5	8500	7	5	1",G1",1-1/2"	H05RN 0.75	22×18×31	46×38×33	2300
750W	230V/50HZ	8.5	10500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×38×33	2040
900W	230V/50HZ	9	11500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×38×33	2040
1100W	230V/50HZ	9.5	12500	7	5	1",G1",1-1/2"	H07RN 1.0	22×18×31	46×38×33	2040

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

KIMPORT

Vibration pump

VMP180 / VMP280

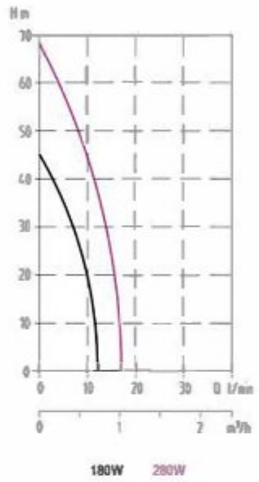

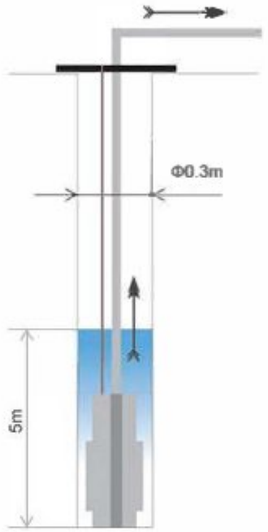

VMP350



RoHS CB BSCI

VMP180 / VMP280 / VMP350					
W		H MAX m	Q MAX l/h		m
180	230V/50HZ	45	720	17	H050.5mm²×10m
280	230V/50HZ	68	1020	19	H050.5mm²×10m
350	230V/50HZ	70	1140	19	H050.5mm²×10m

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

LD-0786

GARDEN PUMP

-PORTABLE
-SELF PRIMING
-PRESSURE CONTROLLER IS OPTIONAL

KIMPORT

- Plastic Head
- Different Style of Handle

- Stainless Head
- Different Style of Handle

RoHS CB BSCI

FGPxx2J / FGPxx3J / FGPxx4J "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	S max m	mm	m	axbxh cm	cm/2pcs	pcs/20'CTN
600W	230V/50HZ	35	2800	7	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
800W	230V/50HZ	40	3000	8	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
1000W	230V/50HZ	44	3200	8	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
1200W	230V/50HZ	46	3500	8	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

RoHS CB BSCI

FGPxx2JB / FGPxx3JB / FGPxx4JB "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	S max m	mm	m	axbxh cm	cm/2pcs	pcs/20'CTN
600W	230V/50HZ	35	2800	7	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
800W	230V/50HZ	40	3000	8	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
1000W	230V/50HZ	44	3200	8	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
1200W	230V/50HZ	46	3500	8	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

KIMPORT

- Plastic Head With Extra Plastic Shell
- Different Style of Handle

- Stainless Head With Extra Plastic Shell
- Different Style of Handle

RoHS CB BSCI

FGPxx2 / FGPxx3 / FGPxx4 "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	S max m	mm	m	axbxh cm	cm/2pcs	pcs/20'CTN
600W	230V/50HZ	35	2800	7	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
800W	230V/50HZ	40	3000	8	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
1000W	230V/50HZ	44	3200	8	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
1200W	230V/50HZ	46	3500	8	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

RoHS CB BSCI

FGPxx2B / FGPxx3B / FGPxx4B "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	S max m	mm	m	axbxh cm	cm/2pcs	pcs/20'CTN
600W	230V/50HZ	35	2800	7	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
800W	230V/50HZ	40	3000	8	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
1000W	230V/50HZ	44	3200	8	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
1200W	230V/50HZ	46	3500	8	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

KIMPORT

RoHS CB BSCI

FGPxx1J / FGPxx1JB / FGPxx1B "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	S max m	mm	m	axbxh cm	cm/2pcs	pcs/2PCTN
600W	230V/50HZ	35	2800	7	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
800W	230V/50HZ	40	3000	8	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
1000W	230V/50HZ	44	3200	8	1"	H07RN 1.0mm²× 1.2	37.5×23×27	45×39×28	1240
1200W	230V/50HZ	46	3500	8	1"	H07RN 1.0mm²× 1.2	37.5×23×27	45×39×28	1240

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

RoHS CB BSCI

FSPxx2JF / FGPxx5J / FSPxx6J "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	S max m	mm	m	axbxh cm	cm/2pcs	pcs/2PCTN
600W	230V/50HZ	35	2800	7	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
800W	230V/50HZ	40	3000	8	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
1000W	230V/50HZ	44	3200	8	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240
1200W	230V/50HZ	46	3500	8	1"	H07RN 1.0mm²×1.2	37.5×23×27	45×39×28	1240

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

GARDEN PUMP
WITH BOOSTER SYSTEM

-LOW NOISE
-RELIABLE PERFORMANCE
-SELF PRIMING

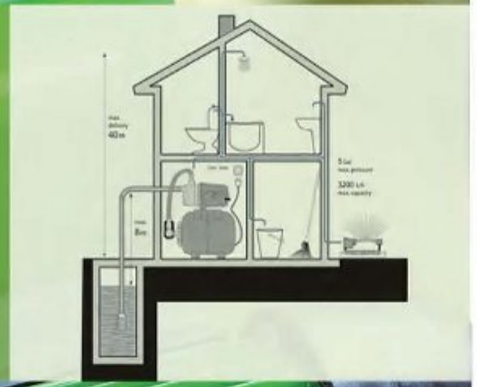

- Short Flexible Hose
- 19L,24L or 50L Steel Tank

RoHS CB BSCI

FGPxxBD / FSPxxD / FSPxxJBD / FSPxxJD "xx" standards for power watt

W	Vmax	H max m	Q max l/h	bar	S max m	mm	m	axbxh cm	cm³/pcs	pcs/CTN
600W	230V/50HZ	35	2800	1.2-3.0	7	1"	H07RN 1.0mm²×1.2	46.5×33×57	47×33.5×57.5	380
800W	230V/50HZ	40	3000	1.2-3.0	8	1"	H07RN 1.0mm²×1.2	46.5×33×57	47×33.5×57.5	380
1000W	230V/50HZ	44	3200	1.2-3.0	8	1"	H07RN 1.0mm²×1.2	46.5×33×57	47×33.5×57.5	380
1200W	230V/50HZ	46	3500	1.2-3.0	8	1"	H07RN 1.0mm²×1.2	46.5×33×57	47×33.5×57.5	380

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

- Long Flexible Hose
- 19L,24L or 50L Steel Tank

RoHS CB BSCI

FGPxxC / FGPxxBC / FGPxxJC / FGPxxJBC

"xx" standards for power watt

W	V/Hz	H max m	Q max l/h	bar	S max m	mm	m	axbxh cm	cm/1pcs	pcs/20'CTN
600W	230V/50HZ	35	2800	1.2-3.0	7	1"	H07RN 1.0mm²×1.2	46.5×33×57	47×33.5×57.5	380
800W	230V/50HZ	40	3000	1.2-3.0	8	1"	H07RN 1.0mm²×1.2	46.5×33×57	47×33.5×57.5	380
1000W	230V/50HZ	44	3200	1.2-3.0	8	1"	H07RN 1.0mm²×1.2	46.5×33×57	47×33.5×57.5	380
1200W	230V/50HZ	46	3500	1.2-3.0	8	1"	H07RN 1.0mm²×1.2	46.5×33×57	47×33.5×57.5	380

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

- Long Flexible Hose
- 19L,24L or 50L Stainless Tank

RoHS CB BSCI

FGPxxJBDS / FGPxxBCS / FSPxxJBCS

"xx" standards for power watt

W	V/Hz	H max m	Q max l/h	bar	S max m	mm	m	axbxh cm	cm/1pcs	pcs/20'CTN
600W	230V/50HZ	35	2800	1.2-3.0	7	1"	H07RN 1.0mm²×1.2	46.5×33×57	47×33.5×57.5	380
800W	230V/50HZ	40	3000	1.2-3.0	8	1"	H07RN 1.0mm²×1.2	46.5×33×57	47×33.5×57.5	380
1000W	230V/50HZ	44	3200	1.2-3.0	8	1"	H07RN 1.0mm²×1.2	46.5×33×57	47×33.5×57.5	380
1200W	230V/50HZ	46	3500	1.2-3.0	8	1"	H07RN 1.0mm²×1.2	46.5×33×57	47×33.5×57.5	380

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

RoHS CB BSCI

FGPxx5JD / FGPxxJDF / FGPxx6JDF

"xx" standards for power watt

w	V/Hz	H max m	Q max l/h	bar	S max m	mm	m	axbxh cm	cm/1pcs	pcs/20'CTN
600W	230V/50HZ	35	2800	1.2-3.0	7	1"	H07RN 1.0mm²×1.2	46.5×33×57	47×33.5×57.5	380
800W	230V/50HZ	40	3000	1.2-3.0	8	1"	H07RN 1.0mm²×1.2	46.5×33×57	47×33.5×57.5	380
1000W	230V/50HZ	44	3200	1.2-3.0	8	1"	H07RN 1.0mm²×1.2	46.5×33×57	47×33.5×57.5	380
1200W	230V/50HZ	46	3500	1.2-3.0	8	1"	H07RN 1.0mm²×1.2	46.5×33×57	47×33.5×57.5	380

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

QB Surface Pump

- Brass Insert on Pump Head
- Brass Impeller
- Stalnless Shaft



RoHS CB BSCI

QB60 / QB70 / QB80

w	V/Hz	H max m	Q max l/h	S max m	mm	m	Stator mm
0.5HP	230V/50HZ	36	2300	8	1"	H05 0.75×1.5m	L=55
0.75HP	230V/50HZ	45	2400	8	1"	H05 0.75×1.5m	L=60
1HP	230V/50HZ	50	2700	8	1"	H05 1.0×1.5m	L=70

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

QB60 Auto

- Brass Insert on Pump Head
- Brass Impeller
- Stalnless Shaft
- 24L Pressure Tank



RoHS CB BSCI

QB60 Auto / QB70 Auto / QB80 Auto

w	V/Hz	H max m	Q max l/h	S max m	mm	m	Stator mm
0.5HP	230V/50HZ	30	2100	8	1"	H05 0.75×1.5m	L=55
0.75HP	230V/50HZ	36	2400	8	1"	H05 0.75×1.5m	L=60
1HP	230V/50HZ	40	2700	8	1"	H05 1.0×1.2m	L=70

Max Temperature of Liquid: 35℃ 110V/60Hz is also available

Float Switch

FS-01

FS-02

FS-03

FS-04

FS-05

FS-06

FS-07

Garden Hose

GH01
PVC with Steel
Wire Tube

GH02
PVC with Steel
Wire Tube

GH03
PVC Corrugated Tube
in Black Color

GH04
PVC Corrugated Tube
in White Color

GH05
Flat Tube

Pressure Tank

Steel
19L 24L 50L

Stainless
19L 24L 50L

Oil Dispensing Gun

FQ-01
- Automatic
- Aluminum Body

FQ-02
- Manual
- Plastic Body

FQ-03
- Semi Automatic
- Aluminum Body

Explosion Proof Material

Connectors

① 3 / 4"

② 1"

③ 1"

④ 1-1 / 2"

⑤ G1-1 / 2" 1-1 / 2"

⑥ G2 2"

⑦ 1-1 / 4"

⑧ 1-1 / 2"

⑨ 1" 1"

⑩ 1" 1-1 / 4"

⑪ 2" Cap

⑫ 1-1 / 2" Cap

⑬ 1-1 / 2" 1-1 / 4"

⑭ 1-1 / 2" 1-1 / 2"

⑮ G1-1 / 2"

⑯ 1"

Battery Pumps

Protection Grade **IPX8**

20V LI-ION

Remote key

CLP020C-1

Product NO.	CLP020C-1
V&Hz	20V
Max.pump rate(L/H)	3500+
Max.height(m)	11+
Working time	35min
Battery capacity	4000mAh
Charging time	2h
QTY/20'CTN	1512pcs
QTY/40'CTN	3096pcs
QTY/40'(H)CTN	3784pcs

Battery Pumps

Protection Grade **IPX8**

Protection Grade **IPX8**

20V LI-ION

Can be used
separately according
to working conditions

Battery box:
Protection Grade IPX4

CLP020C-2

Product NO.	CLP020C-2
V&Hz	20V
Max.pump rate(L/H)	2800+
Max.height(m)	11+
Working time	25min/50min
Battery capacity	2000mAh/4000mAh
QTY/20'CTN	1100pcs
QTY/40'CTN	2200pcs
QTY/40'(H)CTN	2400pcs

Battery Pumps

Protection Grade **IPX8**

20V LI-ION

Can be used
separately according
to working conditions

Battery box:
Protection Grade IPX4

CLP020C-3

Product NO.	CLP020C-3
V&Hz	20V
Max.pump rate(L/H)	2500+
Max.height(m)	11+
Working time	25min/50min
Battery capacity	2000mAh/4000mAh
QTY/20'CTN	2688pcs
QTY/40'CTN	5376pcs
QTY/40'(H)CTN	6272pcs

Battery Pumps

Protection Grade **IPX8**

Protection Grade **IPX8**

20V LI-ION

Amphibious Pump

CLP020C-4

Low water level suction

Can be used separately according to working conditions

Battery box:
Protection Grade IPX4

Product NO.	CLP020C-4
V&Hz	20V
Max.pump rate(L/H)	3200+
Max.height(m)	10+
Working time	20min/40min
Battery capacity	2000mAh/4000mAh
QTY/20'CTN	2100pcs
QTY/40'CTN	4340pcs
QTY/40'(H)CTN	4960pcs

Battery Pumps

Protection Grade **IPX8**

20V LI-ION

CLP020C-5

Replaceable battery

Product NO.	CLP020C-5
V&Hz	20V
Max.pump rate(L/H)	3200+
Max.height(m)	11+
Working time	20min/40min
Battery capacity	2000mAh/4000mAh
QTY/20'CTN	1242pcs
QTY/40'CTN	2538pcs
QTY/40'(H)CTN	3960pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 5mm / 16 mm

CSPxxxC-1 (B)

CSPxxxLD-1

Product NO.	CSP250C-1(B)	CSP400C-1(B)
Power	250W	400W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	4000	5000
Max.height(m)	6	6.5
Max.depth(m)	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²
Length of cable(m)	10	10
QTY/20'CTN	2352pcs	2352pcs
QTY/40'CTN	4704pcs	4704pcs
QTY/40'(H)CTN	5376pcs	5376pcs

Product NO.	CSP400LD-1
Power	400W
V&Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	5500
Max.height(m)	6
Max.depth(m)	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²
Length of cable(m)	10
QTY/20'CTN	1800pcs
QTY/40'CTN	3600pcs
QTY/40'(H)CTN	4200pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 5mm

LONG LIFE
HIGH QUALITY

CSPxxxC-1 (Y)

Product NO.	CSP250C-1Y	CSP350C-1Y
Power	250W	350W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	4500	5000
Max.height(m)	6	7
Max.depth(m)	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²
Length of cable(m)	10	10
QTY/20'CTN	2380pcs	2380pcs
QTY/40'CTN	4760pcs	4760pcs
QTY/40'(H)CTN	5440pcs	5440pcs

Product NO.	CSP350C-3
Power	350W
V&Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	5500
Max.height(m)	11
Max.depth(m)	7
Max.grain size(mm)	0.5~2
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²
Length of cable(m)	10
QTY/20'CTN	1296pcs
QTY/40'CTN	2592pcs
QTY/40'(H)CTN	2896pcs

CSPxxxC-3

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 ℃
Protection IP X8
Max grain size: 5mm

CSPxxxC-5

CSPxxxC-7

CSPxxxC-4

Product NO.	CSP250C-4(5,6,7)	CSP400C-4(5,6,7)	CSP550C-4(5,6,7)	CSP750C-4(5,6,7)	CSP900C-4(5,6,7)
Power	250W	400W	550W	750W	900W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	5500	7300	11500	13000	15000
Max.height(m)	6	7.5	8.5	9.5	10
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN	2380pcs	2380pcs	2380pcs	2040pcs	2040pcs
QTY/40'CTN	4760pcs	4760pcs	4760pcs	4080pcs	4080pcs
QTY/40'(H)CTN	5440pcs	5440pcs	5440pcs	4760pcs	4760pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 ℃
Protection IP X8
Max grain size: 35mm

CSPxxxD-5

CSPxxxD-7

CSPxxxD-4

Product NO.	CSP400D-4(5,6,7)	CSP550D-4(5,6,7)	CSP750D-4(5,6,7)	CSP900D-4(5,6,7)	CSP1100D-4(5,6,7)
Power	400W	550W	750W	900W	1100W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	8500	12500	14000	15000	17500
Max.height(m)	5	7	8	8.5	9
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN	2040pcs	2040pcs	2040pcs	2040pcs	2040pcs
QTY/40'CTN	4080pcs	4080pcs	4080pcs	4080pcs	4080pcs
QTY/40'(H)CTN	4760pcs	4760pcs	4760pcs	4760pcs	4760pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 5mm / 35mm

CSPxxxD-5(B)

CSPxxxC-5(B)

Product NO.	CSP250C-5(B)	CSP400C-5(B)	CSP550C-5(B)	CSP750C-5(B)	CSP900C-5(B)
Power	250W	400W	550W	750W	900W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	5500	7300	11500	13000	15000
Max.height(m)	6	7.5	8.5	9.5	10
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN	2380pcs	2380pcs	2380pcs	2040pcs	2040pcs
QTY/40'CTN	4760pcs	4760pcs	4760pcs	4080pcs	4080pcs
QTY/40'(H)CTN	5440pcs	5440pcs	5440pcs	4760pcs	4760pcs

Product NO.	CSP400D-5(B)	CSP550D-5(B)	CSP750D-5(B)	CSP900D-5(B)	CSP1100D-5(B)
Power	400W	550W	750W	900W	1100W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	8500	12500	14000	15000	17500
Max.height(m)	5	7	8	8.5	9
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN	2040pcs	2040pcs	2040pcs	2040pcs	2040pcs
QTY/40'CTN	4080pcs	4080pcs	4080pcs	4080pcs	4080pcs
QTY/40'(H)CTN	4760pcs	4760pcs	4760pcs	4760pcs	4760pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 5mm / 35mm

CSPxxxD-11(A)

CSPxxxC-11(A)

Product NO.	CSP250C-11(A)	CSP400C-11(A)	CSP550C-11(A)	CSP750C-11(A)	CSP900C-11(A)
Power	250W	400W	550W	750W	900W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	5500	7300	11500	13000	15000
Max.height(m)	6	7.5	8.5	9.5	10
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN	1800pcs	1800pcs	1800pcs	1800pcs	1800pcs
QTY/40'CTN	3600pcs	3600pcs	3600pcs	3600pcs	3600pcs
QTY/40'(H)CTN	3720pcs	3720pcs	3720pcs	3720pcs	3720pcs

Product NO.	CSP400D-11(A)	CSP550D-11(A)	CSP750D-11(A)	CSP900D-11(A)	CSP1100D-11(A)
Power	400W	550W	750W	900W	1100W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	8500	12500	14000	15000	17500
Max.height(m)	5	7	8	8.5	9
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN	1800pcs	1800pcs	1800pcs	1800pcs	1800pcs
QTY/40'CTN	3600pcs	3600pcs	3600pcs	3600pcs	3600pcs
QTY/40'(H)CTN	3720pcs	3720pcs	3720pcs	3720pcs	3720pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 5mm / 35mm

CSPxxxC-12

CSPxxxD-12

Product NO.	CSP250C-12	CSP400C-12	CSP550C-12	CSP750C-12	CSP900C-12
Power	250W	400W	550W	750W	900W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	5500	7300	11500	13000	15000
Max.height(m)	6	7.5	8.5	9.5	10
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN	2380pcs	2380pcs	2380pcs	2040pcs	2040pcs
QTY/40'CTN	4760pcs	4760pcs	4760pcs	4080pcs	4080pcs
QTY/40'(H)CTN	5440pcs	5440pcs	5440pcs	4760pcs	4760pcs

Product NO.	CSP400D-12	CSP550D-12	CSP750D-12	CSP900D-12	CSP1100D-12
Power	400W	550W	750W	900W	1100W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	8500	12500	14000	15000	17500
Max.height(m)	5	7	8	8.5	9
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN	2040pcs	2040pcs	2040pcs	2040pcs	2040pcs
QTY/40'CTN	4080pcs	4080pcs	4080pcs	4080pcs	4080pcs
QTY/40'(H)CTN	4760pcs	4760pcs	4760pcs	4760pcs	4760pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 1-30mm

Convertible clean water and sewage

360 ° adjustment

CSPxxxT-12

Product NO.	CSP400T-12	CSP550T-12	CSP750T-12	CSP900T-12	CSP1100T-12
Power	400W	550W	750W	900W	1100W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	8500	12500	14000	15000	17500
Max.height(m)	5	7	8	8.5	9
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN	1800pcs	1800pcs	1800pcs	1800pcs	1800pcs
QTY/40'CTN	3600pcs	3600pcs	3600pcs	3600pcs	3600pcs
QTY/40'(H)CTN	3720pcs	3720pcs	3720pcs	3720pcs	3720pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 5mm / 25mm

CSPxxxD-13

CSPxxxC-13

Product NO.	CSP250C-13	CSP400C-13
Power	250W	400W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	5500	7300
Max.height(m)	6	7.5
Max.depth(m)	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²
Length of cable(m)	10	10
QTY/20'CTN	2548pcs	2548pcs
QTY/40'CTN	5292pcs	5292pcs
QTY/40'(H)CTN	6048pcs	6048pcs

Product NO.	CSP400D-13
Power	400W
V&Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	8500
Max.height(m)	5
Max.depth(m)	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²
Length of cable(m)	10
QTY/20'CTN	2548pcs
QTY/40'CTN	5292pcs
QTY/40'(H)CTN	6048pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 5mm / 35mm

CSPxxxD-14

CSPxxxC-14

Product NO.	CSP250C-14	CSP400C-14	CSP550C-14	CSP750C-14	CSP900C-14
Power	250W	400W	550W	750W	900W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	5500	7300	11500	13000	15000
Max.height(m)	6	7.5	8.5	9.5	10
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN	1800pcs	1800pcs	1800pcs	1800pcs	1800pcs
QTY/40'CTN	3600pcs	3600pcs	3600pcs	3600pcs	3600pcs
QTY/40'(H)CTN	3720pcs	3720pcs	3720pcs	3720pcs	3720pcs

Product NO.	CSP400D-14	CSP550D-14	CSP750D-14	CSP900D-14	CSP1100D-14
Power	400W	550W	750W	900W	1100W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	8500	12500	14000	15000	17500
Max.height(m)	5	7	8	8.5	9
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN	1800pcs	1800pcs	1800pcs	1800pcs	1800pcs
QTY/40'CTN	3600pcs	3600pcs	3600pcs	3600pcs	3600pcs
QTY/40'(H)CTN	3720pcs	3720pcs	3720pcs	3720pcs	3720pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 5mm



CSPxxxC-15

Product NO.	CSP250C-15	CSP400C-15	CSP550C-15	CSP750C-15	CSP900C-15
Power	250W	400W	550W	750W	900W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	6000	8500	12500	14000	15000
Max.height(m)	5	5.5	7	8	8.5
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN	1176pcs	1176pcs	1176pcs	1176pcs	1176pcs
QTY/40'CTN	2400pcs	2400pcs	2400pcs	2400pcs	2400pcs
QTY/40'(H)CTN	2744pcs	2744pcs	2744pcs	2744pcs	2744pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 5mm

CSPxxxCinox-1

CSPxxxCinox-2

CSPxxxCinox-3

Product NO.	CSP400Cinox-1(2,3,)	CSP550Cinox-1(2,3,)	CSP750Cinox-1(2,3,)	CSP900Cinox-1(2,3,)
Power	400W	550W	750W	900W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	7500	8500	11000	12000
Max.height(m)	6.5	7.5	8.5	9
Max.depth(m)	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10
QTY/20'CTN	2380pcs	2380pcs	2380pcs	2040pcs
QTY/40'CTN	4760pcs	4760pcs	4760pcs	4080pcs
QTY/40'(H)CTN	5440pcs	5440pcs	5440pcs	4760pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 35mm

CSPxxxDinox-1A

CSPxxxDinox-2A

CSPxxxDinox-3A

Product NO.	CSP400Dinox-1(2,3)A	CSP550Dinox-1(2,3)A	CSP750Dinox-1(2,3)A	CSP900Dinox-1(2,3)A	CSP1100Dinox-1(2,3)A
Power	400W	550W	750W	900W	1100W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	8500	12500	14000	15000	20000
Max.height(m)	5	7	8	8.5	9
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN(4A)	2040pcs	2040pcs	2040pcs	2040pcs	2040pcs
QTY/40'CTN(4A)	4080pcs	4080pcs	4080pcs	4080pcs	4080pcs
QTY/40'(H)CTN(4A)	4760pcs	4760pcs	4760pcs	4760pcs	4760pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 20mm

CSPxxxDinox(C)

CSPxxxDinox(B)

CSPxxxDinox(A)

Product NO.	CSP400Dinox(A,B,C)	CSP550Dinox(A,B,C)	CSP750Dinox(A,B,C)	CSP900Dinox(A,B,C)	CSP1100Dinox(A,B,C)
Power	400W	550W	750W	900W	1100W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	8500	12500	14000	15000	20000
Max.height(m)	5	7	8	8.5	9
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN(4A)	1800pcs	1800pcs	1800pcs	1800pcs	1800pcs
QTY/40'CTN(4A)	3720pcs	3720pcs	3720pcs	3720pcs	3720pcs
QTY/40'(H)CTN(4A)	4340pcs	4340pcs	4340pcs	4340pcs	4340pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 35mm

360 ° adjustment

CSPxxxDinox-5

Product NO.	CSP400Dinox-5	CSP550Dinox-5	CSP750Dinox-5	CSP900Dinox-5	CSP1100Dinox-5
Power	400W	550W	750W	900W	1100W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	8500	12500	14000	15000	20000
Max.height(m)	5	7	8	8.5	9
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN(4A)	1560pcs	1560pcs	1560pcs	1560pcs	1560pcs
QTY/40'CTN(4A)	3240pcs	3240pcs	3240pcs	3240pcs	3240pcs
QTY/40'(H)CTN(4A)	3600pcs	3600pcs	3600pcs	3600pcs	3600pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 5mm / 35mm

CSPxxxC-4(1)A

CSPxxxD-4(1)A

Product NO.	CSP250C-4(1)A	CSP400C-4(1)A	CSP550C-4(1)A	CSP750C-4(1)A	CSP900C-4(1)A
Power	250W	400W	550W	750W	900W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	5500	7300	11500	13000	15000
Max.height(m)	6	7.5	8.5	9.5	10
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN	2380pcs	2380pcs	2380pcs	2040pcs	2040pcs
QTY/40'CTN	4760pcs	4760pcs	4760pcs	4080pcs	4080pcs
QTY/40'(H)CTN	5440pcs	5440pcs	5440pcs	4760pcs	4760pcs

Product NO.	CSP400D-4(1)A	CSP550D-4(1)A	CSP750D-4(1)A	CSP900D-4(1)A	CSP1100D-4(1)A
Power	400W	550W	750W	900W	1100W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	8500	12500	14000	15000	17500
Max.height(m)	5	7	8	8.5	9
Max.depth(m)	7	7	7	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	10	10	10
QTY/20'CTN	2040pcs	2040pcs	2040pcs	2040pcs	2040pcs
QTY/40'CTN	4080pcs	4080pcs	4080pcs	4080pcs	4080pcs
QTY/40'(H)CTN	4760pcs	4760pcs	4760pcs	4760pcs	4760pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 5mm

Water pump minimum working water level 2mm

CSPxxxC-4(1)B

Product NO.	CSP250C-4(1)B	CSP400C-4(1)B
Power	250W	400W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	5000	7300
Max.height(m)	5.5	7
Max.depth(m)	7	7
Cable	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²	H05RN-F3G0.75mm² 05RN8-F3G0.75mm²
Length of cable(m)	10	10
QTY/20'CTN	840pcs	840pcs
QTY/40'CTN	1680pcs	1680pcs
QTY/40'(H)CTN	1896pcs	1896pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 1mm

HIGH LIFT
LONG LIFE
HIGH QUALITY
INTELLIGENCE

CSPxxxCinox-H

CSPxxxC-H

CSPxxxCinox-H B

Product NO.	CSP1000C-H / CSP1000Cinox-H	CSP1200C-H / CSP1200Cinox-H
Power	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	5500	6000
Max.height(m)	30	40
Max.depth(m)	12	12
Cable	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	15	15
QTY/20'CTN	1080pcs	1080pcs
QTY/40'CTN	2192pcs	2192pcs
QTY/40'(H)CTN	2564pcs	2564pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 1mm

HIGH LIFT
LONG LIFE
HIGH QUALITY

HIGH FLOW
LONG LIFE
HIGH QUALITY

CSPxxxC-HF1

CSPxxxCinox-HF1

CSPxxxDinox-HF

Product NO.	CSP850C(inox)HF1	CSP1000C(inox)HF1	CSP1200C(inox)HF1
Power	850W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	5000	5500	6000
Max.height(m)	20	30	40
Max.depth(m)	7	7	12
Cable	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10	15
QTY/20'CTN	880pcs	880pcs	880pcs
QTY/40'CTN	1760pcs	1760pcs	1760pcs
QTY/40'(H)CTN	2200pcs	2200pcs	2200pcs

Product NO.	CSP850Dinox-HF	CSP1000Dinox-HF
Power	850W	1000W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	22000	25000
Max.height(m)	11	12
Max.depth(m)	7	7
Cable	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²	H07RN-F3G1.0mm² H07RN8-F3G1.0mm²
Length of cable(m)	10	10
QTY/20'CTN	880pcs	880pcs
QTY/40'CTN	1760pcs	1760pcs
QTY/40'(H)CTN	2200pcs	2200pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 5mm

SPxxxC-1 Ⓑ

SPxxxC-1

Product NO.	SP400C-1	SP550C-1
Power	1/4HP	1/3HP
V&Hz	120/60	120/60
Max.pump rate(GPH)	1850	2500
Max.height (Ft)	25	27
Cable	18AWG	18AWG
Length of cable(m)	3	3
QTY/20'CTN	2380pcs	2380pcs
QTY/40'CTN	4760pcs	4760pcs
QTY/40'(H)CTN	5440pcs	5440pcs

Product NO.	SP400C-1	SP550C-1
Power	200W	280W
V&Hz	230/50	230/50
Max.pump rate(L/H)	5000	7500
Max.height (m)	5	5.5
Cable	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable(m)	3	3
QTY/20'CTN	2380pcs	2380pcs
QTY/40'CTN	4760pcs	4760pcs
QTY/40'(H)CTN	5440pcs	5440pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 5mm

SPxxxC-2E

SPxxxC-2

Product NO.	SP400C-2(2E)	SP550C-2(2E)	SP750C-2(2E)
Power	1/4HP	1/3HP	1/2HP
V&Hz	120/60	120/60	120/60
Max.pump rate(GPH)	1850	2500	2650
Max.height (Ft)	25	27	32
Cable	18AWG	18AWG	18AWG
Length of cable(m)	3	3	3
QTY/20'CTN	2100pcs/1540pcs	2100pcs/1540pcs	2100pcs/1540pcs
QTY/40'CTN	4200pcs/3080pcs	4200pcs/3080pcs	4200pcs/3080pcs
QTY/40'(H)CTN	4800pcs/3520pcs	4800pcs/3520pcs	4800pcs/3520pcs

Product NO.	SP400C-2(2E)	SP550C-2(2E)	SP750C-2(2E)
Power	200W	280W	400W
V&Hz	230/50	230/50	230/50
Max.pump rate(L/H)	5000	7500	10000
Max.height (m)	6.5	8.5	10
Cable	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable(m)	3	3	3
QTY/20'CTN	2100pcs/1540pcs	2100pcs/1540pcs	2100pcs/1540pcs
QTY/40'CTN	4200pcs/3080pcs	4200pcs/3080pcs	4200pcs/3080pcs
QTY/40'(H)CTN	4800pcs/3520pcs	4800pcs/3520pcs	4800pcs/3520pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 5mm

SPxxxLCinox-3A

SPxxxCinox-3B

Product NO.	SP750Cinox-3(A,B)	SP900Cinox-3(A,B)	SP1100Cinox-3(A,B)
Power	1/2HP	3/4HP	1HP
V&Hz	120/60	120/60	120/60
Max.pump rate(GPH)	3950	4250	4750
Max.height (Ft)	25	27	32
Cable	18AWG	18AWG	18AWG
Length of cable(m)	3	3	3
QTY/20'CTN	1540pcs	1540pcs	1540pcs
QTY/40'CTN	3080pcs	3080pcs	3080pcs
QTY/40'(H)CTN	3520pcs	3520pcs	3520pcs

Product NO.	SP750Cinox-3(A,B)	SP900Cinox-3(A,B)	SP1100Cinox-3(A,B)
Power	400W	560W	750W
V&Hz	230/50	230/50	230/50
Max.pump rate(L/H)	15000	16000	18000
Max.height (m)	7.5	8	9.5
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	3	3	3
QTY/20'CTN	1540pcs	1540pcs	1540pcs
QTY/40'CTN	3080pcs	3080pcs	3080pcs
QTY/40'(H)CTN	3520pcs	3520pcs	3520pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 °C
Protection IP X8
Max grain size: 5mm

SPxxxC-4A

SPxxxC-4B

SPxxxC-4

Product NO.	SP550C-4(A,B)	SP750C-4(A,B)
Power	1/3HP	1/2HP
V&Hz	120/60	120/60
Max.pump rate(GPH)	2700	3300
Max.height (Ft)	25	28
Cable	18AWG	18AWG
Length of cable(m)	3	3
QTY/20'CTN	1540pcs	1540pcs
QTY/40'CTN	3080pcs	3080pcs
QTY/40'(H)CTN	3520pcs	3520pcs

Product NO.	SP550C-4(A,B)	SP750C-4(A,B)
Power	280W	400W
V&Hz	230/50	230/50
Max.pump rate(L/H)	10500	12500
Max.height (m)	7.5	8.5
Cable	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable(m)	3	3
QTY/20'CTN	1540pcs	1540pcs
QTY/40'CTN	3080pcs	3080pcs
QTY/40'(H)CTN	3520pcs	3520pcs

Submersible Pumps

Protection Grade **IPX8**

Main Specifications

Liquid temperature up to 35 ℃
Protection IP X8
Max grain size: 5mm

SPxxxC-5E

Product NO.	SP400C-5E	SP550C-5E
Power	1/4HP	1/3HP
V&Hz	120/60	120/60
Max.pump rate(GPH)	1850	2500
Max.height (Ft)	25	27
Cable	18AWG	18AWG
Length of cable(m)	5	5
QTY/20'CTN	1540pcs	1540pcs
QTY/40'CTN	3080pcs	3080pcs
QTY/40'(H)CTN	3520pcs	3520pcs

Product NO.	SP400C-5E	SP550C-5E
Power	200W	280W
V&Hz	230/50	230/50
Max.pump rate(L/H)	5000	7500
Max.height (m)	5	5.5
Cable	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable(m)	5	5
QTY/20'CTN	1540pcs	1540pcs
QTY/40'CTN	3080pcs	3080pcs
QTY/40'(H)CTN	3520pcs	3520pcs

Macerator pumps

Protection Grade **IPX5**

CDP450-1/CDP650-1

CDP400-2 / CDP600-2

CDP250-3/CDP400-3/CDP550-3

Product NO.	CDP450-1 / CDP650-1	CDP400-2 / CDP600-2	CDP250-3 / CDP400-3 / CDP550-3
Power	450W / 650W	400W / 600W	250W / 400W / 550W
V&Hz	220V-240V / 50Hz	220V-240V / 50Hz	220V-240V / 50Hz
Max.height(m)	8m / 10m	7m/9m	6m/7m/8m
Max.Flow Distance	70m / 90m	70m / 80m	50m / 70m / 80m
Max.Flow	200l/m 300l/m	180l/m 300l/m	150l/m 180l/m 280l/m
Dia.Of Pipe	23mm 28mm 32mm	23mm 28mm 32mm	23mm 28mm 32mm
QTY/20'CTN	810pcs	810pcs	/
QTY/40'CTN	1620pcs	1620pcs	/
QTY/40'(H)CTN	1920pcs	1920pcs	/

JET Pumps

Main Specifications

Max. suction head: 8m
Max. liquid temperature: 35 °C
Protection IPX4

CGPxxxA-7E

CGPXXXA-7C

CGPxxxA-7

JET Pumps

Protection Grade **IPX4**

Main Specifications

Max. suction head: 8m
Max. liquid temperature: 35 °C
Protection IPX4

CGPxxx-7J

CGPxxxinox-7JE

CGPxxxA-7J

CGPxxxA-7JC

CGPxxxB-7JC

CGPxxxA-7JCS

CGPxxxinox-7JCS

Product NO.	CGP600(inox,A,B)-7J	CGP800(inox,A,B)-7J	CGP1000(inox,A,B)-7J	CGP1200(inox,A,B)-7J
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3800
Max.height(m)	35	40	44	48
Max.depth(m)	8	8	8	8
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN	1500pcs	1500pcs	1500pcs	1500pcs
QTY/40'CTN	3100pcs	3100pcs	3100pcs	3100pcs
QTY/40'(H)CTN	3410pcs	3410pcs	3410pcs	3410pcs

Product NO.	CGP600(inox,A,B)-7JC(S)	CGP800(inox,A,B)-7JC(S)	CGP1000(inox,A,B)-7JC(S)	CGP1200(inox,A,B)-7JC(S)
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3800
Max.height(m)	35	40	44	48
Max.depth(m)	8	8	8	8
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN	384pcs	384pcs	384pcs	384pcs
QTY/40'CTN	800pcs	800pcs	800pcs	800pcs
QTY/40'(H)CTN	900pcs	900pcs	900pcs	900pcs

JET Pumps

Protection Grade **IPX4**

Main Specifications

Max. suction head: 8m
Max. liquid temperature: 35 °C
Protection IPX4

CGPxxx-7

CGPxxxB-7

CGPxxxinox-7

CGPxxxinox-7C

CGPxxxB-7C

Product NO.	CGP600(inox,A,B)-7	CGP800(inox,A,B)-7	CGP1000(inox,A,B)-7	CGP1200(inox,A,B)-7
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3800
Max.height(m)	35	40	44	48
Max.depth(m)	8	8	8	8
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN	1500pcs	1500pcs	1500pcs	1500pcs
QTY/40'CTN	3100pcs	3100pcs	3100pcs	3100pcs
QTY/40'(H)CTN	3410pcs	3410pcs	3410pcs	3410pcs

Product NO.	CGP600(inox,A,B)-7C(S)	CGP800(inox,A,B)-7C(S)	CGP1000(inox,A,B)-7C(S)	CGP1200(inox,A,B)-7C(S)
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3800
Max.height(m)	35	40	44	48
Max.depth(m)	8	8	8	8
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN	384pcs	384pcs	384pcs	384pcs
QTY/40'CTN	800pcs	800pcs	800pcs	800pcs
QTY/40'(H)CTN	900pcs	900pcs	900pcs	900pcs

JET Pumps

Protection Grade **IPX4**

Main Specifications

Max. suction head: 8m
Max. liquid temperature: 35 °C
Protection IPX4

CGPxxx-1JC

CGPxxxinox-1J

CGPxxxinox-1J Ⓑ

CGPxxxinox-1JD

CGPxxxinox-1JDS

Product NO.	CGP600(inox)-1J(E)	CGP800(inox)-1J(E)	CGP1000(inox)-1J(E)	CGP1200(inox)-1J(E)
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3800
Max.height(m)	35	40	44	48
Max.depth(m)	8	8	8	8
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN(E)	1404pcs(990pcs)	1404pcs(990pcs)	1404pcs(990pcs)	1404pcs(990pcs)
QTY/40'CTN(E)	2880pcs(2070pcs)	2880pcs(2070pcs)	2880pcs(2070pcs)	2880pcs(2070pcs)
QTY/40'(H)CTN(E)	3200pcs(2300pcs)	3200pcs(2300pcs)	3200pcs(2300pcs)	3200pcs(2300pcs)

Product NO.	CGP600(inox)-1JC(1JD,1JCS,1JDS)	CGP800(inox)-1JC(1JD,1JCS,1JDS)	CGP1000(inox)-1JC(1JD,1JCS,1JDS)	CGP1200(inox)-1JC(1JD,1JCS,1JDS)
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3800
Max.height(m)	35	40	44	48
Max.depth(m)	8	8	8	8
Work. pressure	1.5~2.8Bar	1.5~3.0Bar	1.5~3.0Bar	1.5~3.0Bar
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN	384pcs	384pcs	384pcs	384pcs
QTY/40'CTN	800pcs	800pcs	800pcs	800pcs
QTY/40'(H)CTN	900pcs	900pcs	900pcs	900pcs

JET Pumps

Protection Grade **IPX4**

Main Specifications

Max. suction head: 8m
Max. liquid temperature: 35 °C
Protection IPX4

CGPxxx-2J

CGPxxxinox-2J

CGPxxx-2JC

CGPxxx-2JD

Product NO.	CGP600(inox)-2J(E)	CGP800(inox)-2J(E)	CGP1000(inox)-2J(E)	CGP1200(inox)-2J(E)
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3800
Max.height(m)	35	40	44	48
Max.depth(m)	8	8	8	8
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN(E)	1500pcs(1140pcs)	1500pcs(1140pcs)	1500pcs(1140pcs)	1500pcs(1140pcs)
QTY/40'CTN(E)	3100pcs(2340pcs)	3100pcs(2340pcs)	3100pcs(2340pcs)	3100pcs(2340pcs)
QTY/40'(H)CTN(E)	3410pcs(2570pcs)	3410pcs(2570pcs)	3410pcs(2570pcs)	3410pcs(2570pcs)

Product NO.	CGP600(inox)-2JC(2JD,2JCS,2JDS)	CGP800(inox)-2JC(2JD,2JCS,2JDS)	CGP1000(inox)-2JC(2JD,2JCS,2JDS)	CGP1200(inox)-2JC(2JD,2JCS,2JDS)
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3800
Max.height(m)	35	40	44	48
Max.depth(m)	8	8	8	8
Work. pressure	1.5~2.8Bar	1.5~3.0Bar	1.5~3.0Bar	1.5~3.0Bar
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN	384pcs	384pcs	384pcs	384pcs
QTY/40'CTN	800pcs	800pcs	800pcs	800pcs
QTY/40'(H)CTN	900pcs	900pcs	900pcs	900pcs

JET Pumps

Protection Grade **IPX4**

Main Specifications

Max. suction head: 8m
Max. liquid temperature: 35 °C
Protection IPX4

CGPxxx-3J

CGPxxxinox-3J

CGPxxx-3JC

CGPxxxinox-3CS

CGPxxxinox-3

Product NO.	CGP600(inox)-3J(E)	CGP800(inox)-3J(E)	CGP1000(inox)-3J(E)	CGP1200(inox)-3J(E)
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3800
Max.height(m)	35	40	44	48
Max.depth(m)	8	8	8	8
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN(E)	1404pcs(990pcs)	1404pcs(990pcs)	1404pcs(990pcs)	1404pcs(990pcs)
QTY/40'CTN(E)	2880pcs(2070pcs)	2880pcs(2070pcs)	2880pcs(2070pcs)	2880pcs(2070pcs)
QTY/40'(H)CTN(E)	3200pcs(2300pcs)	3200pcs(2300pcs)	3200pcs(2300pcs)	3200pcs(2300pcs)

Product NO.	CGP600(inox)-3JC(3JD,3JCS,CJDS)	CGP800(inox)-3JC(3JD,3JCS,3JDS)	CGP1000(inox)-3JC(3JD,3JCS,3JDS)	CGP1200(inox)-3C(3D,3CS,CDS)
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3800
Max.height(m)	35	40	44	48
Max.depth(m)	8	8	8	8
Work. pressure	1.5~2.8Bar	1.5~3.0Bar	1.5~3.0Bar	1.5~3.0Bar
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN	384pcs	384pcs	384pcs	384pcs
QTY/40'CTN	800pcs	800pcs	800pcs	800pcs
QTY/40'(H)CTN	900pcs	900pcs	900pcs	900pcs

JET Pumps

Protection Grade **IPX4**

Main Specifications

Max. suction head: 8m
Max. liquid temperature: 35 °C
Protection IPX4

CGPxxx-4

CGPxxxinox-4

CGPxxx-4C

CGPxxxinox-4C

Product NO.	CGP600(inox)-4(E)	CGP800(inox)--4(E)	CGP1000(inox)--4(E)	CGP1200(inox)--4(E)
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3800
Max.height(m)	35	40	44	48
Max.depth(m)	8	8	8	8
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN	2028pcs	2028pcs	2028pcs	2028pcs
QTY/40'CTN	4108pcs	4108pcs	4108pcs	4108pcs
QTY/40'(H)CTN	4418pcs	4418pcs	4418pcs	4418pcs

Product NO.	CGP600(inox)-4C	CGP800(inox)-4C	CGP1000(inox)-4C	CGP1200(inox)-4C
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3800
Max.height(m)	35	40	44	48
Max.depth(m)	8	8	8	8
Work. pressure	1.5~2.8Bar	1.5~3.0Bar	1.5~3.0Bar	1.5~3.0Bar
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN	404pcs	404pcs	404pcs	404pcs
QTY/40'CTN	832pcs	832pcs	832pcs	832pcs
QTY/40'(H)CTN	937pcs	937pcs	937pcs	937pcs

JET Pumps

Protection Grade **IPX4**

Main Specifications

Max. suction head: 8m
Max. liquid temperature: 35 °C
Protection IPX4

CGPxxxinox-5 Ⓐ

CGPxxxinox-5C

CGPxxxinox-5CS Ⓐ

Product NO.	CGP600inox-5(A)	CGP800inox-5(A)	CGP1000inox-5(A)	CGP1200inox-5(A)
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3800
Max.height(m)	35	40	44	48
Max.depth(m)	8	8	8	8
Work. pressure	1.5~2.8Bar	1.5~3.0Bar	1.5~3.0Bar	1.5~3.0Bar
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN(E)	352pcs	352pcs	352pcs	352pcs
QTY/40'CTN(E)	720pcs	720pcs	720pcs	720pcs
QTY/40'(H)CTN(E)	840pcs	840pcs	840pcs	840pcs

Product NO.	CGP600inox-5CS(A)	CGP800inox-5CS(A)	CGP1000inox-5CS(A)	CGP1200inox-5CS(A)
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3800
Max.height(m)	35	40	44	48
Max.depth(m)	8	8	8	8
Work. pressure	1.5~2.8Bar	1.5~3.0Bar	1.5~3.0Bar	1.5~3.0Bar
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN(E)	352pcs	352pcs	352pcs	352pcs
QTY/40'CTN(E)	720pcs	720pcs	720pcs	720pcs
QTY/40'(H)CTN(E)	840pcs	840pcs	840pcs	840pcs

JET Pumps

Protection Grade **IPX4**

CGPxxx-6

CGPxxx-6 Ⓐ

CGPxxx-6 Ⓑ

CGPxxxinox-6C

CGPxxxinox-6CS

Main Specifications

Max. suction head: 8m
Max. liquid temperature: 35 °C
Protection IPX4

CGPxxxinox-6

Product NO.	CGP600(inox)-6(A,B)	CGP800(inox)-6(A,B)	CGP1000(inox)-6(A,B)	CGP1200(inox)-6(A,B)
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3800
Max.height(m)	35	40	44	48
Max.depth(m)	8	8	8	8
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN	1772pcs(1305pcs)	1772pcs(1305pcs)	1772pcs(1305pcs)	1772pcs(1305pcs)
QTY/40'CTN	3094pcs(2610pcs)	3094pcs(2610pcs)	3094pcs(2610pcs)	3094pcs(2610pcs)
QTY/40'(H)CTN	4088pcs(2900pcs)	4088pcs(2900pcs)	4088pcs(2900pcs)	4088pcs(2900pcs)

Product NO.	CGP600(inox)-6(C,CS)	CGP800(inox)-6(C,CS)	CGP1000(inox)-6(C,CS)	CGP1200(inox)-6(C,CS)
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3800
Max.height(m)	35	40	44	48
Max.depth(m)	8	8	8	8
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN	1772pcs(1305pcs)	1772pcs(1305pcs)	1772pcs(1305pcs)	1772pcs(1305pcs)
QTY/40'CTN	3094pcs(2610pcs)	3094pcs(2610pcs)	3094pcs(2610pcs)	3094pcs(2610pcs)
QTY/40'(H)CTN	4088pcs(2900pcs)	4088pcs(2900pcs)	4088pcs(2900pcs)	4088pcs(2900pcs)

JET Pumps

Protection Grade **IPX4**

Main Specifications

Max. suction head: 8m
Max. liquid temperature: 35 °C
Protection IPX4

JETxxxA-2 Ⓐ

JETxxxA-2 Ⓑ

JETxxxS-1

Product NO.	JET900A-2	JET1000A-2	JET1100A-2	JET1300A-2
Power	900W	1000W	1100W	1300W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3400	3800	4600	4800
Max.height(m)	42	44	45	48
Max.depth(m)	8	8	8	8
Dia.of pipe	1"	1"	1"	1"
QTY/20'CTN	1143pcs	1143pcs	1143pcs	1143pcs
QTY/40'CTN	2359pcs	2359pcs	2359pcs	2359pcs
QTY/40'(H)CTN	2600pcs	2600pcs	2600pcs	2600pcs

Product NO.	JET900S-1(2)	JET1000S-1(2)	JET1100S-1(2)	JET1300S-1(2)
Power	900W	1000W	1100W	1300W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3400	3800	4600	4800
Max.height(m)	42	44	45	48
Max.depth(m)	8	8	8	8
Dia.of pipe	1"	1"	1"	1"
QTY/20'CTN	1476pcs	1476pcs	1476pcs	1476pcs
QTY/40'CTN	2964pcs	2964pcs	2964pcs	2964pcs
QTY/40'(H)CTN	3397pcs	3397pcs	3397pcs	3397pcs

JET Pumps

Protection Grade **IPX4**

Main Specifications

Max. suction head: 8m
Max. liquid temperature: 35 °C
Protection IPX4

JETxxxA-3C

JETxxxS-3CS

JETxxxS-3

JETxxxS-3J

Product NO.	JET900S(A)-3J(3JC,3JCS)	JET1000S(A)-3J(3JC,3JCS)	JET1100S(A)-3J(3JC,3JCS)	JET1300S(A)-3J(3JC,3JCS)
Power	900W	1000W	1100W	1300W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3400	3800	4600	4800
Max.height(m)	42	44	45	48
Max.depth(m)	8	8	8	8
Dia.of pipe	1"	1"	1"	1"
QTY/20'CTN	1143pcs	1143pcs	1143pcs	1143pcs
QTY/40'CTN	2359pcs	2359pcs	2359pcs	2359pcs
QTY/40'(H)CTN	2600pcs	2600pcs	2600pcs	2600pcs

Product NO.	JET900S(A)-3(3C,3CS)	JET1000S(A)-3(3C,3CS)	JET1100S(A)-3(3C,3CS)	JET1300S(A)-3(3C,3CS)
Power	900W	1000W	1100W	1300W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3400	3800	4600	4800
Max.height(m)	42	44	45	48
Max.depth(m)	8	8	8	8
Dia.of pipe	1"	1"	1"	1"
QTY/20'CTN	1476pcs	1476pcs	1476pcs	1476pcs
QTY/40'CTN	2964pcs	2964pcs	2964pcs	2964pcs
QTY/40'(H)CTN	3397pcs	3397pcs	3397pcs	3397pcs

JET Pumps

Protection Grade **IPX4**

Main Specifications

Max. suction head: 8m
Max. liquid temperature: 35 °C
Protection IPX4

CGPxxx-JF1C

CGPxxx-JF1

Product NO.	CGP750-JF1	CGP900-JF1	CGP1000-JF1	CGP1100-JF1	CGP1300-JF1
Power	750W	900W	1000W	1100W	1300W
V&Hz	230V/50Hz,115V/60Hz	230V/50Hz,115V/60Hz	230V/50Hz,115V/60Hz	230V/50Hz,115V/60Hz	230V/50Hz,115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3600	3800
Max.height(m)	40	45	47	50	50
Max.depth(m)	8	8	8	8	8
Dia.of pipe	1"	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2	1.2
QTY/20'CTN	1540pcs	1540pcs	1540pcs	1540pcs	1540pcs
QTY/40'CTN	3190pcs	3190pcs	3190pcs	3190pcs	3190pcs
QTY/40'(H)CTN	3828pcs	3828pcs	3828pcs	3828pcs	3828pcs

Product NO.	CGP750-JF1C	CGP900-JF1C	CGP1000-JF1C	CGP1100-JF1C	CGP1300-JF1C
Power	750W	900W	1000W	1100W	1300W
V&Hz	230V/50Hz,115V/60Hz	230V/50Hz,115V/60Hz	230V/50Hz,115V/60Hz	230V/50Hz,115V/60Hz	230V/50Hz,115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3600	3800
Max.height(m)	40	45	47	50	50
Max.depth(m)	8	8	8	8	8
Work. pressure	1.5~3.0Bar	1.5~3.0Bar	1.5~3.0Bar	1.5~3.0Bar	1.5~3.0Bar
Dia.of pipe	1"	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2	1.2
QTY/20'CTN	400pcs	400pcs	400pcs	400pcs	400pcs
QTY/40'CTN	800pcs	800pcs	800pcs	800pcs	800pcs
QTY/40'(H)CTN	1000pcs	1000pcs	1000pcs	1000pcs	1000pcs

JET Pumps

Protection Grade **IPX4**

Main Specifications

Max. suction head: 8m
Max. liquid temperature: 35 °C
Protection IPX4

CGPxxx-JF2 Ⓑ

CGPxxx-JF2C

CGPxxx-JF2

Product NO.	CGP600-JF2	CGP800-JF2	CGP1000-JF2	CGP1200-JF2
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	2800	3000	3200	3500
Max.height(m)	32	38	42	45
Max.depth(m)	8	8	8	8
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN	2028pcs	2028pcs	2028pcs	2028pcs
QTY/40'CTN	4108pcs	4108pcs	4108pcs	4108pcs
QTY/40'(H)CTN	4418pcs	4418pcs	4418pcs	4418pcs

Product NO.	CGP600-JF2C(S)	CGP800-JF2C(S)	CGP1000-JF2C(S)	CGP1200-JF2C(S)
Power	600W	800W	1000W	1200W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	2800	3000	3200	3500
Max.height(m)	32	38	42	45
Max.depth(m)	8	8	8	8
Work. pressure	1.5~2.8Bar	1.5~3.0Bar	1.5~3.0Bar	1.5~3.0Bar
Dia.of pipe	1"	1"	1"	1"
Cable	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable(m)	1.2	1.2	1.2	1.2
QTY/20'CTN	404pcs	404pcs	404pcs	404pcs
QTY/40'CTN	832pcs	832pcs	832pcs	832pcs
QTY/40'(H)CTN	937pcs	937pcs	937pcs	937pcs

JET Pumps / DC Pumps

Protection Grade **IPX4**

Main Specifications

Max. suction head: 8m
Max. liquid temperature: 35 °C
Protection IPX4

JETxxx

Product NO.	JET750	JET900	JET1000	JET1100	JET1300
Power	750W	900W	1000W	1100W	1300W
V&Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz	230V/50Hz, 115V/60Hz
Max.pump rate(L/H)	3000	3200	3500	3600	3800
Max.height(m)	40	45	47	50	50
Max.depth(m)	8	8	8	8	8
Dia.of pipe	1"	1"	1"	1"	1"
QTY/20'CTN	1320pcs	1320pcs	1320pcs	1320pcs	1320pcs
QTY/40'CTN	2640pcs	2640pcs	2640pcs	2640pcs	2640pcs
QTY/40'(H)CTN	2904pcs	2904pcs	2904pcs	2904pcs	2904pcs

DC Pumps

CSPxxxC-M(B) **CSPxxxC-M**

Product NO.	CSP50C-M	CSP80C-M
Power	50W	80W
DC	12V	24V
Max.height(m)	5	6
Max rotate speed(r/min)	5800	5800
QTY/20'CTN	7530pcs	7530pcs

Accessories

Pressure Tank

2L~50L
Max. working pressure 6 Bar

60L~500L
Max. working pressure 10 Bar

Variable Speed Swimming Pool Pump

See-through strainer cover lets you see when the basket needs emptying

Extra-large strainer basket holds more debris for less-frequent maintenance

Built-in controller features an LED screen and keypad for easy operation

Permanent magnet, totally enclosed fan-cooled (TEFC) motor provides maximum energy efficiency and long-lasting performance

ENERGY SAVINGS

CLP-6 VS pumps designed for maximum efficiency, providing up to 90% energy savings over single-speed pumps and paying for itself within less than two seasons of usage.

LOW NOISE

Minimize poolside noise and maximize relaxation with CLP-6 VS pumps. Its efficient hydraulic design provides incredibly quiet operation especially at lower, energy-saving speeds.

EASY OPERATION

CLP-6 VS pump is equipped with a built-in controller and an LED screen and keypad for simple, intuitive opeartion.

DUAL-VOLTAGE

CLP-6 VS pumps accept 115 or 230 volt, 50/60Hz input power and it can automatically recognize and adapt to your home setting.

Features

- Variable speed series provide users with different flow rate demand.
- Super energy saving with high efficiency permanent magnet motor.
- 4 Adjustbable Power levels- can be set range from 450 RPM to 3650 RPM.
- Timer function in user-friendly programming lets you pick the best speed for your pool.
- Every pump is performance tested before leaving factory.
- Variable speed technology for great energy savings up to 90%.
- Super quite runing with pre-filter.

SAVE UP TO **90%** ON ENERGY COSTS*

VARIABLE-SPEED TECHNOLOGY THAT SAVES YOUR BILL ON ELECTRICITY COST

Applications

- Suitable for both In-ground and above-ground pools
- Recycling and filtering water for medium and commercial pools.
- Ideal for new and standard pool pump replacement

Dimensional Drawing & Controller

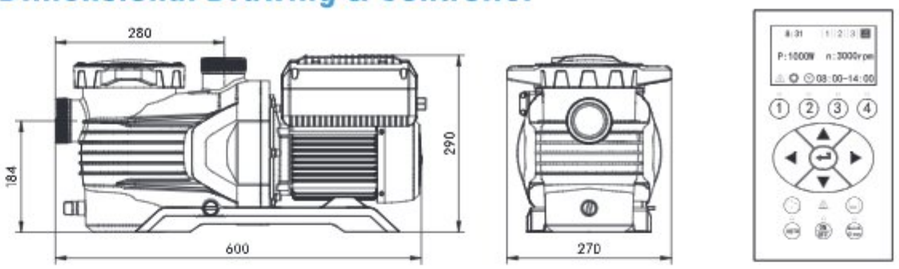

Performance Curve

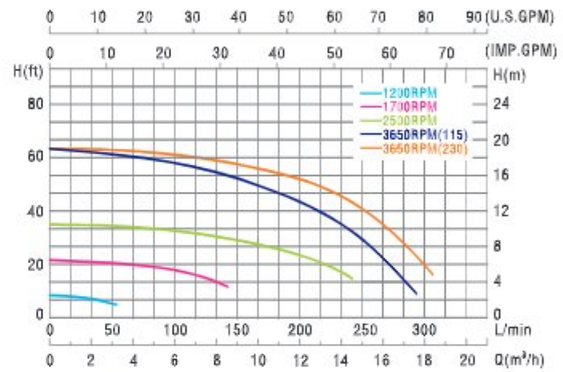

CLP7506

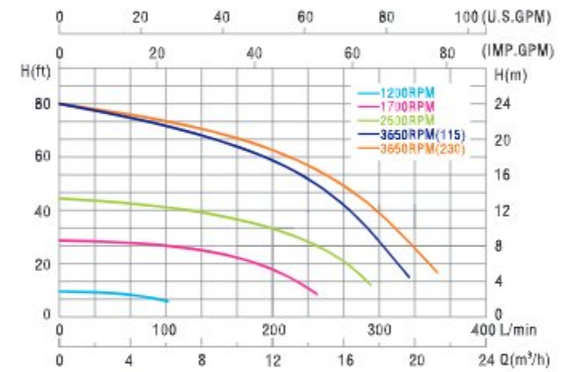

CLP11006

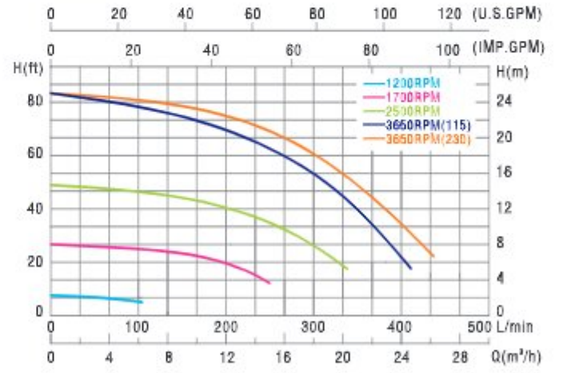

CLP15006

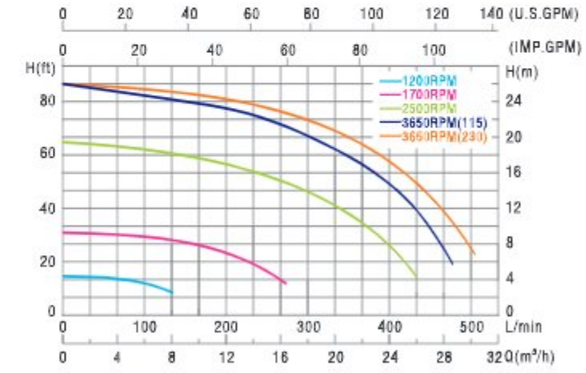

CLP22006

Performance Data

Model #	Volts/Hz	Input Power	Amps	Max.Flow Rate	Max.Head	Connection	Pool Size	Dimensions / Product Weight
CLP7506	230V/50Hz	750W	3.2A	20m³/h	19m	2" 2.5"	≈100 m³	L60cm-W27cm-H29cm / 10.7kg
CLP11006	230V/50Hz	1100W	4.8A	23m³/h	24m	2" 2.5"	≈135 m³	L60cm-W27cm-H29cm / 11.5kg
CLP15006	230V/50Hz	1500W	6.5A	30m³/h	25m	2" 2.5"	≈170 m³	L60cm-W27cm-H29cm / 12.2kg
CLP22006	230V/50Hz	2200W	9.6A	33m³/h	26m	2" 2.5"	≈200 m³	L60cm-W27cm-H29cm / 13.8kg

Pool &Filter Pump Eco Series

Features

- Efficient self-priming swimming pool filter pump for effective water circulation.
- Self-priming pool pump range emits power between 0.76KW and 2.2KW.
- Easy installation, even in existing filter circuits.
- Designed for use in swimming pool filtration systems.
- Integrated pre-filter removes coarse dirt and see-thru lid for quick inspection and tool-free service.
- Extreme water flow and cool & silent running.
- Built-in thermal protector assure long lifetime.
- Every pump is performance tested before leaving factory.
- Water proof level IPX5.
- Medium water temperature: 40°C.

Applications

- Residential pools & spas
- Recycling and filtering water for domestic pools.

Dimensional Drawing

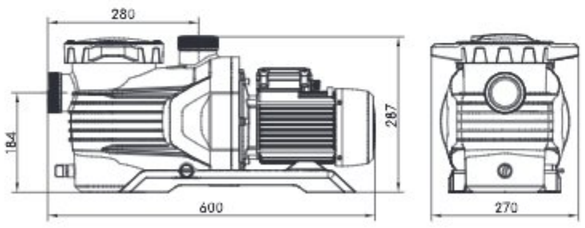

Performance Curve

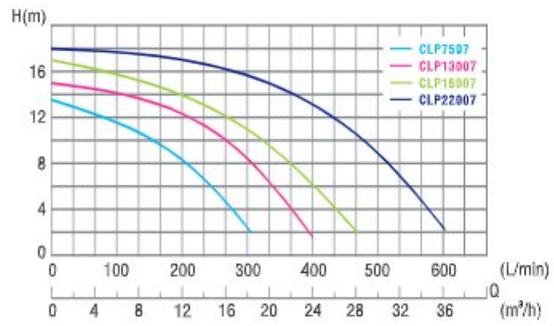

Performance Data

Model #	Volts/Hz	Input Power	Amps	Max.Flow Rate	Max.Head	Connection	Pool Size	Dimensions / Product Weight
CLP7507	230V/50Hz	760W	3.3A	20m³/h	13.5m	2' 2.5"	≈100m³	L60cm-W27cm-H28.7cm/12.9kg
CLP13007	230V/50Hz	1300W	5.7A	25m³/h	15m	2' 2.5"	≈135m³	L60cm-W27cm-H28.7cm/14.6kg
CLP15007	230V/50Hz	1500W	6.5A	30m³/h	17m	2' 2.5"	≈170m³	L60cm-W27cm-H28.7cm /16.7kg
CLP22007	230V/50Hz	2200W	9.6A	38m³/h	18m	2' 2.5"	≈200m³	L60cm-W27cm-H28.7cm /18.8kg

Swimming Pool Pump

Features

- Self priming with quiet motor running.
- Integrated pre-filter and see-thru lid for easy inspection.
- Built-in thermal protector assure long lifetime.
- Designed for use in swimming pool filtration systems.
- Easy installation even in existing filter circuits.
- Every pump is performance tested before leaving factory.
- Water proof level IPX5.
- Medium water temperature: 40°C.

Applications

- Recycling and filtering water for all types and sizes pool (small to medium)
- Ideal for new and standard pool pump replacement
- Residential pools& filtration system

Dimensional Drawing

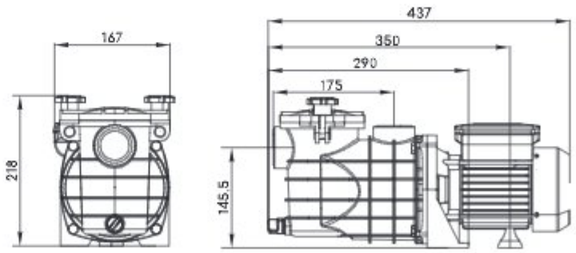

Performance Curve

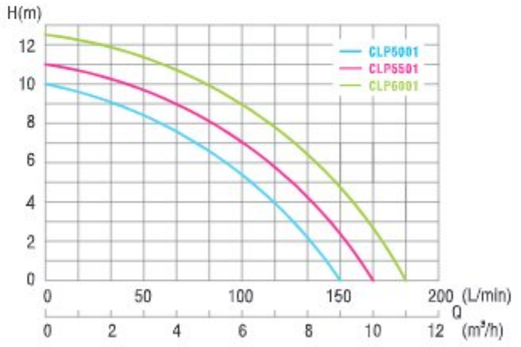

Performance Data

Model #	Volts/Hz	Input Power	Amps	Max.Flow Rate	Max.Head	Connection	Pool Size	Dimensions / Product Weight
CLP5001	230V/50Hz	500W	2.1A	9m³/h	10m	1½"	≈20m³	L43.7cm-W16.7cm-H 21.8cm / 6.5kg
CLP5501	230V/50Hz	550W	2.3A	10m³/h	11m	1½"	≈30m³	L43.7cm-W16.7cm-H 21.8cm / 7.2kg
CLP6001	230V/50Hz	600W	2.6A	11m³/h	12.5m	1½"	≈35m³	L43.7cm-W16.7cm-H 21.8cm / 7.5kg

Swimming Pool Pump

Features

- Quite running single stage pool pump
- Integrated pre-filter and see-thru lid for easy inspection.
- Built-in thermal protector assure long lifetime.
- Designed for use in swimming pool filtration systems.
- Easy installation even in existing filter circuits.
- Every pump is performance tested before leaving factory.
- Water proof level IPX5.
- Medium water temperature: 40°C.

Applications

- Recycling and filtering water for all types of pool (small to medium)
- Ideal for new and standard pool pump replacement
- Residential pools& filtration system

Dimensional Drawing

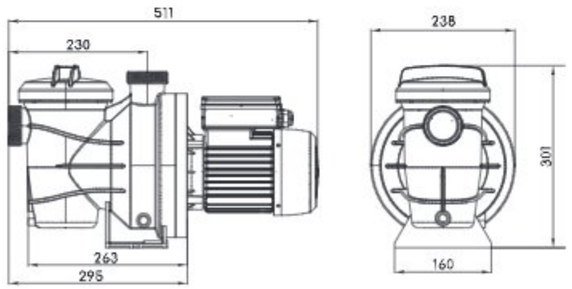

Performance Curve

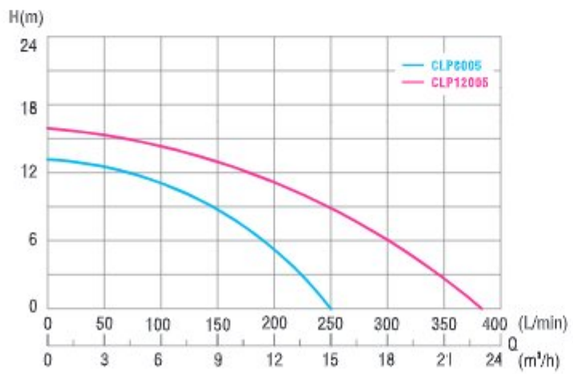

Performance Data

Model #	Volts/Hz	Input Power	Amps	Max.Flow Rate	Max.Head	Connection	Pool Size	Dimensions / Product Weight
CLP8005	230V/50Hz	800W	3.4A	15m³/h	13.5m	1½"	≈50m³	L51.1cm-W23.8cm-H 30.1cm / 9.8kg
CLP12005	230V/50Hz	1200W	5.2A	23m³/h	16m	1½"	≈100m³	L51.1cm-W23.8cm-H 30.1cm / 12kg

Swimming Pool Pump

Features

- Small pump w/o pre-filter for small pools and cost saving while making life simpler.
- Designed for use in swimming pool filtration systems.
- Recommend to make filter combi with 10/12/13L tank volume.
- Timer function can be added for all pumps.
- High-tech motor ensure cool & silent running.
- Every pump is performance tested before leaving factory.
- Water proof level IPX5.
- Medium water temperature: 40°C.

Applications

- Residential pools & spas
- Recycling and filtering water for small pools

Dimensional Drawing

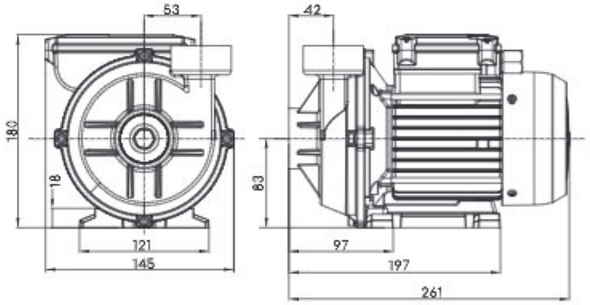

Performance Curve

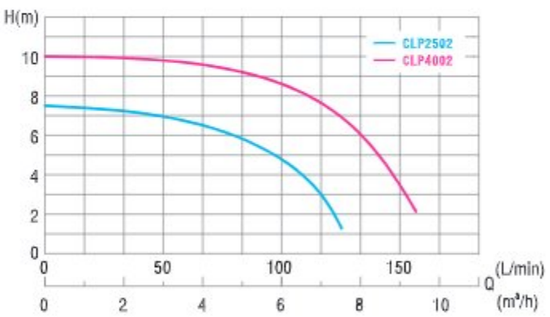

Timer Control Options

- Option A: Mechanical timer is available
- Can set working time by yourself

Mechanical Timer

- Option B: Built-in timer is available with On/Off buttons
- With timer button to adjust working period
- With battery back up to keep the setting memory for 24 hours when electricity suddenly cut off

Built-in timer

Performance Data

Model #	Volts/Hz	Input Power	Amps	Max.Flow Rate	Max.Head	Connection	Pool Size	Dimensions / Product Weight
CLP2502	220-240V/50Hz	250W	1.08A	8m³/h	7.5m	1½"	≈35m³	L26.1cm-W14.5cm-H18cm / 4kg
CLP4002	220-240V/50Hz	400W	1.73A	10m³/h	10m	1½"	≈40m³	L26.1cm-W14.5cm-H18cm / 4.8kg

Swimming Pool Pump

Features

- Small pump with pre-filter for small pools and self priming.
- Designed for use in swimming pool filtration systems.
- Recommend to make filter combi with 10/12/13L tank volume.
- Timer function can be added for all pumps.
- High-tech motor ensure cool & silent running.
- Every pump is performance tested before leaving factory.
- Water proof level IPX5.
- Medium water temperature: 40˚C.

Applications

- Residential pools& spas
- Recycling and filtering water for small pools

Dimensional Drawing

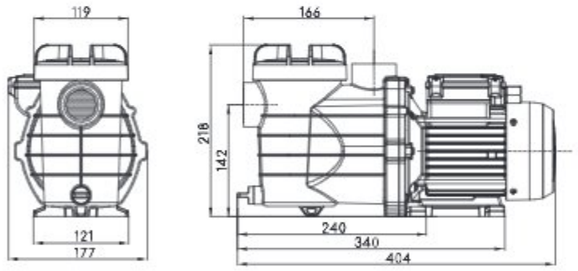

Performance Curve

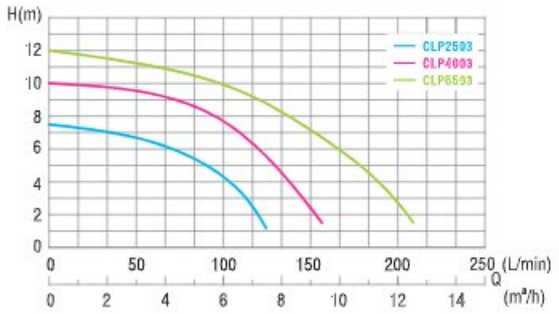

Timer Control Options

- Option A: Mechanical timer is available
- Can set working time by yourself

Mechanical Timer

- Option B: Built-in timer is available with On/Off buttons
- With timer button to adjust working period
- With battery back up to keep the setting memory for 24 hours when electricity suddenly cut off

Built-in timer

Performance Data

Model #	Volts/Hz	Input Power	Amps	Max.Flow Rate	Max.Head	Connection	Pool Size	Dimensions / Product Weight
CLP2503	220-240V/50Hz	250W	1.08A	8m³/h	7.5m	1½"	≈35m³	L40.4cm-W17.7cm-H21.8cm / 4.6kg
CLP4003	220-240V/50Hz	400W	1.73A	10m³/h	10m	1½"	≈40m³	L40.4cm-W17.7cm-H21.8cm / 5.4kg
CLP5503	220-240V/50Hz	550W	2.39A	13m³/h	12m	1½"	≈50m³	L40.4cm-W17.7cm-H21.8cm / 5.9kg

Swimming Pool Pump

Features

- Self priming pool pump
- A see-thru cover with cam-lock lid for quick inspect and tool-free service
- The strainer basket with internal ribs assure flow when filled with leaves and debris.
- Timer function can be added for all pumps.
- High-tech motor ensure cool & silent running.
- Every pump is performance tested before leaving factory.
- Water proof level IPX5.
- Medium water temperature: 40˚C.

Applications

- Recycling and filtering water for domestic pools
- Suitable for both In-ground and above-ground pools

Performance Curve

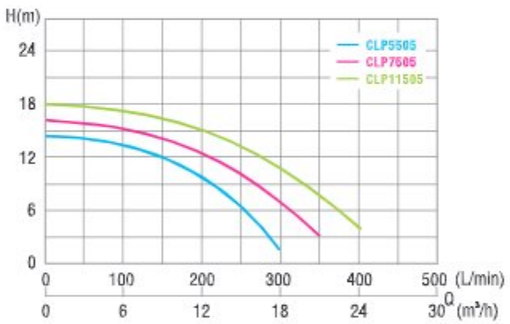

Dimensional Drawing

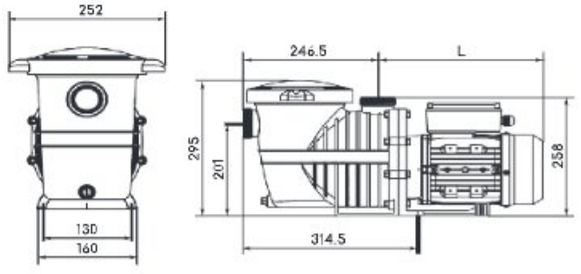

Model	L
CLP5505	281mm
CLP7505	316mm
CLP11505	316mm

Performance Data

Model #	Volts/Hz	Input Power	Amps	Max.Flow Rate	Max.Head	Connection	Pool Size	Dimensions / Product Weight
CLP5505	220-240V/50Hz	800W	3.5A	18m³/h	14 m	1½"	≈75m³	L52.7cm-W16cm-H29.5cm / 13kg
CLP7505	220-240V/50Hz	1200W	4.5A	21m³/h	16m	1½"	≈85m³	L56.2cm-W16cm-H29.5cm / 14kg
CLP11505	220-240V/50Hz	1600W	6.4A	24m³/h	18m	1½"	≈100m³	L56.2cm-W16cm-H29.5cm / 15kg

Swimming Pool Pump

Features

- Small pump with pre-filter for small pools and cost saving while making life simpler.
- Designed for use in swimming pool filtration systems.
- Discharge port available to adjust for flexible installation.
- High-tech motor ensure super quite operation.
- Every pump is performance tested before leaving factory.
- Water proof level IPX5.
- Medium water temperature: 40°C.

Applications

- Recycling and filtering water for domestic pools
- Suitable for both In-ground and above-ground pools

Performance Curve

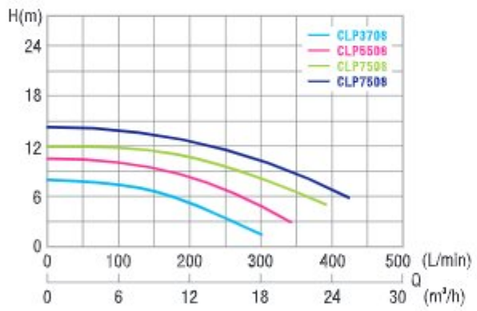

Dimensional Drawing

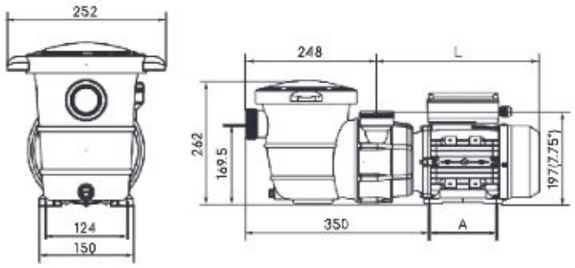

Model	L
CLP3708	272mm
CLP5508	272mm
CLP7508	307mm
CLP11508	307mm

Performance Data

Model #	Volts/Hz	Input Power	Amps	Max.Flow Rate	Max.Head	Connection	Pool Size	Dimensions / Product Weight
CLP3708	220-240V/50Hz	600W	2.5A	18m³/h	8m	1½"	≈75m³	L52cm-W15cm-H26.2cm / 10kg
CLP5508	220-240V/50Hz	800W	2.6A	20m³/h	11m	1½"	≈100m³	L52cm-W15cm-H26.2cm / 11kg
CLP7508	220-240V/50Hz	1200W	4.5A	23m³/h	12m	1½"	≈135m³	L55.5cm-W15cm-H26.2cm / 12kg
CLP11508	220-240V/50Hz	1600W	6.0A	25m³/h	14m	1½"	≈150m³	L55.5cm-W15cm-H26.2cm / 13kg

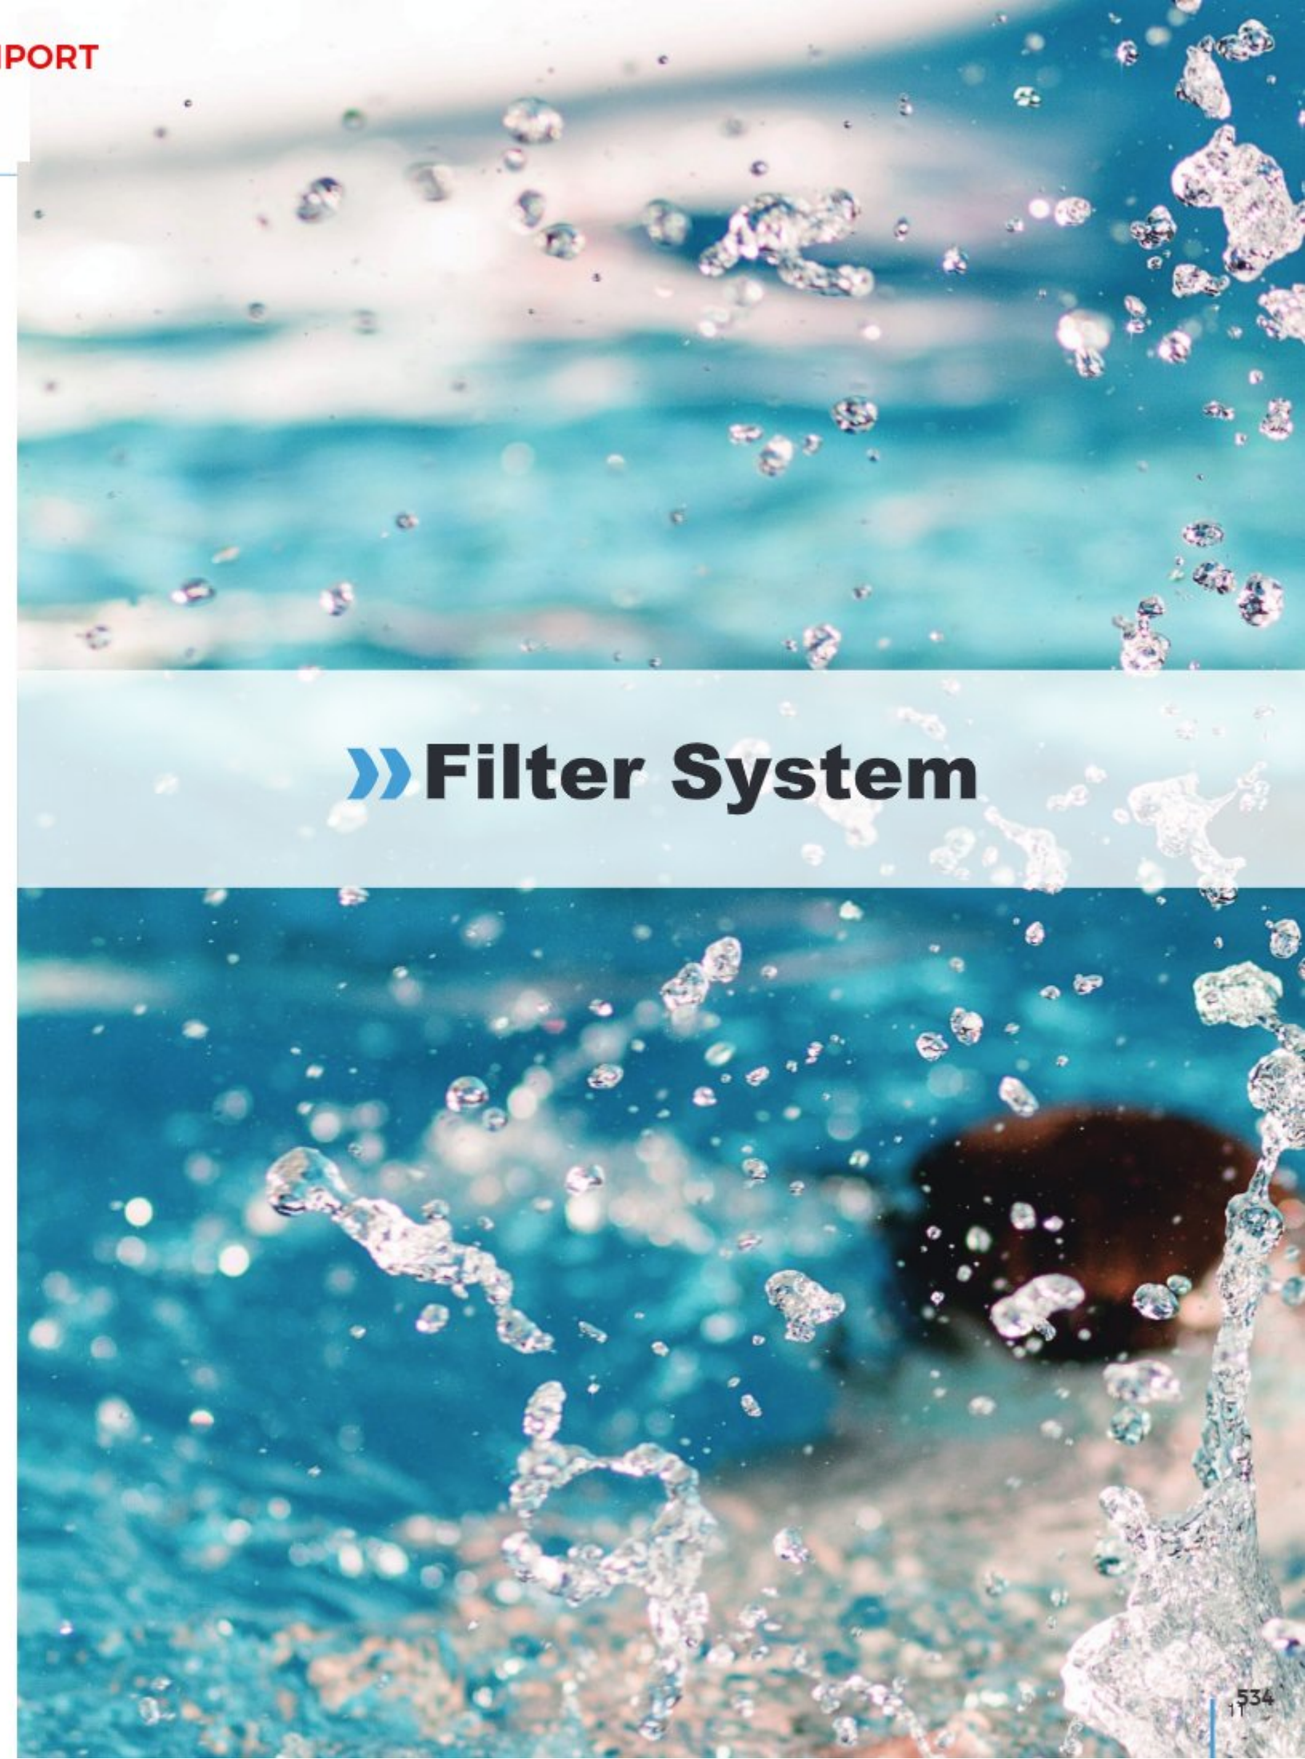

Sand Filter System Kit

Filtration combo

CLP2502F CLP4002F
Small pump with 10" or 12" top mount filter tank

CLP4003F CLP5503F
Filtration combo includes a pump with prefilter and 12" or 13" filter tank, 6 way multiport valve, attached with base

Integrated timer function can be added

6 way valve with easy read pressure gauge

Features

- Sand filter combo offers the solution for easy set-up pools.
- Sand filter is compact sized,easy to install and use and special care is not required. While some models include a prefilter to hold the largest particles to prevent pump from any damage.
- Thanks to their multiport valves, six functions can be carried out: filtration, backwash and rinse, recirculate, drain and close system.
- Timer control option: 24-hour timer with 2 to 12 hour pre-set cycles for automatic operation.
- Tank made of HDPE and can be customized as well as other parts.
- Easy connection to existing pools.
- Excellent filtration efficiency.
- Corrosion-proof and UV-resistant body.
- Protection class: IPX5
- Maximum water temperature 40°C.

Applications

- Recycling and filtering water for domestic pools
- Suitable for pools of all types and sizes.

Performance Curve

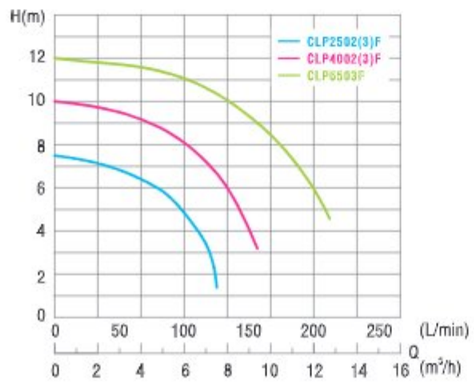

Dimension

CLPXXX2F
10"

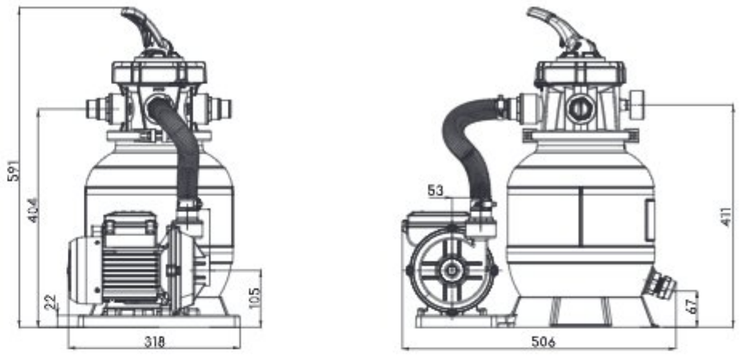

CLPXXX2F
12"

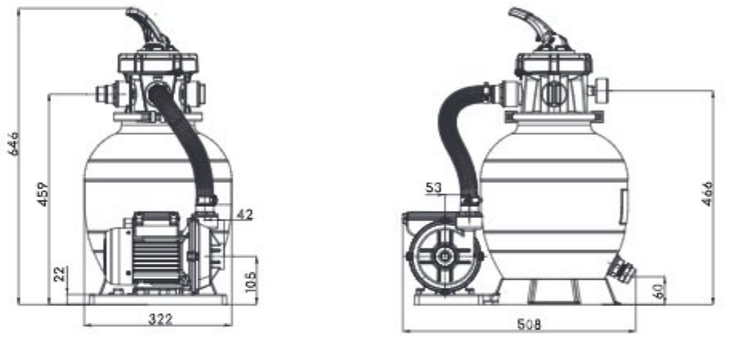

CLPXXX3F
13"

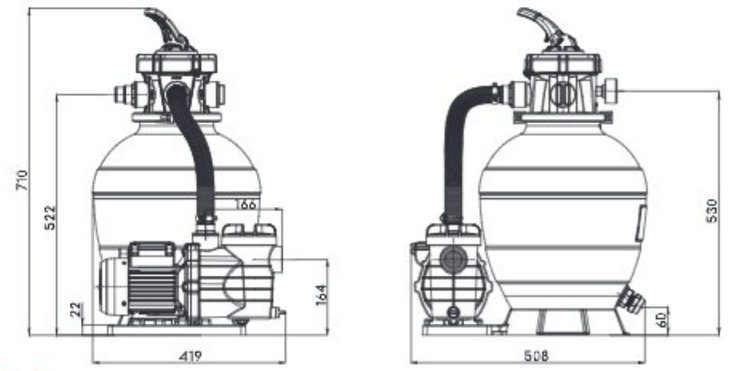

Performance Data

Model #	Voltage (V/Hz)	Power(P1) (W)	MPV Pipe Size	Sand Filter Dia(mm/inch)	System Flow (m³/h)	Pump Max.Flow (m³/h)	Pump Head (m)	Sand Filling (kg)	Grain Size of Quartz Sand (mm)	Product Weight (kg)	Dimension (LxWxH) (cm)
CLP2502F	220-240/50	250	6-way/1.5"	250/10"	4.5	8	7.5	10	0.5-0.8mm 0.7-1.2mm	8	50.6×31.6×59.1
CLP4002F	220-240/50	400	6-way/1.5"	250/10"	5	10	10	10		8.8	50.6×31.6×59.1
CLP2502F	220-240/50	250	6-way/1.5"	305/12"	4.8	8	7.5	13		8.5	50.8×32.2×64.6
CLP4002F	220-240/50	400	6-way/1.5"	305/12"	6	10	10	13		9.3	50.8×32.2×64.6
CLP2503F	220-240/50	250	6-way/1.5"	305/12"	4.8	8	7.5	13		9.1	50.8×40.4×64.6
CLP4003F	220-240/50	400	6-way/1.5"	305/12"	6	10	10	13		9.9	50.8×40.4×64.6
CLP5503F	220-240/50	550	6-way/1.5"	330/13"	7	13	12	25		10.9	50.8×41.9×71.0

Cartridge Filter Pump

Features

- Compatible with above ground Pools (up to 22800L capacity)
- Easy-to-clean, replaceable filter cartridge.
- Easy installation & convenient to keep pool crystal clear and hygienic over the summer months.
- No specific maintenance is required:just the occasional cartridge rinse or swap to keep this pump running strong.
- It works perfectly with Type III-A/C filter cartridges.
- Visibly Clean or replace cartridge every couple of weeks.
- Optional energy-saving plug with a timer.
- 2 hose and 1 filter cartridge included
- Waterproof level IPX8.
- Medium water temperature: 40°C.

Applications

- Specifically designed for above ground pools.
- Circulate and filter the water to keep everything clean, refreshing, and fun.
- Improved water clarity by circulation and filtration and negative ions at the water surface.

Performance Curve

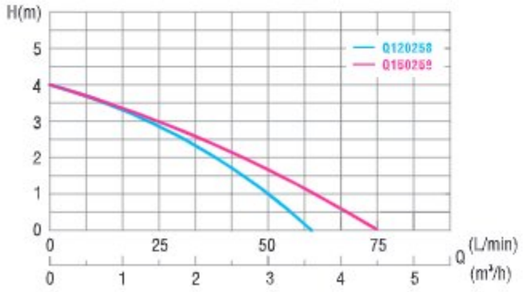

Dimensional Drawing

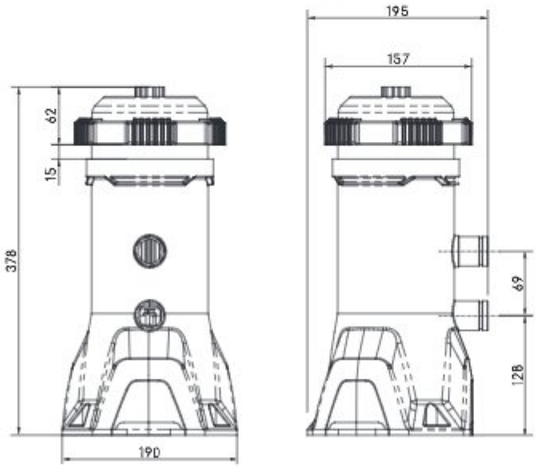

Performance Data

Model #	Volts/Hz	Input Power	Max.Flow Rate	Max.Head	Max. Particle Size	Connection	Dimensions / Product Weight
Q120258	230V/50Hz	120W	3.6m³/h	4m	0.5mm	1-1/4"(32mm)	L19.5cm-W19cm-H37.8cm / 3.2kg
Q150258	230V/50Hz	150W	4.5m³/h	4m	0.5mm	1-1/4"(32mm)	L19.5cm-W19cm-H37.8cm / 4.5kg

LD-0837

Pool Cover Pump

Pool Cover Pump

Features

- Portable and compact size.
- Trouble-free operation.
- Easy to install and no specific maintenance is required.
- To pump water that has collected on the pool cover.
- Dry running protection thanks to an integrated float switch.
- It is small and handy but reliably energy efficient.
- With quick connection port and hose fitting.
- Flexible use - 3 in 1 utility pump.
  (Submersible / pool cover / aquarium)
- Water proof level IPX8.
- Medium water temperature: 40˚C.

Applications

- Solve a well-known problem: drain water that has collected in the middle of the pool cover.
- Ideal for draining flooded areas , basements in general.
- Also perfectly suited for flat suction of small pools.

» Compact
» Easy to Use
» Plug & Play

Performance Curve

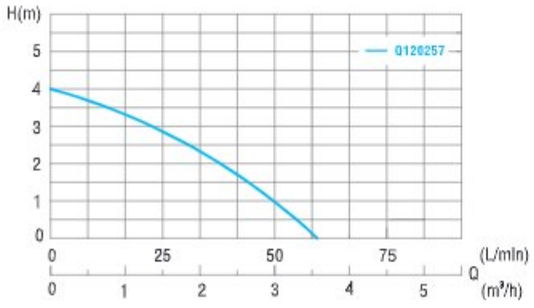

Dimensional Drawing

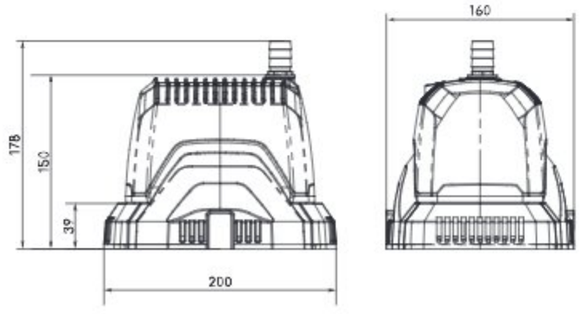

Performance Data

Model #	Volts/Hz	Input Power	Max.Flow Rate	Max.Head	Max. Particle Size	Connection	Dimensions / Product Weight
Q120257	230V/50Hz	120W	3.6m³/h	4m	5mm	1/2"3/4"	L20×W16×H15cm / 3kg

Pool Cover Pump

Features

- Integrated compact design
- PSC motor with thermal overload protection
- Automatic mode(aqua sensor pins) or manual mode (Plug in/off)
- Non-return valve prevents water backflow and protect pump better
- Delayed shutdown system to wipe water completely
- Supplied with 10 m power cable and plug .
- Water proof level IPX8.
- Medium water temperature: 40˚C.

Applications

- To pump water that has collected in the middle of the pool cover.
- Ideal for draining flooded areas, basements in general.
- Also perfectly suited for flat suction of small pools.

Dimensional Drawing

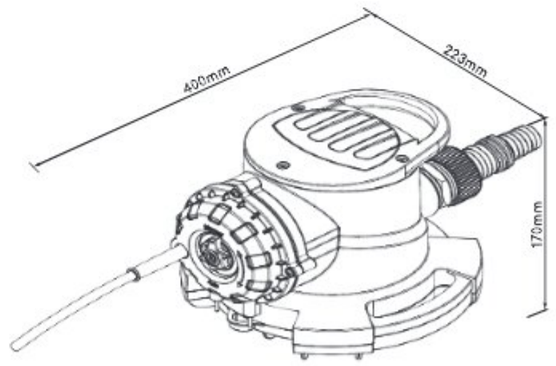

Performance Curve

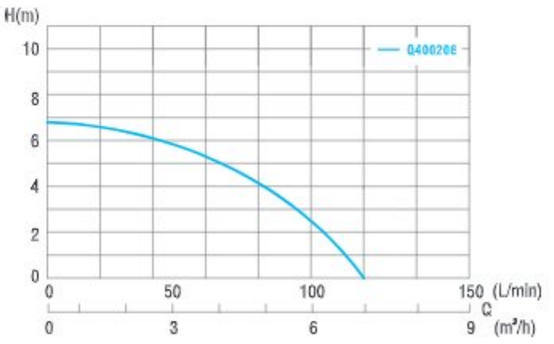

Performance Data

Model #	Volts/Hz	Input Power	Max.Flow Rate	Max.Head	Max. Particle Size	Connection	Dimensions / Product Weight
Q400206	230V/50Hz	400W	7m³/h	7.6m	5mm	1-1/4"(32mm)	L40cm-W22.3cm-H17cm / 4.6kg

KIMPORT

Pool/Pond cleaner

Cordless Pool Cleaner

Features

- Cordless&Rechargeable handheld pool cleaner
- Compact and portable design.
- Light Weight & Easy to operate.
- 60 Mins Hassle-Free Cleaning.
- Unique side drainage system for trouble free operation.
- Easy to use, fast and effective pond cleaning systems.
- Telescopic pole length in a range of 0.7m to 1.5m.
- Coarse filter and mesh bag provides different demand.
- Low noise efficient-working with powerful suction.
- Water proof level IPX8.

Applications

- Ideal for In-Ground and Above Ground Pools for quick pick-ups of all types of dirt.
- Removing all kinds of dirt (sand & silt and debris, also leaves, twigs, and dead algae)

60 Mins | IP X8 | Telescopic | 3kg

Performance Data

Model #	Voltage	Capacity	Power	Flow Rate	Charging Time	Run Time	Max.Particle	Max.Depth	Dimension (LxWxH)
PCT403T	18V	2000mAh	40W	4200l/h	90mins	60mins	<25mm	3m	90×24×13.5cm

Pond Cleaner

Ultimate Pond Cleaning system

Features

- Impeller (small/medium/large) to switch and improve performance according to needs
- Max flow can reach 7800l/h and it solids up to 32mm
- Include pool cleaner and collector/6m hose / two brushheads (10/20cm) / telescopic handle 1.2-2.2m
- Remote control and ventilation to make sure pond cleaner work excellently
- Safe to use with all healthy adult pond fish
- Easy to use, fast and effective pond cleaning systems

Applications

- Suitable for ponds of all types and sizes.
- Quick pick-ups of all types of dirt (leaves, stones, blanket weed and sludge).

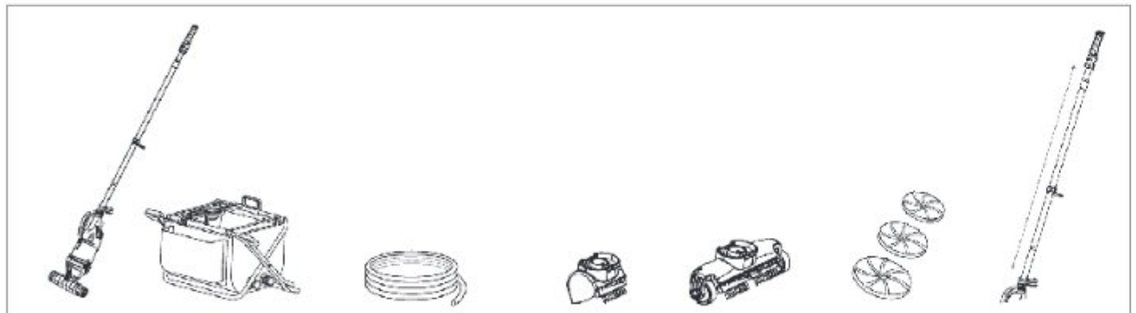

Pond Cleaner | Pond Cleaner collector | 6m Hose, smooth bore, spiral reinforced 1.5' (38mm) | Power brush head(10cm) | Wheeled brush head (20cm) | Large, Medium, Small Impeller options | Adjustable telescopic handle 1.2m to 2.2m

Performance Data

Model #	Voltage(V/Hz)	Power(W)	Max.Flow Rate			Max.Head			Max.Particle Size	Immersion Depth	Telescopic Pole	Power Cable
PCT3501T	230V/50Hz	350W	7800l/h	6500l/h	5400l/h	4.5m	3.6m	2.9m	32mm	5mm	1.2m-2.2m	H07RN-F10m

LD-0837

Swimming Pool Pump

Variable Speed Swimming Pool Pump

See-through strainer cover lets you see when the basket needs emptying

Extra-large strainer basket holds more debris for less-frequent maintenance

Built-in controller features an LED screen and keypad for easy operation

Permanent magnet, totally enclosed fan-cooled (TEFC) motor provides maximum energy efficiency and long-lasting performance

ENERGY SAVINGS

CLP-6 VS pumps designed for maximum efficiency, providing up to 90% energy savings over single-speed pumps and paying for itself within less than two seasons of usage.

LOW NOISE

Minimize poolside noise and maximize relaxation with CLP-6 VS pumps. Its efficient hydraulic design provides incredibly quiet operation especially at lower, energy-saving speeds.

EASY OPERATION

CLP-6 VS pump is equipped with a built-in controller and an LED screen and keypad for simple, intuitive opeartion.

DUAL-VOLTAGE

CLP-6 VS pumps accept 115 or 230 volt, 50/60Hz input power and it can automatically recognize and adapt to your home setting.

Features

- Variable speed series provide users with different flow rate demand.
- Super energy saving with high efficiency permanent magnet motor.
- 4 Adjustbable Power levels- can be set range from 450 RPM to 3650 RPM.
- Timer function in user-friendly programming lets you pick the best speed for your pool.
- Every pump is performance tested before leaving factory.
- Variable speed technology for great energy savings up to 90%.
- Accpets 115-230v,50/60Hz input power.

SAVE UP TO **90%** ON ENERGY COSTS*

VARIABLE-SPEED TECHNOLOGY THAT SAVES YOUR BILL ON ELECTRICITY COST

Applications

- Suitable for both In-ground and above-ground pools
- Recycling and filtering water for medium and commercial pools.
- Ideal for new and standard pool pump replacement

Dimensional Drawing & Controller

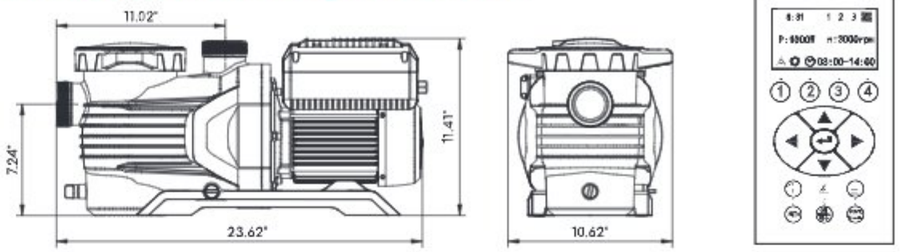

Performance Curve

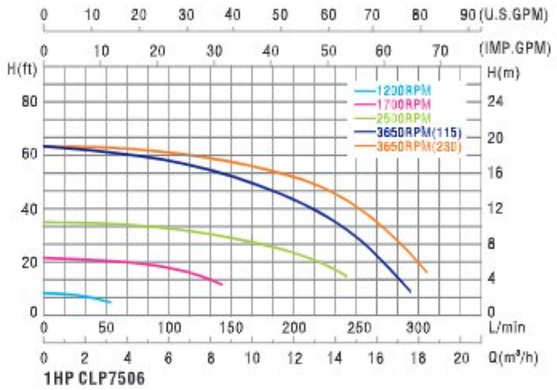

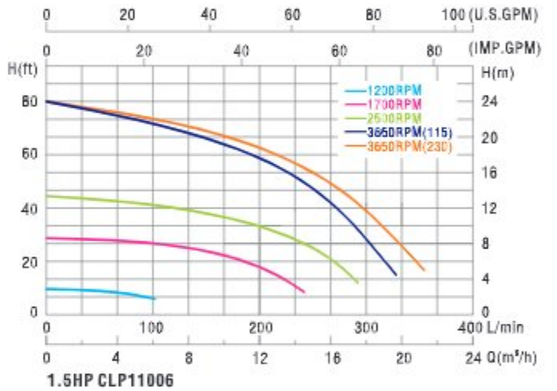

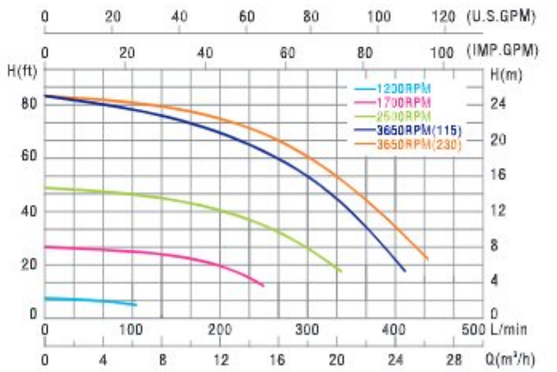

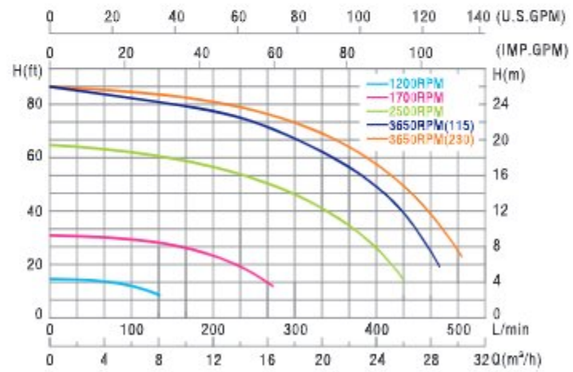

Performance Data

Model #	Volts	Hertz	HP	Power	Full Load Amps	Max. Flow Rate	Max. Lift	Port Size	Speed Range	Product Weight
CLP7506	115-230V	50/60Hz	1HP	750W	3.2A	88GPM	62ft	2"x2"	450-3650RPM	23.6lbs
CLP11006	115-230V	50/60Hz	1.5HP	1100W	4.8A	101GPM	79ft	2"x2"	450-3650RPM	25.3lbs
CLP15006	115-230V	50/60Hz	2HP	1500W	6.5A	132GPM	82ft	2"x2"	450-3650RPM	26.9lbs
CLP22006	115-230V	50/60Hz	3HP	2200W	9.6A	145GPM	85ft	2"x2"	450-3650RPM	30.4lbs

Pool & Filter Pump

Features

- Efficient self-priming swimming pool filter pump for effective water circulation.
- Self-priming pool pump range emits power between 0.76KW and 2.2KW.
- Easy installation, even in existing filter circuits.
- Designed for use in swimming pool filtration systems.
- Integrated pre-filter removes coarse dirt and see-thru lid for quick inspection and tool-free service.
- Extreme water flow and cool & silent running.
- Built-in thermal protector assure long lifetime.
- Every pump is performance tested before leaving factory.
- Water proof level IPX5.

Applications

- Residential pools & spas
- Recycling and filtering water for domestic pools.

Dimensional Drawing

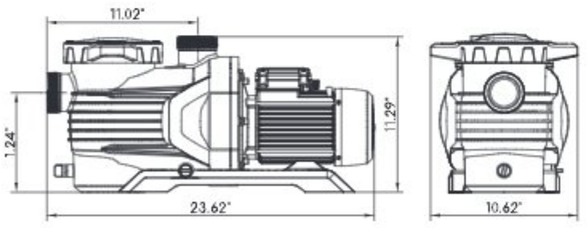

Performance Curve

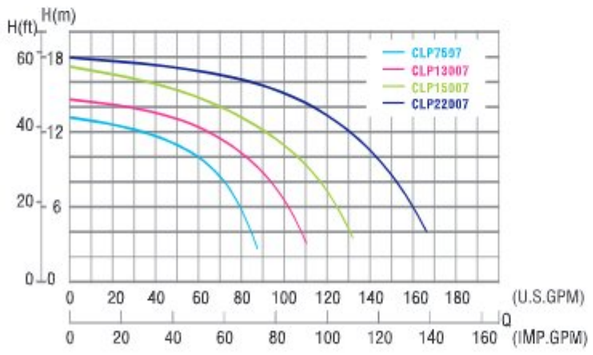

Performance Data

Model #	Volts/Hz	HP	Power	Full Load Amps	Max.Flow Rate	Max Lift	Pool Size	Product Weight
CLP7507	115V/60Hz	1HP	760W	6.6A	88GPM	44ft	2"x2"	28.4lbs
CLP13007	115V/60Hz	1.5HP	1300W	11.5A	110GPM	49ft	2"x2"	32.2lbs
CLP15007	115V/60Hz	2HP	1500W	13.0A	132GPM	56ft	2"x2"	36.8lbs
CLP22007	115V/60Hz	3HP	2200W	19.2A	167GPM	59ft	2"x2"	41.4lbs

Swimming Pool Pump

Features

- Self priming with quiet motor running.
- Integrated pre-filter and see-thru lid for easy inspection.
- Built-in thermal protector assure long lifetime.
- Designed for use in swimming pool filtration systems.
- Easy installation, even in existing filter circuits.
- Every pump is performance tested before leaving factory.
- Water proof level IPX5

Applications

- Recycling and filtering water for all types and sizes pool (small to medium)
- Ideal for new and standard pool pump replacement
- Residential pools & filtration system

Performance Curve

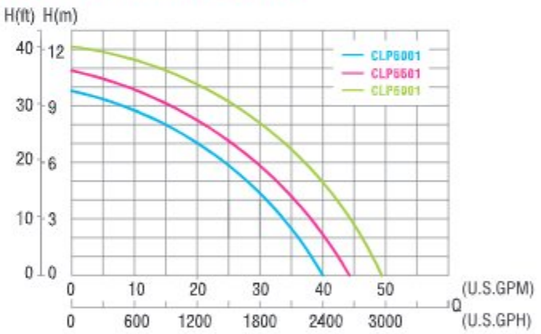

Dimensional Drawing

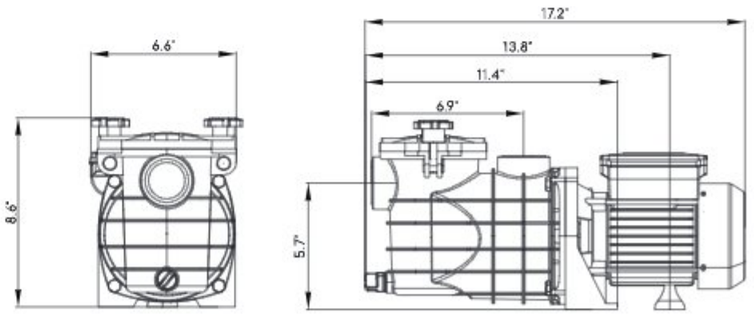

Performance Data

Model #	Volts/Hz	HP	Power	Full Load Amps	Max. Flow Rate	Max. Lift	Port Size	Product Weight
CLP5001	115V/60Hz	0.30HP	500W	4.5A	40GPM	33ft	1.5"x1.5"	14.3lbs
CLP5501	115V/60Hz	0.60HP	550W	5.0A	44GPM	36ft	1.5"x1.5"	15.8lbs
CLP6001	115V/60Hz	0.75HP	600W	5.2A	48GPM	41ft	1.5"x1.5"	16.5lbs

Swimming Pool Pump

Features

- Self priming with quiet motor running.
- Integrated pre-filter and see-thru lid for easy inspection.
- Built-in thermal protector assure long lifetime.
- Designed for use in swimming pool filtration systems.
- Easy installation, even in existing filter circuits.
- Every pump is performance tested before leaving factory.
- Water proof level IPX5

Applications

- Recycling and filtering water for all types and sizes pool (small to medium)
- Ideal for new and standard pool pump replacement
- Residential pools& filtration system

Performance Curve

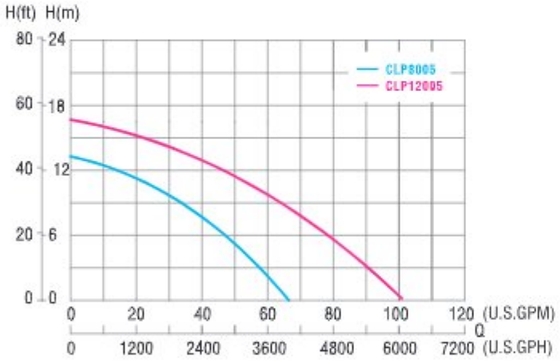

Dimensional Drawing

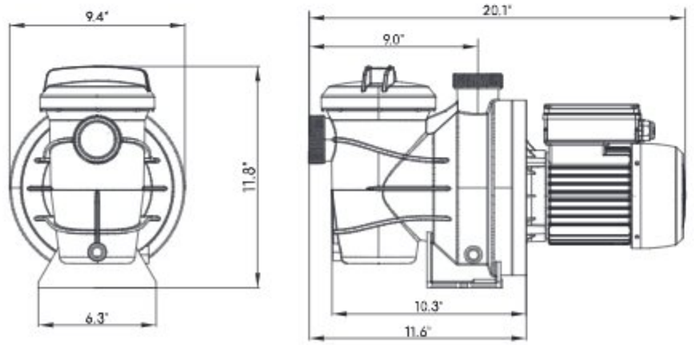

Performance Data

Model #	Volts/Hz	HP	Power	Full Load Amps	Max. Flow Rate	Max. Lift	Port Size	Product Weight
CLP8005	115V/60Hz	1.0HP	800W	6.9A	66GPM	44ft	1.5"x1.5"	21.6 lbs
CLP12005	115V/60Hz	1.5HP	1200W	10.4A	101GPM	53ft	1.5"x1.5"	26.4 lbs

Swimming Pool Pump

Features

- Small pump w/o pre-filter for small pools.
- Designed for use in swimming pool filtration systems.
- Recommend to combine with 10" 12" 13" sand filters.
- Timer function can be added for all pumps.
- High-tech motor ensure cool & silent running.
- Every pump is performance tested before leaving factory.
- Water proof level IPX5

Applications

- Residential pools& spas
- Recycling and filtering water for small pools

Dimensional Drawing

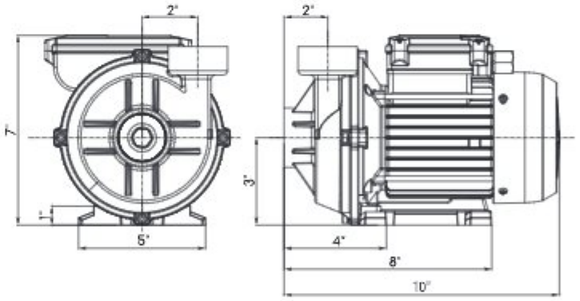

Performance Curve

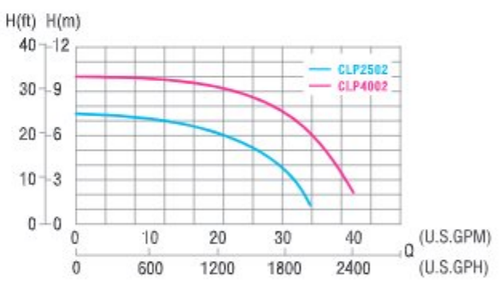

Timer Control Options

- Option A: Mechanical timer is available
- Can set working time by yourself

Mechanical Timer

- Option B: Built-in timer is available with On/Off buttons
- With timer button to adjust working period
- With battery back up to keep the setting memory for 24 hours when electricity suddenly cut off

Built-in timer

Performance Data

Model #	Volts/Hz	HP	Power	Full Load Amps	Max. Flow Rate	Max. Lift	Port Size	Product Weight
CLP2502	115V/60Hz	0.33HP	250W	2.17A	35GPM	25ft	1.5"x1.5"	8.8lbs
CLP4002	115V/60Hz	0.50HP	400W	3.14A	44GPM	33ft	1.5"x1.5"	10.5lbs

Swimming Pool Pump

Features

- Small pump with pre-filter for small pools.
- Designed for use in swimming pool filtration systems.
- Recommend to combine with 10" 12" 13" sand filters.
- Timer function can be added for all pumps
- High-tech motor ensure cool & silent running.
- Every pump is performance tested before leaving factory.
- Water proof level IPX5

Applications

- Residential pools& spas
- Recycling and filtering water for small pools

Dimensional Drawing

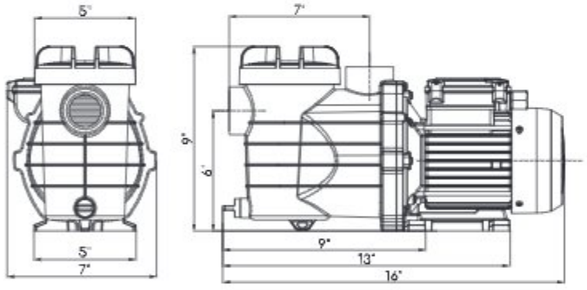

Performance Curve

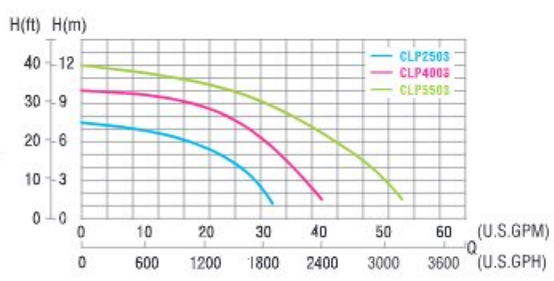

Timer Control Options

- Option A: Mechanical timer is available
- Can set working time by yourself

Mechanical Timer

- Option B: Built-in timer is available with On/Off buttons
- V/ith timer button to adjust working period
- V/ith battery back up to keep the setting memory for 24 hours when electricity suddenly cut off

Built-in timer

Performance Data

Model #	Volts/Hz	HP	Power	Full Load Amps	Max. Flow Rate	Max. Lift	Port Size	Product Weight
CLP2503	115V/60Hz	0.33HP	250W	2.17A	35GPM	25ft	1.5"x1.5"	10.14lbs
CLP4003	116V/60Hz	0.50HP	400W	3.14A	44GPM	33ft	1.5"x1.6"	11.90lbs
CLP5503	115V/60Hz	0.75HP	550W	4.78A	57GPM	39ft	1.5"x1.5"	13lbs

Swimming Pool Pump

Features

- Small pump with pre-filter for small pools.
- A see-thru cover with cam-lock lid for quick inspect and tool-free service
- The strainer basket with internal ribs assure flow when filled with leaves and debris.
- Designed for use in swimming pool filtration systems.
- Recommend to combine with 8"10" 12" 13" sand filters.
- Timer function can be added for all pumps.
- High-tech motor ensure cool & silent running.
- Every pump is performance tested before leaving factory.
- Water proof level IPX5.

Applications

- Residential pools& spas
- Recycling and filtering water for small pools

Performance Curve

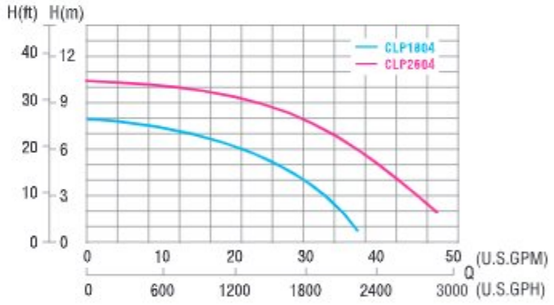

Dimensional Drawing

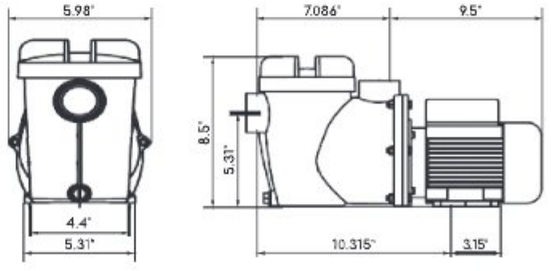

Performance Data

Model #	Volts/Hz	HP	Power	Full Load Amps	Max. Flow Rate	Max. Lift	Port Size	Product Weight
CLP1804	115V/60Hz	0.33HP	250W	2.2A	39GPM	8m	1.5"x1.5"	10.58lbs
CLP2604	115V/60Hz	0.50HP	400W	3.8A	46GPM	10.5m	1.5"x1.5"	11.02lbs

Swimming Pool Pump

DOE

Features

- DoE-Compliant design makes it more energy saving.
- A see-thru cover with cam-lock lid for quick inspect and tool-free service
- The strainer basket with internal ribs assure flow when filled with leaves and debris.
- One-piece case without bolts assure minimum vibration and super quiet operation.
- High-efficient motor bring cooler running and longer life.
- Suitable for all types and sizes pool, in-ground spas.
- Dual voltage and dual speed provide with different flow rate demand.
- Every pump is performance tested before leaving factory.
- Water proof level IPX5

Applications

- Residential pools& spas
- Recycling and filtering water for domestic pools
- Suitable for both In-ground and above-ground pools

Performance Curve

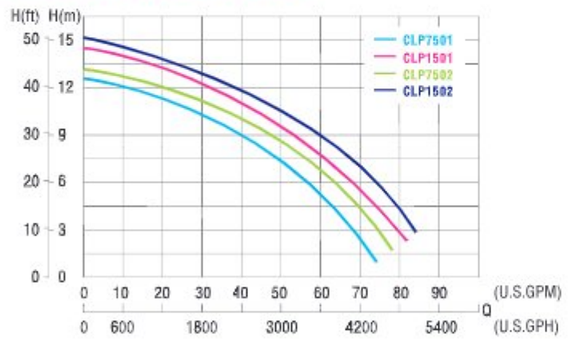

Dimensional Drawing

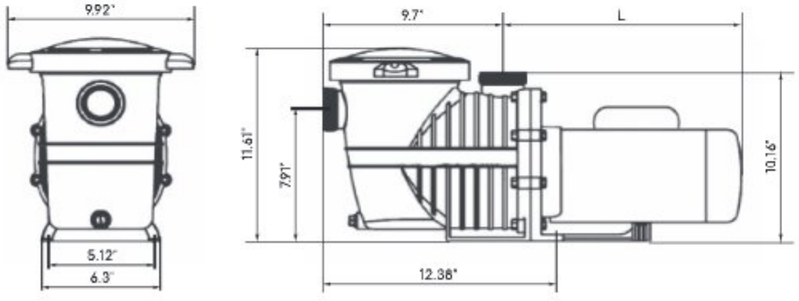

Model	L
CLP7501	13.11"
CLP1501	13.58"
CLP7502	14.65"
CLP1502	15.24"

Performance Data

Model #	Volts/Hz	Description	THP	SF	WEF	Full Load Amps	Max. Flow Rate	Max. Lift	Port Size	Product Weight
CLP7501	115-230V/60Hz	Dual voltage	1.5HP	1.0	4	7.3/3.5A	75GPM	42ft	1.5"x1.5"	33lbs
CLP1501	115-230V/60Hz	Dual voltage	2.0HP	1.0	3.7	8.7/4.4A	82GPM	48ft	1.5"x1.5"	39lbs
CLP7502	230V/60Hz	Dual speed	1.5HP	1.0	5.3	10.1/4.4A	78/36GPM	44ft	1.5"x1.5"	33lbs
CLP1502	230V/60Hz	Dual speed	2.0HP	1.0	4.8	3.6/2.1A	84/39GPM	50ft	1.5"x1.5"	39lbs

Swimming Pool Pump

DOE

Features

- DoE-Compliant design makes it more energy saving."
- A see-thru cover with cam-lock lid for quick inspect and tool-free service
- The strainer basket with internal ribs assure flow when filled with leaves and debris.
- One-piece case without bolts assure minimum vibration and super quiet operation.
- High-efficient motor bring cooler running and longer life.
- Suitable for all types and sizes pool, in-ground spas."
- Dual voltage and dual speed provide with different flow rate demand.
- Every pump is performance tested before leaving factory.
- Water proof level IPX5

Applications

- Residential pools& spas
- Recycling and filtering water for domestic pools
- Suitable for both In-ground and above-ground pools

Performance Curve

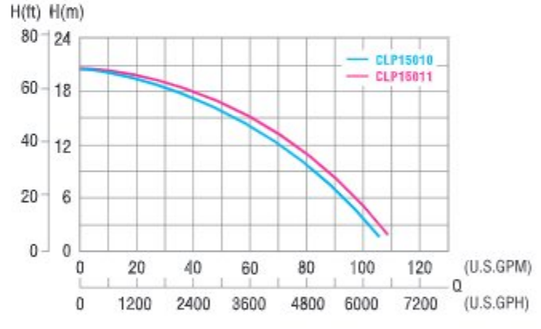

Dimensional Drawing

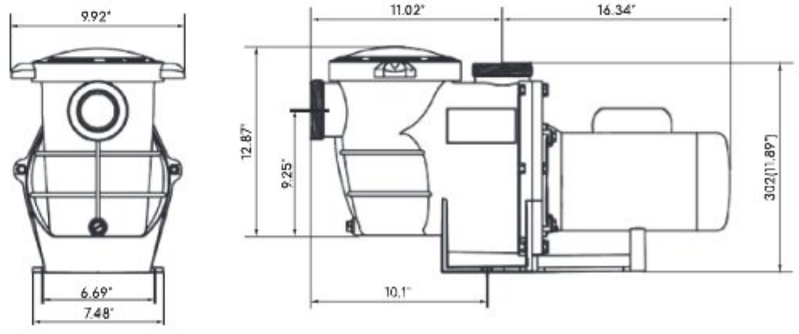

Performance Data

Model #	Volts/Hz	Description	THP	SF	WEF	Full Load Amps	Max. Flow Rate	Max. Lift	Port Size	Product Weight
CLP15010	115-230V/60Hz	Dual voltage	2.0HP	1.0	3.2	11.2/2.7A	107GPM	66ft	2"x2"	43lbs
CLP15011	230V/60Hz	Dual speed	2.0HP	1.0	4.8	12/3.3A	109/51GPM	66ft	2"x2"	43lbs

Cartridge Filter Pump

Cartridge Filter Pump

Features

- Compatible with above ground Pools (for use size 300-6000 gal./h)
- Easy-to-clean, replaceable filter cartridge.
- Easy installation & convenient to keep pool crystal clear and hygienic over the summer months.
- There is no specific maintenance is required: just the occasional cartridge rinse or swap to keep this pump running strong.
- It works perfectly with Type III-A/C filter cartridges.
- Visibly Clean or replace cartridge every couple of weeks.
- Optional energy-saving plug with a timer.
- 2 hose and 1 filter cartridge included

Applications

- Specifically designed for above ground pools.
- Circulate and filter the water to keep everything clean, refreshing, and fun.
- Improved water clarity by circulation and filtration and negative ions at the water surface.

Performance Curve

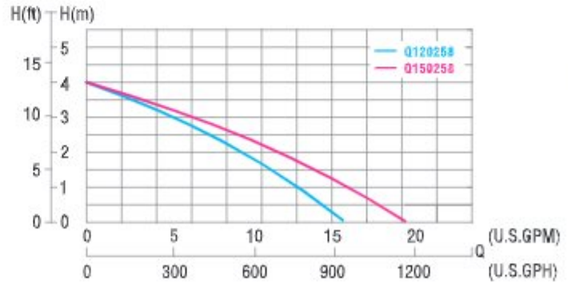

Dimensional Drawing

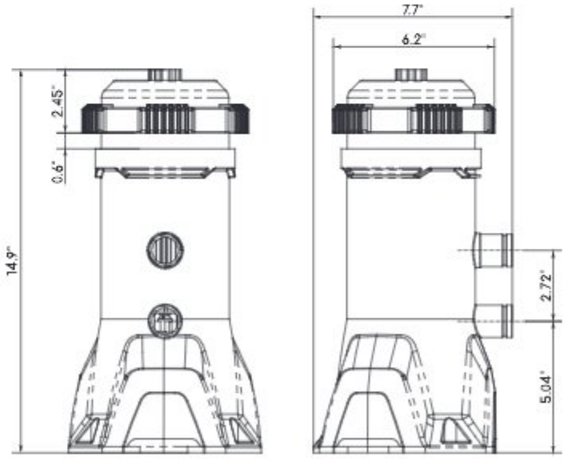

Performance Data

Model #	Volts/Hz	HP	Power	Full Load Amps	Max. Flow Rate	Max. Lift	Port Size	Product Weight
Q120258	115V/60Hz	1/6HP	120W	2.17A	950GPH	13ft	1-1/4"(32mm)	7.05lbs
Q150258	115V/60Hz	1/5HP	150W	3.14A	1180GPH	13ft	1-1/4"(32mm)	9.9lbs

KIMPORT

» Pool Cover Pump

LD-D837

Pool Cover Pump

Features

- Portable and small, easy to use.
- Trouble-free operation.
- Easy to install and no specific maintenance is required.
- To pump water that has collected on the pool cover.
- Dry running protection thanks to an integrated float switch.
- It is small and handy but reliably energy efficient.
- With quick connection port and hose fitting.
- Flexible use - 3 in 1 utility pump.
  (Submersible / pool cover / aquarium)

Applications

- Solve a well-known problem: drain water that has collected in the middle of the pool cover.
- Ideal for draining flooded areas, basements in general.
- Also perfectly suited for flat suction of small pools.

» **Compact**
» **Easy to Use**
» **Plug & Play**

Dimensional Drawing

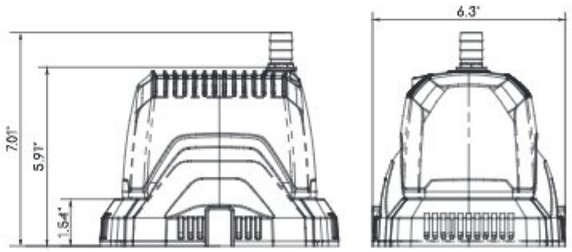

Performance Curve

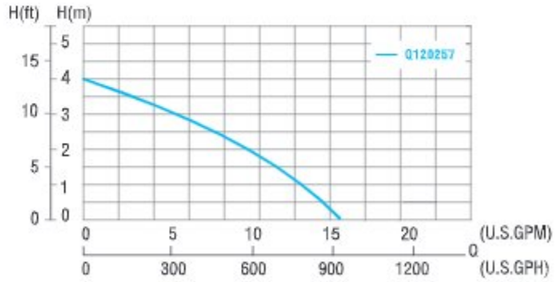

Performance Data

Model #	Volts/Hz	HP	Power	Max. Flow Rate	Max. Lift	Dimension of Particle	Port Size	Product Weight
Q120257	115V/60Hz	1/6HP	120W	950GPH	13ft	1/5inch	1/2"3/4"	6.6lbs

NEW 50%
Performance
Boost Maximum

APPLICATION

Model Comparison

JUNHE MODEL	JGP90062	JGP110062	JGP130062
Rated Power	900W	1100W	1300W
Vol/Fre.	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Max.Flow	6000l/h	6500l/h	7000l/h
Max.Head	44m	48m	53m
Max. Suction Height	8m	8m	8m
Cable specification	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²
Outlet/Inlet	G1"	G1"	G1"
Protection class	IPX4	IPX4	IPX4
Max.liquid temperature	35℃	35℃	35℃
Net weight	8.9kg	9.5kg	10.1kg

NEW 50%
Performance Boost Maximum

APPLICATION

Model Comparison

JUNHE MODEL	JGP90062C	JGP110062C	JGP130062C
Rated Power	900W	1100W	1300W
Vol/Fre.	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Max.Flow	5400l/h	5500l/h	6000l/h
Max.Head	44m	48m	53m
Max. Suction Height	8m	8m	8m
Cable specification	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²
Outlet/Inlet	G1"	G1"	G1"
Protection class	IPX4	IPX4	IPX4
Max.liquid tmperature	35℃	35℃	35℃
Net weight	12.8kg	13.4kg	14kg
Tank volume	24L	24L	24L

NEW 50%
Performance Boost Maximum

APPLICATION

Model Comparison

JUNHE MODEL	JGP90062BN	JGP110062BN	JGP130062BN
Rated Power	900W	1100W	1300W
Vol/Fre.	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Max.Flow	5400l/h	5500l/h	6000l/h
Max.Head	44m	48m	53m
Max. Suction Height	8m	8m	8m
Cable specification	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²
Outlet/Inlet	G1"	G1"	G1"
Protection class	IPX4	IPX4	IPX4
Max.liquid temperature	35℃	35℃	35℃
Net weight	8.9kg	9.5kg	10.1kg

NEW 50%
Performance
Boost Maximum

Ergonomic design of handle

LCD Display
All function under control;
Easy troubleshooting

Pre-filter

High performance,
energy-saving programm

Integrated non
return valve

Innovative & integrated
pump structure

Rubber feet for vibration-free
operation

APPLICATION

Model Comparison

JUNHE MODEL	JGP90062BL	JGP110062BL	JGP130062BL
Rated Power	900W	1100W	1300W
Vol/Fre.	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Max.Flow	5400l/h	5500l/h	6000l/h
Max.Head	44m	48m	53m
Max. Suction Height	8m	8m	8m
Cable specification	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²
Outlet/Inlet	G1"	G1"	G1"
Protection class	IPX4	IPX4	IPX4
Max.liquid tmperature	35℃	35℃	35℃
Net weight	8.9kg	9.5kg	10.1kg

NEW 50%
Performance
Boost Maximum

APPLICATION

Model Comparison

JUNHE MODEL	JGP40063	JGP60063	JGP80063
Rated Power	400W	600W	800W
Vol/Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Flow	3600l/h	4600l/h	5000l/h
Max.Head	30m	36m	43m
Max. Suction Height	8m	8m	8m
Cable specification	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²
Outlet/Inlet	G1"	G1"	G1"
Protection class	IPX4	IPX4	IPX4
Max.liquid temperature	35℃	35℃	35℃
Net weight	5.5kg	5.6kg	6.1kg

NEW 50%
Performance
Boost Maximum

APPLICATION

Model Comparison

JUNHE MODEL	JPG40063C	JPG60063C	JPG80063C
Rated Power	400W	600W	800W
Vol/Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Flow	3600l/h	4600l/h	5000l/h
Max.Head	30m	36m	43m
Max. Suction Height	8m	8m	8m
Cable specification	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²
Outlet/Inlet	G1"	G1"	G1"
Protection class	IPX4	IPX4	IPX4
Max.liquid temperature	35℃	35℃	35℃
Net weight	10kg	10.2kg	10.4kg
Tank volume	19L	19L	19L

NEW 50%
Performance
Boost Maximum

APPLICATION

Model Comparison

JUNHE MODEL	JGP90063 INOX	JGP110063 INOX	JGP130063 INOX
Rated Power	900W	1100W	1300W
Vol/Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Flow	6500l/h	7000l/h	7500l/h
Max.Head	44m	48m	53m
Max. Suction Height	8m	8m	8m
Cable specification	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²	H07RN-F3 G1.0mm²
Outlet/Inlet	G1"	G1"	G1"
Protection class	IPX4	IPX4	IPX4
Max.liquid temperature	35℃	35℃	35℃
Net weight	7.5kg	8.1kg	8.5kg

NEW 50%
Performance
Boost Maximum

APPLICATION

Model Comparison

JUNHE MODEL	JPG90063C INOX	JPG110063C INOX	JPG130063C INOX
Rated Power	900W	1100W	1300W
Vol/Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Flow	6500l/h	7000l/h	7500l/h
Max.Head	44m	48m	53m
Max. Suction Height	8m	8m	8m
Cable specification	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²	H07RN-F3 G1.0mm²
Outlet/Inlet	G1"	G1"	G1"
Protection class	IPX4	IPX4	IPX4
Max.liquid temperature	35℃	35℃	35℃
Net weight	12.1kg	12.5kg	13kg
Tank volume	24L	24L	24L

NEW 50%
Performance
Boost Maximum

APPLICATION

Model Comparison

JUNHE MODEL	JGP40064	JGP60064	JGP80064
Rated Power	400W	600W	800W
Vol/Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Flow	3600l/h	4600l/h	5000l/h
Max.Head	30m	36m	43m
Max. Suction Height	8m	8m	8m
Cable specification	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²
Outlet/Inlet	G1"	G1"	G1"
Protection class	IPX4	IPX4	IPX4
Max.liquid temperature	35℃	35℃	35℃
Net weight	5.5kg	5.6kg	6.1kg

NEW 50%
Performance
Boost Maximum

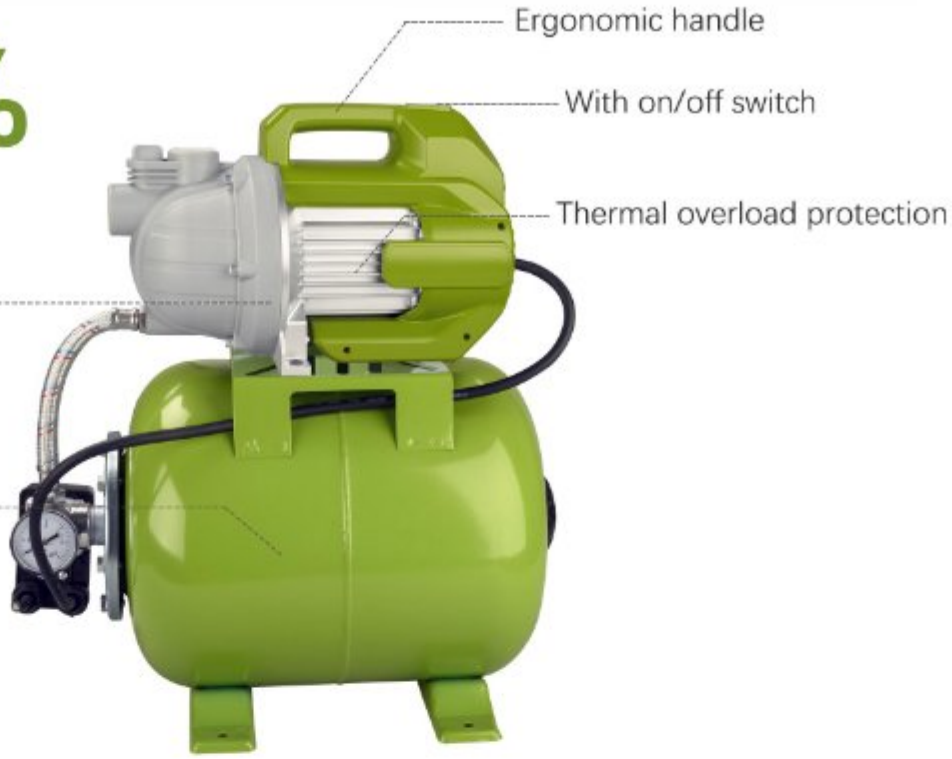

APPLICATION

Model Comparison

JUNHE MODEL	JGP40064C	JGP60064C	JGP80064C
Rated Power	400W	600W	800W
Vol/Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Flow	3600l/h	4600l/h	5000l/h
Max.Head	30m	36m	43m
Max. Suction Height	8m	8m	8m
Cable specification	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²
Outlet/Inlet	G1"	G1"	G1"
Protection class	IPX4	IPX4	IPX4
Max.liquid temperature	35℃	35℃	35℃
Net weight	10kg	10.2kg	10.4kg
Tank volume	19L	19L	19L

NEW 50%
Performance Boost Maximum

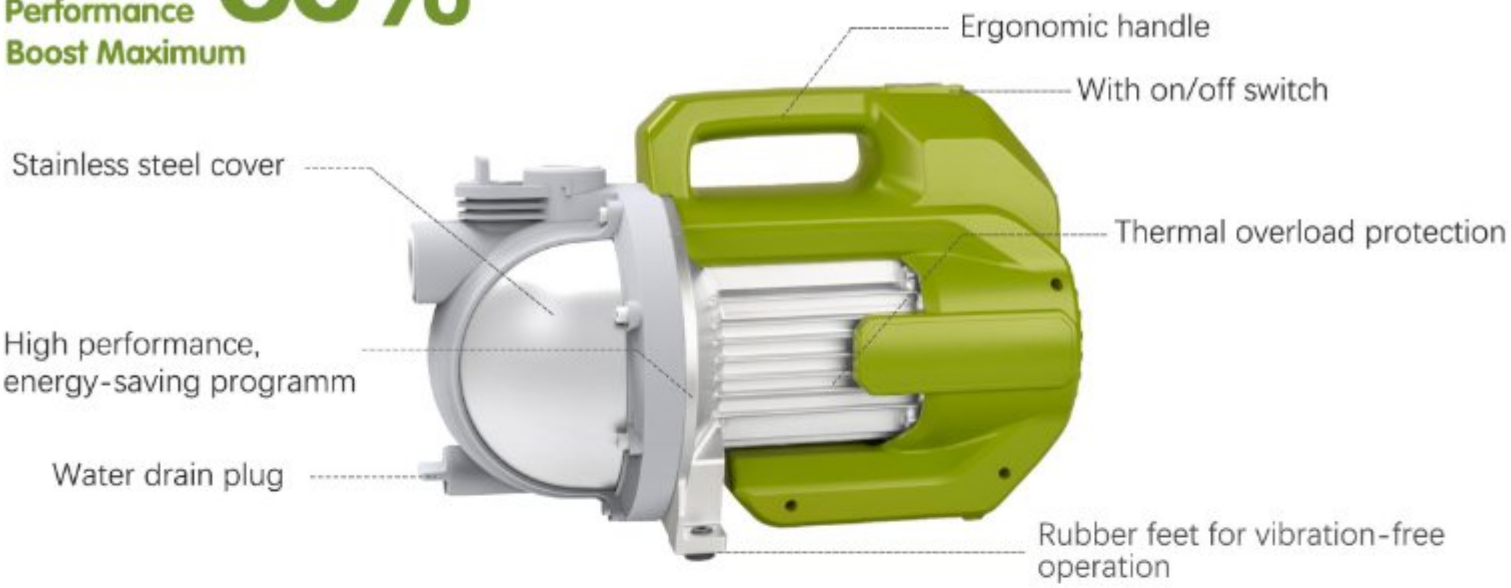

APPLICATION

Model Comparison

JUNHE MODEL	JPG90064 INOX	JPG110064 INOX	JPG130064 INOX
Rated Power	900W	1100W	1300W
Vol/Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Flow	6500l/h	7000l/h	7500l/h
Max.Head	44m	48m	53m
Max. Suction Height	8m	8m	8m
Cable specification	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²
Outlet/Inlet	G1"	G1"	G1"
Protection class	IPX4	IPX4	IPX4
Max.liquid temperature	35℃	35℃	35℃
Net weight	7.5kg	8.1kg	8.5kg

NEW 50%
Performance
Boost Maximum

APPLICATION

Model Comparison

JUNHE MODEL	JPG90064C INOX	JPG110064C INOX	JPG130064C INOX
Rated Power	900W	1100W	1300W
Vol/Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Flow	6500l/h	7000l/h	7500l/h
Max.Head	44m	48m	53m
Max. Suction Height	8m	8m	8m
Cable specification	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²	H07RN-F 3G1.0mm²
Outlet/Inlet	G1"	G1"	G1"
Protection class	IPX4	IPX4	IPX4
Max.liquid temperature	35℃	35℃	35℃
Net weight	12.1kg	12.5kg	13kg
Tank volume	24L	24L	24L

NEW 70%
Performance Boost Maximum

Optimized hydaulic performance

Wipe dry
Pump down to just 1mm water residue

Flow Boost function
The lift up clips can increase the suction area which brings the pump on a higher performance level

Adjustable handle

Compact and novel design

Easy in use

Automatic start from 5 mm water level

APPLICATION

Model Comparison

JUNHE MODEL	Q250237M	Q300237M	Q550237M
Rated Power	250W	300W	550W
Vol/Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Flow	8500l/h	9000l/h	17000l/h
Max.Head	6m	6.5m	9m
Max. grain size	5mm	5mm	5mm
Cable specification	H05RN-F 3G0.75mm²	H05RN-F 3G0.75mm²	H05RN-F 3G0.75mm²
Outlet	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Protection class	IPX8	IPX8	IPX8
Max.liquid temperature	35℃	35℃	35℃
Net weight	3.81kg	3.95kg	4.85kg
Starting water level	5mm	5mm	5mm
Residual water level	1mm	1mm	1mm

NEW 70%
Performance
Boost Maximum

APPLICATION

JUNHE MODEL	Q300B237M	Q550B237M	Q750B237M	Q900B237M
Rated Power	300W	550W	750W	900W
Vol/Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Flow	10000l/h	16000l/h	20000l/h	24000l/h
Max.Head	6m	8m	10m	11m
Max. grain size	30mm	35mm	35mm	38mm
Cable specification	H05RN-F 3G0.75mm²	H05RN-F 3G0.75mm²	H05RN-F 3G0.75mm²	H07RN-F 3G1.0mm²
Outlet	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Protection class	IPX8	IPX8	IPX8	IPX8
Max.liquid temperature	35℃	35℃	35℃	35℃
Net weight	3.97kg	4.72kg	5.36kg	6.65kg
Starting water level	80mm	82mm	82mm	84mm
Residual water level	38.5mm	38.5mm	38.5mm	38.5mm

new

APPLICATION

Model Comparison

JUNHE MODEL	Q750224A
Rated Power	750W
Vol/Fre.	220-240V/50Hz
Max.Flow	13000l/h
Max.Head	8.5m
Max. Submersible Depth	7m
Max. grain size	5mm
Cable specification	H05RN-F3G0.75mm²
Outlet	G1-1/2"
Protection class	IPX8
Max.liquid temperature	35℃
Net weight	4.6kg
Starting water level	50mm
Residual water level	5mm

new

APPLICATION

Model Comparison

JUNHE MODEL	Q750B224A
Rated Power	750W
Vol/Fre.	220-240V/50Hz
Max.Flow	17000l/h
Max.Head	8.5m
Max. Submersible Depth	7m
Max. grain size	35mm
Cable specification	H05RN-F3G0.75mm²
Outlet	G1-1/2"
Protection class	IPX8
Max.liquid temperature	35℃
Net weight	4.8kg
Starting water level	100mm
Residual water level	42mm

new

APPLICATION

Model Comparison

JUNHE MODEL	DCQ9015
Rated Power	90W
Battery capacity	18V/4AH
Max.Flow	5000l/h
Max.Head	8m
Max. submersible depth	1m
Max. grain size	5mm
Continuous working time	40mins (Boost); 60mins (Eco)
Battery charging time	3 hours
Outlet	G1"
Protection class	IPX8
Max.liquid temperature	35℃
Net weight	2.8kg
Starting water level	5mm
Residual water level	1mm

new

- Compact&portable design,easy to carry.
- Patented sealing structure.
- Built-in PCB board, high-low voltage and current protection.

18V battery pack guarantees, long continuous working time.

Aluminum alloy motor shell.

Base can be disassembled quickly, easy to clean the filter screen.

Standard water pipe connector can match a variety of nozzles.

The battery box is designed easy to hang and carry, customized battery platform available.

With its telescopic pipe, the height of pump can be adjusted freely.

APPLICATION

Model Comparison

JUNHE MODEL	DCQ501 I	DCQ806 II	DCQ807 III	DCQ9013	DCQ90B13
Product Image					
Rated Power	50W	80W	80W	90W	90W
Battery Capacity	12V/2AH	18V/4AH	18V/4AH	18V/4AH	18V/4AH
Max.Pump Height	11M	17.5M	17.5M	8M	6M
Max.Pump Rate	1500L/H	1800L/H	1800L/H	4500L/H	3800L/H
Max.Grain Size	0.5mm	0.5mm	0.5mm	5mm	15mm
Max.Pressure	1.1Bar	1.75Bar	1.75Bar	0.8Bar	0.6Bar
Continuous Working Time	30Min	45Min	45Min	40Min	40Min
Lowest Starting Level	22mm	22mm	30mm	5mm	10mm
Lowest Sucking Level	12mm	12mm	20mm	1mm	1mm

new

- Compact&portable design,easy to carry.
- Locked rotor, over-voltage, short circuit and low voltage protection.
- 1.8L filter cavity,can store a lot of garbage at one time
- Low noise

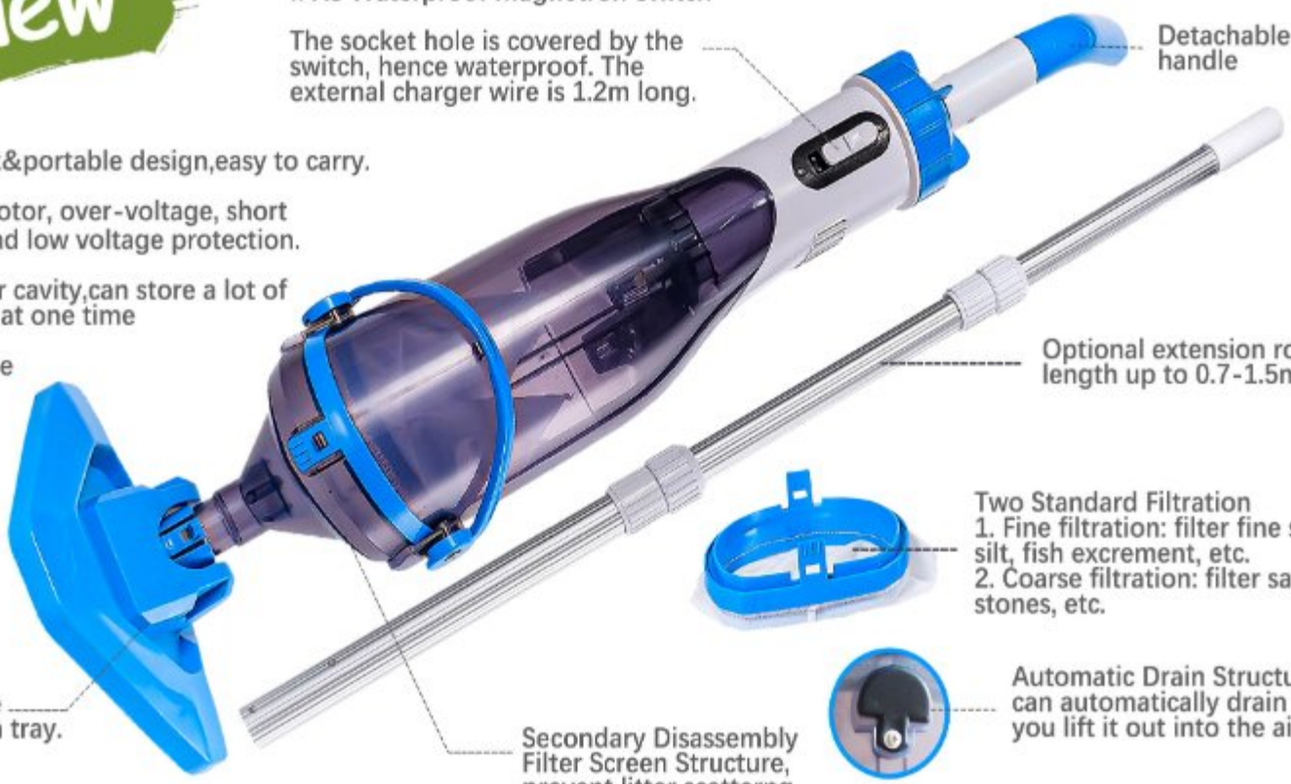

APPLICATION

Small swimming pool

Fish pond

Spa pool

Landscape pool

Model Comparison

JUNHE MODEL	PCT403T	PCT3501T
Product Image		
Rated Power	40W	350W
Vol/Fre.	-	230V/50Hz
Battery Capacity	18V/2000mAH	-
Max.Pump Rate	4200L/H	8000L/H
Max.Grain Size	25mm	32mm
Max.Submersible Depth	3M	5M
Continuous Working Time	60Min	-
Battery Charging Time	90Min	-

LD-0837

new

1、Symmetric channel, stable and reliable pressure-bearing
2、Anti-turbulence design of valve body channel, low loss

Function:Filtration, back-washing, flushing, wastewater, circulation, shutdown, anti-freeze.

- UV resistance.
- Sintered Graphite Mechanical Seal , stable and reliable
- Water-Proof and Insulative Shaft Seal, safe and reliable

Detachable pump base and barrel base.

APPLICATION

Model Comparison

JUNHE MODEL	CLPXXX2		CLPXXX2F	
Product Image				
Junhe Model	CLP2502	CLP4002	CLP2502F	CLP4002F
Rated Power	250W	400W	250W	400W
Vol/Fre.	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Max.Pump Height	7.5M	10M	7.5M	10M
Max.Pump Rate	7900L/H	10000L/H	7900L/H	10000L/H
Max.Grain Size	2.5mm	2.5mm	2.5mm	2.5mm
Sand Tank Size	-	-	12"	12"

new

- UV resistance.
- Sintered Graphite Mechanical Seal , stable and reliable
- Water-Proof and Insulative Shaft Seal, safe and reliable

1、Symmetric channel, stable and reliable pressure-bearing
2、Anti-turbulence design of valve body channel, low loss

Function:Filtration, back-washing, flushing, wastewater, circulation, shutdown, anti-freeze.

Pump head with filter.

Detachable pump base and barrel base.

APPLICATION

Model Comparison

JUNHE MODEL	CLPXXX3			CLPXXX3F		
Product Image						
Junhe Model	CLP2503	CLP4003	CLP5503	CLP2503F	CLP4003F	CLP5503F
Rated Power	250W	400W	550W	250W	400W	550W
Vol/Fre.	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Max.Pump Height	7.5M	10M	12M	7.5M	10M	12M
Max.Pump Rate	7900L/H	10000L/H	13000L/H	7900L/H	10000L/H	13000L/H
Max.Grain Size	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm
Sand Tank Size	-	-	-	12"	12"	13"

new

- CE certified.

Stainless steel sleeve shell.

Efficient cutting blade.

Seal in Low Pressure Area

High Pressure Chamber

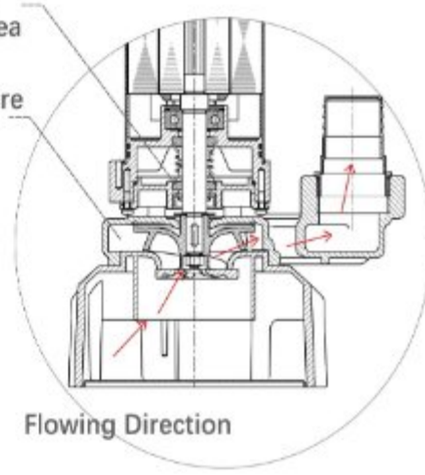

Flowing Direction

equipped with float switch, can start and stop automatically.

1.Separate Pump Chamber and Oil Chamber.

2.The reliability of the shaft seal is unaffected by the dirt in pump chamber.

APPLICATION

Septic Tank

Animal husbandry

Pig Farm

Rural biogas digester

Model Comparison

JUNHE MODEL	Q700B187	Q800B205
Product Image		
Rated Power	700W	800W
Vol/Fre.	220-240V/50HZ	220-240V/50HZ
Max.Pump Height	10M	10M
Max.Pump Rate	16400L/H	16400L/H
Max. Submersible Depth	7M	7M

DC GARDEN PUMP

2022 PRODUCT SHEET

DCJ1502

Characteristic

PORTABLE | WATER PIPE CONNECTOR | EASY CLEAN | BATTERY | INDICATOR LIGHT | SECURITY | PCB BOARD

- Novel appearance,compact&portable design,easy to carry.
- Standard water pipe connector can match a variety of nozzles.
- Built-in-filter, easy clean.
- Customized battery platform available.
- Built-in circuit board, high and low modes can be selected freely.
- The indicator light is distinct to see, which can show the power situation.
- Overload protection.

DCJ1502	Rated Power	180W
	Battery Capacity	18V/4AH
	Max.Pump Height	22M
	Max.Pump Rate	2800L/H
	Max.Pressure	2.2Bar
	Max.Grain Size	0.5mm
	Continuous Working Time	IGear 35Min
		IIGear 25Min

Q1/6HP203

2022 PRODUCT SHEET

UTILITY SUB -MERSIBLE PUMP

Characteristic

STAINLESS STEEL | ALUMINIUM ALLOY | COMPACT STRUCTURE | STRONG STABILITY | LONG LIFE TIME | UL

- Stainless steel handle.
- Aluminum alloy motor shell, plastic-sprayed pump housing, strong corrosion resistance.
- Compact structure,oil-cooled motor, long continuous working time.
- The special materia base for high tensile strength and stability.
- Copper wire motor, UL Listed.

Q1/6HP203	Rated Power	1/6HP
	Vol&Fre.	110-120V/60Hz
	Max.Pump Height	26FT
	Max.Pump Rate	1600GPH
	Max.Grain Size	1/5 INCH
	Lowest Pump Starting Level	1 INCH
	Lowest Pump Sucking Level	1/5 INCH

Q400206A

2022 PRODUCT SHEET

POOL COVER PUMP

Characteristic

CORROSION RESISTANCE | AUTOMATIC | SPECIAL MATERIAL | 3/4 INCH | WIDE APPLICATION RANGE | UL

- Compact&portable design, easy to carry.
- Automatic on/off switch.
- PP glass-fiber handle、flame retardant housing、PP glass-fiber base.
- 3/4" corrosion resistant plastic drain, fits any standard garden hose.
- 1 inch starting water level, 1/2 inch stopping water level, wide application scenarios.
- Copper wire motor, UL Listed.

Junhe Model	Q1/4HP206	Q400206A
Rated Power	1/4HP	400W
Vol&Fre.	110-120V/60Hz	230V/50Hz
Max.Pump Height	25FT	7.6M
Max.Pump Rate	1800GPH	7000L/H
Max.Grain Size	1/5 INCH	5mm
Lowest Pump Starting Level	1 INCH	25.4mm
Lowest Pump Sucking Level	1/2 INCH	12.7mm

Sewage Pump

2022 PRODUCT SHEET

QXXXB217

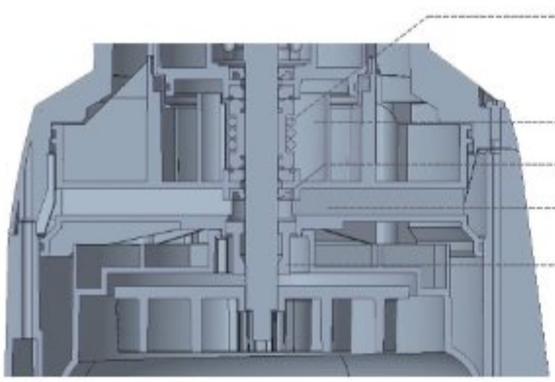

PLASTIC HOUSING

SEALING

ANTI-BLOCKING

LONG LIFE TIME

- Plastic shell has corrosion resistance.
- Separate Pump Chamber and Oil Chamber, Separate Sand Prevention Seal.
- Large distance between the impeller and the base, good sewage discharge , anti-blocking.

Junhe Model	Q1600B217M	Q2000B217M
Rated Power	1600W	2000W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.Pump Height	13M	15M
Max.Pump Rate	23000L/H	28000L/H
Max.Grain Size	40mm	40mm

SUBMERSIBLE WATER PUMP

2022 PRODUCT SHEET

QXXX210

EASY CLEAN

STAINLESS STEEL

PA IMPELLER

MOVEABLE

- Compact&portable design, easy to clean.
- Stainless steel about exposed screws.
- PA impeller.
- Moveable handle, save storage space.

Junhe Model	Q400210	Q400B210
Rated Power	400W	400W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.Pump Height	8M	5M
Max.Pump Rate	8000L/H	9500L/H
Max.Grain Size	3mm	15mm

DCQ802

2022 PRODUCT SHEET

DC BILGE PUMP

Characteristic

PORTABLE

EASY CLEAN

POWER SAVING

LONG CONTINUOUS WORKING TIME

- Compact&portable design,easy to carry.
- Base can be detachable and cleaned easily.
- Long continuous working time.
- ABS shell, stainless steel motor shaft.
- Suitable for 12V、24V power supply.
- Overload protection.

DCQ802	Rated Power	80W
	Max.Pump Height	5M
	Max.Pump Rate	4000L/H
	Max.Pressure	0.5Bar
	Max.Grain Size	3.5mm

Submersible Rain Water Pump

Plastic submersible rain water pump with flexible tube and floater switch for clean water. This pump could be used for rain water application, in which you could put this pump into the wooden barrel or plastic water tank for water transferring or garden irrigation.

Junhe Model	Q250118	Q400118
Rated Power	250W	400W
Max.pump height	9m	11m
Max.pump rate	2500l/h	4000l/h
Max.pressure	0.9bar	1.1bar
Dia of connecting pipe	G3/4"	G3/4"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²
Lowest pump starting level	85mm	85mm
Lowest pump sucking level	28mm	28mm
Qty in carton box	4pcs	4pcs
Master carton box size	46×38x40cm	46×38x40cm
Master carton box gross weight	20.1kg	21.1kg
Qty/20'GP	1600pcs	1600pcs

Q□□□118

New

Q550118A-2P

Q550118-2P

Plastic submersible rain water pump with flexible tube and floater switch for clean water. This pump has 2 stage plastic impellers for which could reach max delivery height 20m.

Junhe Model	Q550118-2P
Rated Power	550W
Max.pump height	20m
Max.pump rate	5000l/h
Max.pressure	2.0bar
Dia of connecting pipe	G3/4"
Cable specification	HO5RN-F3G0.75mm²
Lowest pump starting level	85mm
Lowest pump sucking level	28mm
Qty in carton box	4pcs
Master carton box size	46×38×40cm
Master carton box gross weight	26.5kg
Qty/20'GP	1600pcs

Submersible Rain Water Pump

Junhe Model	Q550118A-2P
Rated Power	550W
Max.pump height	20m
Max.pump rate	5000l/h
Max.pressure	2.0bar
Dia of connecting pipe	G3/4"
Cable specification	H05RN-F 0.75mm²
Lowest pump starting level	46mm
Lowest pump sucking level	29mm
Qty in carton box	4pcs
Master carton box size	46×38×39.5cm
Master carton box gross weight	25.36kg
Qty/20'GP	1480pcs

Plastic submersible rain water pump with flexible tube for clean water application. This pump has 2 stage plastic impellers for which could reach max delivery height 20m. This pump is equipped with built-in electrical control switch, which is of the function for no water shut down, pressure maintaining / restarting and leakage shut down.

Submersible Pump

Submersible pump with plastic pump housing and floater switch for clean water application. On this model of pump, the shape of the base and the height of the main pump have been changed based on the original model so that a more compact structure and boundary dimension are achieved. This pump is equipped with a round floater switch which is more economical.

Q40027S-4

New

New

Submersible Pump

Submersible pump with plastic pump housing and floater switch for dirty water application.On this model of pump, the shape of the base and the height of the main pump have been changed based on the original model so that a more compact structure and boundary dimension are achieved. This pump is equipped with a round float switch which is more economical.

Q400B27S-4

Junhe Mode	Q40027S-4
Rated Power	400W
Vol&Fre	230V/50Hz
Max.pump height	8.0m
Max.pump rate	8000l/h
Max.submersible depth	7m
Max.grain size	5mm
Max.pressure	0.8bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"
Cable specification	HO5RN-F3G0.75mm2
Length of cable	10m
Lowest pump starting level	100mm
Lowest pump sucking level	5mm
Max.medium temperature	35℃
Qty in carton box	4pcs
Master carton box size	42×36×27cm
Master carton box gross weight	13.2kg
Qty/20'GP	2752pcs

Junhe Mode	Q400B27S-4
Rated Power	400W
Vol&Fre	230V/50Hz
Max.pump height	5.0m
Max.pump rate	8000l/h
Max.submersible depth	7m
Max.grain size	15mm
Max.pressure	0.5bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"
Cable specification	HO5RN-F3G0.75mm2
Length of cable	10m
Lowest pump starting level	100mm
Lowest pump sucking level	16mm
Max.medium temperature	35℃
Qty in carton box	4pcs
Master carton box size	42×36×28.5cm
Master carton box gross weight	14.52kg
Qty/20'GP	2752pcs

Submersible Pump

Stainless steel submersible pump with adjustable pump handle and floater switch for clean water applicatio. Simple design, stable performance and high quality which makes this pump become the best selling second generation pump range in Junhe.

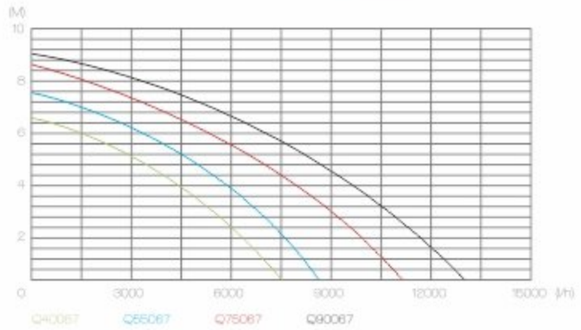

Q□□□67

Junhe Model	Q40067	Q55067	Q75067	Q90067
Rated Power	400W	550W	750W	900W
Max.pump height	6.5m	7.5m	8.5m	9m
Max.pump rate	7500l/h	8500l/h	11000l/h	13000l/h
Max.pressure	0.65bar	0.75bar	0.85bar	0.9bar
Dia of connecting pipe	1"G1-1/4"G1-1/4"	1"G1-1/4"G1-1/4"	1"G1-1/4"G1-1/4"	1"G1-1/4"G1-1/4"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G1.0mm²	HO5RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	100mm	100mm	100mm	100mm
Lowest pump sucking level	23mm	23mm	23mm	23mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46×34×32cm	46×34×35cm	46×34×38cm	46×34×38cm
Master carton box gross weight	19.5kg	23.2kg	23.5kg	24kg
Qty/20'GP	2240pcs	2048pcs	1888pcs	1888pcs

Submersible Pump

Stainless steel submersible pump with adjustable pump handle and floater switch for dirty water application. Simple design, stable performance and high quality which makes this pump become the best selling second generation pump range in Junhe.

Q□□□B67

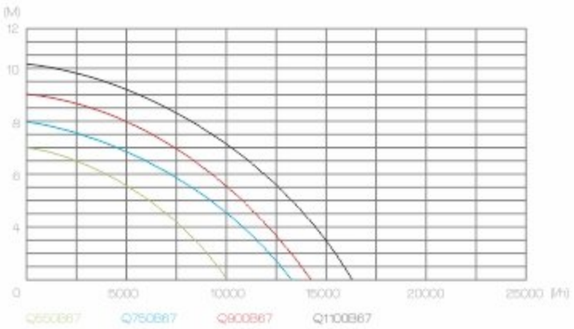

Junhe Model	Q550B67	Q750B67	Q900B67	Q1100B67
Rated Power	550W	750W	900W	1100W
Max.pump height	7m	8m	9m	10.5m
Max.pump rate	10000l/h	13000l/h	14000l/h	16500l/h
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0.7bar	0.8bar	0.9bar	1.05bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	HO5RN-F3G1.0mm²	HO5RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	135mm	135mm	135mm	135mm
Lowest pump sucking level	45mm	45mm	45mm	45mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46×38×43cm	46×38×43cm	46×38×45cm	46×38×45cm
Master carton box gross weight	24.4kg	26.5kg	28.3kg	30.8kg
Qty/20'GP	1500pcs	1500pcs	1420pcs	1420pcs

Submersible Pump

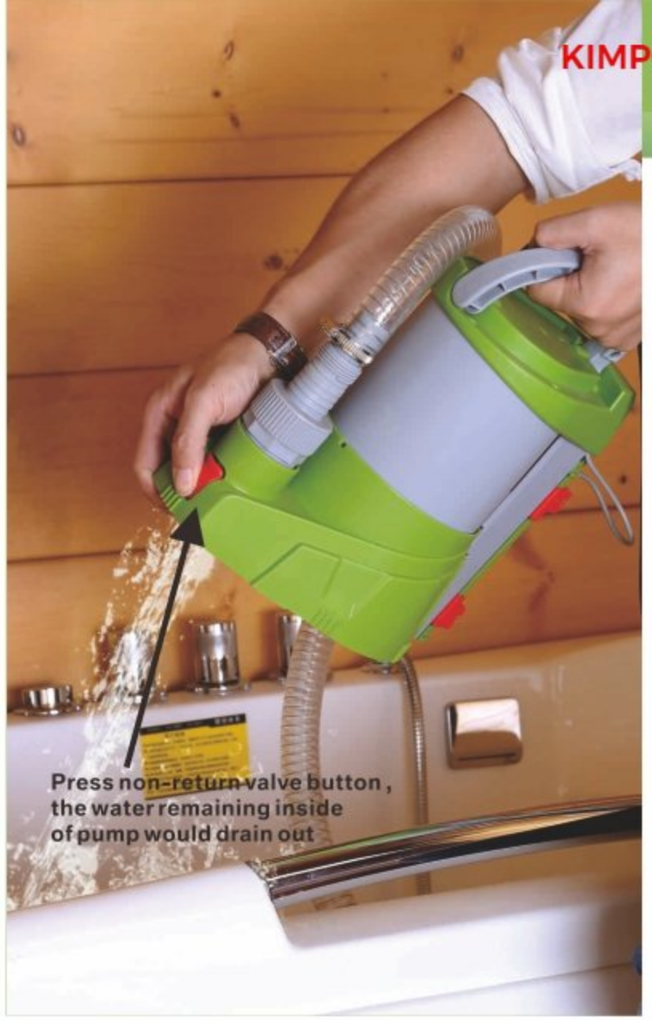

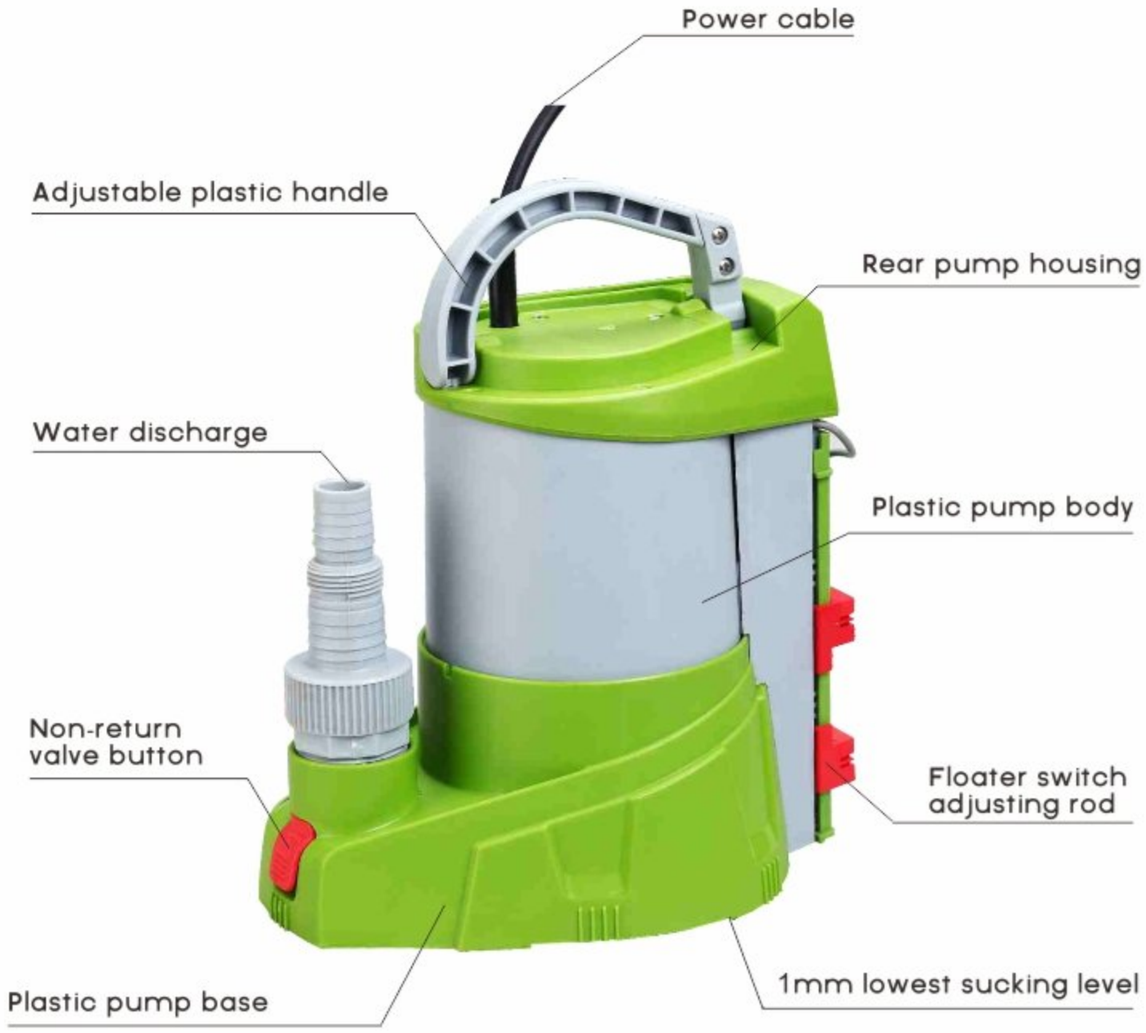

Submersible Pump

Plastic submersible pump with electronic aqua sensor for clean water. Water starting level could be adjustable; you could change to either manual control mode or automatic control mode when using the pump. This pump has the foldable pump handle, when stand up the pump handle, there will be a small step existing in the pump base area, which is perfect design for sucking the water in a very low level. This pump could start working even when water level is only 5mm, this pump also has the non-return valve which avoid water back flow.

Q□□□115

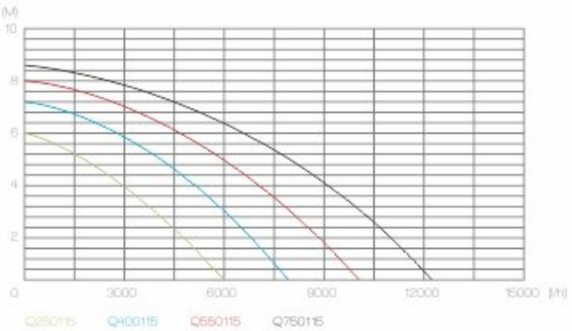

Junhe Model	Q250115	Q400115	Q550115	Q750115
Rated Power	250W	400W	550W	750W
Max.pump height	6m	7m	8m	8.5m
Max.pump rate	6000l/h	8000l/h	10000l/h	12500l/h
Max.pressure	0.6bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²
Manua control lowest pump starting level	5mm	5mm	5mm	5mm
Manua control lowest pump sucking level	1mm	1mm	1mm	1mm
Automatic control start water level	50-140mm	50-140mm	50-140mm	50-140mm
Automatic control close water level	40-130mm	40-130mm	40-130mm	40-130mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	54×42×33cm	54×42×33cm	54×42×33cm	54×42×33cm
Master carton box gross weight	20kg	21kg	23kg	24kg
Qty/20'GP	1500pcs	1500pcs	1500pcs	1500pcs

Submersible Pump

Plastic submersible pump with stainless main pump body and electronic aqua sensor for clean water. Water starting level could be adjustable; you could change to either manual control mode or automatic control mode when using the pump. This pump has the foldable pump handle, when stand up the pump handle, there will be a small step existing in the pump base area, which is perfect design for sucking the water in a very low level. This pump could start working even when water level is only 5mm, this pump also has the non-return valve which avoid water back flow.

Q□□□115 INOX

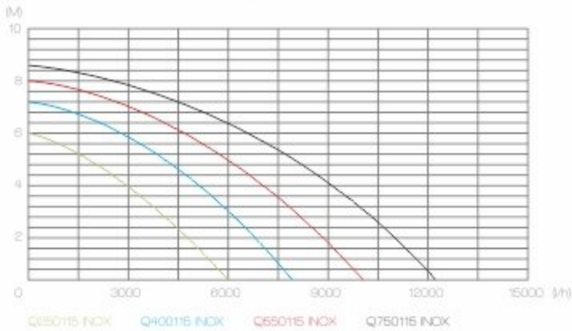

Junhe Model	Q250115 INOX	Q400115 INOX	Q550115 INOX	Q750115 INOX
Rated Power	250W	400W	550W	750W
Max.pump height	6m	7m	8m	8.5m
Max.pump rate	6000l/h	8000l/h	10000l/h	12500l/h
Max.pressure	0.6bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²
Manua control lowest pump starting level	5mm	5mm	5mm	5mm
Manua control lowest pump sucking level	1mm	1mm	1mm	1mm
Automatic control start water level	50-140mm	50-140mm	50-140mm	50-140mm
Automatic control close water level	40-130mm	40-130mm	40-130mm	40-130mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	54×42×33cm	54×42×33cm	54×42×33cm	54×42×33cm
Master carton box gross weight	20kg	21kg	23kg	24kg
Qty/20'GP	1500pcs	1500pcs	1500pcs	1500pcs

KIMPORT

Submersible Pump

Plastic submersible pump with floater switch and top water discharge for clean water application. The floater switch is adjustable, it could fixed to any step of pump body, but please be attention that the floater switch should be upward when put this pump into the water, otherwise the pump couldn't work.

Q□□□121

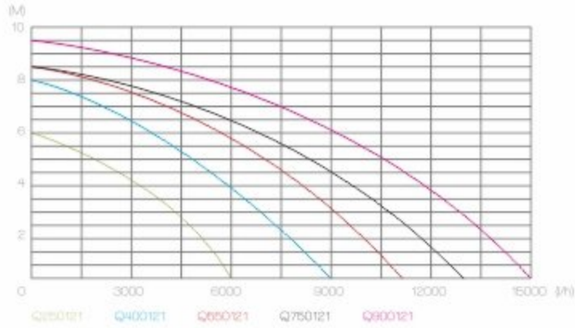

Junhe Model	Q250121	Q400121	Q550121	Q750121	Q900121
Rated Power	250W	400W	550W	750W	900W
Max.pump height	6m	8m	8.5m	8.5m	9.5m
Max.pump rate	6000l/h	9000l/h	11000l/h	13000l/h	15000l/h
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	100mm	100mm	100mm	100mm	100mm
Lowest pump sucking level	5mm	5mm	5mm	5mm	5mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	48×38×36cm	48×38×36cm	48×38×36cm	48×38×36cm	48×38×36cm
Master carton box gross weight	18.3kg	18.9kg	20.5kg	21.5kg	25.5kg
Qty/20'GP	1708pcs	1708pcs	1708pcs	1708pcs	1708pcs

Submersible Pump

Plastic submersible pump with floater switch and top water discharge for dirty water application. The floater switch is adjustable, it could fixed to any step of pump body, but please be attention that the floater switch should be upward when put this pump into the water, otherwise the pump couldn't work.

Q□□□B121

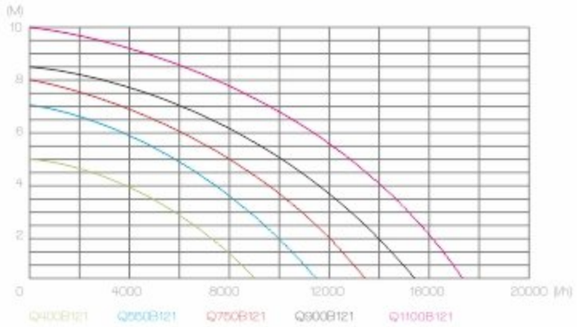

Junhe Model	Q400B121	Q550B121	Q750B121	Q900B121	Q1100B121
Rated Power	400W	550W	750W	900W	1100W
Max.pump height	5m	7m	8m	8.5m	10m
Max.pump rate	9000l/h	11500l/h	13500l/h	15500l/h	17500l/h
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar	1.0bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	120mm	120mm	120mm	120mm	120mm
Lowest pump sucking level	45mm	45mm	45mm	45mm	45mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	48×38×41cm	48×38×41cm	48×38×41cm	48×38×41cm	48×38×41cm
Master carton box gross weight	20.2kg	22.2kg	23.1kg	26kg	27kg
Qty/20'GP	1500pcs	1500pcs	1500pcs	1500pcs	1500pcs

KIMPORT

Submersible Pump

Plastic submersible pump with built-in float switch for clean water application.This pump is equipped with both automatic control mode and manual control mode, you may adjust the switch in which mode that you want before using this pump.

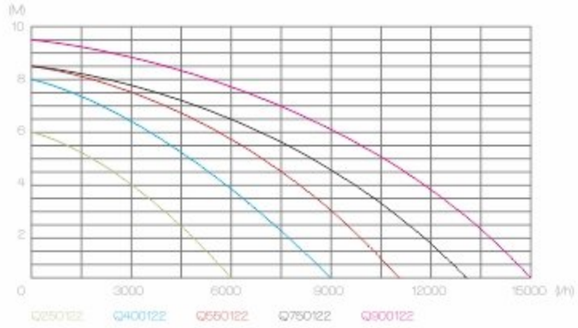

Q□□□122

Junhe Model	Q250122	Q400122	Q550122	Q750122	Q900122
Rated Power	250W	400W	550W	750W	900W
Max.pump height	6m	8m	8.5m	8.5m	9.5m
Max.pump rate	6000l/h	9000l/h	11000l/h	13000l/h	15000l/h
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO7RN-F3G1.0mm²
Manua control lowest pump starting level	60mm	60mm	60mm	60mm	60mm
Manua control lowest pump sucking level	5mm	5mm	5mm	5mm	5mm
Automatic control start water level	100-180mm	100-180mm	100-180mm	100-180mm	100-180mm
Automatic control close water level	60mm	60mm	60mm	60mm	60mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	50×38×33cm	50×38×33cm	50×38×33cm	50×38×33cm	50×38×33cm
Master carton box gross weight	18.7kg	19.2kg	22kg	22.2kg	26kg
Qty/20'GP	1788pcs	1788pcs	1788pcs	1788pcs	1788pcs

KIMPORT

Submersible Pump

Plastic submersible pump with built-in float switch for dirty water application. This pump is equipped with both automatic control mode and manual control mode, you may adjust the switch in which mode that you want before using this pump.

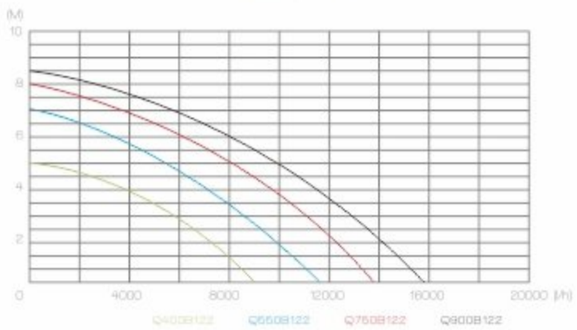

Q□□□B122

Junhe Model	Q400B122	Q550B122	Q750B122	Q900B122
Rated Power	400W	550W	750W	900W
Max.pump height	5m	7m	8m	8.5m
Max.pump rate	9000l/h	11500l/h	13500l/h	15500l/h
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	120mm	120mm	120mm	120mm
Lowest pump sucking level	45mm	45mm	45mm	45mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	50x38x38.5cm	50x38x38.5cm	50x38x38.5cm	50x38x38.5cm
Master carton box gross weight	20.8kg	22.1kg	24.4kg	26.2kg
Qty/20'GP	1532pcs	1532pcs	1532pcs	1532pcs

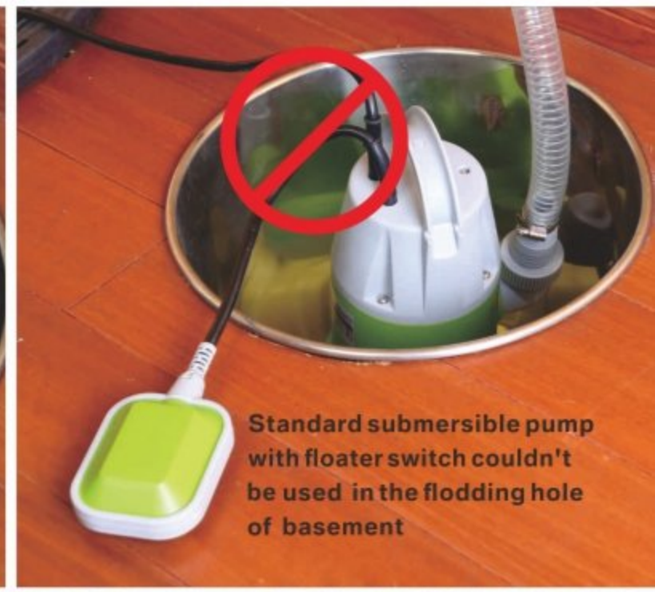

LD-0837

Submersible Pump

Plastic submersible pump with stainless steel casing for the pump body and adjustable floater switch for clean water application.The stainless steel casing has many circles with purpose to present a dramatic design to our customers.

Q□□□123 INOX

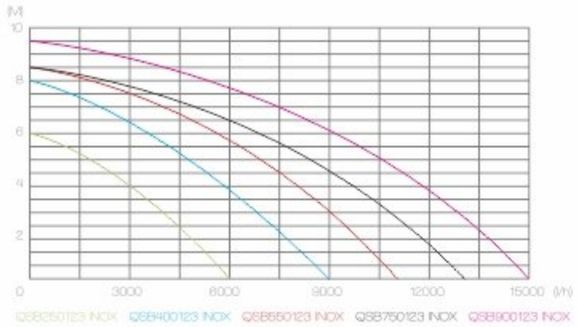

Junhe Model	Q250123 INOX	Q400123 INOX	Q550123 INOX	Q750123 INOX	Q900123 INOX
Rated Power	250W	400W	550W	750W	900W
Max.pump height	6m	8m	8.5m	8.5m	9.5m
Max.pump rate	6000l/h	9000l/h	11000l/h	13000l/h	15000l/h
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	100mm	100mm	100mm	100mm	100mm
Lowest pump sucking level	5mm	5mm	5mm	5mm	5mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	50×38×31cm	50×38×31cm	50×38×33cm	50×38×33cm	50×38×35cm
Master carton box gross weight	19.5kg	20kg	22.5kg	23.5kg	26.8kg
Qty/20'GP	1900pcs	1900pcs	1780pcs	1780pcs	1680pcs

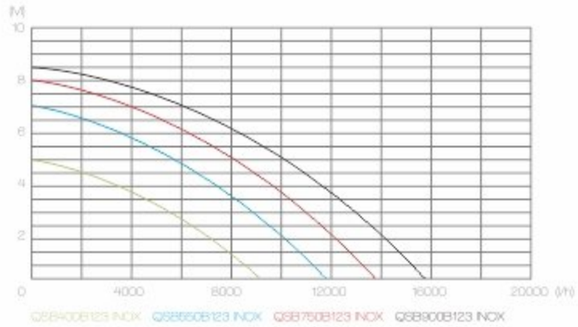

Submersible Pump

Plastic submersible pump with stainless steel casing for the pump body and adjustable floater switch for clean water application.The stainless steel casing has many circles with purpose to present a dramatic design to our customers.

Q□□□B123 INOX

Junhe Model	Q400B123 INOX	Q550B123 INOX	Q750B123 INOX	Q900B123 INOX
Rated Power	400W	550W	750W	900W
Max.pump height	5m	7m	8m	8.5m
Max.pump rate	9000l/h	11500l/h	13500l/h	15500l/h
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	120mm	120mm	120mm	120mm
Lowest pump sucking level	45mm	45mm	45mm	45mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	50×38x36cm	50×38×38.5cm	50×38×38.5cm	50×38×38.5cm
Master carton box gross weight	20.8kg	23.6kg	23.7kg	27.4kg
Qty/20'GP	1640pcs	1532pcs	1532pcs	1532pcs

Submersible Pump

Plastic submersible pump with adjustable pump handle and floater switch for clean water application. Simple design, stable performance and high quality which makes this pump become the best selling second generation pump range in Junhe.

Q□□□124

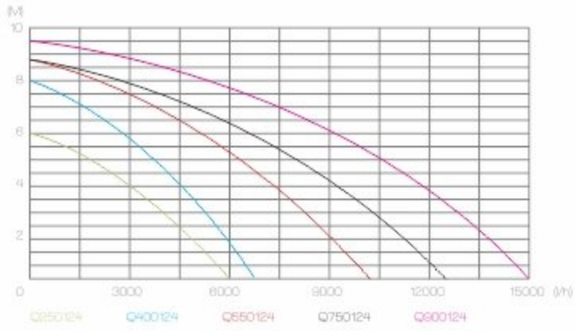

Junhe Model	Q250124	Q400124	Q550124	Q750124	Q900124
Rated Power	250W	400W	550W	750W	900W
Max.pump height	6m	8m	8.5m	8.5m	9.5m
Max.pump rate	6000l/h	7000l/h	11000l/h	12500l/h	15000l/h
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1*1-1/4"G1-1/2"	1"G1*1-1/4"G1-1/2"	1"G1*1-1/4"G1-1/2"	1"G1*1-1/4"G1-1/2"	1"G1*1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G1.0mm²	HO5RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	100mm	100mm	100mm	100mm	100mm
Lowest pump sucking level	5mm	5mm	5mm	5mm	5mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46×38×35cm	46×38×35cm	46×38×35cm	46×38×37cm	46×38×37cm
Master carton box gross weight	17.5kg	18.5kg	22.5kg	23.5kg	25.5kg
Qty/20'GP	1832pcs	1832pcs	1832pcs	1732pcs	1732pcs

Submersible Pump

Plastic submersible pump with adjustable pump handle and floater switch for dirty water application. Simple design, stable performance and high quality which makes this pump become the best selling second generation pump range in Junhe.

Q□□□B124

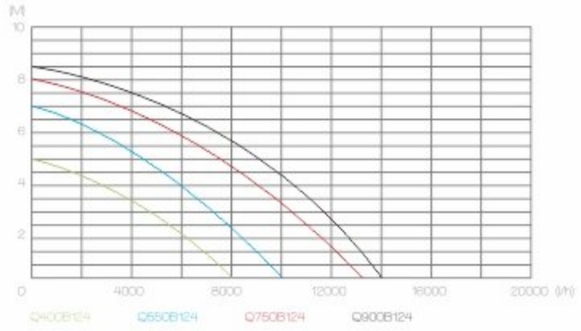

Junhe Model	Q400B124	Q550B124	Q750B124	Q900B124
Rated Power	400W	550W	750W	900W
Max.pump height	5m	7m	8m	8.5m
Max.pump rate	8000l/h	10000l/h	13000l/h	14000l/h
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1*1-1/4"G1-1/2"	1"G1*1-1/4"G1-1/2"	1"G1*1-1/4"G1-1/2"	1"G1*1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G1.0mm²	HO5RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	135mm	135mm	135mm	135mm
Lowest pump sucking level	40mm	40mm	40mm	40mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46×38×39cm	46×38×39cm	46×38×41cm	46×38×43cm
Master carton box gross weight	18.5kg	21.5kg	23.5kg	26.5kg
Qty/20'GP	1640pcs	1640pcs	1560pcs	1490pcs

Submersible Pump

Plastic submersible pump with water level aqua sensor for clean water application.This pump is equipped with both automatic control mode and manual control mode, you may adjust the switch in which mode that you want before using this pump.

Junhe Model	Q250122A	Q400122A	Q550122A	Q750122A	Q900122A
Rated Power	250W	400W	550W	750W	900W
Max.pump height	6m	8m	8.5m	8.5m	9.5m
Max.pump rate	6000l/h	9000l/h	11000l/h	13000l/h	15000l/h
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	100mm	100mm	100mm	100mm	100mm
Lowest pump sucking level	5mm	5mm	5mm	5mm	5mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	50×38×33cm	50×38×33cm	50×38×33cm	50×38×33cm	50×38×33cm
Master carton box gross weight	18.7kg	19.2kg	22kg	22.2kg	26kg
Qty/20'GP	1788pcs	1788pcs	1788pcs	1788pcs	1788pcs

Q□□□122A

Plastic submersible pump with water level aqua sensor for dirty water application. This pump is equipped with both automatic control mode and manual control mode, you may adjust the switch in which mode that you want before using this pump.

Junhel Model	Q400B122A	Q550B122A	Q750B122A	Q900B122A
Rated Power	400W	550W	750W	900W
Max.pump height	5m	7m	8m	8.5m
Max.pump rate	9000l/h	11500l/h	13500l/h	15500l/h
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	120mm	120mm	120mm	120mm
Lowest pump sucking level	45mm	45mm	45mm	45mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	50×38×30.5cm	50×38×30.5cm	50×38×33cm	50×38×33cm
Master carton box gross weight	19.5kg	20kg	22.5kg	23.5kg
Qty/20'GP	1930pcs	1930pcs	1780pcs	1780pcs

Q□□□B122A

Submersible Pump

Plastic submersible pump with adjustable pump handle and water level sensor switch for clean water application. The new design and innovative function would surely complete the submersible pump family in Junhe.

Junhe Model	Q250124A	Q400124A	Q550124A	Q750124A	Q900124A
Rated Power	250W	400W	550W	750W	900W
Max.pump height	6m	8m	8.5m	8.5m	9.5m
Max.pump rate	6000l/h	7000l/h	11000l/h	12500l/h	15000l/h
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G1.0mm²	HO5RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	100mm	100mm	100mm	100mm	100mm
Lowest pump sucking level	5mm	5mm	5mm	5mm	5mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46×38×35cm	46×38×35cm	46×38×35cm	46×38×37cm	46×38×37cm
Master carton box gross weight	17.5kg	18.5kg	22.5kg	23.5kg	25.5kg
Qty/20'GP	1832pcs	1832pcs	1832pcs	1732pcs	1732pcs

Q□□□124A

Plastic submersible pump with adjustable pump handle and water level sensor switch for dirty water application. The new design and innovative function wouldsurely complete the submersible pump family in Junhe.

Junhe Model	Q400B124A	Q550B124A	Q750B124A	Q900B124A
Rated Power	400W	550W	750W	900W
Max.pump height	5m	7m	8m	8.5m
Max.pump rate	8000l/h	10000l/h	13000l/h	14000l/h
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G1.0mm²	HO5RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	135mm	135mm	135mm	135mm
Lowest pump sucking level	40mm	40mm	40mm	40mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46×38×39cm	46×38×39cm	46×38×41cm	46×38×43cm
Master carton box gross weight	18.5kg	21.5kg	23.5kg	26.5kg
Qty/20'GP	1640pcs	1640pcs	1560pcs	1490pcs

Q□□□B124A

Submersible Pump

Plastic submersible pump with floater switch and top water discharge for clean water or dirty water application. The floater switch could be adjusted up and down when under operation. The pump base has a position ring which shows 1mm to 23mm, the pump would be under clean water application mode when you take this pump out from the gift box. When you want to use this pump for dirty water application, you may pull the pump up and then rotate the position ring to 23mm.

Q□□□B142

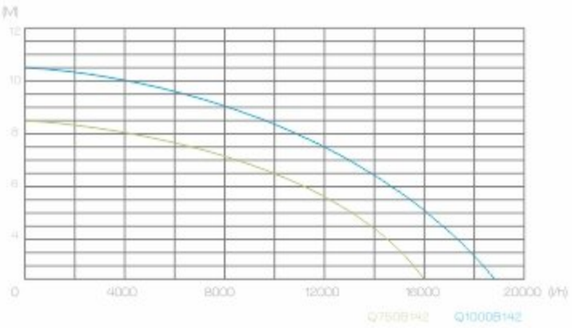

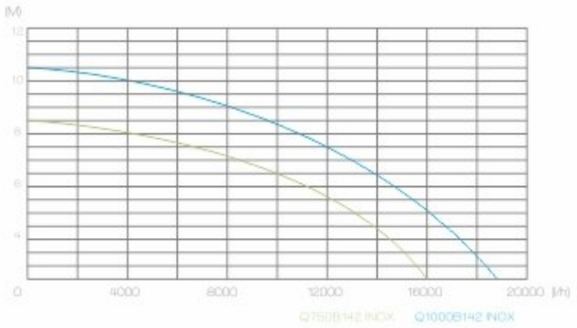

Junhe Model	Q750B142	Q1000B142
Rated Power	750W	1000W
Max.pump height	8.5m	10.5m
Max.pump rate	16000l/h	18500l/h
Max.pressure	0.85bar	1.05bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	25mm	25mm
Lowest pump sucking level	1mm	1mm
Qty in carton box	2pcs	2pcs
Master carton box size	46x28x38cm	46x28x38cm
Master carton box gross weight	14.3kg	16kg
Qty/20'GP	1144pcs	1144pcs

Submersible Pump

Plastic submersible pump with stainless steel casing and floater switch and top water discharge for clean water or dirty water application. The floater switch could be adjusted up and down when under operation. The pump base has a position ring which shows 1mm to 23mm, the pump would be under clean water application mode when you take this pump out from the gift box. When you want to use this pump for dirty water application, you may pull the pump up and then rotate the position ring to 23mm.

Q□□□B142 INOX

Junhe Model	Q750B142 INOX	Q1000B142 INOX
Rated Power	750W	1000W
Max.pump height	8.5m	10.5m
Max.pump rate	16000l/h	18500l/h
Max.pressure	0.85bar	1.05bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	25mm	25mm
Lowest pump sucking level	1mm	1mm
Qty in carton box	2pcs	2pcs
Master carton box size	46x28x38cm	46x28x38cm
Master carton box gross weight	14.8kg	16.5kg
Qty/20'GP	1144pcs	1144pcs

Submersible Pump

Plastic multi-stage submersible pump with stainlesssteel casing and floater switch for clean water application. This pump has 3 or 4 stage plastic impellers for which could reach max delivery height to 30 or 40m.

Q□□□103-XP

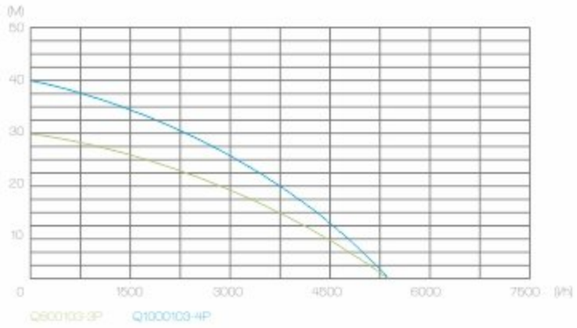

Junhe Model	Q800103-3P	Q1000103-4P
Rated Power	800W	1000W
Max.pump height	30m	40m
Max.pump rate	5500l/h	5500l/h
Max.pressure	3.0bar	4.0bar
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	40mm	40mm
Lowest pump sucking level	25mm	25mm
Qty in carton box	4pcs	4pcs
Master carton box size	50×38×40cm	50×38×42cm
Master carton box gross weight	35.1kg	37.4kg
Qty/20'GP	1474pcs	1400pcs

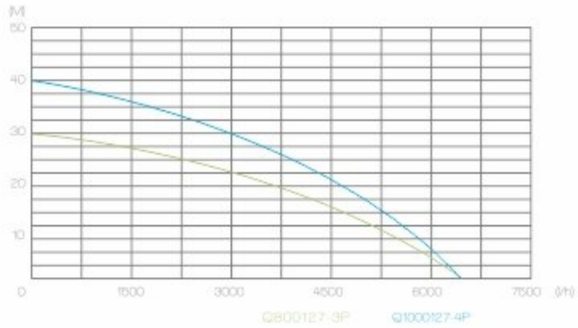

Junhe Model	Q800127-3P	Q1000127-4P
Rated Power	800W	1000W
Max.pump height	30m	40m
Max.pump rate	6500l/h	6500l/h
Max.pressure	3bar	4bar
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	60mm	60mm
Lowest pump sucking level	50mm	50mm
Qty in carton box	2pcs	2pcs
Master carton box size	42x24x52cm	42x24x52cm
Master carton box gross weight	19.3kg	20.5kg
Qty/20'GP	1068pcs	1068pcs

Submersible Pump

Plastic multi-stage submersible pump with stainlesssteel casing and floater switch for clean water application. This pump has 3 or 4 stage plastic impellers for which could reach max delivery height to 30 or 40m.

Q□□□127-XP

KIMPORT

Submersible Pump

Plastic multi-stage submersible pump with stainlesssteel casing and built-in automatic pressure control switch for clean water application. This pump has 3 or 4 stage plastic impellers for which could reach max delivery height to 35 or 45m. The pump could reach to 12m for max submersible depth, it also has 15m power cable and 15m nylon rope.

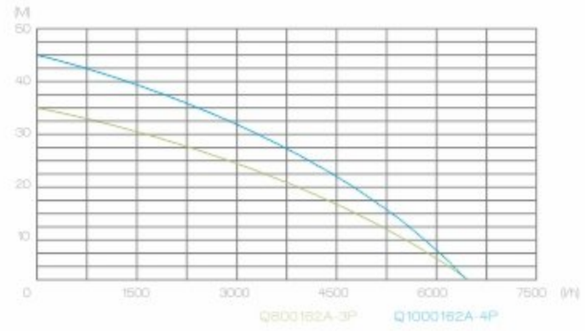

Q□□□162A-XP

Junhe Model	Q800162A-3P	Q1000162A-4P
Rated Power	850W	1100W
Max.pump height	35m	45m
Max.pump rate	6000l/h	6000l/h
Max.pressure	3.5bar	4.5bar
Dia of connecting pipe.	G1''	G1''
Cable specification	H07RN-F3G1mm²	H07RN-F3G1mm²
Lowest pump starting level	60mm	60mm
Lowest pump sucking level	50mm	50mm
Qty in carton box	2pcs	2pcs
Master carton box size	42x26x58cm	42x26x60cm
Master carton box gross weight	22.5kg	24.7kg
Qty/20'GP	884pcs	854pcs

KIMPORT

Garden Jet Pump

LD-0837

Garden Jet Pump

Garden jet pump with plastic pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

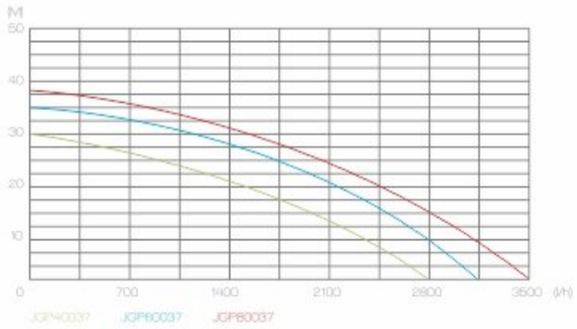

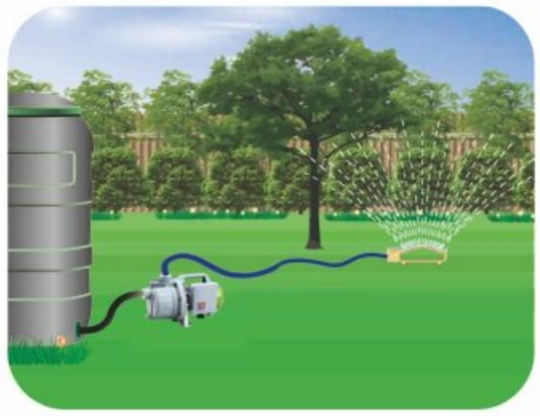

JGP□□□37

Junhe Model	JGP40037	JGP60037	JGP80037
Rated Power	400W	600W	800W
Max.Head	30m	35m	38m
Max.flow rate	2800l/h	3100l/h	3500l/h
Max.Pressure	3bar	3.5bar	3.8bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	39x25x30cm	39x25x30cm	39x25x30cm
Single gross weight	5.8kg	6.9kg	7.2kg
Qty/20'GP	957pcs	957pcs	957pcs

Garden Jet Pump

Garden jet pump with stainless steel pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

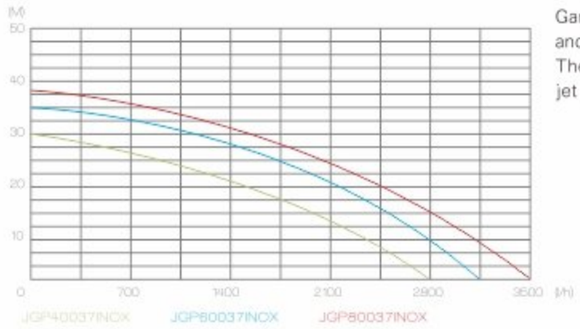

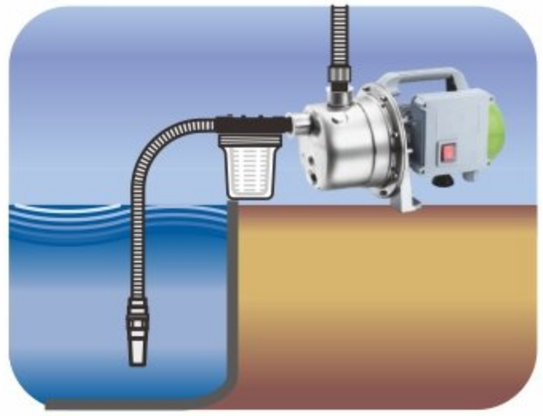

JGP□□□37 INOX

Junhe Model	JGP40037 INOX	JGP60037 INOX	JGP80037 INOX
Rated Power	400W	600W	800W
Max.Head	30m	35m	38m
Max.flow rate	2800l/h	3100l/h	3500l/h
Max.Pressure	3bar	3.5bar	3.8bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	39x25x30cm	39x25x30cm	39x25x30cm
Single gross weight	5.8kg	6.9kg	7.3kg
Qty/20'GP	957pcs	957pcs	957pcs

Garden Jet Pump

Garden jet pump with plastic pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

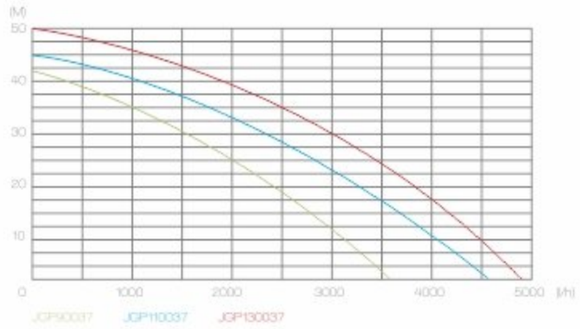

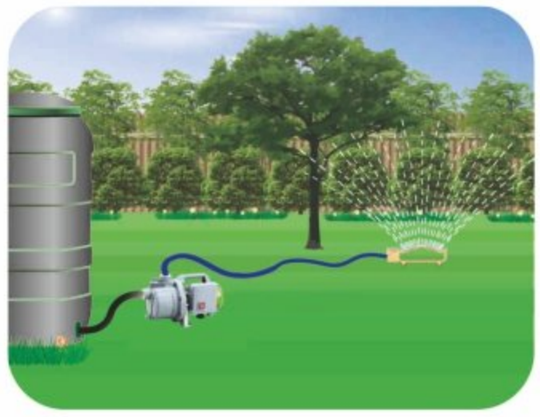

JGP□□□37

Junhe Model	JGP90037	JGP110037	JGP130037
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.Pressure	4.2bar	4.5bar	5bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	39.5x25x30cm	39.5x25x30cm	39.5x25x30cm
Single gross weight	9.1kg	9.6kg	10.5kg
Qty/20'GP	945pcs	945pcs	945pcs

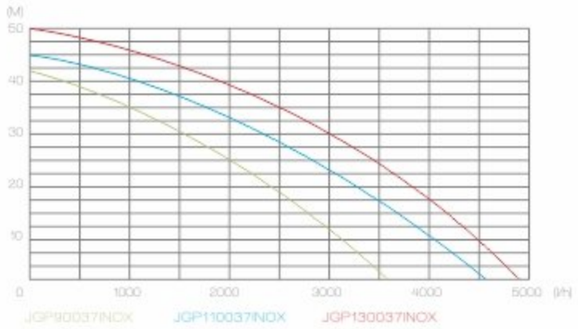

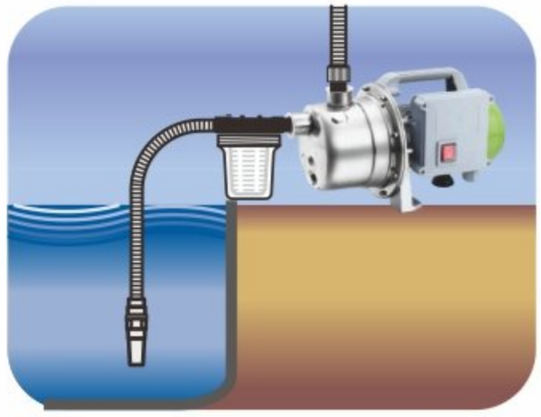

Garden Jet Pump

Garden jet pump with stainless steel pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

JGP□□□37 INOX

Junhe Model	JGP90037 INOX	JGP110037 INOX	JGP130037 INOX
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.Pressure	4.2bar	4.5bar	5bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	39.5x25x30cm	39.5x25x30cm	39.5x25x30cm
Single gross weight	9.1kg	9.9kg	10.7kg
Qty/20'GP	945pcs	945pcs	945pcs

Garden Jet Pump

Garden jet pump with plastic pump head and plastic pump handle and plastic pump base and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

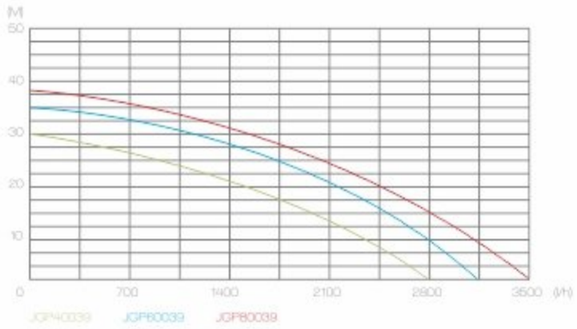

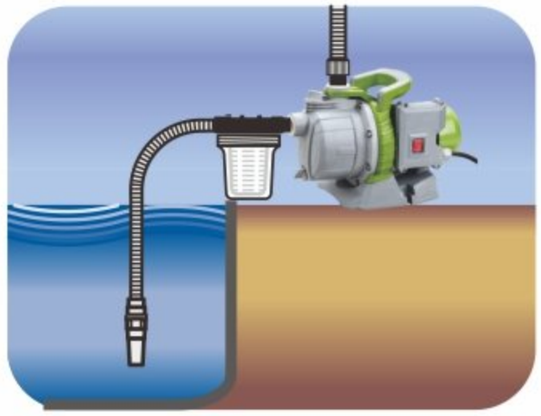

JGP□□□39

Junhe Model	JGP40039	JGP60039	JGP80039
Rated Power	400W	600W	800W
Max.Head	30m	35m	38m
Max.flow rate	2800l/h	3100l/h	3500l/h
Max.Pressure	3bar	3.5bar	3.8bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	35x25x30cm	35x25x30cm	35x25x30cm
Single gross weight	6.5kg	6.8kg	7.2kg
Qty/20'GP	1066pcs	1066pcs	1066pcs

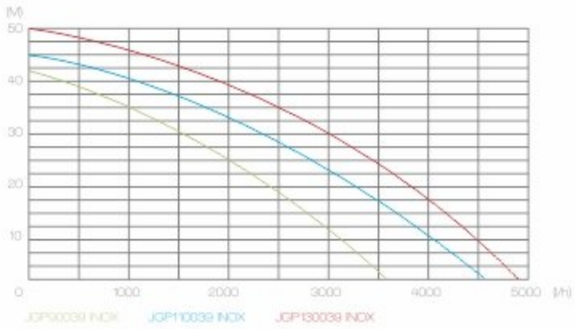

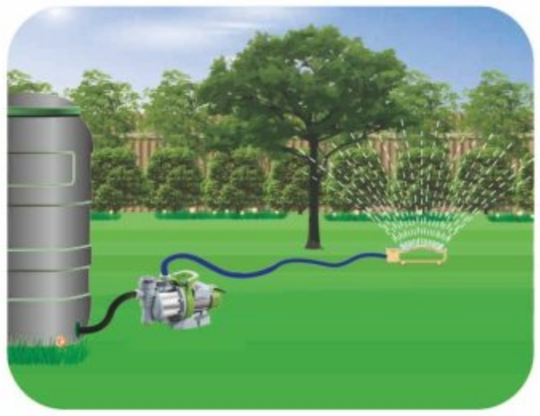

Garden Jet Pump

Garden jet pump with plastic pump head and built-in water filter on head for clean water application. It has plastic pump handle and plastic pump base and aluminum motor housing and iron fan cover and on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

JGP□□□39 INOX

Junhe Model	JGP90039 INOX	JGP110039 INOX	JGP130039 INOX
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.Pressure	4.2bar	4.5bar	5bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	46×25x35.5cm	46×25x35.5cm	46×25x35.5cm
Single gross weight	9.2kg	11.2kg	12.2kg
Qty/20'GP	685pcs	685pcs	685pcs

KIMPORT

Garden Jet Pump

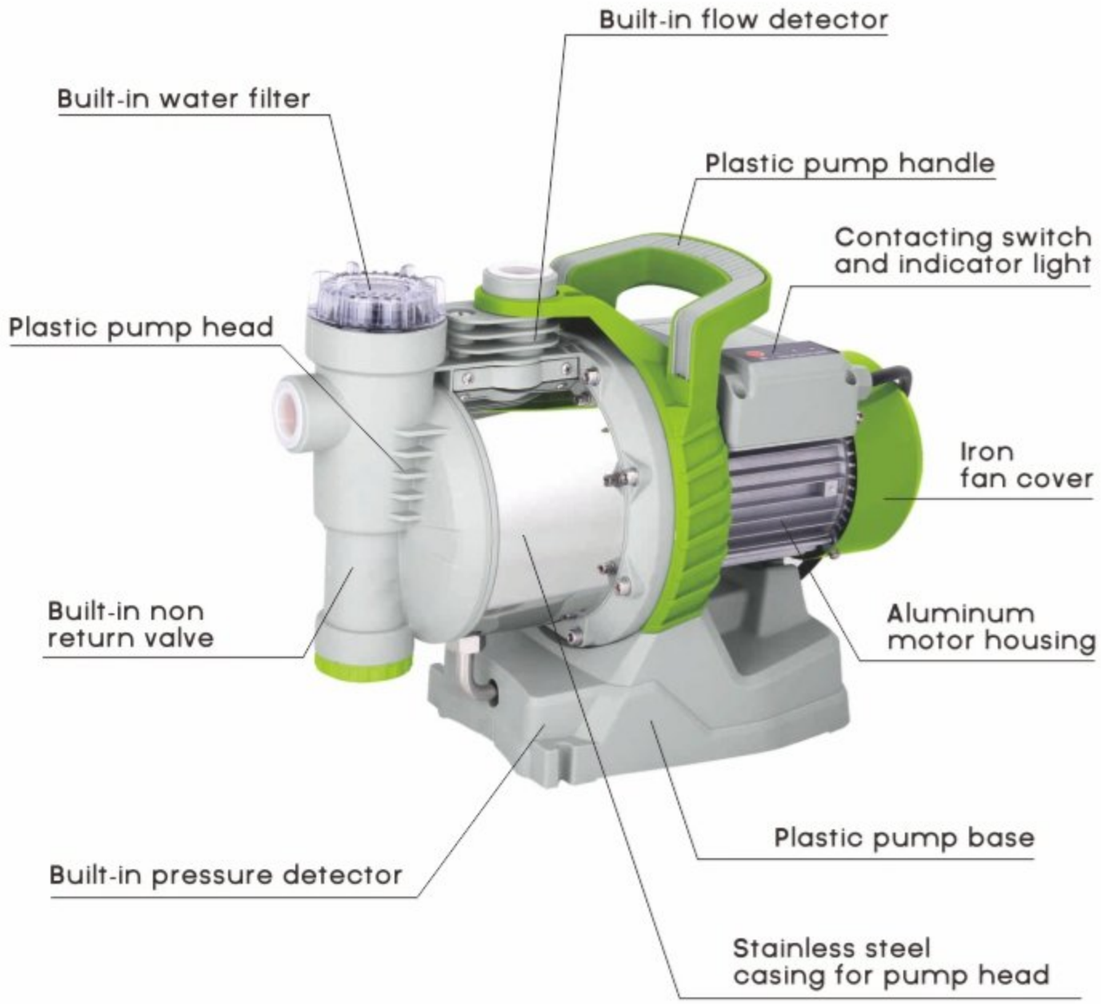

LD-0837

Garden Jet Pump

Multi-function garden jet pump with plastic pump head and stainless steel casing for clean water application. The pump head has built-in water filter / built-in flow detector / built-in non-return valve, the junction box has contacting switch and indicator light to show the pump in different operation status, the pump base has installed built-in pressure detector for which could automatically control the pump start and stop on the set pressure.

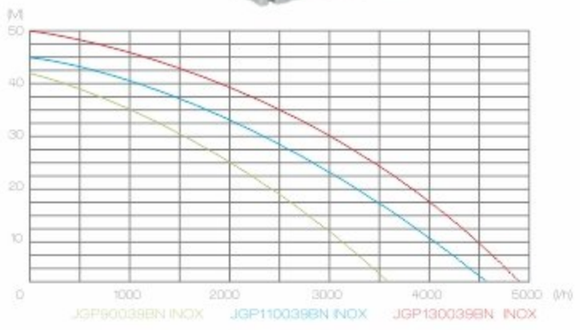

JGP□□□39BN INOX

Junhe Model	JGP90039BN INOX	JGP110039BN INOX	JGP130039BN INOX
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	1	4 00l/h
Max.Pressure	4.2bar	4.5bar	5bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	46×28×38cm	46×28×38cm	46×28×38cm
Single gross weight	9.8kg	11.7kg	12.1kg
Qty/20'GP	572pcs	572pcs	572pcs

Garden Jet Pump

Multi-function garden jet pump with plastic pump head and stainless steel casing for clean water application. The pump head has built-in water filter / built-in flow detector / built-in non-return valve, the junction box has LCD screen and contacting switch and indicator light to show the pump in different operation status, the pump base has installed built-in pressure detector for which could automatically control the pump start and stop on the set pressure. You may set-up time and pressure for this pump, it also could show flow rate and delivery height on the screen.

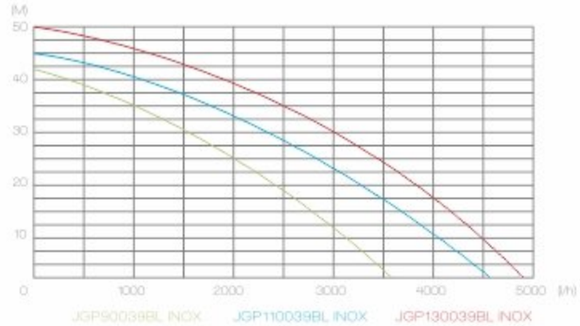

JGP□□□39BL INOX

Junhe Model	JGP90039BL INOX	JGP110039BL INOX	JGP130039BL INOX
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4100l/h	4200l/h
Max.Pressure	4.2bar	4.5bar	5bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	46×28×38cm	46×28×38cm	46×28×38cm
Single gross weight	9.8kg	11.7kg	12.1kg
Qty/20'GP	572pcs	572pcs	572pcs

Garden Jet Pump

Garden jet pump with plastic pump head and built-in water filter on head for clean water application. It has plastic pump handle and plastic pump motor cover and on/off waterproof switch.

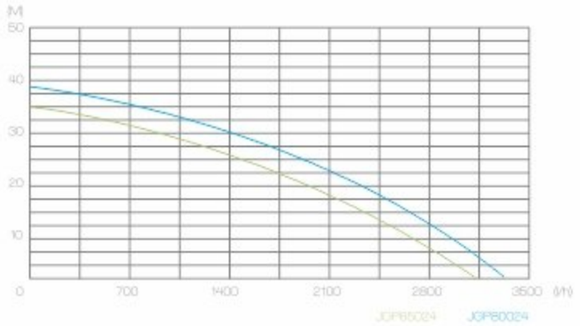

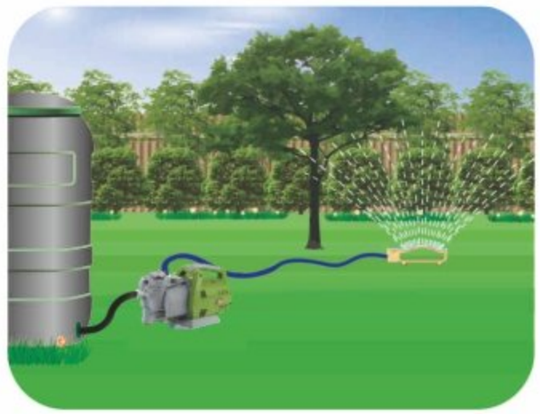

JGP□□□24

Junhe Model	JGP65024	JGP80024
Rated Power	650W	800W
Max.Head	35m	38m
Max.flow rate	3000l/h	3300l/h
Max.pressure	3.5bar	3.8bar
Max.Noise(dB)	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC
Single gift box size	46×26×32cm	46×26×32cm
Single gross weight	8.4kg	8.8kg
Qty/20'GP	736pcs	736pcs

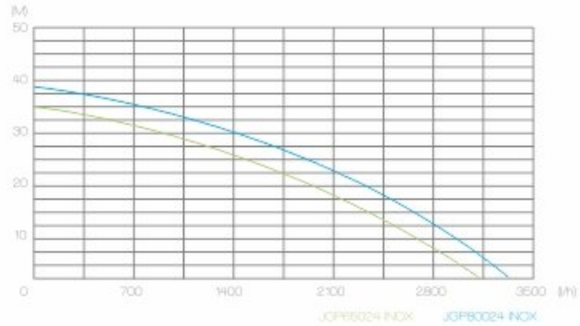

Garden Jet Pump

Garden jet pump with plastic pump head and built-in water filter on head for clean water application. The stainless steel casing is only for decoration purpose. It has plastic pump handle and plastic pump motor cover and on/off waterproof switch.

JGP□□□24 INOX

Junhe Model	JGP65024 INOX	JGP80024 INOX
Rated Power	650W	800W
Max.Head	35m	38m
Max.flow rate	3000l/h	3300l/h
Max.pressure	3.5bar	3.8bar
Max.Noise(dB)	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC
Single gift box size	46×26×32cm	46×26×32cm
Single gross weight	8.5kg	9kg
Qty/20'GP	736pcs	736pcs

Garden Jet Pump

Garden jet pump with plastic pump head and built-in water filter on head for clean water application. It has plastic pump handle and plastic pump motor cover and on/off water proof switch.

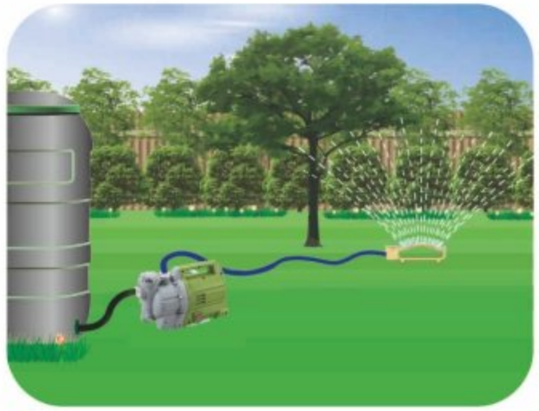

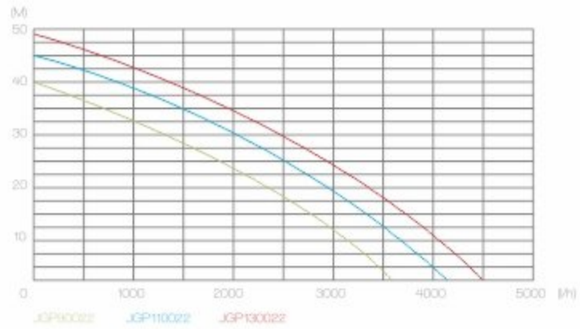

JGP□□□22

Junhe Model	JGP90022	JGP110022	JGP130022
Rated Power	900W	1100W	1300W
Max.Head	40m	45m	48m
Max.flow rate	3600l/h	4200l/h	4500l/h
Max.Pressure	4bar	4.5bar	4.8bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	48.5x25.5x29cm	48.5x25.5x29cm	48.5x25.5x29cm
Single gross weight	10.4kg	11.5kg	12.1kg
Qty/20'GP	780pcs	780pcs	780pcs

LD-0837

Garden Jet Pump

Garden jet pump with cast iron pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

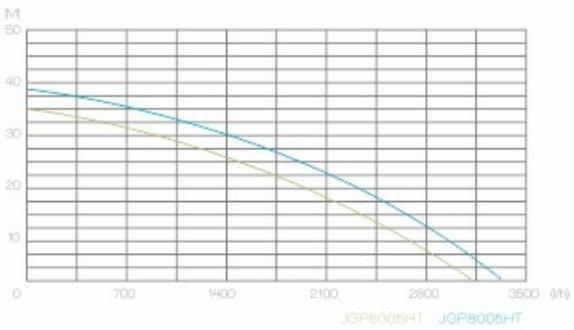

JGP□□□5HT

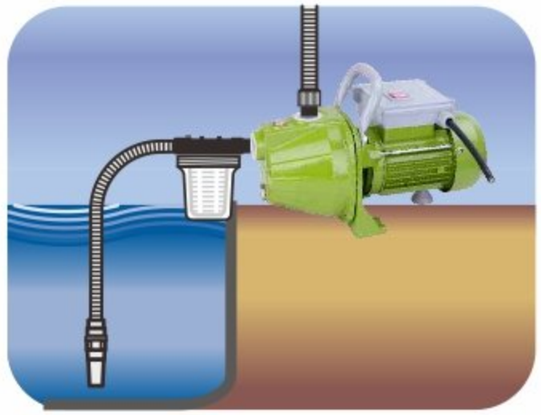

Junhe Model	JGP6005HT	JGP8005HT
Rated Power	600W	800W
Max.Head	35m	38m
Max.flow rate	3000l/h	3200l/h
Max.pressure	3.5bar	3.8bar
Max.Noise(dB)	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC
Single gift box size	38x22.5x28cm	38x22.5x28cm
Single gross weight	8.5kg	9.9kg
Qty/20'GP	1170pcs	1170pcs

Garden Jet Pump

Garden jet pump with cast iron pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch This type of garden jet pumps are very easy to install and operate.

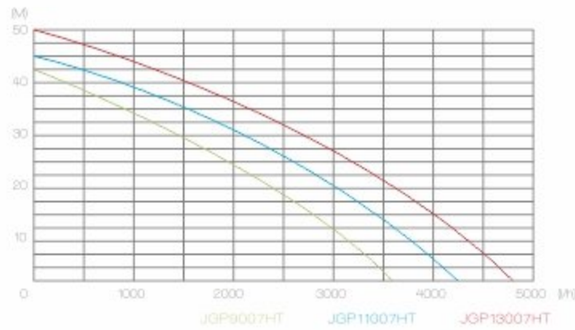

JGP□□□7HT

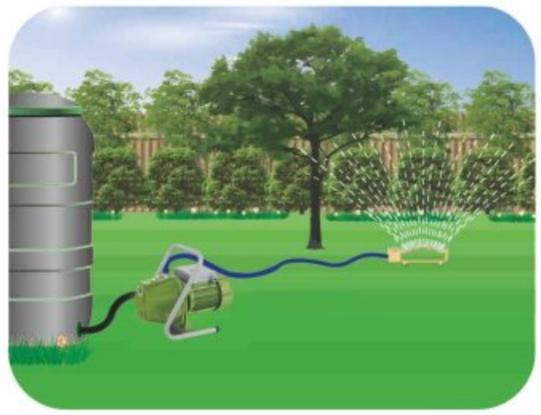

Junhe Model	JGP9007HT	JGP11007HT	JGP13007HT
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.Pressure	4.2bar	4.5bar	5bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	8.8kg	10kg	11.2kg
Qty/20'GP	1386pcs	1386pcs	1386pcs

Garden Jet Pump

Garden jet pump with cast iron pump head and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

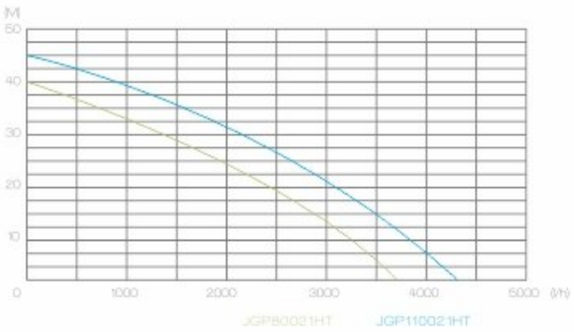

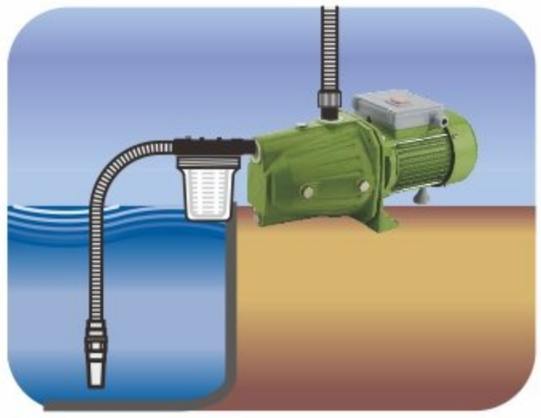

JGP□□□21HT

230V~50Hz | Max.35℃ | Cable1m | Max.1mm | Max.8m

Junhe Model	JGP80021HT	JGP110021HT
Rated Power	800W	1100W
Max.Head	40m	45m
Max.flow rate	3600l/h	4200l/h
Max.pressure	4.0bar	4.5bar
Max.Noise(dB)	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC
Single gift box size	45x22x23.5cm	45x22x23.5cm
Single gross weight	14.3kg	15.7kg
Qty/20'GP	1200pcs	1200pcs

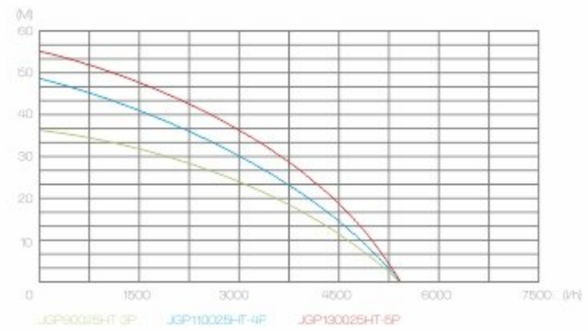

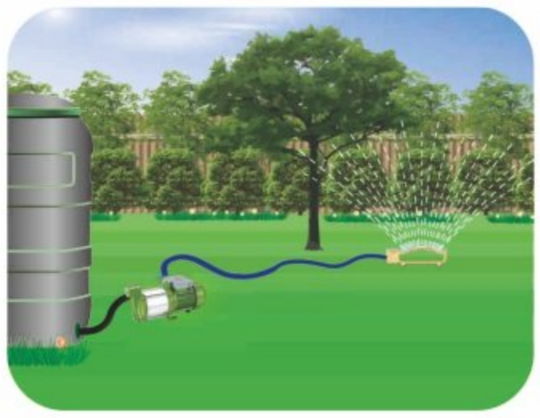

Garden Jet Pump

Multi-stage impeller garden jet pump with cast iron pump head with stainless steel casing on pump head and aluminum motor housing and iron fan cover for clean water application.The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

JGP□□□25HT-XP

230V~50Hz | Max.35℃ | Cable1m | Max.1mm | Max.8m

Junhe Model	JGP90025HT-3P	JGP110025HT-4P	JGP130025HT-5P
Rated Power	900W	1100W	1300W
Max.Head	36m	46m	55m
Max.flow rate	5400l/h	5400l/h	5400l/h
Max. Pressure	3.6bar	4.6bar	5.5bar
Max.Noise(dB)	80	80	80
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	3PCS	4PCS	5PCS
Single gift box size	45x22x27cm	47x22x27cm	47x22x27cm
Single gross weight	12.5kg	13.8kg	14.4kg
Qty/20'GP	1048pcs	1002pcs	1002pcs

KIMPORT

Automatic Booster System

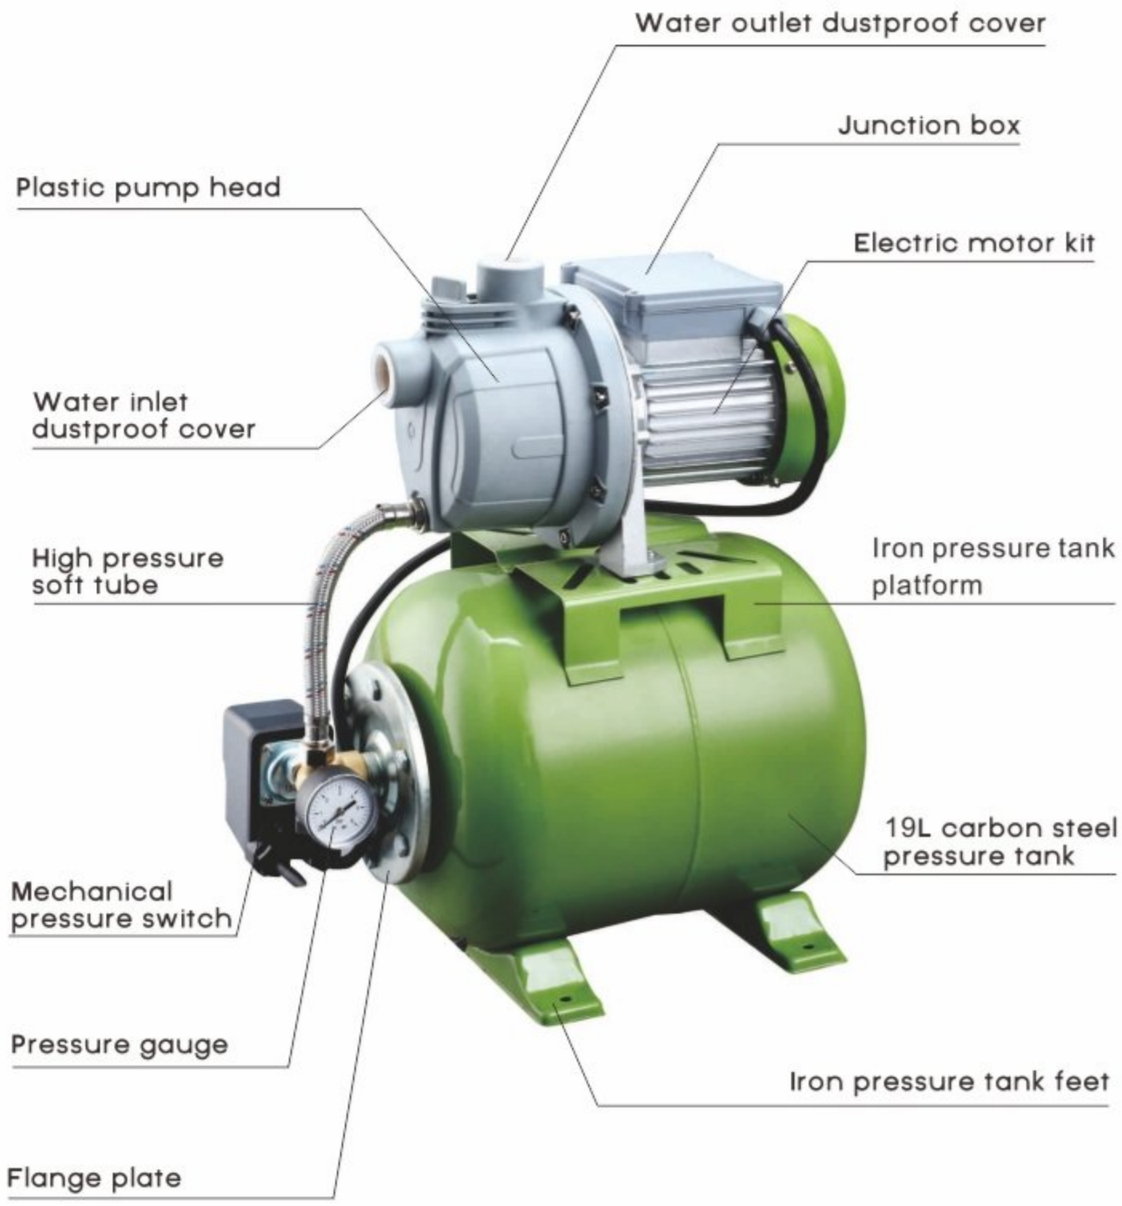

Automatic Booster System

Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

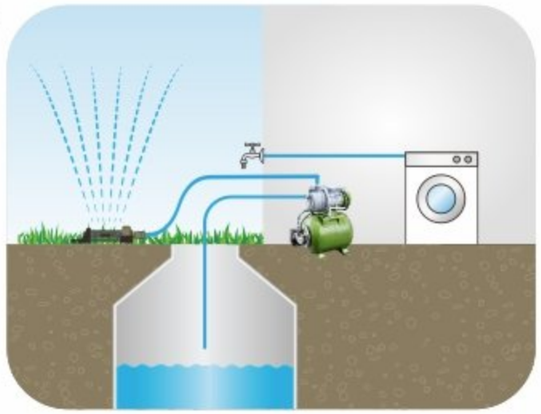

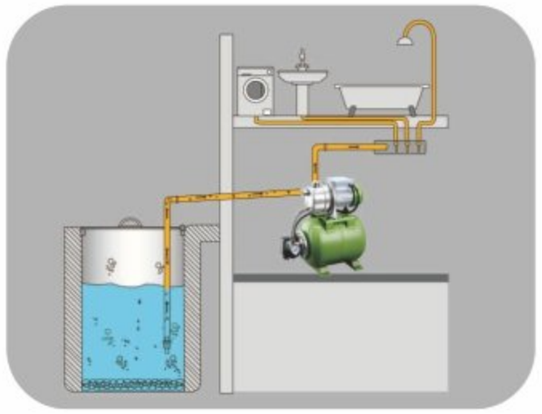

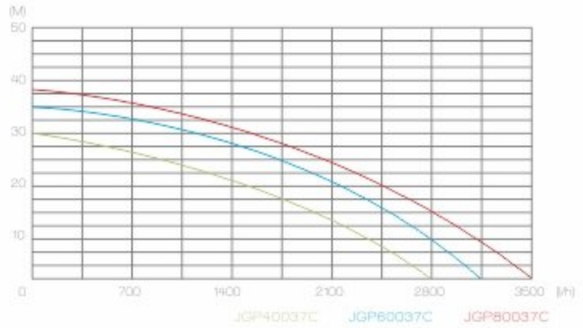

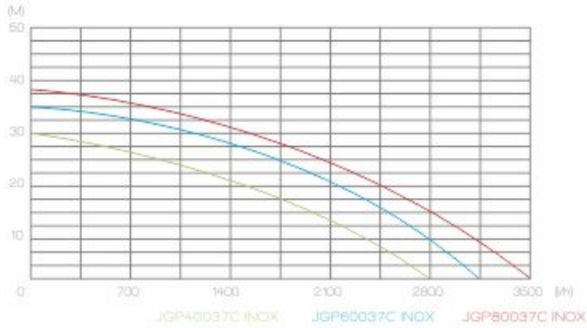

JGP□□□37C

Junhe Model	JGP40037C	JGP60037C	JGP80037C
Rated Power	400W	600W	800W
Max.Head	30m	35m	38m
Max.flow rate	2800l/h	3100l/h	3500l/h
Work Pressure	1.2-2.4bar	1.3-2.6bar	1.5-3.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Pressure tank volume	19L	19L	19L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Single gross weight	11.5kg	12.2kg	13.3kg
Qty/20'GP	377pcs	377pcs	377pcs

Automatic Booster System

Automatic booster system coupled with stainless steel pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water systeml.

JGP□□□37C INOX

Junhe Model	JGP40037C INOX	JGP60037C INOX	JGP80037C INOX
Rated Power	400W	600W	800W
Max.Head	30m	35m	38m
Max.flow rate	2800l/h	3100l/h	3500l/h
Work Pressure	1.2-2.4bar	1.3-2.6bar	1.5-3.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Pressure tank volume	19L	19L	19L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Single gross weight	11kg	12kg	12.8kg
Qty/20'GP	377pcs	377pcs	377pcs

Automatic Booster System

Automatic booster system coupled with plastic pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

JGP□□□37D

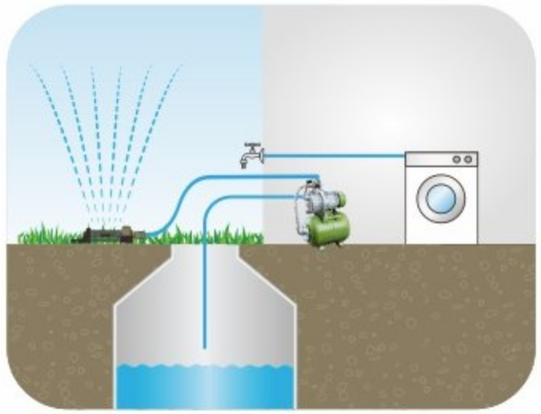

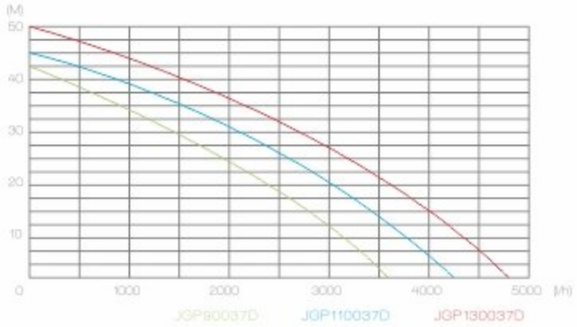

Junhe Model	JGP90037D	JGP110037D	JGP130037D
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Work Pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Pressure tank volume	24L	24L	24L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	55×32×61cm	55×32×61cm	55×32×61cm
Single gross weight	14kg	15.8kg	16.2kg
Qty/20'GP	260pcs	260pcs	260pcs

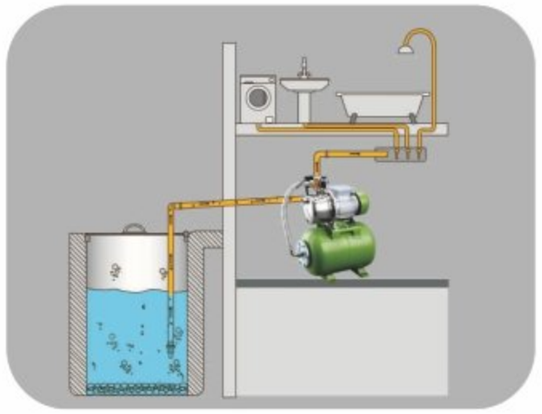

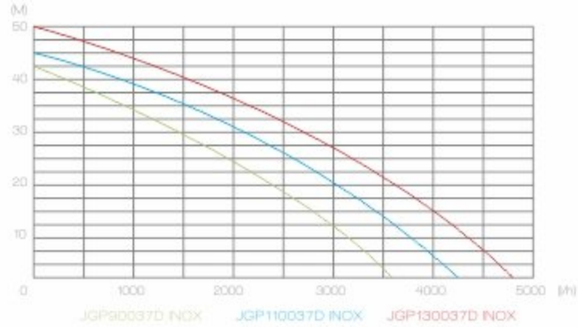

Automatic Booster System

Automatic booster system coupled with stainless steel pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

JGP□□□37D INOX

Junhe Model	JGP90037D INOX	JGP110037D INOX	JGP130037D INOX
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Work Pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Pressure tank volume	24L	24L	24L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	55×32×61cm	55×32×61cm	55×32×61cm
Single gross weight	14.5kg	16.5kg	17kg
Qty/20'GP	260pcs	260pcs	260pcs

Automatic Booster System

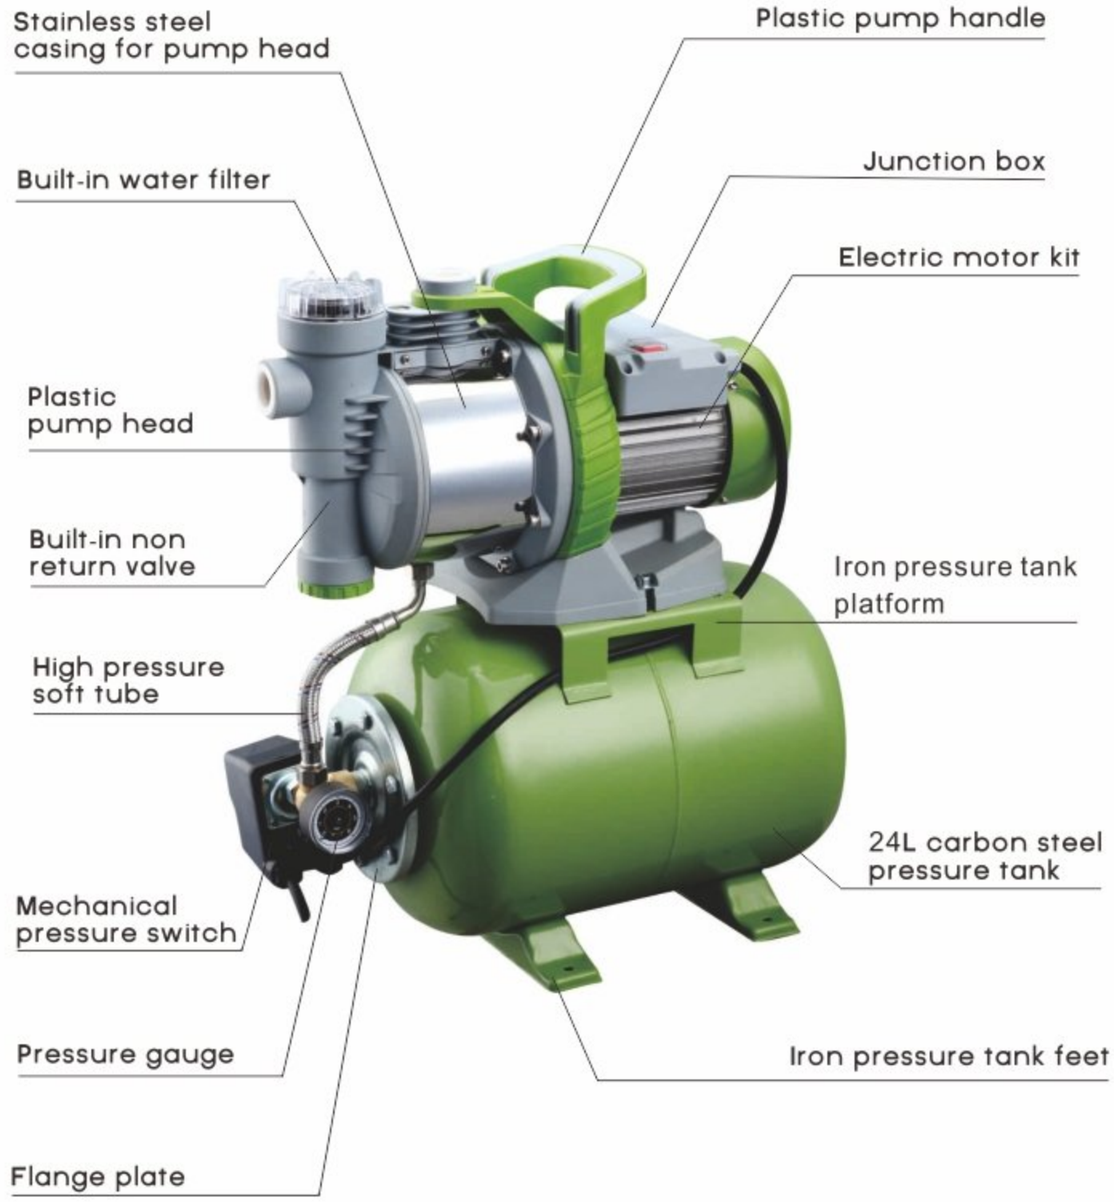

Automatic Booster System

Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

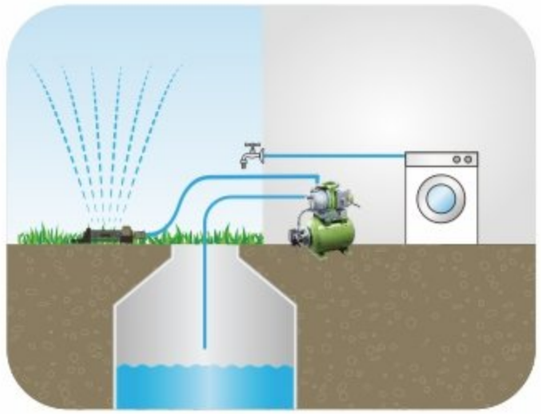

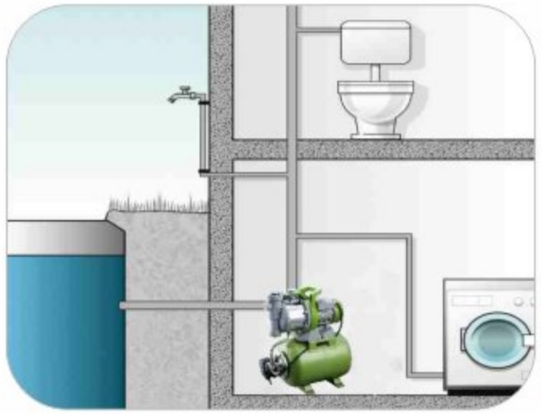

JGP□□□39C

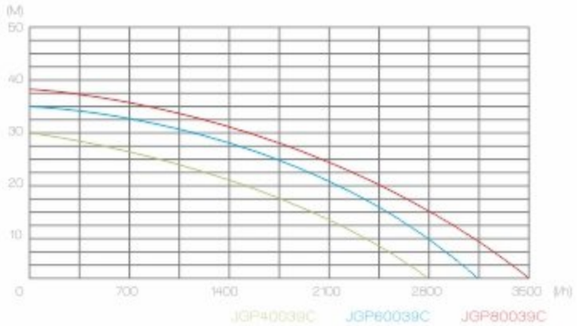

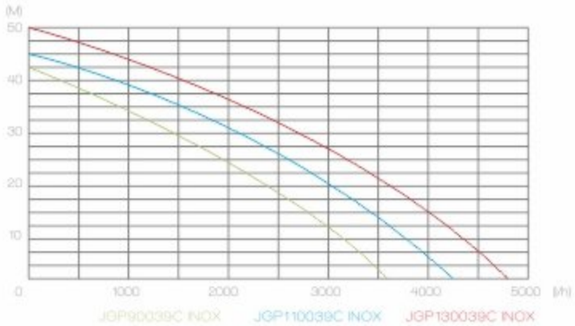

Junhe Model	JGP40039C	JGP60039C	JGP80039C
Rated Power	400W	600W	800W
Max.Head	30m	35m	38m
Max.flow rate	2800l/h	4100l/h	4200l/h
Work Pressure	1.2-2.4bar	1.3-2.6bar	1.5-3.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Pressure tank volume	19L	19L	19L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	46×30×61cm	46×30×61cm	46×30×61cm
Single gross weight	12.1kg	13kg	13.5kg
Qty/20'GP	255pcs	255pcs	255pcs

Automatic Booster System

Automatic booster system coupled with plastic pump head jet pump with built-in water filter and stainless steel casing on head and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

JGP□□□39C INOX

Junhe Model	JGP90039C INOX	JGP110039C INOX	JGP130039C INOX
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4100l/h	4200l/h
Work Pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Pressure tank volume	24L	24L	24L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	46×30×61cm	46×30×61cm	46×30×61cm
Single gross weight	14.8kg	15.5kg	16.5kg
Qty/20'GP	255pcs	255pcs	255pcs

Automatic Booster System

Automatic booster system coupled with plastic pump head jet pump with built-in water filter and stainless steel casing on head and 24L stainless steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water systeml.

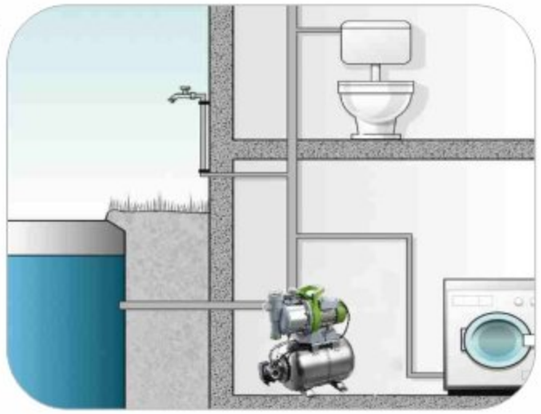

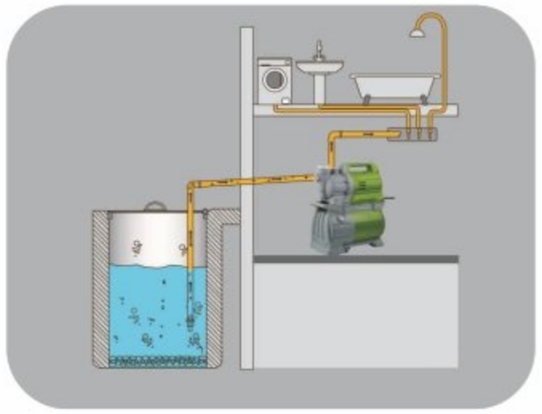

JGP□□□39CS INOX

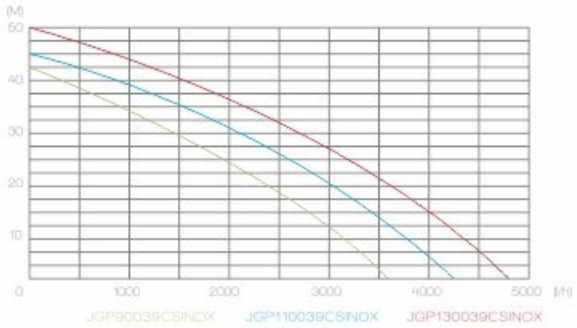

Junhe Model	JGP90039CSINOX	JGP110039CSINOX	JGP130039CSINOX
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4100l/h	4200l/h
Work Pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Pressure tank volume	24L	24L	24L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	46×30×61cm	46×30×61cm	46×30×61cm
Single gross weight	15kg	15.7kg	16.2kg
Qty/20'GP	255pcs	255pcs	255pcs

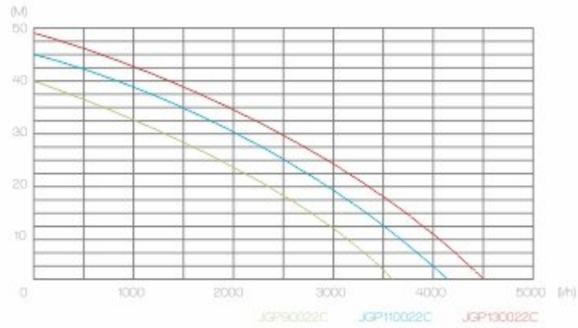

Automatic Booster System

Automatic booster system coupled with plastic pump head jet pump with built-in water filter on head and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

JGP□□□22C

Junhe Model	JGP90022C	JGP110022C	JGP130022C
Rated Power	900W	1100W	1300W
Max.Head	40m	45m	48m
Max.flow rate	3600l/h	4200l/h	4500l/h
Work Pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Pressure tank volume	19L	19L	19L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	50×35×65cm	50×35×65cm	50×35×65cm
Single gross weight	15.7kg	16.2kg	16.8kg
Qty/20'GP	255pcs	255pcs	255pcs

Automatic Booster System

Automatic booster system coupled with plastic pump head jet pump with built-in water filter on head and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

JGP□□□24C

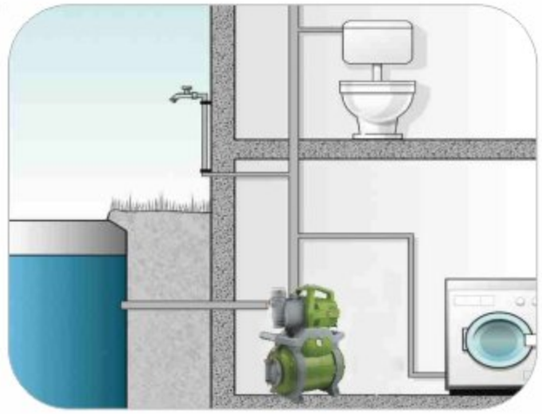

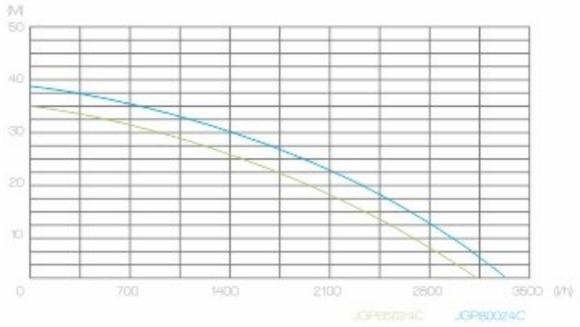

Junhe Model	JGP65024C	JGP80024C
Rated Power	650W	800W
Max.Head	35m	38m
Max.flow rate	3000l/h	3300l/h
Work Pressure	1.3-2.6bar	1.5-3.0bar
Max.Noise(dB)	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Pressure tank volume	24L	24L
Qty of Impeller	1PC	1PC
Single gift box size	53x32x63cm	53x32x63cm
Single gross weight	13.2kg	14kg
Qty/20'GP	262pcs	262pcs

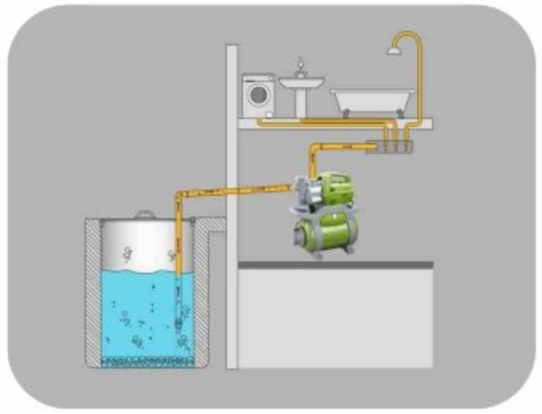

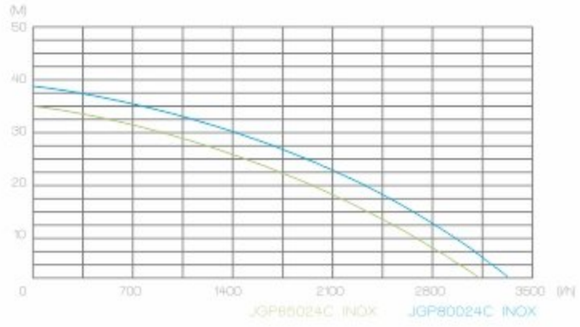

Automatic Booster System

Automatic booster system coupled with plastic pump head jet pump with built-in water filter and stainless steel casing on head and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

JGP□□□24C INOX



Junhe Model	JGP65024C INOX	JGP80024C INOX
Rated Power	650W	800W
Max.Head	35m	38m
Max.flow rate	3000l/h	3300l/h
Work Pressure	1.3-2.6bar	1.5-3.0bar
Max.Noise(dB)	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Pressure tank volume	24L	24L
Qty of Impeller	1PC	1PC
Single gift box size	53x32x63cm	53x32x63cm
Single gross weight	13.5kg	14.3kg
Qty/20'GP	262pcs	262pcs

Automatic Booster System

Automatic booster system coupled with cast iron pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

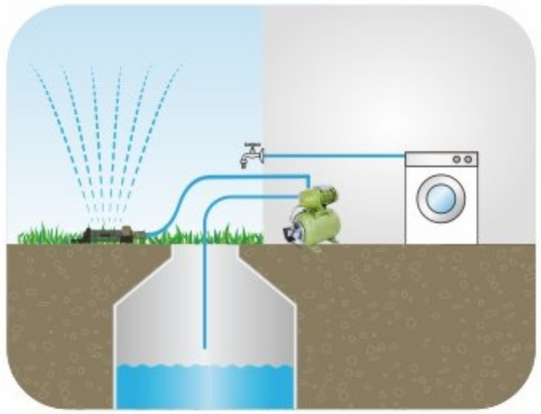

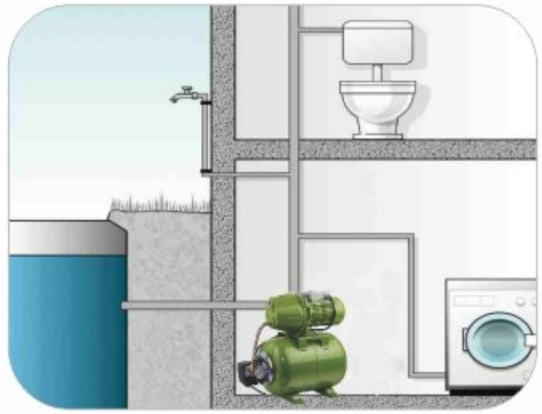

JGP□□□5CHT

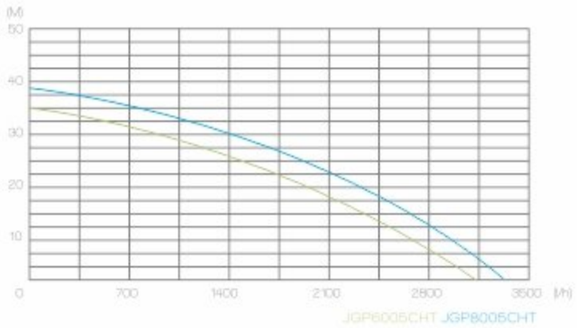

Junhe Model	JGP6005CHT	JGP8005CHT
Rated Power	600W	800W
Max.Head	35m	38m
Max.flow rate	3000l/h	3200l/h
Work pressure	1.3-2.6bar	1.5-3.0bar
Max.Noise(dB)	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Pressure tank volume	19L	19L
Qty of Impeller	1PC	1PC
Single gift box size	48.5x30x51cm	48.5x30x51cm
Single gross weight	12.5kg	13.2kg
Qty/20'GP	377pcs	377pcs

Automatic Booster System

Automatic booster system coupled with cast iron pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

JGP□□□7CHT

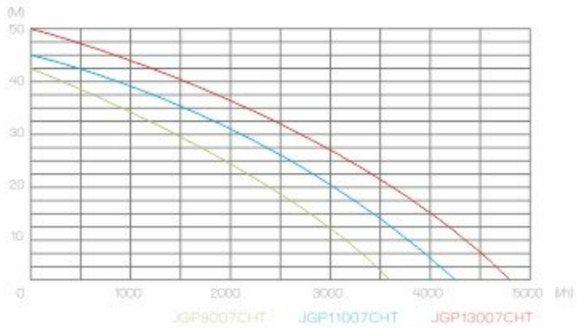

Junhe Model	JGP9007CHT	JGP11007CHT	JGP13007CHT
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Work Pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Pressure tank volume	24L	24L	24L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Single gross weight	13.7kg	14.5kg	15.2kg
Qty/20'GP	377pcs	377pcs	377pcs

Automatic Booster System

Automatic booster system coupled with cast iron pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

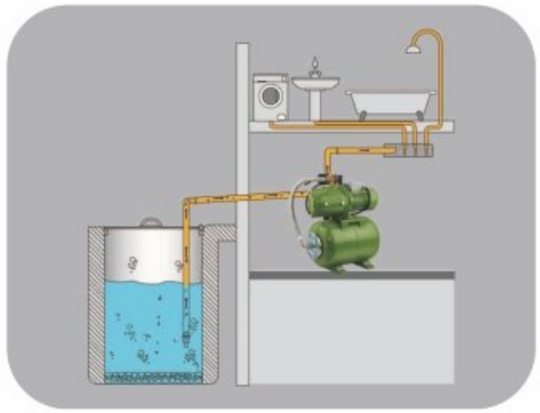

JGP□□□21DHT

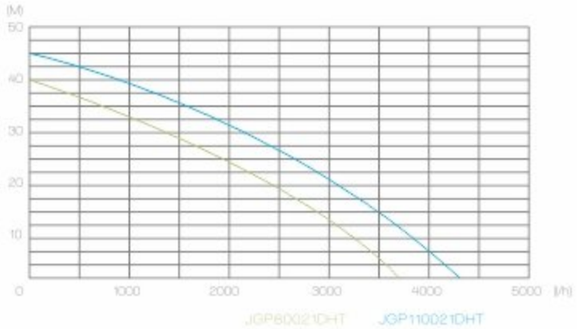

Junhe Model	JGP80021DHT	JGP110021DHT
Rated Power	800W	1100W
Max.Head	40m	45m
Max.flow rate	3600l/h	4200l/h
Work pressure	1.5-3.0bar	1.5-3.0bar
Max.Noise(dB)	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Pressure tank volume	24L	24L
Qty of Impeller	1PC	1PC
Single gift box size	55x32x56cm	55x32x56cm
Single gross weight	18kg	21.4kg
Qty/20'GP	284pcs	284pcs

Automatic Booster System

Automatic booster system coupled with multi-stage impeller jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

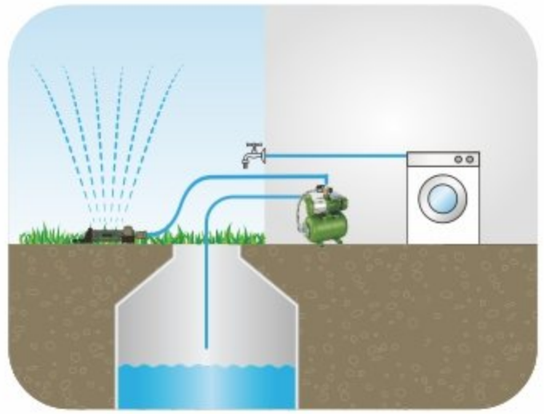

JGP□□□25DHT-XP

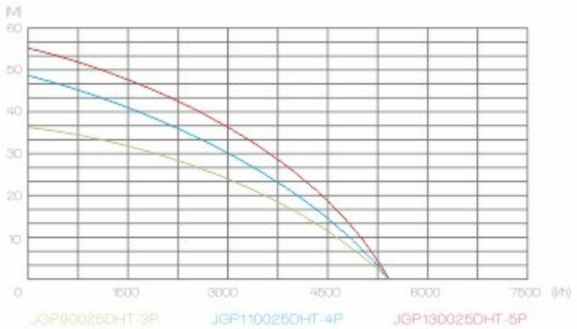

Junhe Model	JGP90025DHT-3P	JGP110025DHT-4P	JGP130025DHT-5P
Rated Power	900W	1100W	1300W
Max.Head	36m	46m	55m
Max.flow rate	5400l/h	5400l/h	5400l/h
Work Pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.Noise(dB)	80	80	80
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Pressure tank volume	24L	24L	24L
Qty of Impeller	3PCS	4PCS	5PCS
Single gift box size	55x32x59cm	55x32x59cm	55x32x59cm
Single gross weight	17.2kg	18.3kg	21.5kg
Qty/20'GP	269pcs	269pcs	269pcs

Swimming Pool Pump

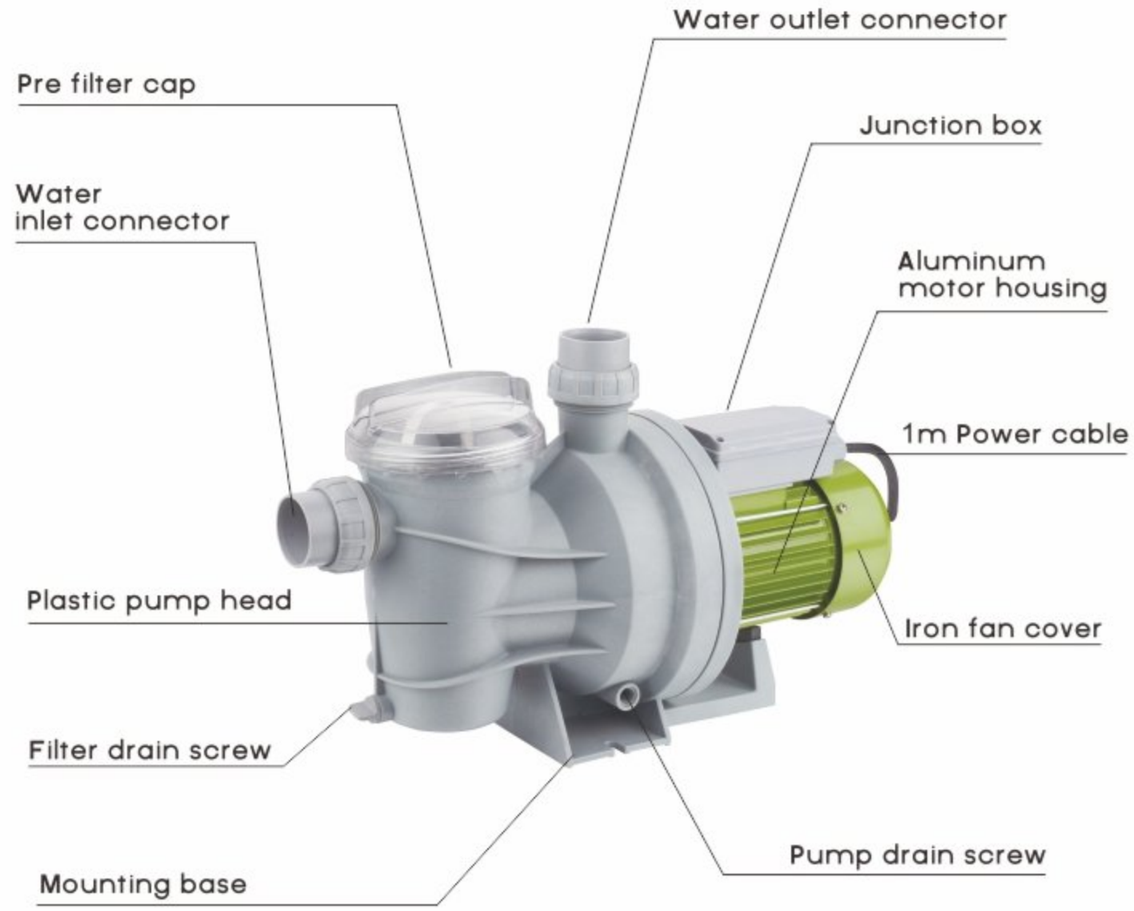

Swimming Pool Pump

Swimming pool pump with plastic pump head and built-in water filter for pool water application. Aluminum motor housing and iron fan cover is the most classic design for this pump. It works very silent and reliable and esay for installation and operation.

CLP□□□1

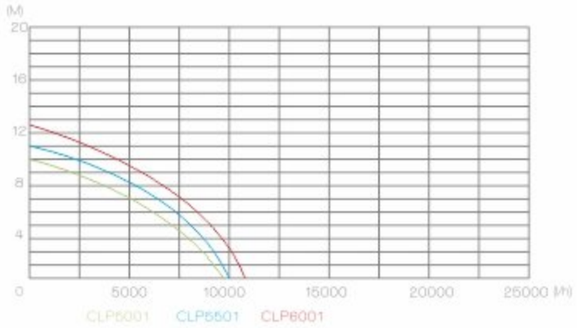

Junhe Model	CLP5001	CLP5501	CLP6001
Rated Power	500W	550W	600W
Max.Head	10m	11m	12.5m
Max.flow rate	9000l/h	10000l/h	11000l/h
Max.Pressure	1.0bar	1.1bar	1.25bar
Max.Noise(dB)	80	80	80
Dia of connecting pipe	G1-1/2"	G1-1/2"	G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²
Qty of Impeller	1PC	1PC	1PC
Signle gift box size	45.5x23x27cm	45.5x23x27cm	45.5x23x27cm
Signle gross weight	6.8kg	7.2kg	7.5kg
Qty/20'GP	990pcs	990pcs	990pcs

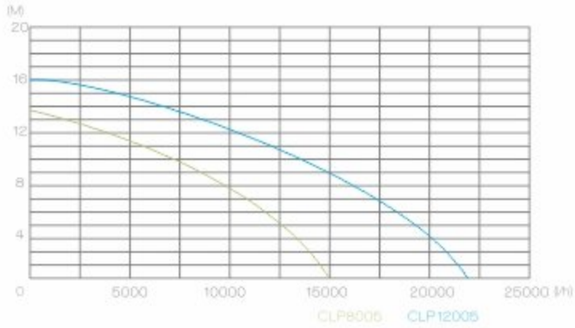

Junhe Model	CLP8005	CLP12005
Rated Power	800W	1200W
Max.Head	13.5m	16m
Max.flow rate	15000l/h	23000l/h
Max.pressure	1.35bar	1.6bar
Max.Noise(dB)	80	80
Dia of connecting pipe	G2-1/4"	G2-1/4"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC
Signle gift box size	56x29.5x35.5cm	56x29.5x35.5cm
Signle gross weight	10.4kg	12.4kg
Qty/20'GP	476pcs	476pcs

Swimming Pool Pump

Swimming pool pump with plastic pump head and built-in water filter for pool water application. It works very silent and reliable and esay for installation and operation. It is the best selling swimming pool pump in Junhe.

CLP□□□5

Deep Well Pump

Deep well pump with stainless pump body and multi-stage plastic impellers for clean water. It has 20m length cable with plug and 20m nylon rope for lifting the pump up in a well. With optimized pump specification and structure which makes this pump become more and more popular in European market.

Junhe Model	MSP750X6AM12T	MSP900X9AM12T	MSP1000X8AM12T
Rated Power	750W	900W	1000W
Max.pump height	40m	60m	55m
Max.pump rate	4500l/h	4500l/h	5200l/h
Max.pressure	4bar	6bar	6bar
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Lowest pump starting level	371mm	451mm	457mm
Lowest pump sucking level	160mm	160mm	160mm
Qty in carton box	2pcs	2pcs	2pcs
Master carton box size	58.3×37×24.5cm	64.5×37×24.5cm	65.5×37×24.5cm
Master carton box gross weight	25kg	25.5kg	27kg
Qty/20'GP	1058pcs	965pcs	950pcs

MSP□□□AM12T

Deep well pump with stainless pump body and multi-stage plastic impellers for clean water. It has 20m length cable with plug and 20m nylon rope for lifting the pump up in a well. With optimized pump specification and structure which makes this pump become more and more popular in European market.

Junhe Model	MSP750X6AM13T	MSP900X9AM13T	MSP1000X8AM13T
Rated Power	750W	900W	1000W
Max.pump height	40m	60m	55m
Max.pump rate	4500l/h	4500l/h	5200l/h
Max.pressure	4bar	6bar	5.5bar
Dia of connecting pipe	G1-1/4"	G1-1/4"	G1-1/4"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Lowest pump starting level	260mm	370mm	380mm
Lowest pump sucking level	70mm	70mm	70mm
Qty in carton box	1pcs	1pcs	1pcs
Master carton box size	69×23×17cm	77×23×17cm	79×23×17cm
Master carton box gross weight	12.5kg	13kg	13.5kg
Qty/20'GP	1038pcs	930pcs	906pcs

MSP□□□AM13T

New

Deep Well Pump

Deep well pump with stainless steel pump body and multi-stage plastic impellers for clean water application. It has 20m length cable with plug and 20m nylon rope for lifting the pump up in a well. This pump is additionally armed with the electrical pressure control switch to add more automatic functions, including: no water shut down, pressure maintaining / restarting and leakage shut down, which makes this pump become more and more popular in European market.

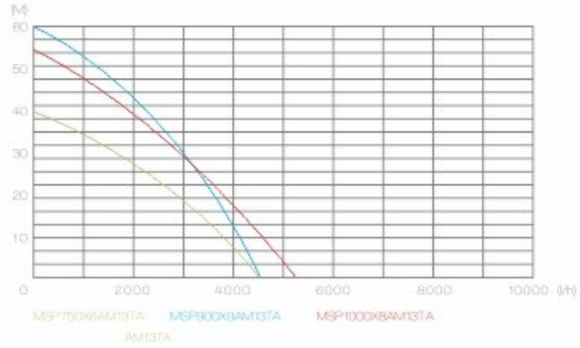

MSP□□□AM13TA

Junhe Model	MSP750X6AM13TA	MSP900X9AM13TA	MSP1000X8AM13TA
Rated Power	750W	900W	1000W
Max.pump height	40m	60m	55m
Max.pump rate	4500l/h	4500l/h	5200l/h
Max.pressure	4bar	6bar	5.5bar
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Lowest pump starting level	260mm	260mm	260mm
Lowest pump sucking level	70mm	70mm	70mm
Qty in carton box	1pcs	1pcs	1pcs
Master carton box size	93×37×26cm	101×37×26cm	102×37×26cm
Master carton box gross weight	11.5kg	12kg	12.5kg
Qty/20'GP	592pcs	544pcs	512pcs

DC Rain Water Pump

New

Submersible rain water pump with DC 12V battery and battery charger for clean water application. The pump is designed for no electricty water application purpose. It could used in any place of outdoors for water transferring and irrigation. The pump could put into a wooden barrel or plastic water tank before operation.

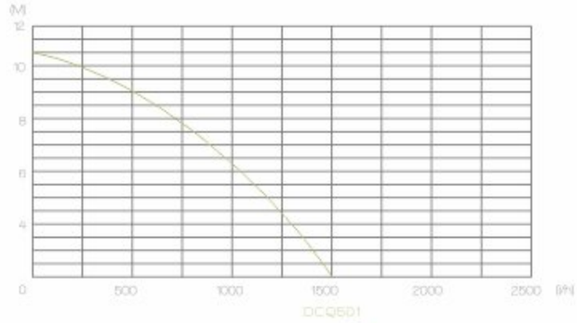

DCQ501

Junhe Model	DCQ501
Rated Power	50W
Max.pump height	11m
Max.pump rate	1500l/h
Max.pressure	1.1bar
Dia of connecting pipe	G3/4"
Battery Capacity	12V / 2AH
Battery max single using time	30min
Battery charger	Included
Cable specification	HO5RN-F2G0.75mm²
Lowest pump starting level	30mm
Lowest pump sucking level	15mm
Qty in carton box	4pcs
Master carton box size	76×34×38cm
Master carton box gross weight	20.5kg
Qty/20'GP	1140pcs

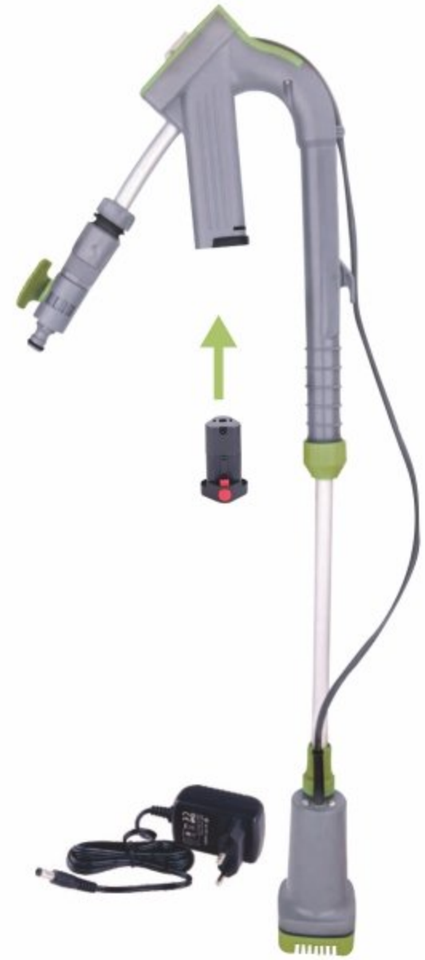

DC Garden Pump

Garden jet pump with DC 18V battery and battery charger for clean water application. This pump replaces the previous AC products by using lithium battery as the power to be free from many limitations. It could be used in any place of outdoors for water transferring and irrigation. The pump is favored by many customers because it is not only small but equipped with the battery package so that it can be free from the external power to make it easy to carry.

New

DCJ1502



Junhe Model	DCJ1502
Rated Power	180W
Max.pump height	22m
Max.pump rate	2800l/h
Max.grain size	0.5mm(no filter)
Max.pressure	2.2bar
Dia of connecting pipe	G1"
Battery Capacity	18V/4AH
Battery max single using time	27min
Battery charger	Included
Cable specification	Cordless type
Max.medium temperature	35℃
Qty in carton box	1pcs
Single gift box size	45×23×29.5cm
Single gross weight	4.2kg
Qty/20'GP	943pcs

New

DCQ802

Junhe Model	DCQ802
Rated Power	80W
Max.pump height	5m
Max.pump rate	4000l/h
Max.grain size	3.5mm
Max.pressure	0.5bar
Dia of connecting pipe	1"
Voltage	12V/DC
Cable specification	H05RN-F2x0.75mm2
Max.medium temperature	35℃
Qty in carton box	24pcs
Single gift box size	13×10.5×23cm
Single gross weight	1.4kg
Qty/20'GP	7488pcs

DC Bilge Pump

This pump is a household DC submersible pump with a design of fast removable base, which will facilitate cleaning the entanglements. Applicable conditions: pumping for boats, gardening, pool pumping, irrigating flowers and grass, ambient water temperature not over 35 degree celsius . The simple appearance design and the small dimension make it easy to carry , it has been very popular for both domestic market and Southeast Asian countries.

LD-0837

Pond Cleaner

New

PCT3501T

This pond cleaner has three choices of different impellers, which the max flow can reach to 7800l/h and it can also solid up to 32mm. In addition, this cleaner is remote controlled. UK, Indonesia, Malaysia and Singapore are excluded due to the exclusive sales agreement.

4 times faster than pond vacuum cleaners

Removes all pond debris...effortlessly (up to 32mm solids)

Recycle filtered water back into your pond

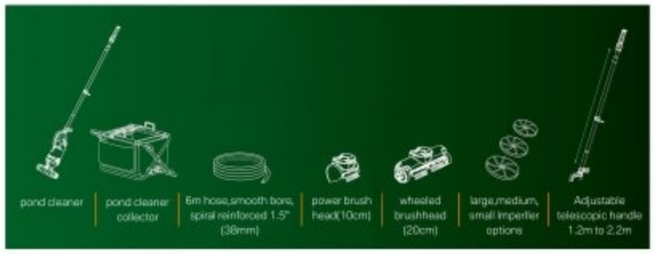

Junhe Model	PCT3501T
Vol&Fre	230V/50Hz
Rated Power	350W
Max flow	5400l/h 6500l/h 7800 l/h
Maximum lift	2.9m 3.6m 4.5m
Max.grain size	32mm
Max.submersible depth	5m
Adjustable telescopic handle	1.2m-2.2m
Qty in carton box	2pcs
Master carton box size	120X35X50cm
Master carton box gross weight	27.6kg
Qty/20'GP	232pcs

KIMPORT

Vibration Pump

Vibration pump with complete aluminum pump housing for clean water application. It is one of the best selling pump items for East European market, especially for Russia. We could also provide a choice of 20m / 30m / 40m length cable for your choice.

Q□□□40

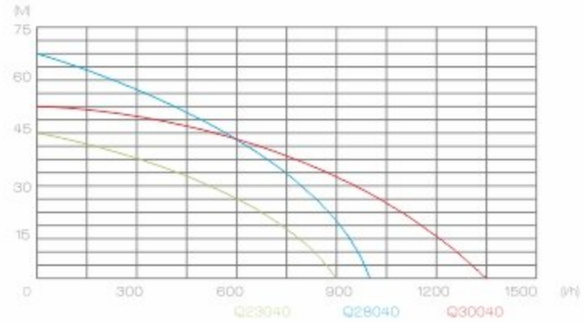

Junhe Model	Q23040	Q28040	Q30040
Rated Power	230W	280W	300W
Max.pump height	45m	68m	55m
Max.pump rate	900l/h	1020l/h	1400l/h
Max.pressure	4.5bar	6.8bar	5.5bar
Dia of connecting pipe	1/2"	1/2"	1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²
Lowest pump starting level	300mm	300mm	300mm
Lowest pump sucking level	250mm	250mm	250mm
Qty in carton box	4pcs	4pcs	4pcs
Master carton box size	33x26x32cm	33x26x32cm	33x26x32cm
Master carton box gross weight	16.5kg	18kg	19.2kg
Qty/20'GP	4080pcs	4080pcs	4080pcs

LD-0837

KIMPORT

Aluminum Submersible Pump

Submersible pump with complete aluminum pump housing and floater switch for clean water application. There three top selling power available for this pump model, classic design and stable performance and competitive price, we believe it would become a very good selling product in Junhe.

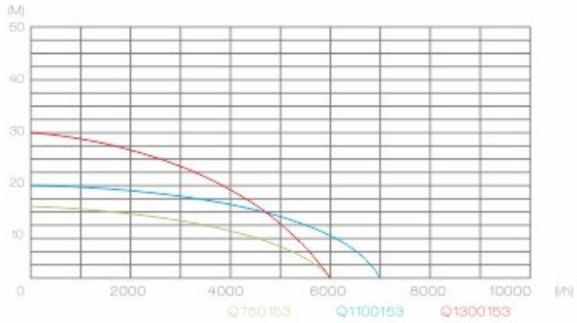

Q□□□153

Junhe Model	Q750153	Q1100153	Q1300153
Rated Power	750W	1100W	1300W
Max.pump height	16m	20m	30m
Max.pump rate	6000l/h	7000l/h	6000l/h
Max.pressure	1.6bar	2bar	3bar
Dia of connecting pipe	1"G1"	1"G1"	1"G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	75mm	75mm	85mm
Lowest pump sucking level	35mm	35mm	40mm
Qty in carton box	1pc	1pc	1pc
Master carton box size	22x18x40cm	22x18x44cm	22x18x44cm
Master carton box gross weight	8.5kg	9.5kg	10kg
Qty/20'GP	1768pcs	1600pcs	1600pcs

Agricultural Submersible Pump

New

Submersible pump with stainless steel pump body and cast iron pump base and cast iron impeller and floater switch for dirty water application. This pump is the perfect choice for agricultural irrigation purpose. There are two best selling powers available for the moment.

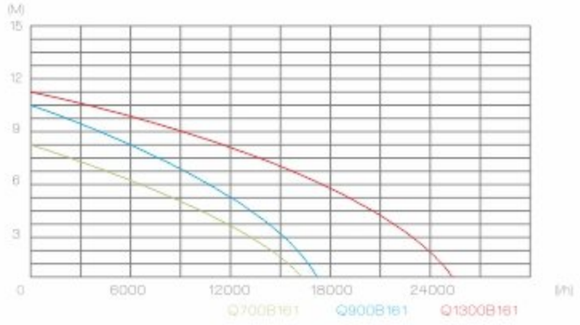

Q□□□B161

Junhe Model	Q700B161	Q900B161	Q1300B161
Rated Power	700W	900W	1300W
Max.pump height	8m	10m	11m
Max.pump rate	16000l/h	17000l/h	25000l/h
Max.pressure	0.8bar	1bar	1.1bar
Dia of connecting pipe	G2"	G2"	G2"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Lowest pump starting level	150mm	150mm	150mm
Lowest pump sucking level	55mm	55mm	55mm
Qty in carton box	1pc	1pc	1pc
Master carton box size	35x27x55cm	35x27x55cm	35x27x55cm
Master carton box gross weight	12.5kg	14kg	16.7kg
Qty/20'GP	538pcs	538pcs	538pcs

LD-0837

Circulating pump

Circulating pump with cast iron pump head and aluminum motor housing for hot water system. It is one of the best selling items for East European market, especially for Russia.

ZPB15-6-125

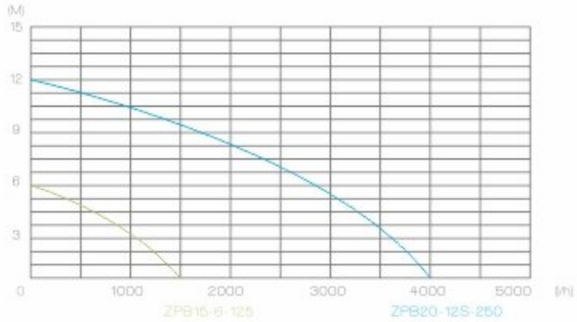

ZPB20-12S-250

Junhe Model	ZPB15-6-125	ZPB20-12S-250
Rated Power	125W	250W
Max.pump height	6m	12m
Max.pump rate	1500l/h	4000l/h
Max.pressure	0.6bar	1.2bar
Dia of connecting pipe	G3/4"	G1"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²
Qty in carton box	8pcs	8pcs
Master carton box size	42x34x38cm	42x34x38cm
Master carton box gross weight	22kg	26kg
Qty/20'GP	4120pcs	4120pcs

EDWC 2017

Electronic pressure control switch

AT-2B 4M

4M water suction hose

AT-4B 4M

4M water suction hose

FS-JH-01 377C

Submersible floater switch

FS-JH-02 377C

Submersible floater switch

FS-JH-03 377C

Submersible floater switch

AT-8 10M

10m*φ25mm PVC water delivery hose

AT-9 10M

10m*φ32mm PVC water delivery hose

AT-10 10M

10m*φ40mm PVC water delivery hose

FS-JH-04 377C

Submersible floater switch

FS-JH-05 377C

Submersible floater switch

FS-JH-06 377C

Submersible floater switch

Pump Accessories

KIMPORT

WSC-1L

1 L Water filter with dry-running protector

Junhe Model	WSC-1L
Certificate Model	WSC-1
V&Hz	220V-240V;50-60Hz
Current	10A
Cable	H07RN-F3G1.0mm²
Length of cable	1.5m
Max.Pressure	8bar
Net.size	14x13x20cm
N.W	1.5kg/pcs
Protection type	IPx4

WSC-2L

2L Water filter with dry-running protector

Junhe Model	WSC-2L
Certificate Model	WSC-2
V&Hz	220V-240V;50-60Hz
Current	10A
Cable	H07RN-F3G1.0mm²
Length of cable	1.5m
Max.Pressure	8bar
Net.size	14x13x29.5cm
N.W	1.6kg/pcs
Protection type	IPx4

HYWK-0402

Dry-running protector

Junhe Model	HYWK-0402
Certificate Model	HYWK-0402
V&Hz	110V-230V;50-60Hz
Current	10A
Cable	H07RN-F3G1.0mm²
Length of cable	1.2m
Pressure	0.6bar-6bar
Net size	18x15x11cm
Qty in carton box	24pcs
Master carton box size	46x37x46cm
N.W/G.W	11kg/13kg
Qty/20'GP	9360pcs

FS-JH-CW

Floater switch with countweight

Floater switch with 3mxH07RN-F3G1.0mm² and counter weight,you may make the cable length shorter or longer according to your order request,we also have total 6 options for the floater switch type for your choice.

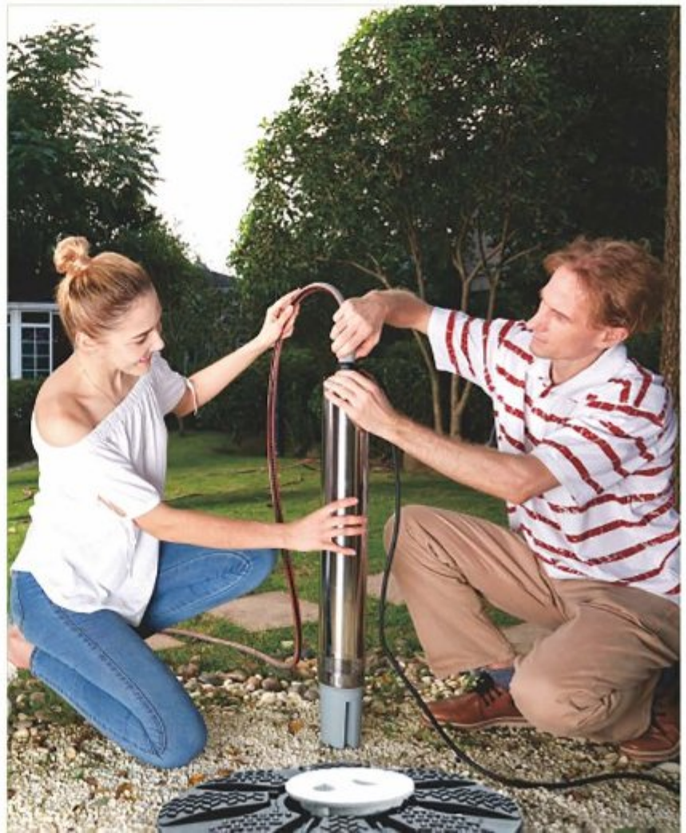

LD-0837

Submersible Pump

QXXX2

Model No.	Q2002	Q2502	Q3502
Rated Power	200W	250W	350W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.5m	6m	6.5m
Max.pump rate	3000l/h	4000l/h	5000 l/h
Max.submersible depth	7m	7m	7m
Max.grain size	5mm	5mm	5mm
Max.pressure	0. 55bar	0. 6bar	0. 65bar
Dia of connecting pipe.	3/4" 1" G1"	3/4" 1" G1"	3/4" 1" G1"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable	10m	10m	10m
Lowerst pump starting level	100mm	100mm	135mm
Lowerst pump sucking level	10mm	10mm	10mm
Max.medium temperature	35℃	35℃	35℃
Qty in carton box	6pcs	6pcs	6pcs
Master carton box size	54x46x33cm	54x46x33cm	54x46x33cm
Master carton box gross weight	23.8kg	25kg	25.4kg
Qty/20'GP	2052pcs	2052pcs	2052pcs

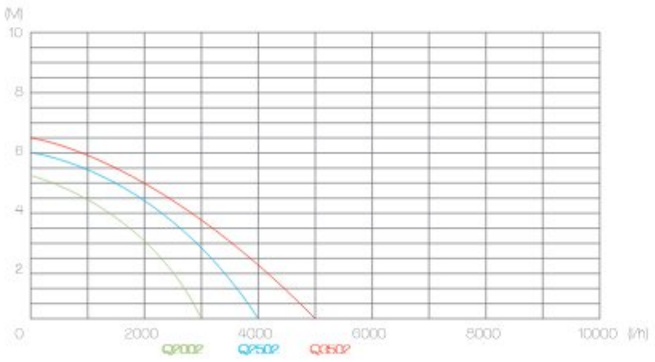

Submersible pump with plastic pump housing and floater switch for clean water application only.

Submersible Pump

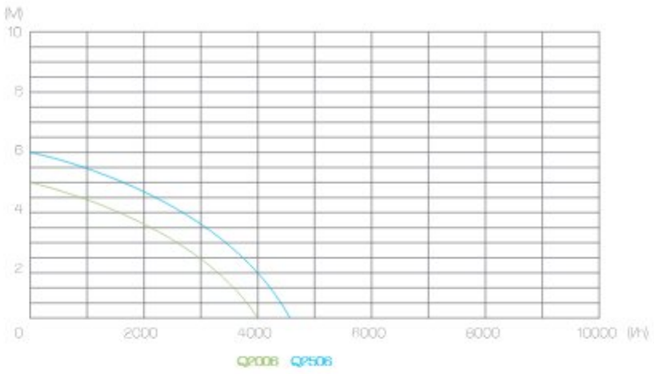

Submersible pump with plastic pump housing for clean water application only. Best selling pump item in Southeast Asia.

QXXX6

Model No.	Q2006	Q2506
Rated Power	200W	250W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	5.0m	6.0m
Max.pump rate	4000l/h	4500l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.5bar	0.6bar
Dia of connecting pipe.	1"G1"	1"G1"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable	10m	10m
Lowerst pump starting level	80mm	80mm
Lowerst pump sucking level	2mm	2mm
Max.medium temperature	35℃	35℃
Qty in carton box	6pcs	6pcs
Master carton box size	51x34x28cm	51x34x28cm
Master carton box gross weight	19.7kg	20.2kg
Qty/20'GP	2310pcs	2310pcs

Submersible Pump

QXXX7

Model No.	Q2007	Q2507
Rated Power	200W	250W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	5.0m	6.0m
Max.pump rate	4000l/h	4500l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.5bar	0.6bar
Dia of connecting pipe.	1"G1"	1"G1"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable	10m	10m
Lowerst pump starting level	80mm	80mm
Lowerst pump sucking level	2mm	2mm
Max.medium temperature	35℃	35℃
Qty in carton box	6pcs	6pcs
Master carton box size	54×42×31cm	54×42×31cm
Master carton box gross weight	23.3kg	25kg
Qty/20'GP	2394pcs	2394pcs

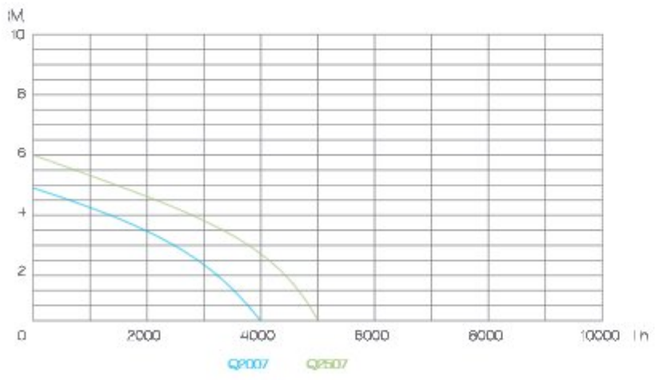

Submersible pump with plastic pump housing and floater switch for clean water application only.

Submersible Pump

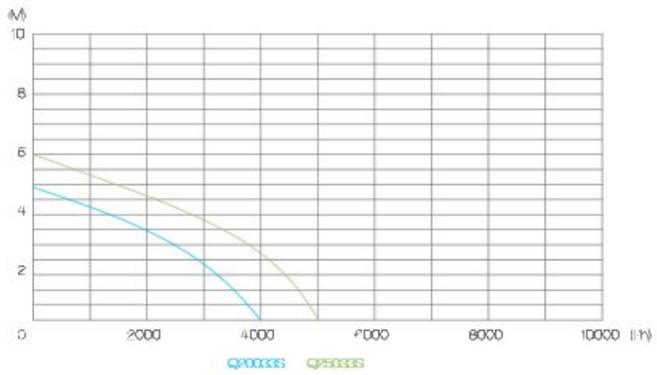

Submersible pump with plastic pump housing and floater switch for clean water application only.

QXXX33S

Model No.	Q20033S	Q25033S
Rated Power	200W	250W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	5.0m	6.0m
Max.pump rate	4000l/h	4500l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.5bar	0.6bar
Dia of connecting pipe.	1"G1"	1"G1"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable	10m	10m
Lowerst pump starting level	80mm	80mm
Lowerst pump sucking level	2mm	2mm
Max.medium temperature	35℃	35℃
Qty in carton box	6pcs	6pcs
Master carton box size	54×42×31cm	54×42×31cm
Master carton box gross weight	20.6kg	21.8kg
Qty/20'GP	2394pcs	2394pcs

KIMPORT

Submersible Pump

QXXX3A-1

Plastic submersible pump equipped with electronic aqua sensor for clean water, water starting level could be adjustable, you could change to either manual control mode or automatic control mode when using the pump. This pump has the stainless steel pump base, the pump could keep working even in condition with water level at 5mm. The pump also has the non-return valve which could avoid water back flow.

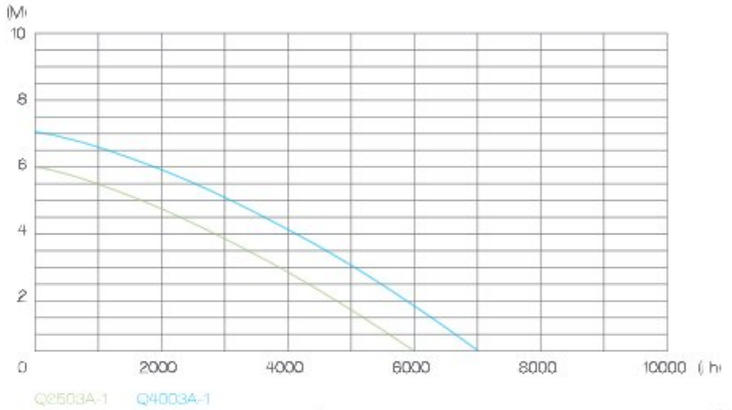

Model No.	Q2503A-1	Q4003A-1
Rated Power	250W	400W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	6.0m	7.0m
Max.pump rate	6000l/h	7000l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.6bar	0.7bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable	10m	10m
Lowerst pump starting level	5mm	5mm
Lowerst pump sucking level	1mm	1mm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	46×38×30cm	46×38×30cm
Master carton box gross weight	17.8kg	18.6kg
Qty/20'GP	2136pcs	2136pcs

Submersible Pump

QXXX3A

Model No.	Q2503A	Q4003A	Q5503A	Q7503A	Q9003A
Rated Power	250W	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	8.0m	8.5m	8.5m	9.5m
Max.pump rate	6000l/h	7000l/h	11000l/h	12500l/h	15000l/h
Max.submersible depth	7m	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm	5mm
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G1.0mm²	HO5RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m	10m
Lowerst pump starting level	100mm	100mm	120mm	120mm	120mm
Lowerst pump sucking level	5mm	5mm	5mm	5mm	5mm
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46×34×35cm	46×34×35cm	46×34×37cm	46×34×37cm	46×34×37cm
Master carton box gross weight	17.4kg	18.2kg	21.4kg	22kg	23.2kg
Qty/20'GP	2048pcs	2048pcs	1982pcs	1982pcs	1982pcs

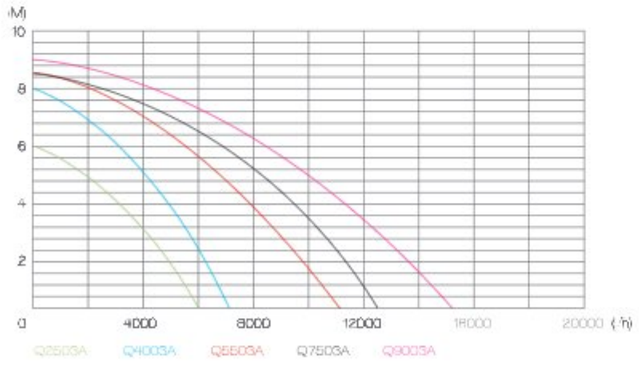

Plastic submersible pump equipped with electronic aqua sensor for clean water, the starting water level could be adjustable. With automatic control mode, the pump would automatically stop working when couldn't suck the water.

Submersible Pump

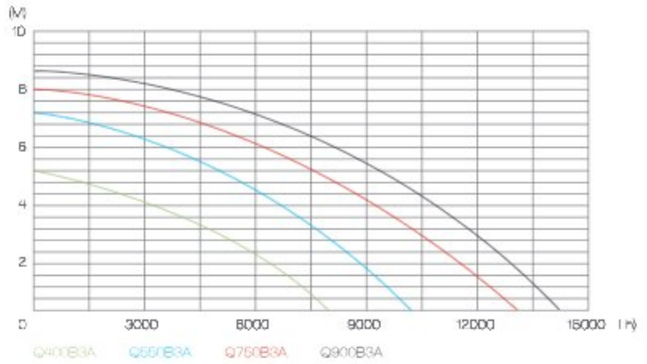

Plastic submersible pump equipped with electronic aqua sensor for dirty water, the starting water level could be adjustable. With automatic control mode, the pump would automatically stop working when couldn't suck the water.

QXXXB3A

Model No.	Q400B3A	Q550B3A	Q750B3A	Q900B3A
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m	8.5m
Max.pump rate	8000l/h	10000l/h	13000l/h	14000l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G1.0mm²	HO5RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	135mm	135mm	155mm	155mm
Lowerst pump sucking level	37mm	37mm	37mm	37mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46×34×37cm	46×34×37cm	46×34×39cm	46×34×39m
Master carton box gross weight	18.5kg	21.4kg	23.5kg	24.8kg
Qty/20'GP	1940pcs	1940pcs	1836pcs	1836pcs

Submersible Pump

QXXX1

Model No.	Q2501	Q4001	Q5501	Q7501	Q9001
Rated Power	250W	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	8.0m	8.5m	8.5m	9.5m
Max.pump rate	6000l/h	7000l/h	11000l/h	12500l/h	15000l/h
Max.submersible depth	7m	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm	5mm
Max.pressure	0. 6bar	0. 8bar	0. 85bar	0. 85bar	0. 95bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m	10m
Lowerst pump starting level	100mm	100mm	115mm	135mm	135mm
Lowerst pump sucking level	5mm	5mm	5mm	5mm	5mm
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46×34×36cm	46x34x36cm	46x34x36cm	46x34x38cm	46x34x38cm
Master carton box gross weight	17.5kg	18kg	21.7kg	22.9kg	25.5kg
Qty/20'GP	1992pcs	1992pcs	1992pcs	1888pcs	1888pcs

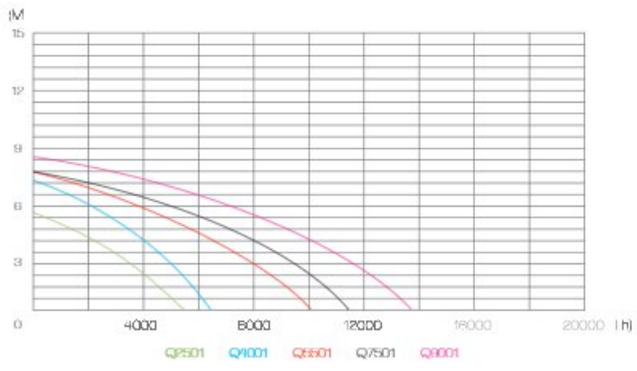

Submersible pump with plastic pump housing and floater switch for clean water application only. It is one of the best selling plastic pumps in Junhe.

Submersible Pump

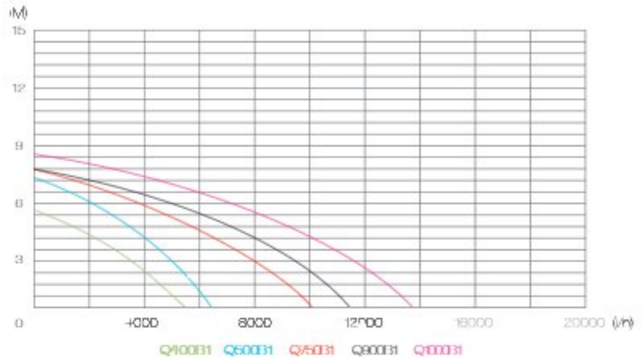

Submersible pump with plastic pump housing and floater switch for dirty water application . It is one of the best selling plastic pumps in Junhe.

QXXXB1

Model No.	Q400B1	Q550B1	Q750B1	Q900B1	Q1000B1
Rated Power	400W	550W	750W	900W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m	8.5m	10m
Max.pump rate	8000l/h	10000l/h	13000l/h	14000l/h	16000l/h
Max.submersible depth	7m	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm	35mm
Max.pressure	0. 5bar	0. 7bar	0. 8bar	0. 85bar	1.0bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m	10m
Lowerst pump starting level	135mm	145mm	145mm	155mm	155mm
Lowerst pump sucking level	35mm	35mm	35mm	35mm	35mm
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46×34×38cm	46x34x38cm	46x36x40.5cm	46x36x40.5cm	46x36x40.5cm
Master carton box gross weight	18.2kg	22kg	23kg	26kg	26.5kg
Qty/20'GP	1888pcs	1888pcs	1672pcs	1672pcs	1672pcs

Submersible Pump

QXXX3

Model No.	Q2503	Q4003	Q5503	Q7503	Q9003
Rated Power	250W	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	8.0m	8.5m	8.5m	9.5m
Max.pump rate	6000l/h	7000l/h	11000l/h	12500l/h	15000l/h
Max.submersible depth	7m	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm	5mm
Max.pressure	0. 6bar	0. 8bar	0. 85bar	0. 85bar	0. 95bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m	10m
Lowerst pump starting level	100mm	100mm	135mm	135mm	135mm
Lowerst pump sucking level	5mm	5mm	5mm	5mm	5mm
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x33cm	46x34x33cm	46x34x35cm	46x34x37cm	46x34x37cm
Master carton box gross weight	16.3kg	17.6kg	20.8kg	23kg	24.8kg
Qty/20'GP	2048pcs	2048pcs	1992pcs	1888pcs	1888pcs

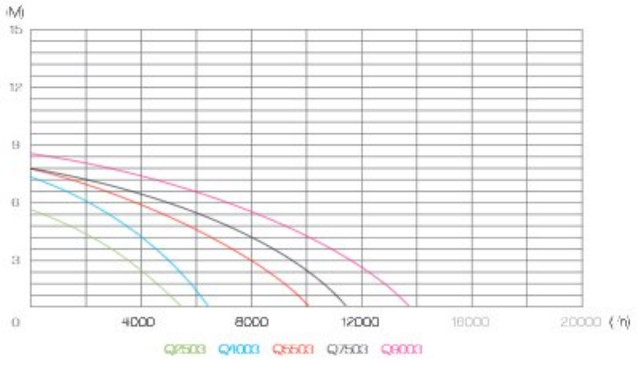

Submersible pump with plastic pump housing and floater switch for clean water application only. It is one of the best selling plastic pumps in Junhe.

Submersible Pump

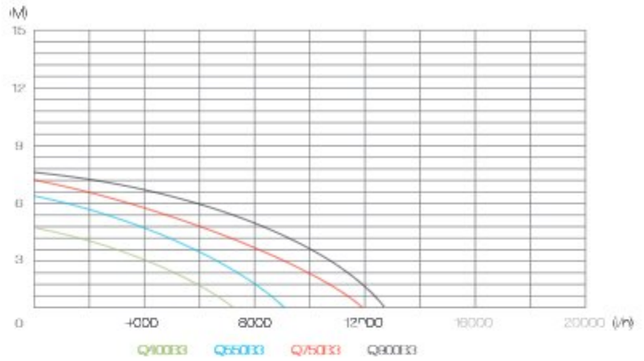

Submersible pump with plastic pump housing and floater switch for dirty water application . It is one of the best selling plastic pumps in Junhe.

QXXXB3

Model No.	Q400B3	Q550B3	Q750B3	Q900B3
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m	8.5m
Max.pump rate	8000l/h	10000l/h	13000l/h	14000l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	30mm	35mm	35mm	35mm
Max.pressure	0. 5bar	0. 7bar	0. 8bar	0. 85bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	135mm	145mm	145mm	155mm
Lowerst pump sucking level	37mm	37mm	37mm	37mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x37cm	46x34x37cm	46x34x39cm	46x34x39cm
Master carton box gross weight	18.4kg	21.7kg	22.3kg	24kg
Qty/20'GP	1888pcs	1888pcs	1672pcs	1672pcs

Submersible Pump

QXXX8-1

Model No.	Q2508-1	Q4008-1	Q5508-1	Q7508-1
Rated Power	250W	400W	550W	750W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	8.0m	8.5m	8.5m
Max.pump rate	6000l/h	7000l/h	11000l/h	12500l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	100mm	100mm	115mm	135mm
Lowerst pump sucking level	1mm	1mm	1mm	1mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46×38×33cm	46×38×33cm	46×38×33cm	46×38×33cm
Master carton box gross weight	16.4kg	18.5kg	21.6kg	22kg
Qty/20'GP	1940pcs	1940pcs	1940pcs	1940pcs

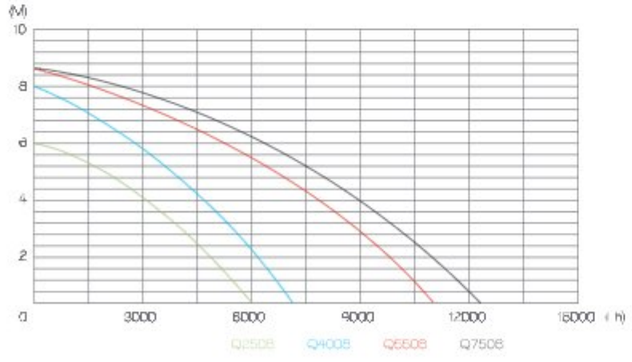

Submersible pump with plastic pump housing and floater switch for clean water application only, this pump is equipped with a very thin pump base which could sucking to the lowest water level 1mm.

Submersible Pump

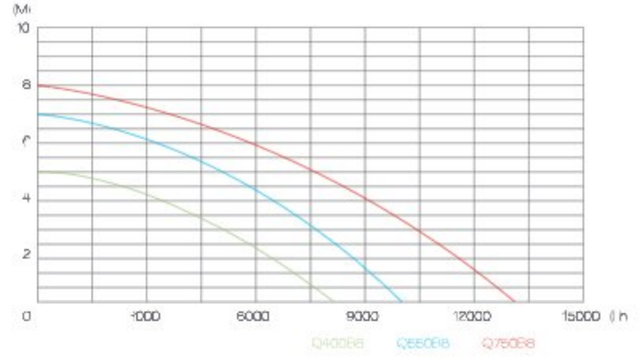

Submersible pump with oval-shaped plastic pump housing and floater switch for dirty water application.

QXXXB8

Model No.	Q400B8	Q550B8	Q750B8
Rated Power	400W	550W	750W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m
Max.pump rate	8000l/h	10000l/h	13000l/h
Max.submersible depth	7m	7m	7m
Max.grain size	35mm	35mm	35mm
Max.pressure	0.5bar	0.7bar	0.8bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable	10m	10m	10m
Lowerst pump starting level	135mm	145mm	145mm
Lowerst pump sucking level	35mm	35mm	35mm
Max.medium temperature	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs
Master carton box size	46×38×38cm	46×38×38cm	46×38×38cm
Master carton box gross weight	20kg	22kg	22.5kg
Qty/20'GP	1688pcs	1688pcs	1688pcs

Submersible Pump

QXXX11

Model No.	Q25011	Q40011	Q55011	Q75011
Rated Power	250W	400W	550W	750W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	8.0m	8.5m	8.5m
Max.pump rate	6000l/h	7000l/h	11000l/h	12500l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm
Max.pressure	0. 6bar	0. 8bar	0. 85bar	0. 85bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	100mm	100mm	115mm	135mm
Lowerst pump sucking level	5mm	5mm	5mm	5mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46×34×37cm	46x34x37cm	46x34x37cm	46x34x37cm
Master carton box gross weight	17.9kg	18.9kg	21.5kg	22kg
Qty/20'GP	1940pcs	1940pcs	1940pcs	1940pcs

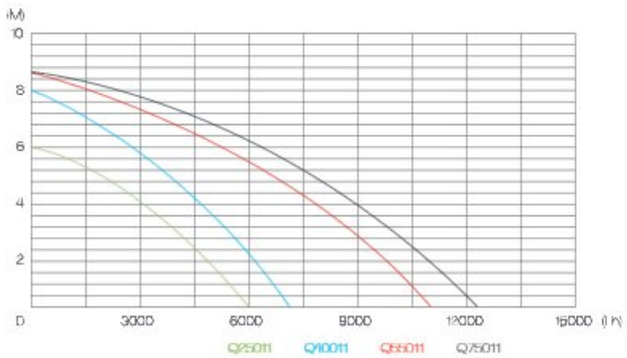

Submersible pump with plastic pump housing and built-in floater switch for clean water application only. It is one of the best selling pump items in Russian market.

Submersible Pump

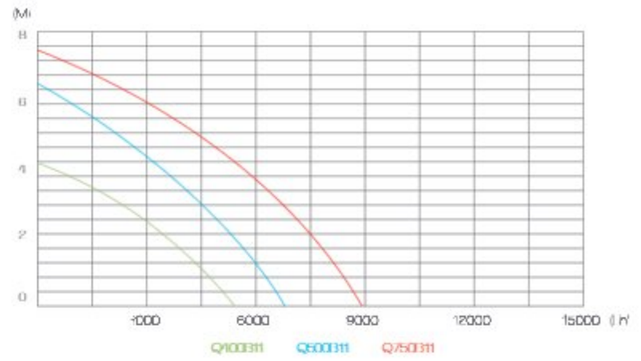

Submersible pump with plastic pump housing and built-in floater switch for dirty water application. It is one of the best selling pump items in Russian market.

QXXXB11

Model No.	Q400B11	Q550B11	Q750B11
Rated Power	400W	550W	750W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m
Max.pump rate	8000l/h	10000l/h	13000l/h
Max.submersible depth	7m	7m	7m
Max.grain size	35mm	35mm	35mm
Max.pressure	0.5bar	0.5bar	0.5bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²
Length of cable	10m	10m	10m
Lowerst pump starting level	135mm	135mm	135mm
Lowerst pump sucking level	35mm	35mm	35mm
Max.medium temperature	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs
Master carton box size	46×34×39cm	46×34×39cm	46×34×39cm
Master carton box gross weight	19kg	22.1kg	22.5kg
Qty/20'GP	1836pcs	1836pcs	1836pcs

Submersible Pump

QXXX12

Model No.	Q55012	Q75012
Rated Power	550W	750W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	8.5m	8.5m
Max.pump rate	11000l/h	12500l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.85bar	0.85bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	135mm	135mm
Lowerst pump sucking level	13mm	13mm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	46×38×38cm	46×38×38cm
Master carton box gross weight	24.1kg	25.4kg
Qty/20'GP	1688pcs	1688pcs

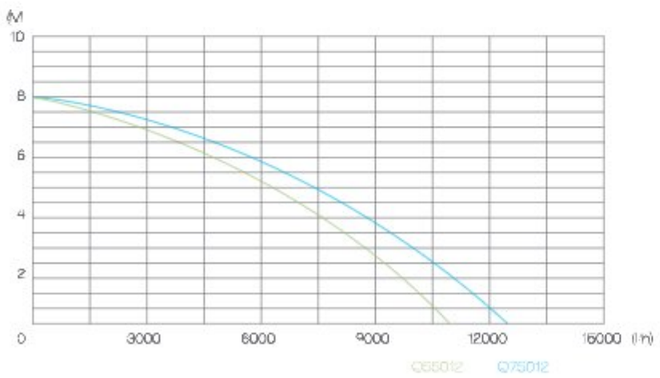

Submersible pump with plastic pump housing and triangle shape floater switch for clean water application only.

Submersible Pump

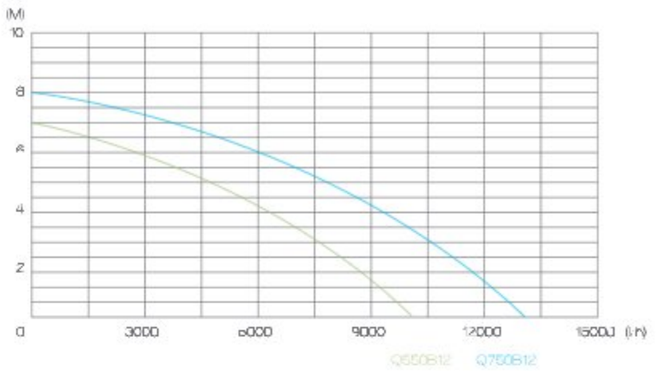

Submersible pump with plastic pump housing and triangle shape floater switch for dirty water application.

QXXXB12

Model No.	Q550B12	Q750B12
Rated Power	550W	750W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	7.0m	8.0m
Max.pump rate	10000l/h	13000l/h
Max.submersible depth	7m	7m
Max.grain size	30mm	30mm
Max.pressure	0.7bar	0.8bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	145mm	145mm
Lowerst pump sucking level	40mm	40mm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	46×38×40cm	46×38×40cm
Master carton box gross weight	23kg	24kg
Qty/20'GP	1600pcs	1600 pcs

Submersible Pump

Submersible Pump

QXXX13-1

Model No.	Q25013-1	Q35013-1	Q40013-1
Rated Power	250W	350W	400W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	9.0m	10m	11m
Max.pump rate	2500l/h	3000l/h	4000l/h
Max.submersible depth	7m	7m	7m
Max.grain size	0.5mm	0.5mm	0.5mm
Max.pressure	0.9bar	1.0bar	1. 1bar
Dia of connecting pipe.	G3/4"	G3/4"	G3/4"
Cable specification	H05RN-F3G0. 75mm²	H05RN-F3G0. 75mm²	H05RN-F3G0. 75mm²
Length of cable	10m	10m	10m
Lowerst pump starting level	65mm	65mm	65mm
Lowerst pump sucking level	16mm	16mm	16mm
Max.medium temperature	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs
Master carton box size	52x42x33cm	52x42x33cm	52x42x33cm
Master carton box gross weight	17.9kg	20.1kg	21.2kg
Qty/20'GP	1556pcs	1556pcs	1556pcs

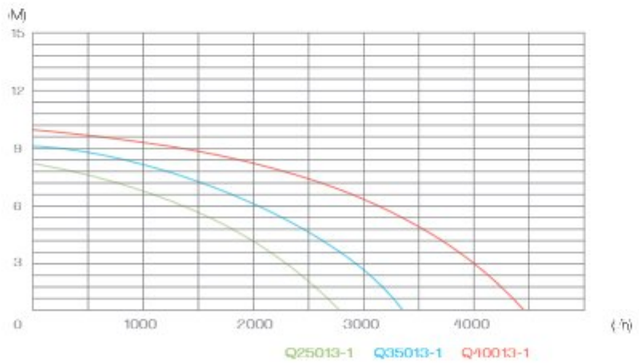

Plastic submersible rain water pump with flexible tube for clean water only. This pump could be using for rain water application, in which you could put this pump into the wooden barrel or plastic water tank for water transferring or garden irrigation.

Submersible Pump

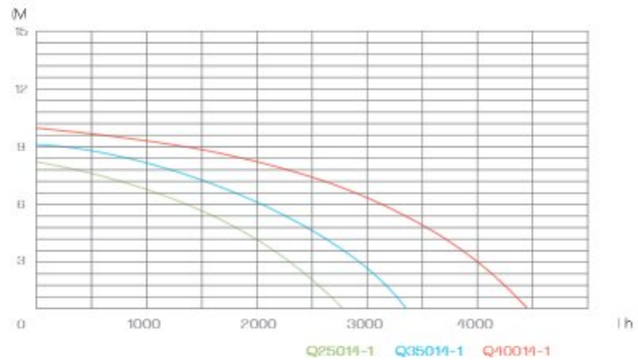

Plastic submersible rain water pump with flexible tube for clean water only. This pump could be using for rain water application, in which you could put this pump into the wooden barrel or plastic water tank for water transferring or garden irrigation.

QXXX14-1

Model No.	Q25014-1	Q35014-1	Q40014-1
Rated Power	250W	350W	400W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	9.0m	10m	11m
Max.pump rate	2500l/h	3000l/h	4000l/h
Max.submersible depth	7m	7m	7m
Max.grain size	0.5mm	0.5mm	0.5mm
Max.pressure	0.9bar	1.0bar	1. 1bar
Dia of connecting pipe.	G3/4"	G3/4"	G3/4"
Cable specification	H05RN-F3G0. 75mm²	H05RN-F3G0. 75mm²	H05RN-F3G0. 75mm²
Length of cable	10m	10m	10m
Lowerst pump starting level	65mm	65mm	65mm
Lowerst pump sucking level	16mm	16mm	16mm
Max.medium temperature	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs
Master carton box size	46×34×35cm	46×34×35cm	46×34×35cm
Master carton box gross weight	17.9kg	19kg	19.5kg
Qty/20'GP	2048pcs	2048pcs	2048pcs

Submersible Pump

QXXX23

Model No.	Q25023	Q40023	Q55023	Q75023	Q90023
Rated Power	250W	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	8.0m	8.5m	8.5m	9.5m
Max.pump rate	6000l/h	7000l/h	11000l/h	12500l/h	15000l/h
Max.submersible depth	7m	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm	5mm
Max.pressure	0. 6bar	0. 8bar	0. 85bar	0. 85bar	0. 95bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m	10m
Lowerst pump starting level	100mm	100mm	135mm	135mm	135mm
Lowerst pump sucking level	5mm	5mm	5mm	5mm	5mm
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x35cm	46x34x35cm	46x34x35cm	46x34x38cm	46x34x38cm
Master carton box gross weight	17.5kg	18kg	21kg	23kg	24.8kg
Qty/20'GP	2048pcs	2048pcs	2048pcs	1888pcs	1888pcs

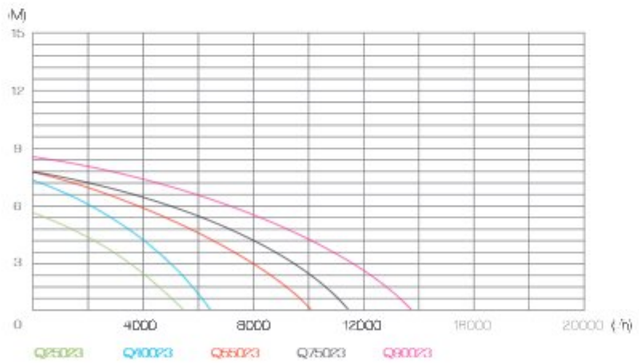

Submersible pump with plastic pump housing and floater switch for clean water application only.

Submersible Pump

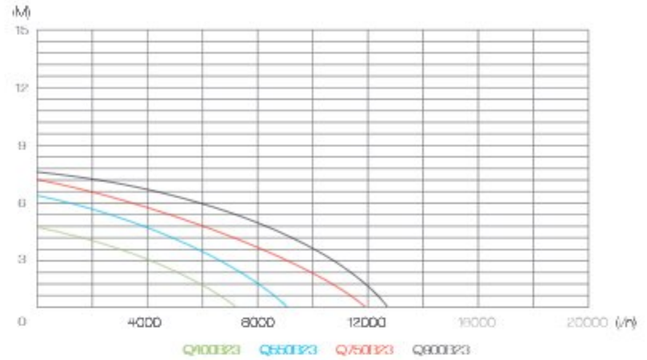

Submersible pump with plastic pump housing and floater switch for dirty water application .

QXXXB23

Model No.	Q400B23	Q550B23	Q750B23	Q900B23
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m	8.5m
Max.pump rate	8000l/h	10000l/h	13000l/h	14000l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	30mm	35mm	35mm	35mm
Max.pressure	0. 5bar	0. 7bar	0. 8bar	0. 85bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	135mm	145mm	145mm	155mm
Lowerst pump sucking level	37mm	37mm	37mm	37mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x38cm	46x34x38cm	46x36x40cm	46x36x40cm
Master carton box gross weight	18.8kg	21.1kg	23.6kg	25kg
Qty/20'GP	1884pcs	1884pcs	1700pcs	1700pcs

Submersible Pump

QXXX27

Model No.	Q25027	Q40027	Q55027	Q75027	Q90027
Rated Power	250W	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	8.0m	8.5m	8.5m	9.5m
Max.pump rate	6000l/h	7000l/h	11000l/h	12500l/h	15000l/h
Max.submersible depth	7m	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm	5mm
Max.pressure	0. 6bar	0. 8bar	0. 85bar	0. 85bar	0. 95bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m	10m
Lowerst pump starting level	100mm	100mm	115mm	135mm	135mm
Lowerst pump sucking level	5mm	5mm	5mm	5mm	5mm
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x33cm	46x34x33cm	46x34x34cm	46x34x34cm	46x34x36cm
Master carton box gross weight	17.5kg	18.5kg	21.3kg	23kg	24.7kg
Qty/20'GP	2240pcs	2240pcs	2100pcs	2100pcs	1988pcs

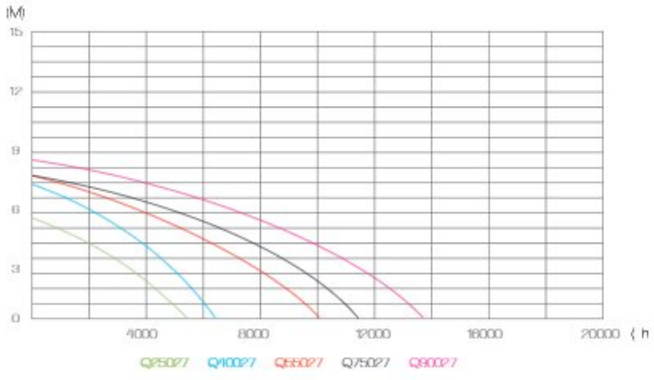

Submersible pump with plastic pump housing and floater switch for clean water application only. It is one of the best selling plastic pumps in Junhe.

Submersible Pump

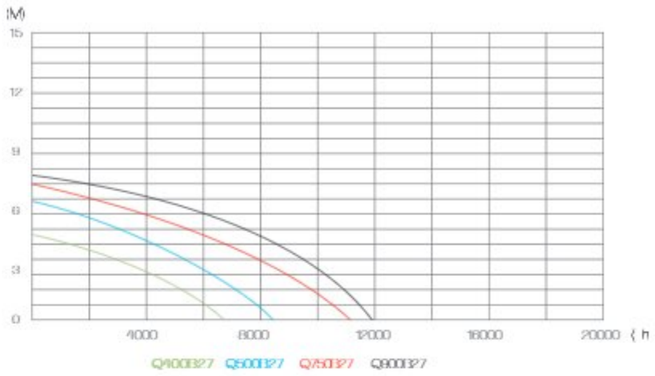

Submersible pump with plastic pump housing and floater switch for dirty water application . It is one of the best selling plastic pumps in Junhe.

QXXXB27

Model No.	Q400B27	Q550B27	Q750B27	Q900B27
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m	8.5m
Max.pump rate	8000l/h	10000l/h	13000l/h	14000l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0. 5bar	0. 7bar	0. 8bar	0. 85bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	135mm	145mm	145mm	155mm
Lowerst pump sucking level	35mm	35mm	35mm	35mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x35cm	46x34x37cm	46x34x39cm	46x34x39cm
Master carton box gross weight	17.6kg	20.6kg	22.9kg	24.3kg
Qty/20'GP	2048pcs	1940pcs	1840pcs	1840pcs

Submersible Pump

QXXX27S-1

Model No.	Q25027S-1	Q40027S-1	Q55027S-1	Q75027S-1	Q90027S-1
Rated Power	250W	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	8.0m	8.5m	8.5m	9.5m
Max.pump rate	6000l/h	7000l/h	11000l/h	12500l/h	15000l/h
Max.submersible depth	7m	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm	5mm
Max.pressure	0. 6bar	0. 8bar	0. 85bar	0. 85bar	0. 95bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m	10m
Lowerst pump starting level	100mm	100mm	115mm	135mm	135mm
Lowerst pump sucking level	5mm	5mm	5mm	5mm	5mm
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x30cm	46x34x30cm	46x34x32cm	46x34x32cm	46x34x32cm
Master carton box gross weight	16.2kg	17kg	18.7kg	20.5kg	21kg
Qty/20'GP	2388pcs	2388pcs	2240pcs	2240pcs	2240pcs

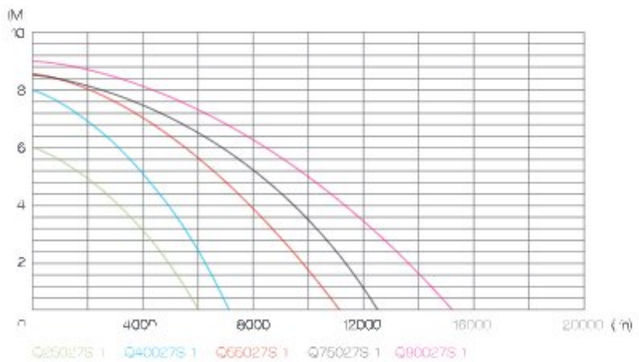

Submersible pump with plastic pump housing and floater switch for clean water application only. It is the best selling basic entry level for European market.

Submersible Pump

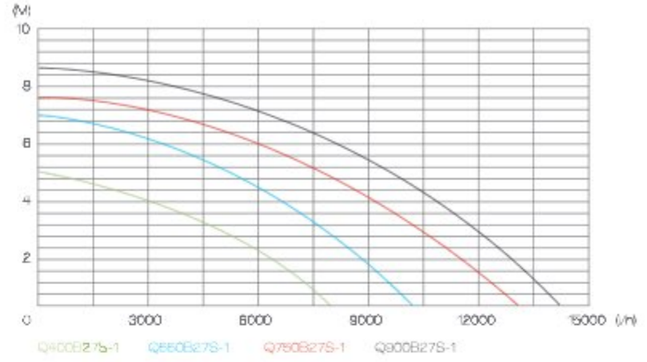

Submersible pump with plastic pump housing and floater switch for dirty water application. It is the best selling basic entry level for European market.

QXXXB27S-1

Model No.	Q400B27S-1	Q550B27S-1	Q750B27S-1	Q900B27S-1
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m	8.5m
Max.pump rate	8000l/h	10000l/h	13000l/h	14000l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0. 5bar	0. 7bar	0. 8bar	0. 85bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	135mm	145mm	145mm	155mm
Lowerst pump sucking level	35mm	35mm	35mm	35mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x33cm	46x34x34cm	46x34x37cm	46x34x37cm
Master carton box gross weight	17.2kg	18.7kg	20.5kg	21.4kg
Qty/20'GP	2180pcs	2100pcs	1940cs	1940cs

Submersible Pump

QXXX32

Model No.	Q25032	Q40032	Q55032	Q75032	Q100032
Rated Power	250W	400W	550W	750W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	7.5m	8.0m	8.5m	9.5m
Max.pump rate	6000l/h	7000l/h	11000l/h	12500l/h	16000l/h
Max.submersible depth	7m	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm	5mm
Max.pressure	0. 6bar	0. 75bar	0. 8bar	0. 85bar	0. 95bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m	10m
Lowerst pump starting level	80mm	100mm	115mm	135mm	135mm
Lowerst pump sucking level	5mm	5mm	5mm	5mm	5mm
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	50x40x36cm	50x40x36cm	50x40x36cm	50x40x39cm	50x40x39cm
Master carton box gross weight	19.2kg	19.7kg	22.3kg	23.7kg	28.9kg
Qty/20'GP	1556pcs	1556pcs	1556pcs	1436pcs	1436pcs

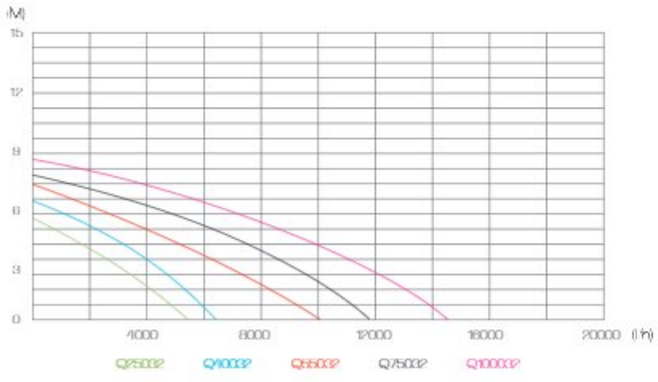

Submersible pump with plastic pump housing and floater switch for clean water application only.

Submersible Pump

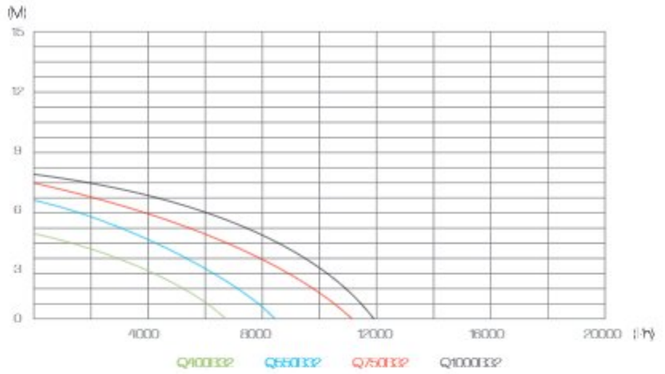

Submersible pump with plastic pump housing and floater switch for dirty water application .

QXXXB32

Model No.	Q400B32	Q550B32	Q750B32	Q1000B32
Rated Power	400W	550W	750W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m	9.5m
Max.pump rate	8000l/h	10000l/h	13000l/h	15000l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm
Max.pressure	0. 5bar	0. 7bar	0. 8bar	0. 95bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	135mm	155mm	155mm	155mm
Lowerst pump sucking level	40mm	40mm	40mm	40mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	50x40x40cm	50x40x40cm	50x40x43cm	50x40x43cm
Master carton box gross weight	20.2kg	22.6kg	25.4kg	30.2kg
Qty/20'GP	1400pcs	1400pcs	1300pcs	1300pcs

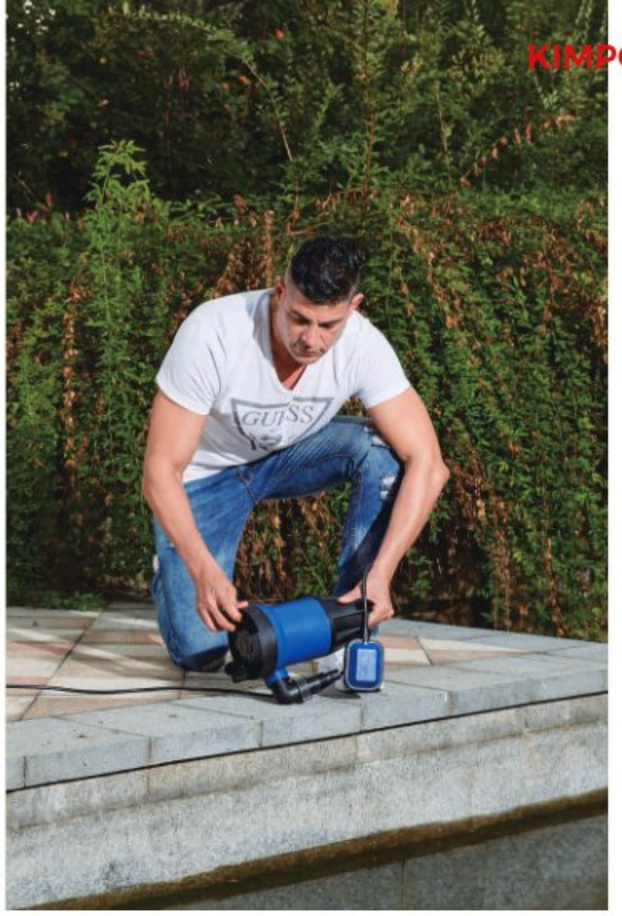

KIMPORT

Submersible Pump

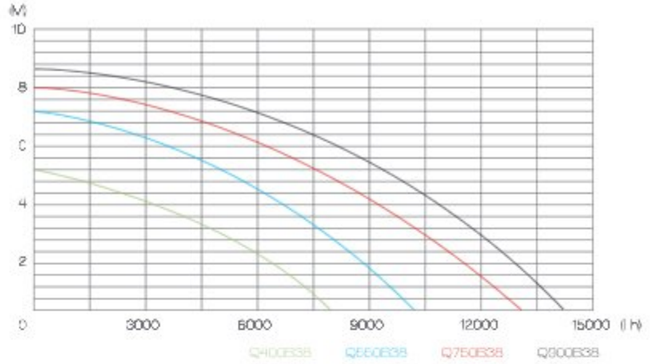

Submersible pump with plastic pump housing and floater switch and foldable pump base for both clean and dirty water application. When you open the pump base by hand, it could be used for dirty water application, when you close the pump base by hand, it could be used for clean water application only.

QXXXB38

Model No.	Q400B38	Q550B38	Q750B38	Q900B38
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m	8.5m
Max.pump rate	8000l/h	10000l/h	13000l/h	14000l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	5-30mm	5-30mm	5-30mm	5-30mm
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G1.0mm²	HO5RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	135mm	135mm	155mm	155mm
Lowerst pump sucking level	5mm	5mm	5mm	5mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46×34×35cm	46×34×35cm	46×34×37cm	46×34×37cm
Master carton box gross weight	18.3kg	21kg	23.3kg	24.2kg
Qty/20'GP	2048pcs	2048pcs	1936pcs	1936pcs

Submersible Pump

QXXX92

Model No.	Q25092	Q40092	Q55092	Q75092	Q90092
Rated Power	250W	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6m	8m	8.5m	8.5m	9.5m
Max.pump rate	6000l/h	7000l/h	11000l/h	12500l/h	15000l/h
Max.submersible depth	7m	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm	5mm
Max.pressure	0.6bar	0.8bar	0.9bar	0.9bar	0.95bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G1.0mm²	HO5RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m	10m
Lowerst pump starting level	100mm	100mm	100mm	100mm	100mm
Lowerst pump sucking level	5mm	5mm	5mm	5mm	5mm
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46×34×35cm	46×34×35cm	46×34×38cm	46×34×38cm	46×34×38cm
Master carton box gross weight	17.5kg	18.5kg	22.5kg	23.5kg	25.5kg
Qty/20'GP	2048pcs	2048pcs	1992pcs	1992pcs	1888pcs

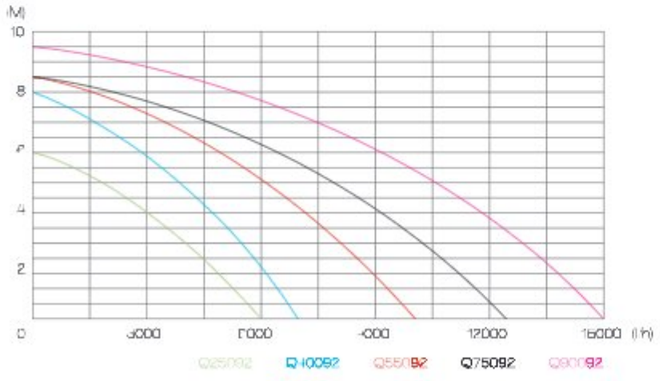

Submersible pump with plastic pump housing and floater switch for clean water application only.

Submersible Pump

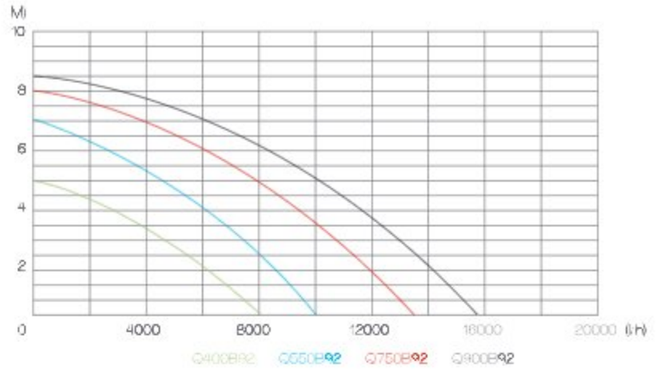

Submersible pump with plastic pump housing and floater switch for dirty water application .

QXXXB92

Model No.	Q400B92	Q550B92	Q750B92	Q900B92
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5m	7m	8m	8.5m
Max.pump rate	8000l/h	10000l/h	13500l/h	15500l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0.5bar	0.7bar	0.75bar	0.85bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G1.0mm²	HO5RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	135mm	135mm	135mm	135mm
Lowerst pump sucking level	35mm	35mm	35mm	35mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46×34×35cm	46×34×38cm	46×36×40.5cm	46×36×40.5cm
Master carton box gross weight	19.5kg	23.5kg	25kg	26kg
Qty/20'GP	2048pcs	1888pcs	1672pcs	1672pcs

Submersible Pump

QXXX51R

Model No.	Q40051R	Q55051R	Q75051R	Q90051R
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.5m	7.5m	8.5m	9.0m
Max.pump rate	7500l/h	8500l/h	11000l/h	12000l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm
Max.pressure	0. 65bar	0. 75bar	0. 85bar	0. 9bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	35mm	35mm	35mm	35mm
Lowerst pump sucking level	11mm	11mm	11mm	11mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x33cm	46x34x33cm	46x34x33cm	46x34x33cm
Master carton box gross weight	21kg	21.7kg	23.5kg	26.3kg
Qty/20'GP	2172pcs	2172pcs	2172pcs	2172pcs

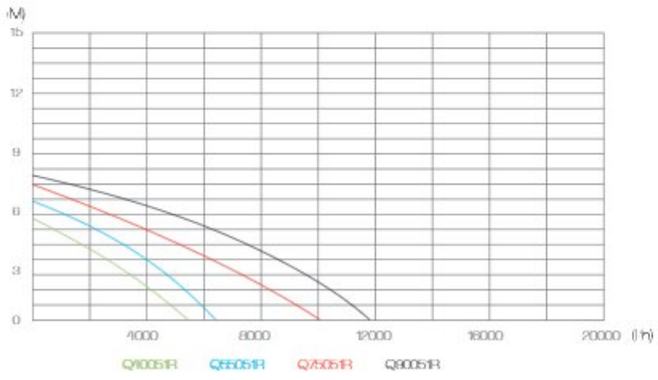

Sumersible pump with stainless steel pump body and plastic pump base and floater switch for clean water application only.

Submersible Pump

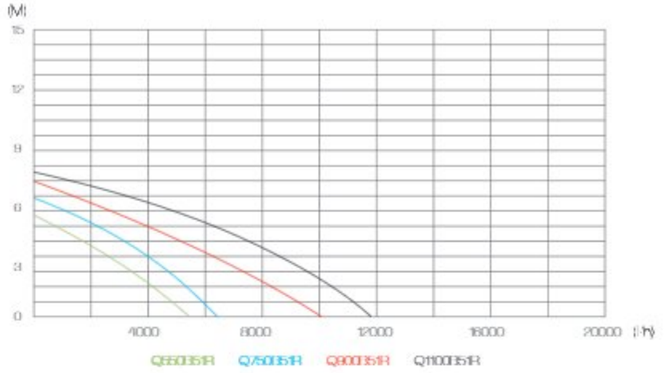

Sumersible pump with stainless steel pump body and plastic pump base and floater switch for dirty water application.

QXXXB51R

Model No.	Q550B51R	Q750B51R	Q900B51R	Q1100B51R
Rated Power	550W	750W	900W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	7.0m	8.0m	9.0m	10.5m
Max.pump rate	9500l/h	12500l/h	13500l/h	16500l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0. 7bar	0. 8bar	0. 9bar	1.05bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	135mm	135mm	135mm	135mm
Lowerst pump sucking level	40mm	40mm	40mm	40mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x38x38.5cm	46x38x38.5cm	46x38x38.5cm	46x38x38.5cm
Master carton box gross weight	24.6kg	25.7kg	27.3kg	29.8kg
Qty/20'GP	1664pcs	1644pcs	1644pcs	1664pcs

Submersible Pump

QXXX52R

Model No.	Q40052R	Q55052R	Q75052R	Q90052R
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.5m	7.5m	8.5m	9.0m
Max.pump rate	7500l/h	8500l/h	11000l/h	13000l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm
Max.pressure	0. 65bar	0. 75bar	0. 85bar	0. 9bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	35mm	35mm	35mm	35mm
Lowerst pump sucking level	11mm	11mm	11mm	11mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x33cm	46x34x33cm	46x34x33cm	46x38x33cm
Master carton box gross weight	19.9kg	22.8kg	23.6kg	26.7kg
Qty/20'GP	2172pcs	2172pcs	2172pcs	2172pcs

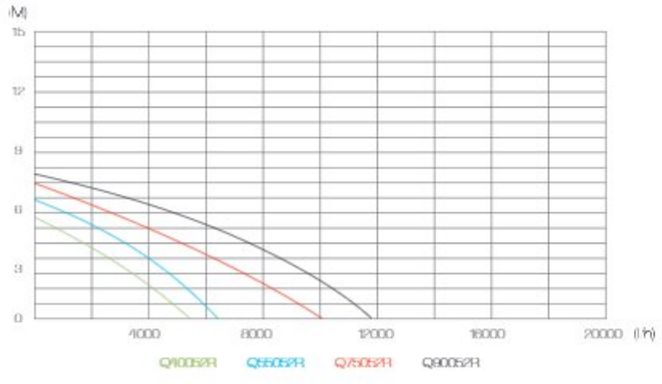

Submersible pump with stainless steel pump housing and floater switch for clean water application only. It is one of the best selling pump items in Junhe.

Submersible Pump

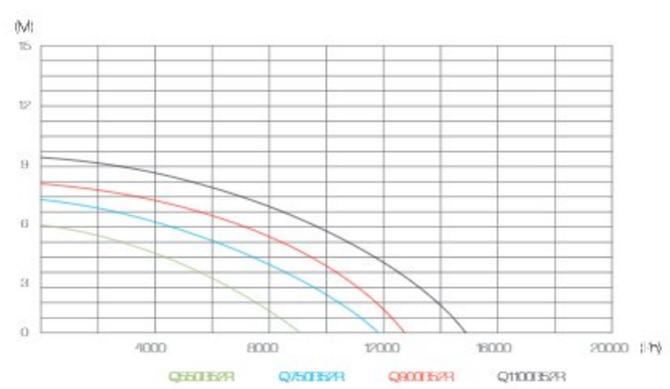

Submersible pump with stainless steel pumphousing and floater switch for dirty water application. It is one of the best selling pump items in Junhe.

QXXXB52R

Model No.	Q550B52R	Q750B52R	Q900B52R	Q1100B52R
Rated Power	550W	750W	900W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	7.0m	8.0m	9.0m	10.5m
Max.pump rate	10000l/h	13000l/h	14000l/h	16500l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0. 7bar	0. 8bar	0. 9bar	1.05bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	135mm	135mm	135mm	135mm
Lowerst pump sucking level	45mm	45mm	45mm	45mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x38x38cm	46x38x38.5cm	46x38x38.5cm	46x38x38.5cm
Master carton box gross weight	23.5kg	26.2kg	27.4kg	30.3kg
Qty/20'GP	1688pcs	1668pcs	1668pcs	1668pcs

Submersible Pump

QXXX54R

Model No.	Q40054R	Q55054R	Q75054R	Q90054R
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.5m	7.5m	8.5m	9.0m
Max.pump rate	7500l/h	8500l/h	11000l/h	13000l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm
Max.pressure	0. 65bar	0. 75bar	0. 85bar	0. 9bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	35mm	35mm	35mm	35mm
Lowerst pump sucking level	11mm	11mm	11mm	11mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x33cm	46x34x33cm	46x34x33cm	46x34x33cm
Master carton box gross weight	20kg	23.3kg	24.3kg	25.7kg
Qty/20'GP	2172pcs	2172pcs	2172pcs	2172pcs

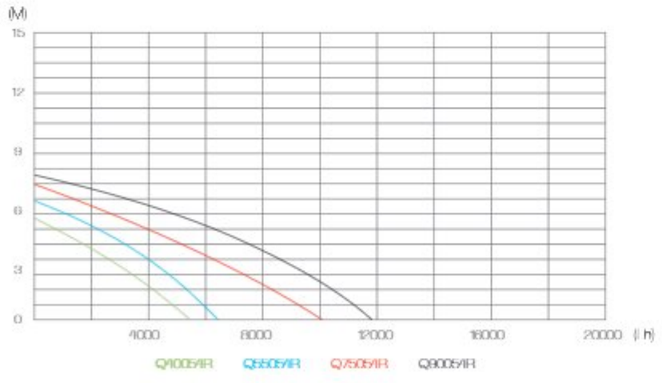

Submersible pump with stainless steel pump housing and floater switch for clean water application only. It is one of the best selling pump items in Junhe.

Submersible Pump

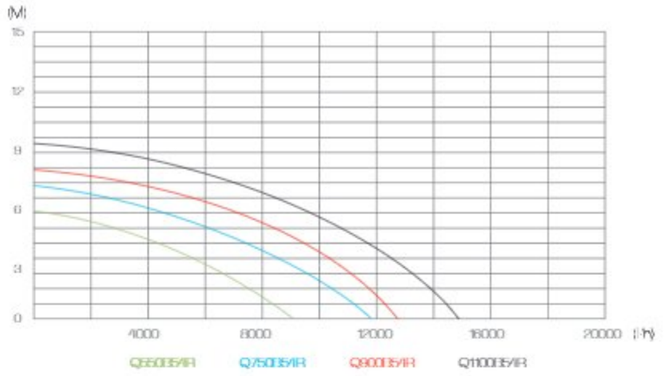

Submersible pump with stainless steel pump housing and floater switch for dirty water application. It is one of the best selling pump items in Junhe.

QXXXB54R

Model No.	Q550B54R	Q750B54R	Q900B54R	Q1100B54R
Rated Power	550W	750W	900W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	7.0m	8.0m	9.0m	10.5m
Max.pump rate	10000l/h	13000l/h	14000l/h	16500l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0. 7bar	0. 8bar	0. 9bar	1.05bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	135mm	135mm	135mm	135mm
Lowerst pump sucking level	45mm	45mm	45mm	45mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x38x38.5cm	46x38x38.5cm	46x38x38.5cm	46x38x38.5cm
Master carton box gross weight	24.4kg	26.2kg	28kg	30.7kg
Qty/20'GP	1688pcs	1668pcs	1668pcs	1668pcs

Submersible Pump

QXXX56

Model No.	Q60056	Q100056
Rated Power	600W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	8.0m	9.5m
Max.pump rate	15000l/h	16500l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.8bar	0.95bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	135mm	135mm
Lowerst pump sucking level	33mm	33mm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	46x38x38cm	46x38x39cm
Master carton box gross weight	26.6kg	29.9kg
Qty/20'GP	1688pcs	1644pcs

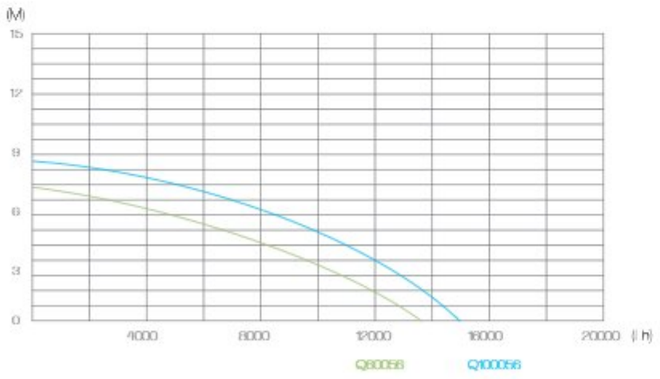

Submersible pump with stainless steel pump housing and floater switch for clean water application only.

Submersible Pump

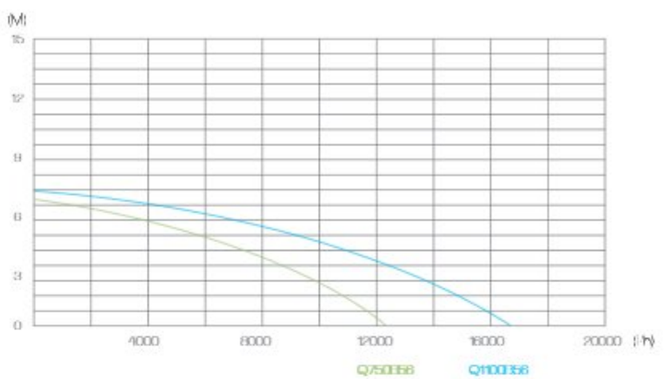

Submersible pump with stainless steel pump housing and floater switch for dirty water application.

QXXXB56

Model No.	Q750B56	Q1100B56
Rated Power	750W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	7.5m	8.0m
Max.pump rate	13500l/h	18500l/h
Max.submersible depth	7m	7m
Max.grain size	15mm	20mm
Max.pressure	0.75bar	0.8bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	135mm	135mm
Lowerst pump sucking level	33mm	33mm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	46x38x39cm	46x38x41cm
Master carton box gross weight	26.3kg	30.6kg
Qty/20'GP	1644pcs	1560pcs

Submersible Pump

QXXX56A

Model No.	Q60056A	Q100056A
Rated Power	600W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	8.0m	9.5m
Max.pump rate	15000l/h	16500l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.8bar	0.95bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	135mm	135mm
Lowerst pump sucking level	33mm	33mm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	46x38x38cm	46x38x39cm
Master carton box gross weight	24.5kg	29.9kg
Qty/20'GP	1688pcs	1644pcs

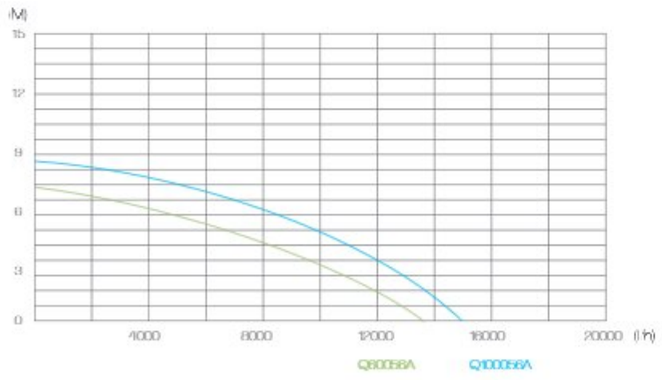

Submersible pump with stainless steel pump housing and auqan sensor switch for clean water application only.

Submersible Pump

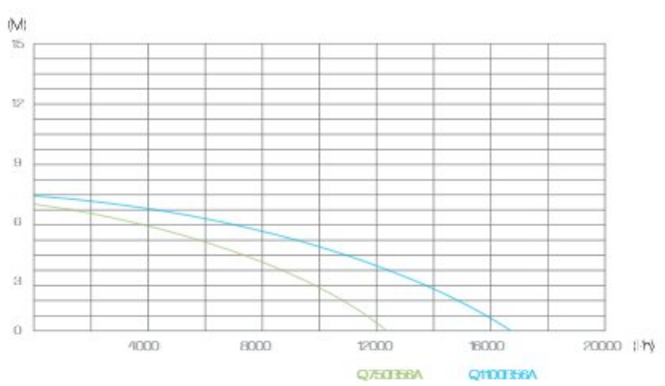

Submersible pump with stainless steel pump housing and auqan sensor switch for dirty water application.

QXXXB56A

Model No.	Q750B56A	Q1100B56A
Rated Power	750W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	7.5m	8.0m
Max.pump rate	13500l/h	18500l/h
Max.submersible depth	7m	7m
Max.grain size	15mm	20mm
Max.pressure	0.75bar	0.8bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	135mm	135mm
Lowerst pump sucking level	33mm	33mm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	46x38x39cm	46x38x41cm
Master carton box gross weight	26.4kg	29.7kg
Qty/20'GP	1644pcs	1560pcs

Submersible Pump

QXXX64

Model No.	Q40064	Q55064
Rated Power	400W	550W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	6.5m	7.5m
Max.pump rate	7500l/h	8500l/h
Max.submersible depth	7m	7m
Max.grain size	1mm	1mm
Max.pressure	0. 65bar	0. 75bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	35mm	35mm
Lowerst pump sucking level	1mm	1mm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	42x36x33cm	42x36x33cm
Master carton box gross weight	18.6kg	19.2kg
Qty/20'GP	2248pcs	2248pcs

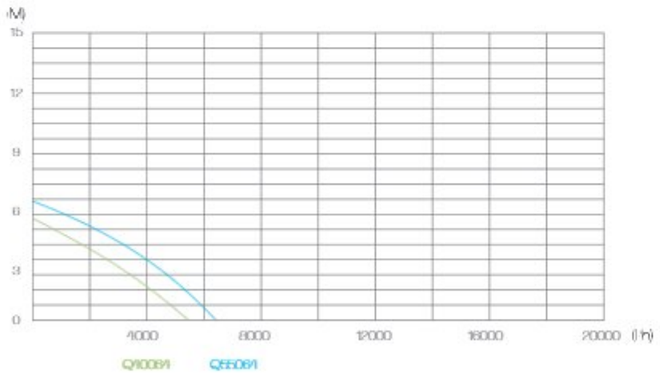

Submersible pump with stainless steel pump housing and floater switch for clean water application only, this pump is equipped with a very thin pump base which could sucking to the lowest water level 1mm.

Submersible Pump

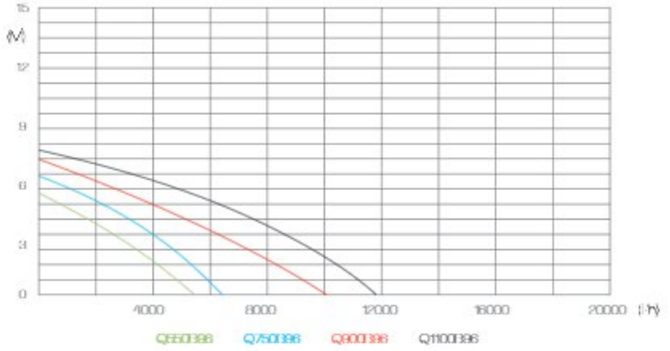

Sumersible pump with stainless steel pump body and plastic pump base and floater switch for dirty water application. It is the best selling basic entry level for European market.

QXXXB96

Model No.	Q550B96	Q750B96	Q900B96	Q1100B96
Rated Power	550W	750W	900W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.5m	8.0m	8.5m	9.0m
Max.pump rate	12500l/h	14000l/h	16500l/h	20000l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0.65bar	0. 8bar	0.85bar	0.9bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²	H05RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	135mm	135mm	135mm	135mm
Lowerst pump sucking level	40mm	40mm	40mm	40mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x38x37cm	46x38x39cm	46x38x39cm	46x39x39cm
Master carton box gross weight	23.5kg	27.5kg	28.5kg	29.5kg
Qty/20'GP	1732pcs	1644pcs	1644pcs	1644pcs

Submersible Pump

QXXX68

Model No.	Q60068	Q100068
Rated Power	600W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	8.0m	9.5m
Max.pump rate	15000l/h	16500l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.8bar	0.95bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	135mm	135mm
Lowerst pump sucking level	33mm	33mm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	50x38x39cm	50x38x43cm
Master carton box gross weight	26.3kg	31.8kg
Qty/20'GP	1372pcs	1440pcs

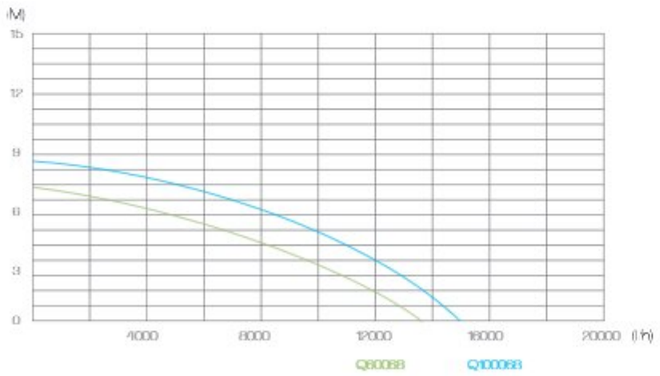

Submersible pump with stainless steel pump body and plastic casing and floater switch for clean water application only.

Submersible Pump

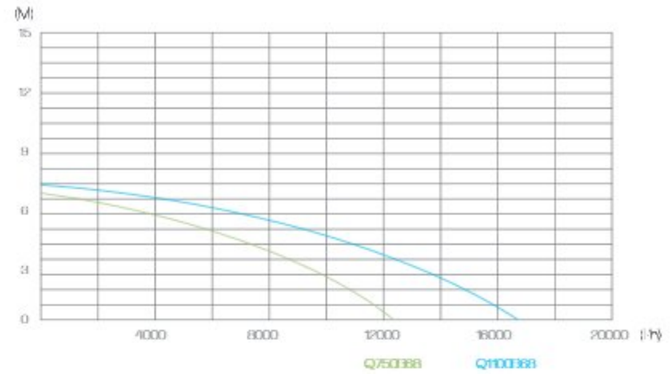

Submersible pump with stainless steel pump body and plastic casing and floater switch for dirty water application.

QXXXB68

Model No.	Q750B68	Q1100B68
Rated Power	750W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	7.5m	8.0m
Max.pump rate	13500l/h	18500l/h
Max.submersible depth	7m	7m
Max.grain size	15mm	20mm
Max.pressure	0.75bar	0.8bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	135mm	135mm
Lowerst pump sucking level	33mm	33mm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	50x38x39cm	50x38x43cm
Master carton box gross weight	27.7kg	31.6kg
Qty/20'GP	1512pcs	1372pcs

Submersible Pump

QXXX68A

Model No.	Q60068A	Q100068A
Rated Power	600W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	8.0m	9.5m
Max.pump rate	15000l/h	16500l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.8bar	0.95bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	135mm	135mm
Lowerst pump sucking level	33mm	33mm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	50x38x40cm	50x38x43cm
Master carton box gross weight	26.2kg	30kg
Qty/20'GP	1472pcs	1372pcs

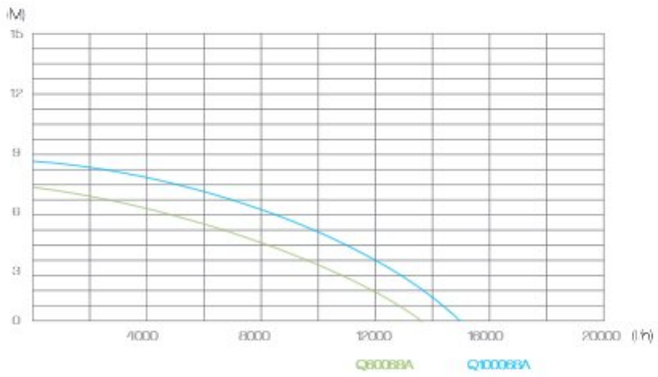

Submersible pump with stainless steel steel pump body and plastic casing and aqua sensor switch for clean water application only.

Submersible Pump

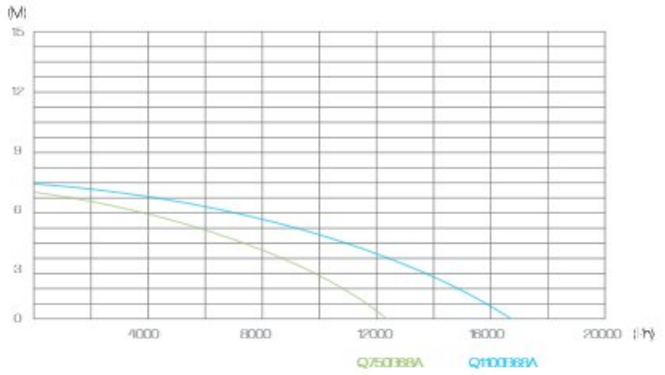

Submersible pump with stainless steel pump body and plastic casing and aqua sensor switch for dirty water application.

QXXXB68A

Model No.	Q750B68A	Q1100B68A
Rated Power	750W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	7.5m	8.0m
Max.pump rate	13500l/h	18500l/h
Max.submersible depth	7m	7m
Max.grain size	15mm	20mm
Max.pressure	0.75bar	0.8bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	135mm	135mm
Lowerst pump sucking level	33mm	33mm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	50x38x40cm	50x38x43cm
Master carton box gross weight	27kg	31kg
Qty/20'GP	1472pcs	1372pcs

KIMPORT

Submersible Pump

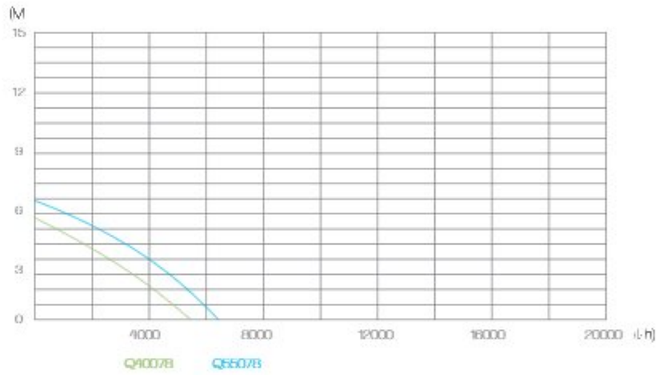

QXXX78

Submersible pump with stainless steel pump body and plastic casing and floater switch for clean water application only. This pump is equipped with a very thin pump base which could sucking to the lowest water level 1mm.

Model No.	Q40078	Q55078
Rated Power	400W	550W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	6.5m	7.5m
Max.pump rate	7500l/h	8500l/h
Max.submersible depth	7m	7m
Max.grain size	1mm	1mm
Max.pressure	0. 65bar	0. 75bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	35mm	35mm
Lowerst pump sucking level	1mm	1mm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	42x36x33cm	42x36x33cm
Master carton box gross weight	20.1kg	22.5kg
Qty/20'GP	2248pcs	2248pcs

Submersible Pump

QXXX65

Model No.	Q40065	Q55065	Q75065	Q90065
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	7m	8m	8.5m	9.0m
Max.pump rate	8500l/h	10000l/h	11500l/h	13000l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	10mm	10mm	10mm	10mm
Max.pressure	0.7bar	0.88bar	0.85bar	0.95bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO7RN-F3G1.0mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	135mm	135mm	135mm	135mm
Lowerst pump sucking level	5mm	5mm	5mm	5mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x33cm	46x34x33cm	46x34x33cm	46x34x33cm
Master carton box gross weight	17.7kg	21.7kg	24.2kg	27.2kg
Qty/20'GP	2180pcs	2180pcs	2180pcs	2180pcs

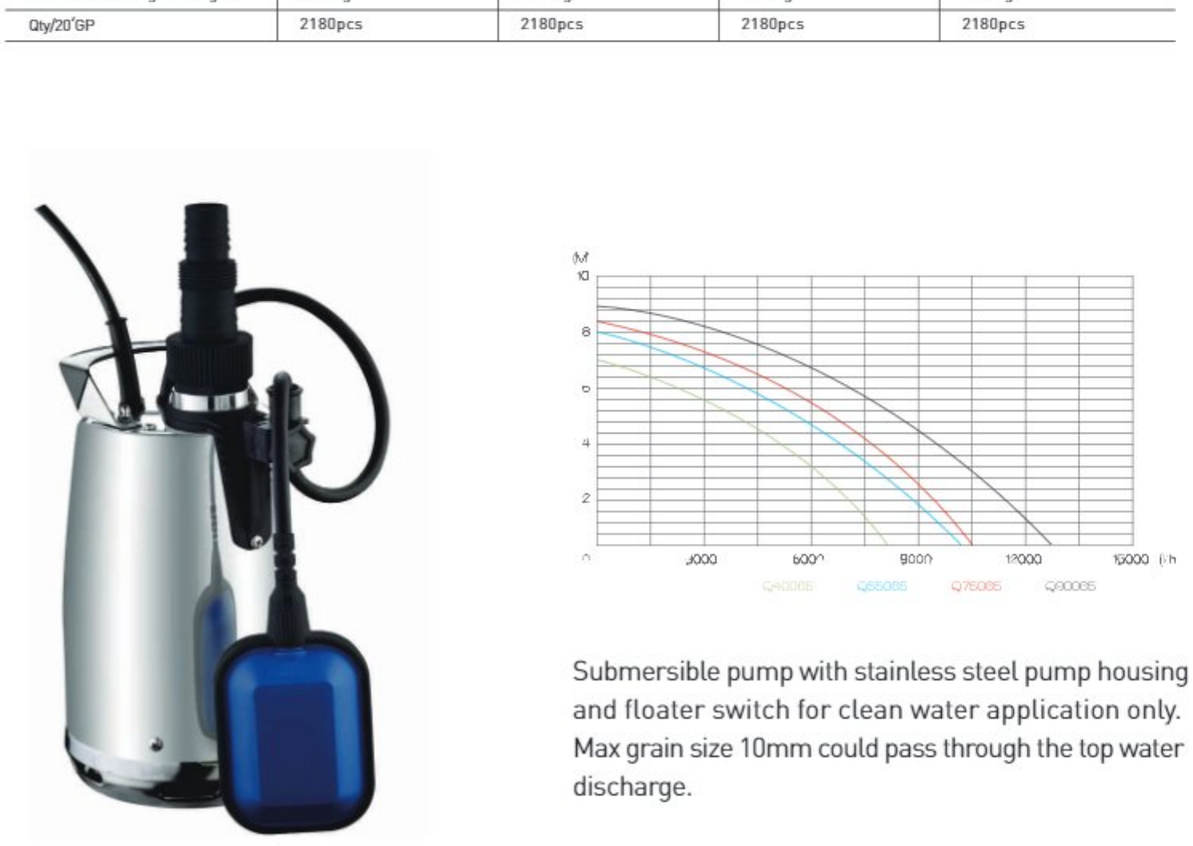

Submersible pump with stainless steel pump housing and floater switch for clean water application only. Max grain size 10mm could pass through the top water discharge.

Submersible Pump

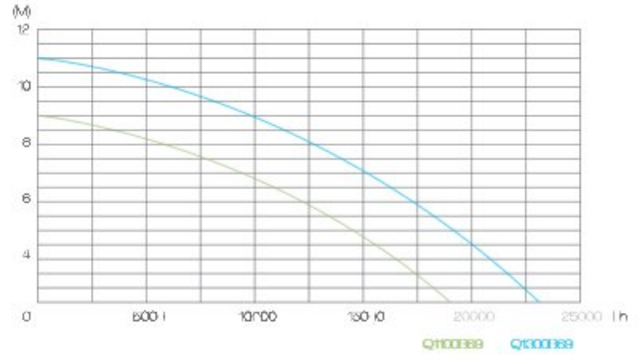

Submersible pump with stainless steel pump housing and floater switch for dirty water application. This pump has 2" water discharge and could reach very big flow rate per hour.

QXXXB69

Model No.	Q1100B69	Q1300B69
Rated Power	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	9m	11m
Max.pump rate	18500l/h	23000l/h
Max.submersible depth	7m	7m
Max.grain size	40mm	40mm
Max.pressure	0.9bar	1.1bar
Dia of connecting pipe.	G1-1/2"2"G2"	G1-1/2"2"G2"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	150mm	150mm
Lowerst pump sucking level	50mm	50mm
Max.medium temperature	35℃	35℃
Qty in carton box	2pcs	2pcs
Master carton box size	40x26x13cm	40x26x13cm
Master carton box gross weight	17.7kg	18.9kg
Qty/20'GP	1252pcs	1252pcs

KIMPORT

Submersible Pump

QXXX101

Model No.	Q750101	Q1000101
Rated Power	750W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	13m	16m
Max.pump rate	12000l/h	13000l/h
Max.submersible depth	7m	7m
Max.grain size	1mm	1mm
Max.pressure	1.3bar	1.6bar
Dia of connecting pipe.	G1-1/2"2"G2	G1-1/2"2"G2
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	80mm	80mm
Lowerst pump sucking level	22mm	22mm
Max.medium temperature	35℃	35℃
Qty in carton box	2pcs	2pcs
Master carton box size	44x25x46cm	44x25x46cm
Master carton box gross weight	16.9kg	18.8kg
Qty/20'GP	1106pcs	1106pcs

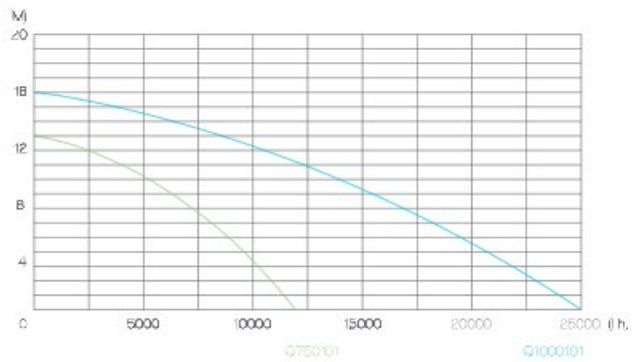

Submersible pump with plastic pump housing and floater switch for clean water application only. 2" water discharge, pump base with screen filter.

Submersible Pump

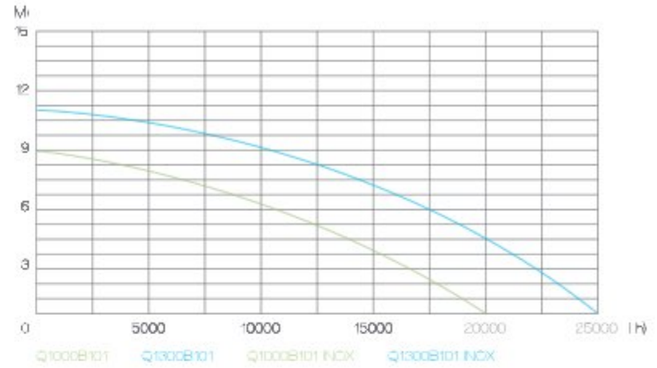

Submersible pump with plastic pump housing and floater switch for dirty water application. 2" water discharge could reach very big flow rate per hour.

QXXXB101

Model No.	Q1000B101	Q1300B101
Rated Power	1000W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	9m	11m
Max.pump rate	20000l/h	25000l/h
Max.submersible depth	7m	7m
Max.grain size	40mm	40mm
Max.pressure	0.9bar	1.1bar
Dia of connecting pipe.	G1-1/2"2"G2	G1-1/2"2"G2
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	165mm	165mm
Lowerst pump sucking level	53mm	53mm
Max.medium temperature	35℃	35℃
Qty in carton box	2pcs	2pcs
Master carton box size	48x27x47cm	48x27x47cm
Master carton box gross weight	16.2kg	17kg
Qty/20'GP	920pcs	920pcs

Submersible Pump

QXXX101 INOX

Model No.	Q750101 INOX	Q1000101 INOX
Rated Power	750W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	13m	16m
Max.pump rate	12000l/h	13000l/h
Max.submersible depth	7m	7m
Max.grain size	1mm	1mm
Max.pressure	1.3bar	1.6bar
Dia of connecting pipe.	G1-1/2"2"G2"	G1-1/2"2"G2"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	80mm	80mm
Lowerst pump sucking level	22mm	22mm
Max.medium temperature	35℃	35℃
Qty in carton box	2pcs	2pcs
Master carton box size	44x25x46cm	44x25x46cm
Master carton box gross weight	16.9kg	18.8kg
Qty/20'GP	1106pcs	1106pcs

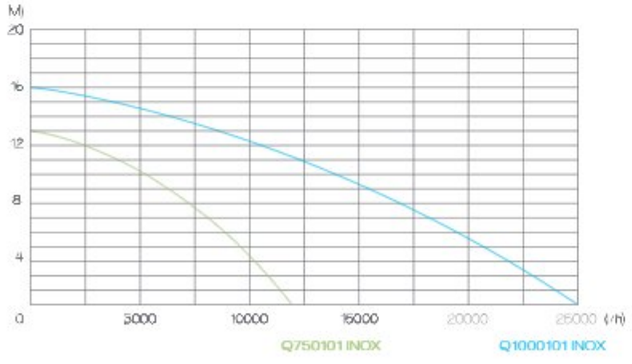

Submersible pump with plastic pump housing and stainless steel casing and floater switch for clean water application only. 2" water discharge, pump base with screen filter.

Submersible Pump

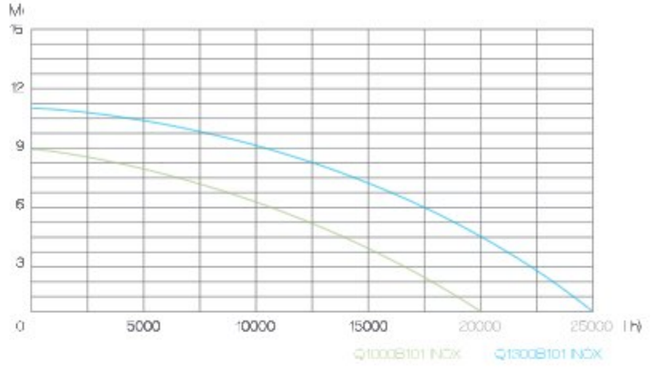

Submersible pump with plastic pump housing and stainless steel casing and floater switch for dirty water application. 2" water discharge could reach very big flow rate per hour.

QXXXB101 INOX

Model No.	Q1000B101 INOX	Q1300B101 INOX
Rated Power	1000W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	9.0m	11m
Max.pump rate	20000l/h	25000l/h
Max.submersible depth	7m	7m
Max.grain size	40mm	40mm
Max.pressure	0.9bar	1.1bar
Dia of connecting pipe.	G1-1/2"2"G2"	G1-1/2"2"G2"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	165mm	165mm
Lowerst pump sucking level	53mm	53mm
Max.medium temperature	35℃	35℃
Qty in carton box	2pcs	2pcs
Master carton box size	48x27x47cm	48x27x47cm
Master carton box gross weight	16.5kg	17.3kg
Qty/20'GP	920pcs	920pcs

Submersible Pump

QXXX93A

Model No.	Q60093A	Q100093A
Rated Power	600W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	8.0m	9.5m
Max.pump rate	15000l/h	16500l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.8bar	0.95bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	135mm	135mm
Lowerst pump sucking level	33mm	33mm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	46x38x37cm	46x38x39cm
Master carton box gross weight	24.5kg	26.5kg
Qty/20'GP	1732pcs	1644pcs

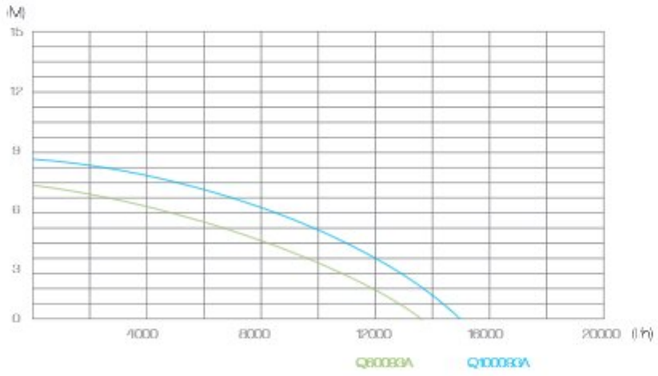

Submersible pump with stainless steel pump body and plastic casing and aqua sensor switch for clean water application only.

Submersible Pump

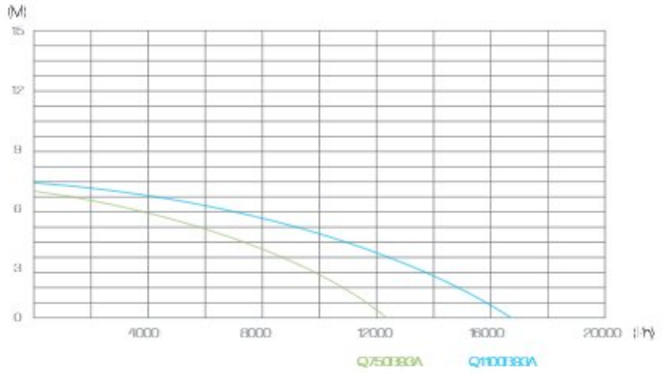

Submersible pump with stainless steel pump body and plastic casing and aqua sensor switch for dirty water application.

QXXXB93A

Model No.	Q750B93A	Q1100B93A
Rated Power	750W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	7.5m	8.0m
Max.pump rate	13500l/h	18500l/h
Max.submersible depth	7m	7m
Max.grain size	15mm	20mm
Max.pressure	0.75bar	0.8bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	10m	10m
Lowerst pump starting level	135mm	135mm
Lowerst pump sucking level	33mm	33mm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	46x38x39cm	46x38x39cm
Master carton box gross weight	27.5kg	28.5kg
Qty/20'GP	1644pcs	1644pcs

Submersible Pump

Q80030-3P

Multi-stage submersible pump with floater switch for clean water application only. Plastic pump handle / stainless steel pump body / aluminum pump base, 3 stage plastic impeller could reach max 30m delivery height.

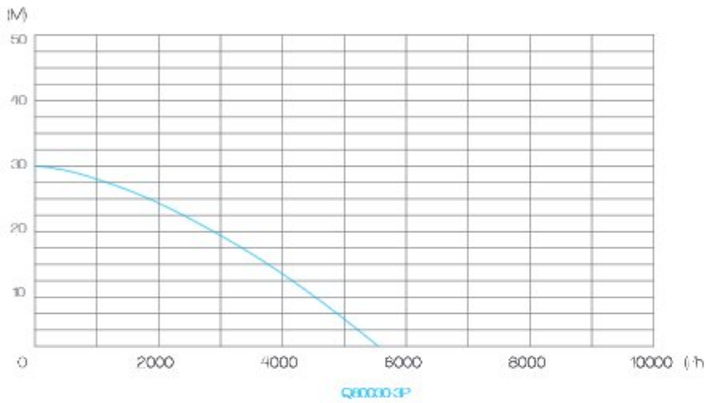

Model No.	Q80030-3P
Rated Power	800W
Vol&Fre.	230V/50Hz
Max.pump height	30m
Max.pump rate	5500l/h
Max.submersible depth	7m
Max.grain size	0.5mm
Max.pressure	3.0bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/4"
Cable specification	HO7RN-F3G1.0mm²
Length of cable	10m
Lowerst pump starting level	85mm
Lowerst pump sucking level	22mm
Max.medium temperature	35℃
Qty in carton box	4pcs
Master carton box size	46x34x38cm
Master carton box gross weight	31.5kg
Qty/20'GP	1888pcs

Submersible Pump

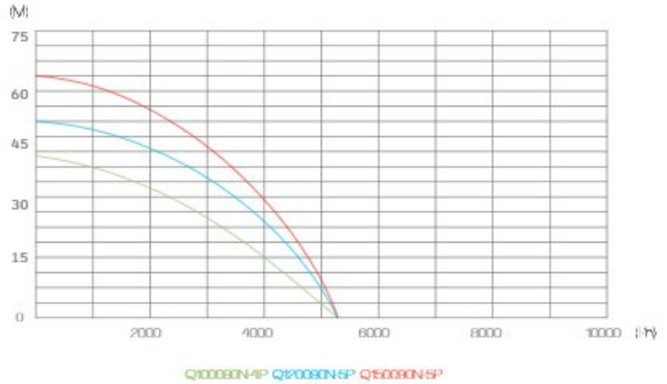

Multi-stage submersible pump with complete stainless steel pump housing for clean water application only. We have option of 4 stage / 5 stage / 6 stage plastic impellers for you.

QXXX90N-XP

Model No.	Q100090N-4P	Q120090N-5P	Q150090N-6P
Rated Power	1000W	1200W	1500W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	42m	54m	65m
Max.pump rate	5500l/h	5500l/h	5500l/h
Max.submersible depth	7m	7m	7m
Max.grain size	1.5mm	1.5mm	1.5mm
Max.pressure	4.2bar	5.4bar	6.5bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	10m	10m	10m
Lowerst pump starting level	160mm	185mm	185mm
Lowerst pump sucking level	30mm	30mm	30mm
Max.medium temperature	35℃	35℃	35℃
Qty in carton box	2pcs	2pcs	2pcs
Master carton box size	60.5x37x24.5cm	60.5x37x24.5cm	60.5x37x24.5cm
Master carton box gross weight	25.7kg	26.6kg	28kg
Qty/20'GP	1020pcs	1020pcs	1020pcs

KIMPORT

Submersible Pump

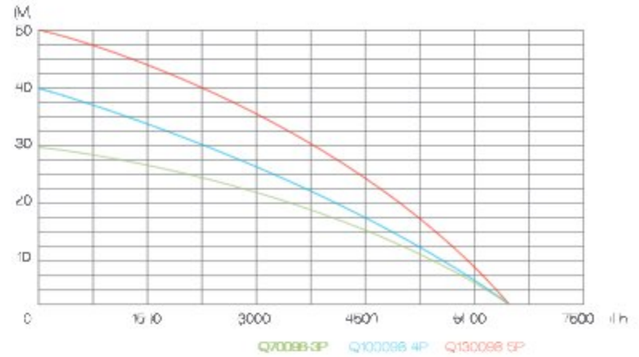

Multi-stage submersible pump with stainless steel pump body and cast iron pump base for clean water application only. We have option of 3 stage / 4 stage / 5 stage plastic impellers for you.

QXXX98-XP

Model No.	Q70098-3P	Q100098-4P	Q130098-5P
Rated Power	700W	1000W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	30m	40m	50m
Max.pump rate	6500l/h	6500l/h	6500l/h
Max.submersible depth	7m	7m	7m
Max.grain size	2.5mm	2.5mm	2.5mm
Max.pressure	4bar	4bar	5bar
Dia of connecting pipe.	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	10m	10m	10m
Lowerst pump starting level	160mm	160mm	190mm
Lowerst pump sucking level	40mm	40mm	40mm
Max.medium temperature	35℃	35℃	35℃
Qty in carton box	2pcs	2pcs	4pcs
Master carton box size	60.5x37x24.5cm	60.5x37x24.5cm	60.5x37x24.5cm
Master carton box gross weight	25kg	27.9kg	29kg
Qty/20'GP	1020pcs	1020pcs	1020pcs

LD-0837

Garden Jet Pump

Specification				
Model No.	**JGP6001 INOX**	**JGP8001 INOX**	**JGP10001 INOX**	**JGP12001 INOX**
Rated Power	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	7.1kg	7.3kg	8.2kg	8.5kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs

JGPXXX1 INOX

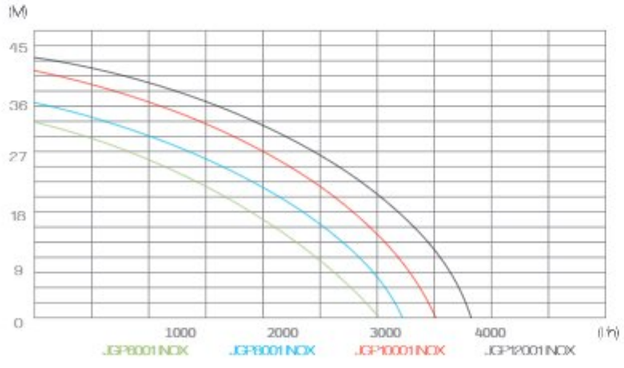

Garden jet pump with stainless steel pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

JGPXXX3

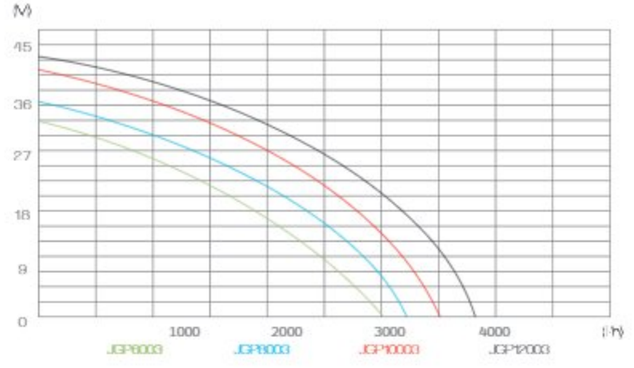

Garden jet pump with plastic pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch.This type of garden jet pumps are very easy to install and operate.

Specification				
Model No.	**JGP6003**	**JGP8003**	**JGP10003**	**JGP12003**
Rated Power	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	7.3kg	7.7kg	8.4kg	8.6kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs

Garden Jet Pump

Specification				
Model No.	**JGP6001W INOX**	**JGP8001W INOX**	**JGP10001W INOX**	**JGP12001W INOX**
Rated Power	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	7.5kg	7.8kg	8.1kg	8.5kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs

JGPXXX1W INOX

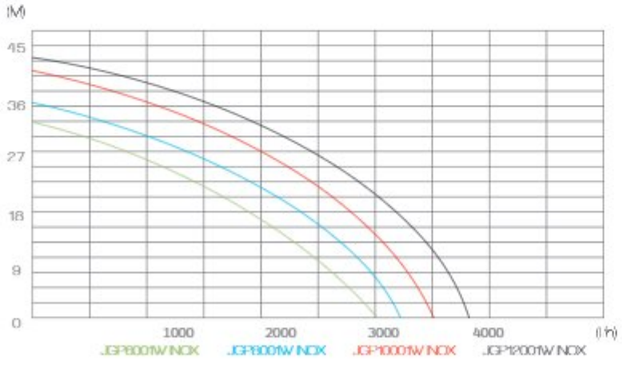

Garden jet pump with stainless steel pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

JGPXXX3W

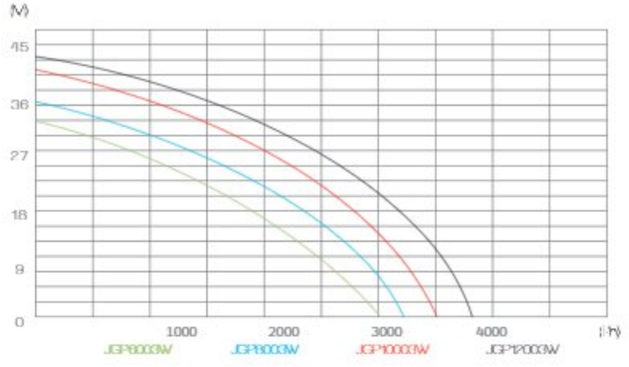

Garden jet pump with plastic pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Specification				
Model No.	**JGP6003W**	**JGP8003W**	**JGP10003W**	**JGP12003W**
Rated Power	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	7kg	7.3kg	7.6kg	8kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs

Garden Jet Pump

Specification				
Model No.	**JGP6002 INOX**	**JGP8002 INOX**	**JGP10002 INOX**	**JGP12002 INOX**
Rated Power	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	7.5kg	7.8kg	8.1kg	8.5kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs

JGPXXX2 INOX

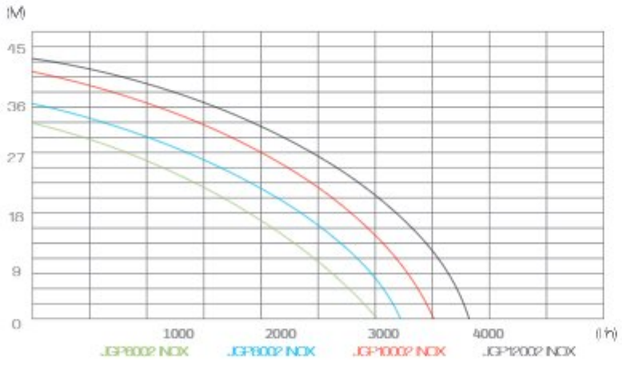

Garden jet pump with stainless steel pump head and plastic pump handle and complete plastic motor housing cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

JGPXXX4

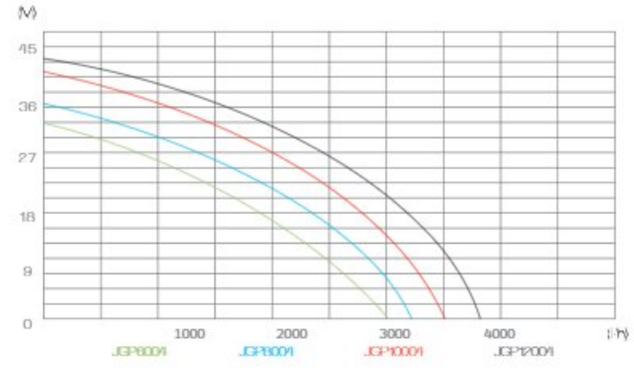

Garden jet pump with plastic pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Specification				
Model No.	**JGP6004**	**JGP8004**	**JGP10004**	**JGP12004**
Rated Power	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	7kg	7.3kg	7.6kg	8kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs

Garden Jet Pump

Specification				
Model No.	**JGP6002F INOX**	**JGP8002F INOX**	**JGP10002F INOX**	**JGP12002F INOX**
Rated Power	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37.5x26x32cm	37.5x26x32cm	37.5x26x32cm	37.5x26x32cm
Single gross weight	7.5kg	7.8kg	8.1kg	8.5kg
Qty/20'GP	898pcs	898pcs	898pcs	898pcs

JGPXXX2F INOX

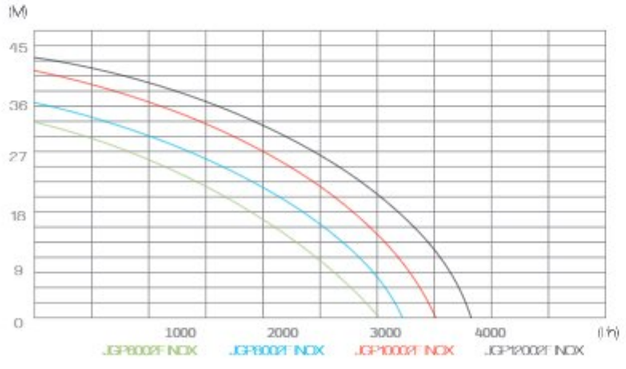

Garden jet pump with stainless steel pump head and plastic pump handle and complete plastic motor housing cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

JGPXXX4F

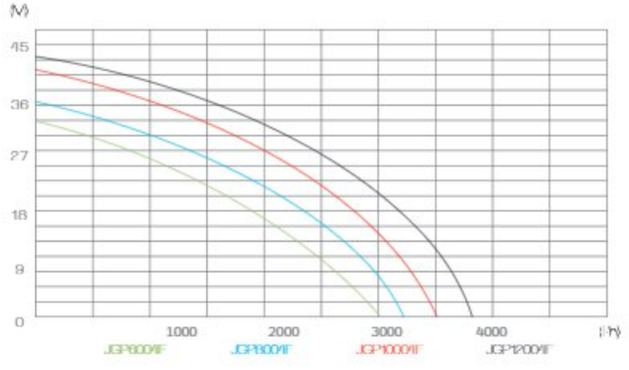

Garden jet pump with plastic pump head and plastic pump handle and complete plastic motor housing cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Specification				
Model No.	**JGP6004F**	**JGP8004F**	**JGP10004F**	**JGP12004F**
Rated Power	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37.5x26x32cm	37.5x26x32cm	37.5x26x32cm	37.5x26x32cm
Single gross weight	7kg	7.3kg	7.6kg	8kg
Qty/20'GP	898pcs	898pcs	898pcs	898pcs

Garden Jet Pump

Specification		
Model No.	**JGP6005**	**JGP8005**
Rated Power	600W	800W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.Head	35m	38m
Max.flow rate	3000l/h	3200l/h
Max.suction height	8m	8m
Max.pressure	3.5bar	3.8bar
Max.grain size	1mm	1mm
Max.Noise(dB)	85	85
Dia of connecting pipe.	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m
Max.medium temperature	35℃	35℃
Qty of Impeller	1PC	1PC
Single gift box size	37x22.5x26cm	37x22.5x26cm
Single gross weight	6.5kg	6.7kg
Qty/20'GP	1294pcs	1294pcs

JGPXXX5

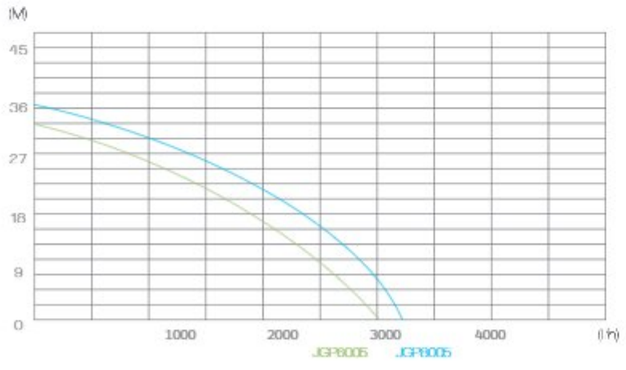

Garden jet pump with plastic pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch.This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

JGPXXX5 INOX

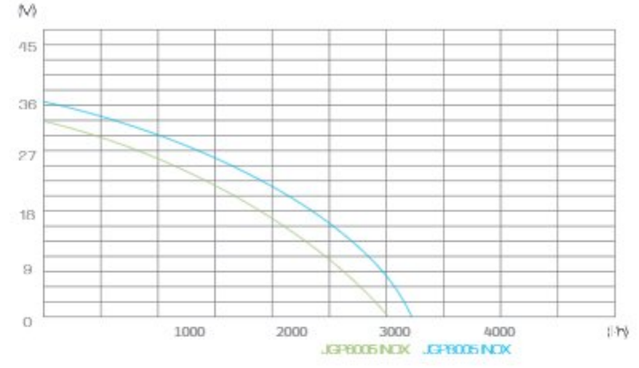

Garden jet pump with plastic pump head and stainless steel pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Specification		
Model No.	**JGP6005 INOX**	**JGP8005 INOX**
Rated Power	600W	800W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.Head	35m	38m
Max.flow rate	3000l/h	3200l/h
Max.suction height	8m	8m
Max.pressure	3.5bar	3.8bar
Max.grain size	1mm	1mm
Max.Noise(dB)	85	85
Dia of connecting pipe.	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m
Max.medium temperature	35℃	35℃
Qty of Impeller	1PC	1PC
Single gift box size	37x22.5x26cm	37x22.5x26cm
Single gross weight	6.9kg	7.2kg
Qty/20'GP	1294pcs	1294pcs

Garden Jet Pump

Specification

Model No.	JGP6006	JGP8006
Rated Power	600W	800W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.Head	35m	38m
Max.flow rate	3000l/h	3200l/h
Max.suction height	8m	8m
Max.pressure	3.5bar	3.8bar
Max.grain size	1mm	1mm
Max.Noise(dB)	85	85
Dia of connecting pipe.	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m
Max.medium temperature	35℃	35℃
Qty of Impeller	1PC	1PC
Single gift box size	37x22.5x26cm	37x22.5x26cm
Single gross weight	6.5kg	6.7kg
Qty/20'GP	1294pcs	1294pcs

JGPXXX6

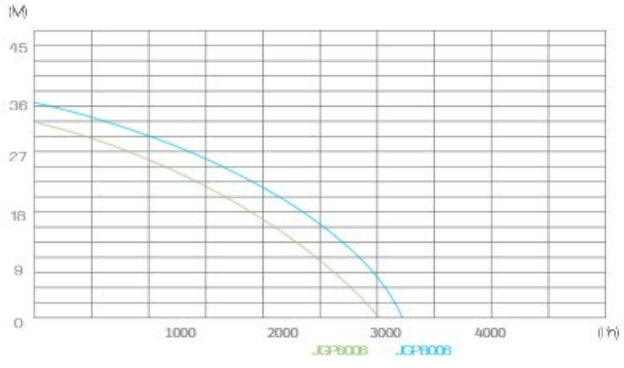

Garden jet pump with plastic pump head and plastic pump handle and complete plastic motor housing cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

JGPXXX6 INOX

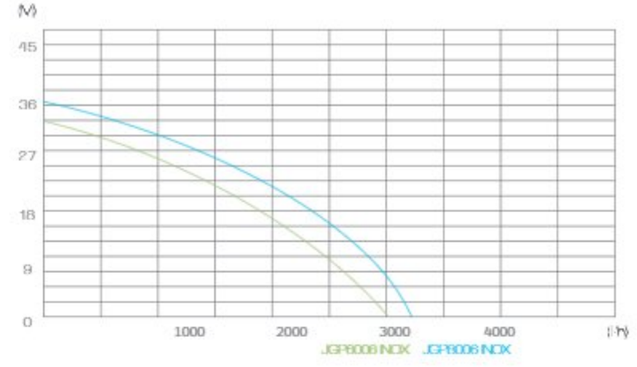

Garden jet pump with plastic pump head and stainless steel pump handle and complete plastic motor housing cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Specification

Model No.	JGP6006 INOX	JGP8006 INOX
Rated Power	600W	800W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.Head	35m	38m
Max.flow rate	3000l/h	3200l/h
Max.suction height	8m	8m
Max.pressure	3.5bar	3.8bar
Max.grain size	1mm	1mm
Max.Noise(dB)	85	85
Dia of connecting pipe.	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m
Max.medium temperature	35℃	35℃
Qty of Impeller	1PC	1PC
Single gift box size	37x22.5x26cm	37x22.5x26cm
Single gross weight	6.9kg	7.2kg
Qty/20'GP	1294pcs	1294pcs

Garden Jet Pump

Specification

Model No.	JGP40035	JGP60035	JGP80035	JGP100035	JGP120035
Rated Power	400W	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	35m	38m	44m	46m
Max.flow rate	2800l/h	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m	8m
Max.pressure	3bar	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC	1PC
Signle gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Signle gross weight	6.7kg	6.8kg	7kg	8.3kg	8.6kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs	1386pcs

JGPXXX35

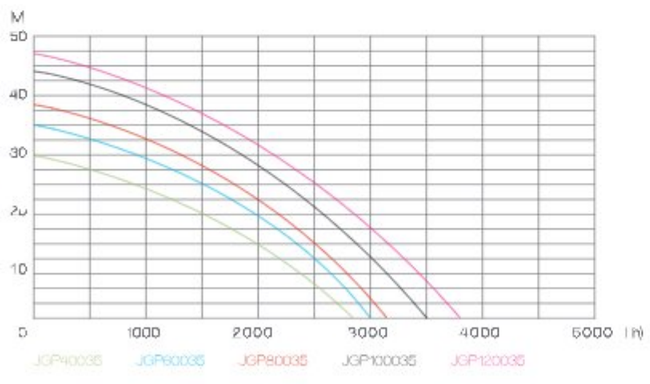

Garden jet pump with plastic pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

JGPXXX35 INOX

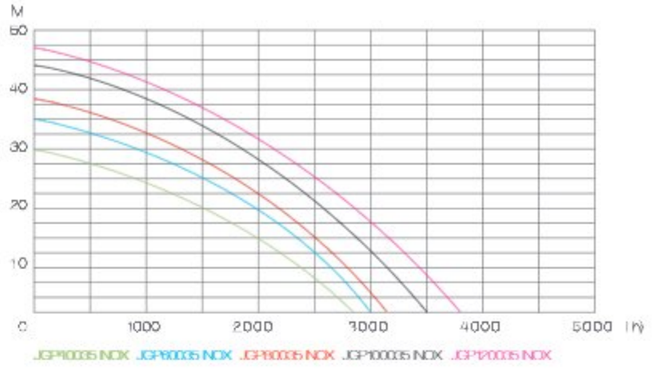

Garden jet pump with stainless steel pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch.This type of garden jet pumps are very easy to install and operate.

Specification

Model No.	JGP40035 INOX	JGP60035 INOX	JGP80035 INOX	JGP100035 INOX	JGP120035 INOX
Rated Power	400W	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	35m	38m	44m	46m
Max.flow rate	2800l/h	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m	8m
Max.pressure	3bar	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC	1PC
Signle gift box size	37x22.5x26cm	37x22.5x26cm	37x22.5x26cm	37x22.5x26cm	37x22.5x26cm
Signle gross weight	7kg	7.2kg	7.5kg	7.8kg	8.8kg
Qty/20'GP	1293pcs	1293pcs	1293pcs	1293pcs	1293pcs

Garden Jet Pump

Specification

Model No.	JGP40036	JGP60036	JGP80036	JGP100036	JGP120036
Rated Power	400W	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	35m	38m	44m	46m
Max.flow rate	2800l/h	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m	8m
Max.pressure	3bar	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC	1PC
Signle gift box size	37×22.5×26cm	37×22.5×26cm	37×22.5×26cm	37×22.5×26cm	37×22.5×26cm
Signle gross weight	6.9kg	7.2kg	7.5kg	7.8kg	8.2kg
Qty/20'GP	1293pcs	1293pcs	1293pcs	1293pcs	1293pcs

JGPXXX36

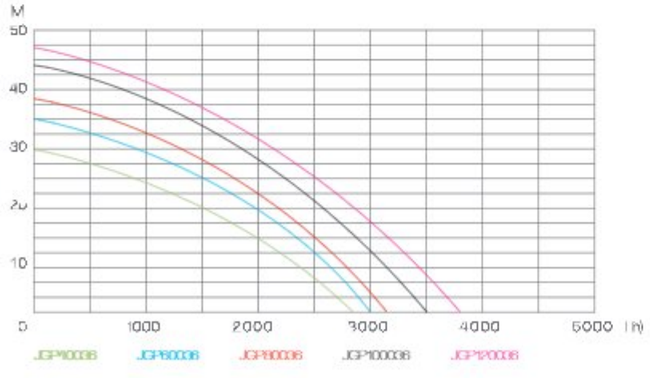

Garden jet pump with plastic pump head and plastic pump handle and complete plastic motor housing cover for clean water application only. Thepump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

JGPXXX36 INOX

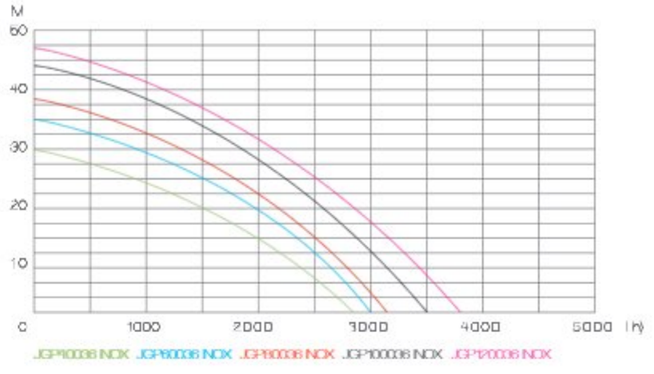

Garden jet pump with stainless steel pump head and plastic pump handle and complete plastic motor housing cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Specification

Model No.	JGP40035 INOX	JGP60035 INOX	JGP80035 INOX	JGP100035 INOX	JGP120035 INOX
Rated Power	400W	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	35m	38m	44m	46m
Max.flow rate	2800l/h	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m	8m
Max.pressure	3bar	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC	1PC
Signle gift box size	37×22.5×26cm	37×22.5×26cm	37×22.5×26cm	37×22.5×26cm	37×22.5×26cm
Signle gross weight	6.9kg	7.2kg	7.5kg	7.8kg	8.8kg
Qty/20'GP	1293pcs	1293pcs	1293pcs	1293pcs	1293pcs

Garden Jet Pump

Specification

Model No.	JGP40049	JGP60049	JGP80049
Rated Power	400W	600W	800W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	35m	38m
Max.flow rate	2800l/h	3100l/h	3500l/h
Max.suction height	8m	8m	8m
Max.pressure	3bar	3.5bar	3.8bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Signle gift box size	35x23x30cm	35x23x30cm	35x23x30cm
Signle gross weight	6.1kg	6.4kg	6.7kg
Qty/20'GP	1160pcs	1160pcs	1160pcs

JGPXXX49

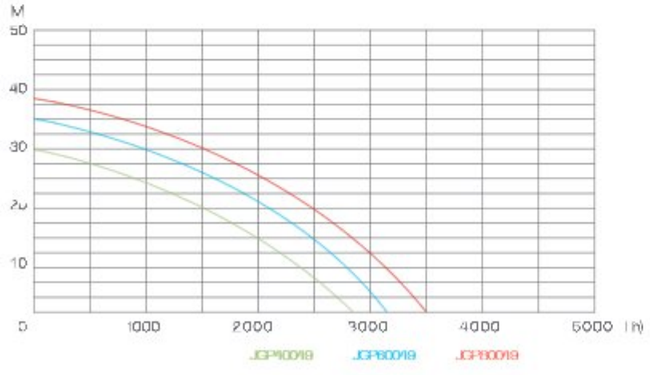

Garden jet pump with plastic pump head and plastic pump handle and aluminum motor housing and plastic fan cover for clean water application only. The pump has equipped with on/off waterproof switch.This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

JGPXXX49 INOX

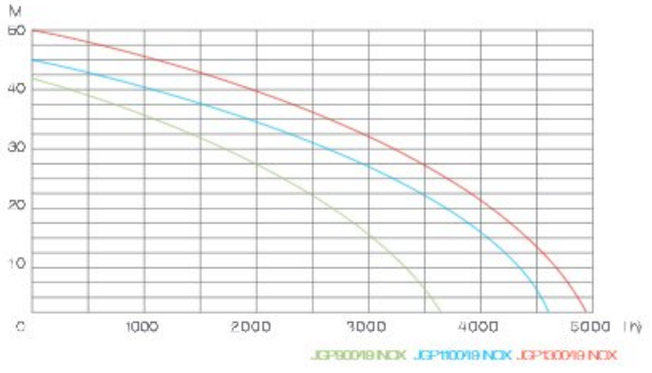

Garden jet pump with plastic pump head with stainless steel casing and plastic pump handle and aluminum motor housing and plastic fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Specification

Model No.	JGP90049INOX	JGP110049NOX	JGP130049INOX
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.suction height	8m	8m	8m
Max.pressure	4.2bar	4.5bar	5.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Signle gift box size	38x24.5x31.5cm	38x24.5x31.5cm	38x24.5x31.5cm
Signle gross weight	7.5kg	8.1kg	8.5kg
Qty/20'GP	954pcs	954pcs	954pcs

Garden Jet Pump

Specification

Model No.	JGP9007	JGP11007	JGP13007
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.suction height	8m	8m	8m
Max.pressure	4.2bar	4.5bar	5.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Signle gift box size	37x21x26cm	37x21x26cm	37x21x26cm
Signle gross weight	7.5kg	7.8kg	8.0kg
Qty/20'GP	1380pcs	1380pcs	1380pcs

JGPXXX7

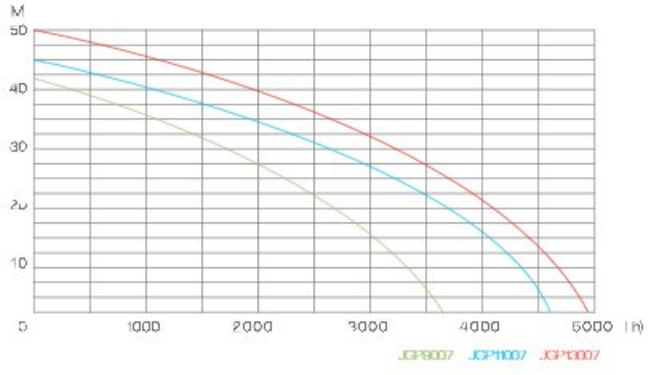

Garden jet pump with plastic pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch.This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

JGPXXX7 INOX

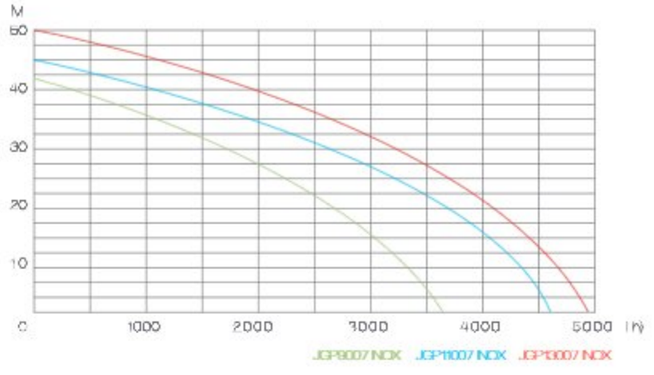

Garden jet pump with stainless steel pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Specification

Model No.	JGP9007 INOX	JGP11007 INOX	JGP13007 INOX
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.suction height	8m	8m	8m
Max.pressure	4.2bar	4.5bar	5.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Signle gift box size	40x22x23.5cm	40x22x23.5cm	40x22x23.5cm
Signle gross weight	7.8kg	8.3kg	8.8kg
Qty/20'GP	1353pcs	1353pcs	1353pcs

Garden Jet Pump

Specification

Model No.	JGP9008	JGP11008	JGP13008
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.suction height	8m	8m	8m
Max.pressure	4.2bar	4.5bar	5.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Signle gift box size	39x28x34cm	39x28x34cm	39x28x34cm
Signle gross weight	7.7kg	8.0kg	8.2kg
Qty/20'GP	754pcs	754pcs	754pcs

JGPXXX8

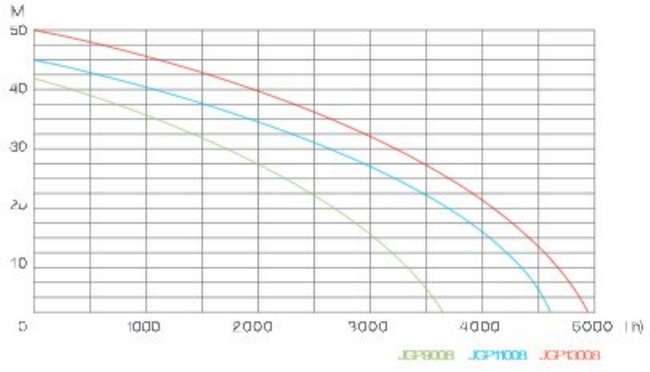

Garden jet pump with plastic pump head and plastic pump handle and complete plastic motor housing cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

JGPXXX8 INOX

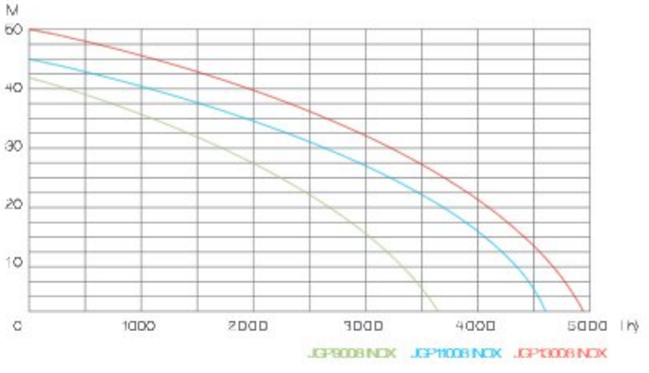

Garden jet pump with stainless pump head and plastic pump handle and complete plastic motor housing cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Specification

Model No.	JGP9008 INOX	JGP9008 INOX	JGP9008 INOX
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.suction height	8m	8m	8m
Max.pressure	4.2bar	4.5bar	5.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Signle gift box size	39x28x34cm	39x28x34cm	39x28x34cm
Signle gross weight	7.7kg	8.0kg	8.2kg
Qty/20'GP	754pcs	754pcs	754pcs

Garden Jet Pump

Specification

Model No.	JGP9009	JGP11009	JGP13009
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.suction height	8m	8m	8m
Max.pressure	4.2bar	4.5bar	5.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Signle gift box size	39x28x34cm	39x28x34cm	39x28x34cm
Signle gross weight	7.7kg	8.0kg	8.2kg
Qty/20'GP	754pcs	754pcs	754pcs

JGPXXX9

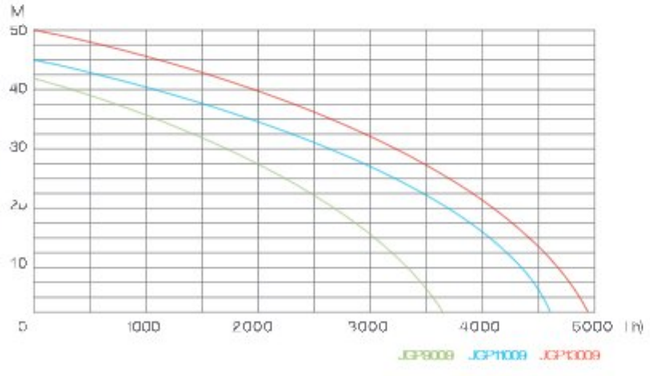

Garden jet pump with plastic pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

JGPXXX9 INOX

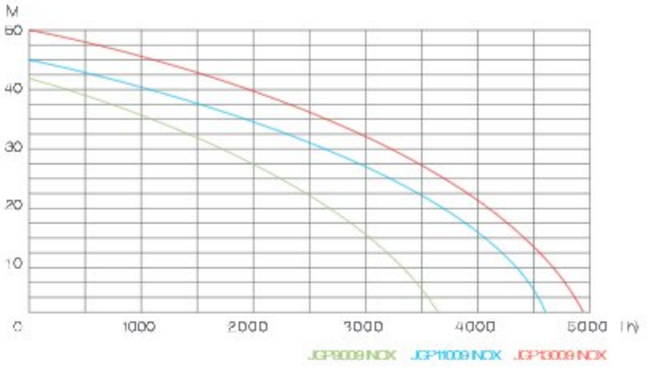

Garden jet pump with stainless steel pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Specification

Model No.	JGP9009 INOX	JGP11009 INOX	JGP13009 INOX
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.suction height	8m	8m	8m
Max.pressure	4.2bar	4.5bar	5.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Signle gift box size	39x28x34cm	39x28x34cm	39x28x34cm
Signle gross weight	7.7kg	8.0kg	8.2kg
Qty/20'GP	754pcs	754pcs	754pcs

Garden Jet Pump

Specification				
Model No.	**JGP6001HT**	**JGP8001HT**	**JGP10001HT**	**JGP12001HT**
Rated Power	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gift box size	8.7kg	9kg	9.3kg	9.6kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs

JGPXXX1HT

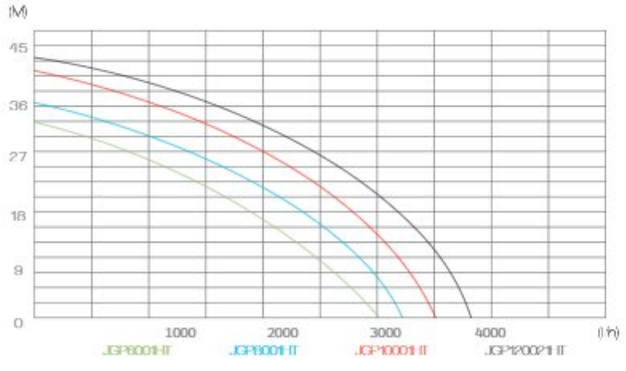

Garden jet pump with cast iron pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

JGPXXX1WHT

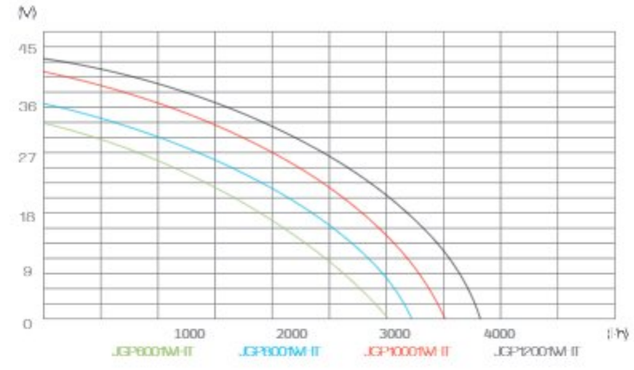

Garden jet pump with cast iron pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Specification				
Model No.	**JGP6001WHT**	**JGP8001WHT**	**JGP10001WHT**	**JGP12001WHT**
Rated Power	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	8.7kg	9kg	9.3kg	9.6kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs

Garden Jet Pump

Specification

Model No.	JGP40041HT	JGP60041HT	JGP80041HT
Rated Power	400W	600W	800W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	35m	38m
Max.flow rate	2800l/h	3000l/h	3200l/h
Max.suction height	8m	8m	8m
Max.pressure	3bar	3.5bar	3.8bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Signle gift box size	39×20×27cm	39×20×27cm	39×20×27cm
Signle gross weight	8.4kg	8.7kg	9kg
Qty/20'GP	1333pcs	1333pcs	1333pcs

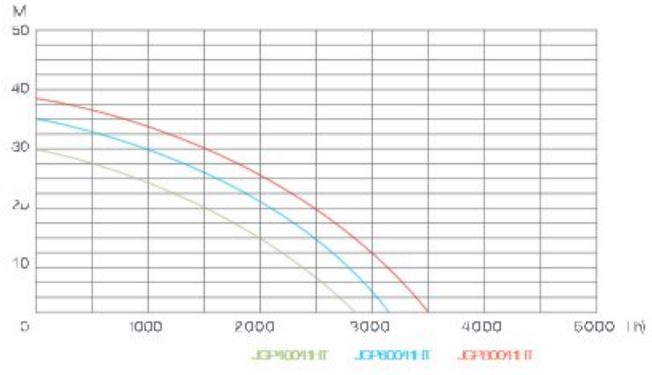

JGPXXX41HT

Garden jet pump with cast iron pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

JGPXXX41HT

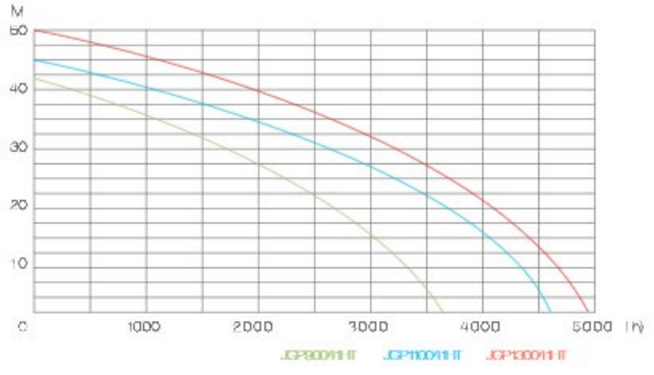

Garden jet pump with cast iron pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Specification

Model No.	JGP90041HT	JGP110041HT	JGP130041HT
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.suction height	8m	8m	8m
Max.pressure	4.2bar	4.5bar	5.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Signle gift box size	39×20×27cm	39×20×27cm	39×20×27cm
Signle gross weight	9.5kg	9.8kg	10kg
Qty/20'GP	1333pcs	1333pcs	1333pcs

Garden Jet Pump

Specification

Model No.	JGP9007 INOX-3P	JGP11007 INOX-4P	JGP13007 INOX-5P
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	46m	55m
Max.flow rate	5400l/h	5400l/h	5400l/h
Max.suction height	8m	8m	8m
Max.pressure	3.5bar	4.6bar	5.5bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	80	80	80
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	3PCS	4PCS	5PCS
Signle gift box size	39x30.5x34cm	41x30.5x34cm	43x30.5x34cm
Signle gross weight	8.5kg	9.8kg	10.3kg
Qty/20'GP	692pcs	658pcs	627pcs

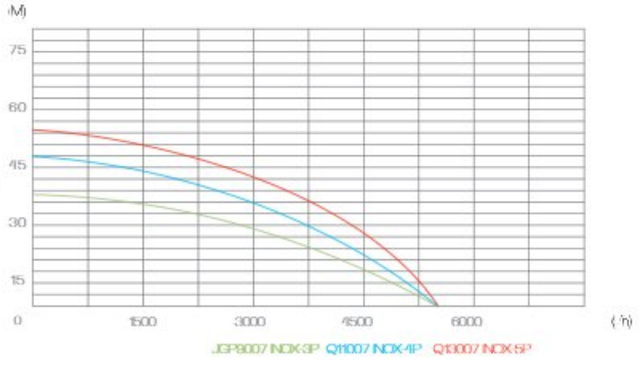

JGPXXX7 INOX-XP

Multi-stage impeller garden jet pump with stainles steel pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

JGPXXX8 INOX-XP

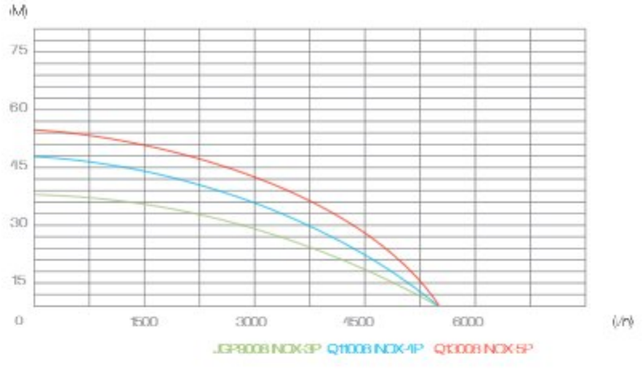

Multi-stage impeller garden jet pump with stainles steel pump head and plastic pump handle and complete plastic motor housing cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Specification

Model No.	JGP9008 INOX-3P	JGP11008 INOX-4P	JGP13008 INOX-5P
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	46m	55m
Max.flow rate	5400l/h	5400l/h	5400l/h
Max.suction height	8m	8m	8m
Max.pressure	3.5bar	4.6bar	5.5bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	80	80	80
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	3PCS	4PCS	5PCS
Signle gift box size	39x30.5x34cm	41x30.5x34cm	43x30.5x34cm
Signle gross weight	8.8kg	10.1kg	12.1kg
Qty/20'GP	692pcs	658pcs	627pcs

Garden Jet Pump

Specification

Model No.	JGP9009 INOX-3P	JGP11009 INOX-4P	JGP13009 INOX-5P
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	46m	55m
Max.flow rate	5400l/h	5400l/h	5400l/h
Max.suction height	8m	8m	8m
Max.pressure	3.5bar	4.6bar	5.5bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	80	80	80
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	3PCS	4PCS	5PCS
Signle gift box size	39x30.5x34cm	41x30.5x34cm	43x30.5x34cm
Signle gross weight	8.8kg	10.1kg	12.1kg
Qty/20'GP	692pcs	658pcs	627pcs

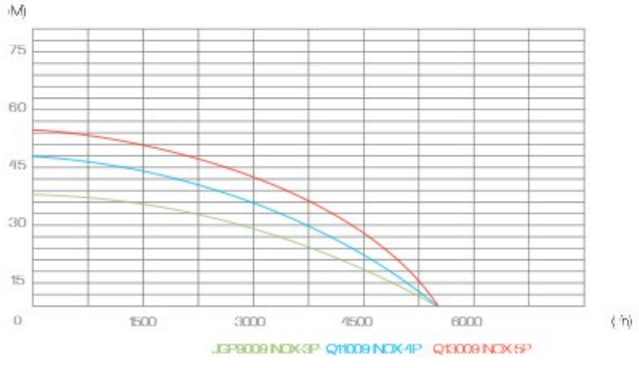

JGPXXX9 INOX-XP

Multi-stage impeller garden jet pump with stainles steel pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

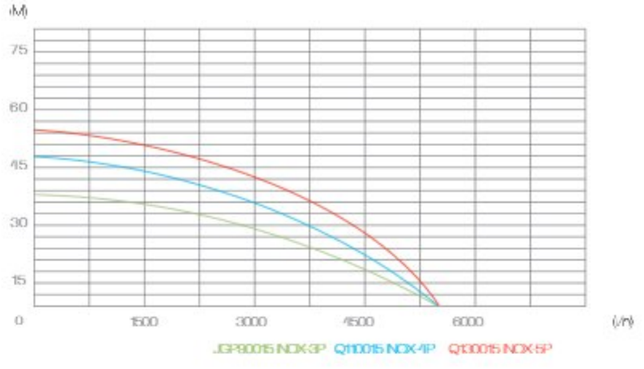

JGPXXX15-XP

Multi-stage impeller garden jet pump with plastic pump head with stainless steel casing on pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Specification

Model No.	JGP90015-3P	JGP110015-4P	JGP130015-5P
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	46m	55m
Max.flow rate	5400l/h	5400l/h	5400l/h
Max.suction height	8m	8m	8m
Max.pressure	3.5bar	4.6bar	5.5bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	80	80	80
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	3PCS	4PCS	5PCS
Signle gift box size	46x28x29cm	46x28x29cm	46x28x29cm
Signle gross weight	10.8kg	11.7kg	12.7kg
Qty/20'GP	749pcs	749pcs	749pcs

Garden Jet Pump

Specification			
Model No.	**CMP900-3P**	**CMP1100-4P**	**CMP1300-5P**
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	46m	55m
Max.flow rate	6000l/h	6000l/h	6000l/h
Max.suction height	1.5m	1.5m	1.5m
Max.pressure	3.5bar	4.6bar	5.5bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	80	80	80
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	3PCS	4PCS	5PCS
Signle gift box size	42x22x27cm	45x22x27cm	47x22x27cm
Signle gross weight	13.3kg	14.5kg	15.3kg
Qty/20'GP	1122pcs	1047pcs	1002pcs

CMPXXX-XP

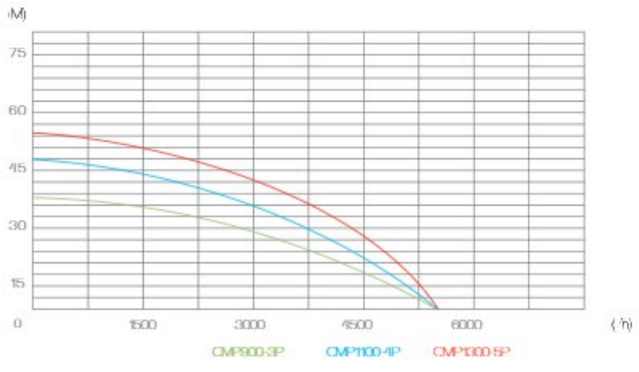

Multi-stage impeller garden jet pump with cast iron pump head with stainless steel casing on pump head and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Garden Jet Pump

CMPXXXW-XP

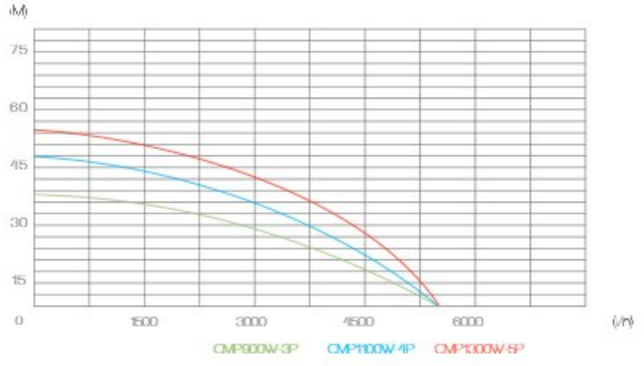

Multi-stage impeller garden jet pump with cast iron pump head with stainless steel casing on pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

Specification			
Model No.	**CMP900W-3P**	**CMP1100W-4P**	**CMP1300W-5P**
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	46m	55m
Max.flow rate	6000l/h	6000l/h	6000l/h
Max.suction height	1.5m	1.5m	1.5m
Max.pressure	3.5bar	4.6bar	5.5bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	80	80	80
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	3PCS	4PCS	5PCS
Signle gift box size	44x23.5x29cm	46x23.5x29cm	48x23.5x29cm
Signle gross weight	14.2kg	15kg	15.8kg
Qty/20'GP	933pcs	893pcs	855pcs

Garden Jet Pump

QBXXXHT

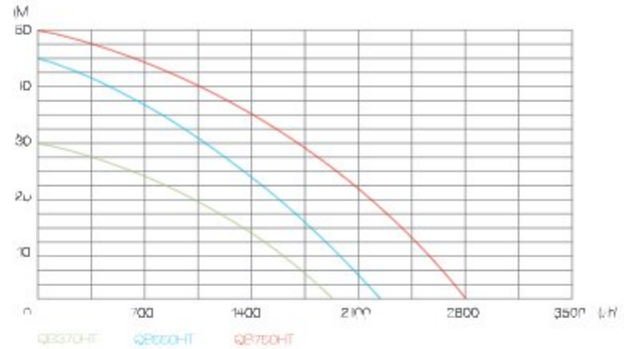

Peripheral pump with cast iron pump head and aluminum motor housing and iron fan cover for clean water application. It is the best entry basic level product in worldwide.

Specification

Model No.	QB370HT	QB550HT	QB750HT
Rated Power	350W	550W	750W
Vol&Fre.	220V/60Hz	220V/60Hz	220V/60Hz
Max.Head	30m	45m	50m
Max.flow rate	1900L/h	2200L/h	2800L/h
Max.suction height	8m	8m	8m
Max.pressure	3bar	4.5bar	5bar
Max.Noise(dB)	1mm	1mm	1mm
Max.grain size	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G0.75mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Signle gift box size	27x21x20cm	32x21x20cm	27x21x20cm
Signle gross weight	5.5kg	7kg	7.5kg
Qty/20'GP	2468pcs	2083pcs	1348pcs

Garden Jet Pump

Specification

Model No.	AUJDP800HT	AUJDP1100HT
Rated Power	800W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.Head	45m	56m
Max.flow rate	2400l/h	2600l/h
Max.suction height	20m	25m
Max.pressure	2.2bar	3.2bar
Max.grain size	1mm	1mm
Max.Noise(dB)	85	85
Dia of connecting pipe.	G1"1 1/4"	G1"、G1 1/4"
Cable specification	HO7RN-F3G0.75mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m
Max.medium temperature	35℃	35℃
Qty of Impeller	1PC	1PC
Pressure tank volume	24L	24L
Single gift box size	40.5x35x26cm	40.5x35x26cm
Single gross weight	16.1kg	17.2kg
Qty/20'GP	760pcs	760pcs

AUDJPXXXHT

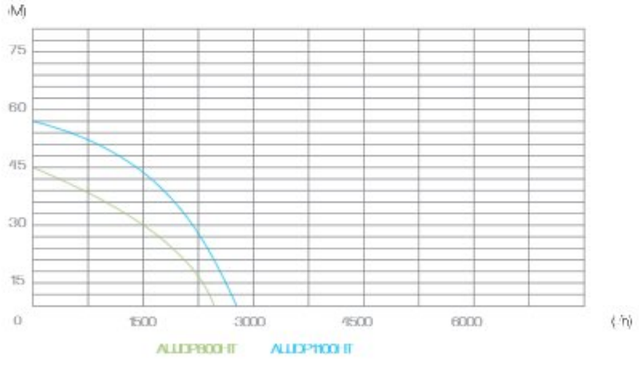

Garden jet pump equipped with an injector for high suction purpose and applied for clean water only. Cast iron pump head, aluminum motor housing and fan cover. This pump has also included both pressure gaugue and mechanical pressure control switch.

Garden Jet Pump

CPXXXHT

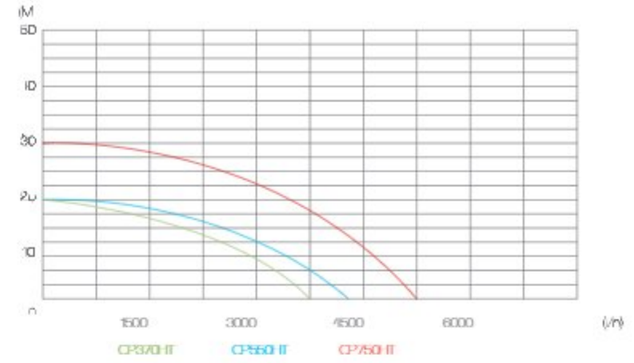

Centrifugal pump with cast iron pump head and aluminum motor housing and iron fan cover for clean water application only. The pump has equipped with on/off waterproof switch. This type of pumps are very easy to install and operate.

Specification

Model No.	CP370HT	CP550HT	CP750HT
Rated Power	370W	550W	750W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	20m	20m	30m
Max.flow rate	4000l/h	4500l/h	5000l/h
Max.pressure	2.0bar	2.0bar	3.0bar
Max.grain size	1mm	1mm	1mm
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G0.75mm²	HO7RN-F3G0.75mm²	HO7RN-F3G0.75mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Single gift box size	33.5x23x27cm	33.5x23x27cm	33.5x23x27cm
Single gross weight	7.8kg	9.5kg	11.5kg
Qty/20'GP	1345pcs	1345pcs	1345pcs

Automatic Booster System

Specification

Model No.	JGP6001C INOX	JGP8001C INOX	JGP10001C INOX	JGP12001C INOX
Rated Power	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m
Working pressure	1.3-2.6bar	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L
Single gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Single gross weight	13.7kg	14kg	14.3kg	14.6kg
Qty/20'GP	377pcs	377pcs	377pcs	377pcs

JGPXXX1C INOX

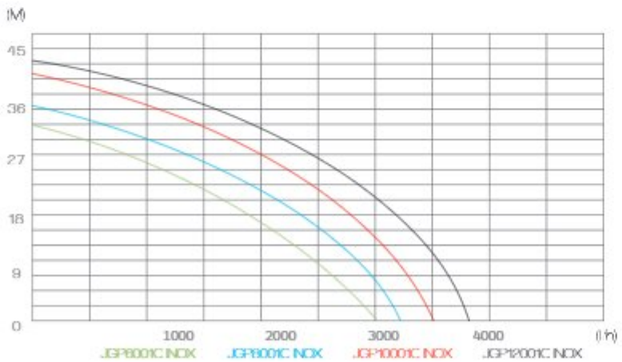

Automatic booster system coupled with stainless steel pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Automatic Booster System

JGPXXX3C

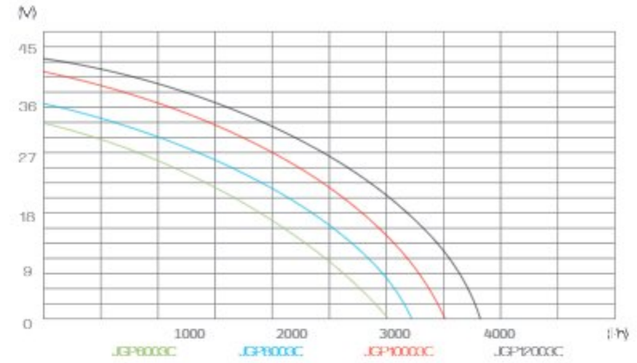

Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and r eliable and particularly suitable to increase pressure from a water system.

Specification

Model No.	JGP6003C	JGP8003C	JGP10003C	JGP12003C
Rated Power	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m
Working pressure	1.3-2.6bar	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L
Single gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Single gross weight	12.7kg	13kg	13.4kg	13.6kg
Qty/20'GP	377pcs	377pcs	377pcs	377pcs

Automatic Booster System

Specification				
Model No.	**JGP6002C INOX**	**JGP8002C INOX**	**JGP10002C INOX**	**JGP12002C INOX**
Rated Power	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m
Working pressure	1.3-2.6bar	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L
Single gift box size	46.5x28x51cm	46.5x28x51cm	46.5x28x51cm	46.5x28x51cm
Single gross weight	13.7kg	14kg	14.3kg	14.6kg
Qty/20'GP	377pcs	377pcs	377pcs	377pcs

JGPXXX2C INOX

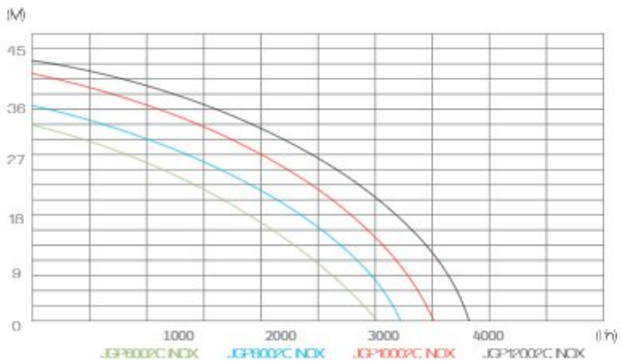

Automatic booster system coupled with stainless steel pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Automatic Booster System

JGPXXX4C

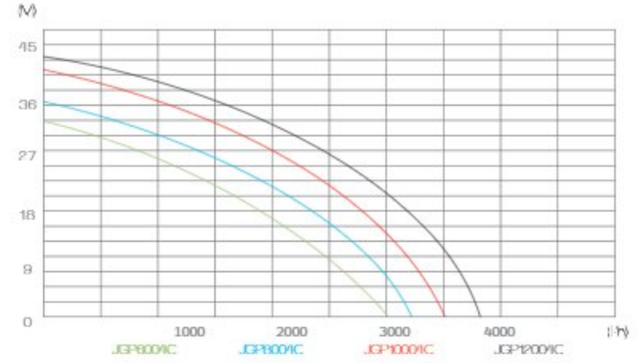

Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Specification				
Model No.	**JGP6004C**	**JGP8004C**	**JGP10004C**	**JGP12004C**
Rated Power	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m
Working pressure	1.3-2.6bar	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L
Single gift box size	46.5x28x51cm	46.5x28x51cm	46.5x28x51cm	46.5x28x51cm
Single gross weight	12.7kg	13kg	13.4kg	13.6kg
Qty/20'GP	377pcs	377pcs	377pcs	377pcs

Automatic Booster System

Specification

Model No.	JGP6005C	JGP8005C
Rated Power	600W	800W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.Head	35m	38m
Max.flow rate	3000l/h	3200l/h
Max.suction height	8m	8m
Working pressure	1.3~2.6bar	1.5~3.0bar
Max.grain size	1mm	1mm
Max.Noise(dB)	85	85
Dia of connecting pipe.	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m
Max.medium temperature	35℃	35℃
Qty of Impeller	1PC	1PC
Pressure tank volume	19L	19L
Single gift box size	48.5x30x57cm	48.5x30x57cm
Single gross weight	11.58kg	12.2kg
Qty/20'GP	338pcs	338pcs

JGPXXX5C

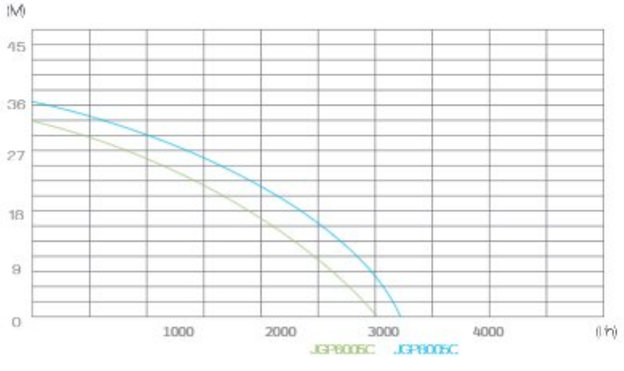

Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Automatic Booster System

JGPXXX5C INOX

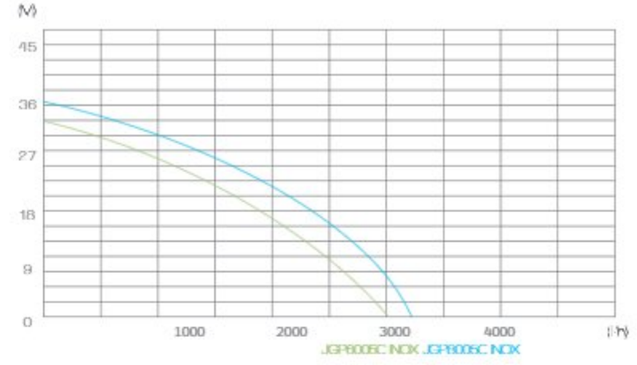

Automatic booster system coupled with stainless steel pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Specification

Model No.	JGP6005C INOX	JGP8005C INOX
Rated Power	600W	800W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.Head	35m	38m
Max.flow rate	3000l/h	3200l/h
Max.suction height	8m	8m
Working pressure	1.3~2.6bar	1.5~3.0bar
Max.grain size	1mm	1mm
Max.Noise(dB)	85	85
Dia of connecting pipe.	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m
Max.medium temperature	35℃	35℃
Qty of Impeller	1PC	1PC
Pressure tank volume	19L	19L
Single gift box size	48.5x30x57cm	48.5x30x57cm
Single gross weight	11.7kg	12.4kg
Qty/20'GP	338pcs	338pcs

Automatic Booster System

Specification

Model No.	JGP6006C	JGP8006C
Rated Power	600W	800W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.Head	35m	38m
Max.flow rate	3000l/h	3200l/h
Max.suction height	8m	8m
Working pressure	1.3-2.6bar	1.5-3.0bar
Max.grain size	1mm	1mm
Max.Noise(dB)	85	85
Dia of connecting pipe.	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m
Max.medium temperature	35℃	35℃
Qty of Impeller	1PC	1PC
Pressure tank volume	19L	19L
Single gift box size	48.5x30x57cm	48.5x30x57cm
Single gross weight	11.58kg	12.2kg
Qty/20'GP	338pcs	338pcs

JGPXXX6C

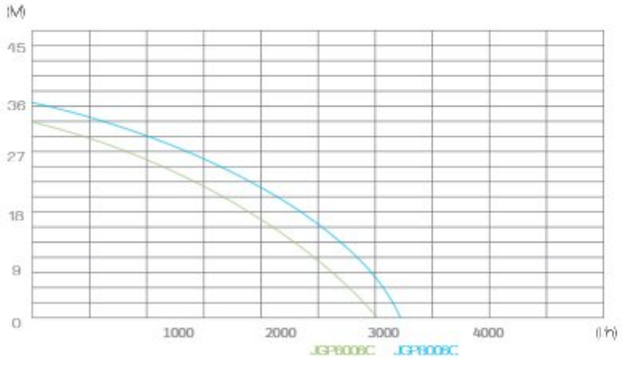

Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Automatic Booster System

JGPXXX6C INOX

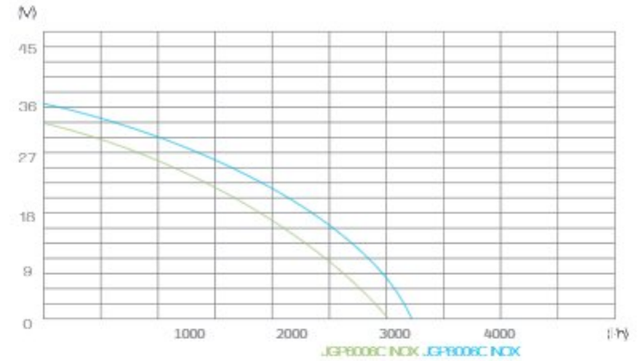

Automatic booster system coupled with stainless steel pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Specification

Model No.	JGP6006C INOX	JGP8006C INOX
Rated Power	600W	800W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.Head	35m	38m
Max.flow rate	3000l/h	3200l/h
Max.suction height	8m	8m
Working pressure	1.3-2.6bar	1.5-3.0bar
Max.grain size	1mm	1mm
Max.Noise(dB)	85	85
Dia of connecting pipe.	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m
Max.medium temperature	35℃	35℃
Qty of Impeller	1PC	1PC
Pressure tank volume	19L	19L
Single gift box size	48.5x30x57cm	48.5x30x57cm
Single gross weight	11.7kg	12.4kg
Qty/20'GP	338pcs	338pcs

Automatic Booster System

Specification					
Model No.	**JGP40035C**	**JGP60035C**	**JGP80035C**	**JGP100035C**	**JGP120035C**
Rated Power	400W	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	30m	30m	38m	44m	46m
Max.pump rate	2800l/h	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m	8m
Working pressure	1.2-2.4bar	1.3-2.6bar	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L	19L
Single gift box size	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm
Single gross weight	11.2kg	11.8kg	12.4kg	13kg	13.8kg
Qty/20'GP	338pcs	338pcs	338pcs	338pcs	338pcs

JGPXXX35C

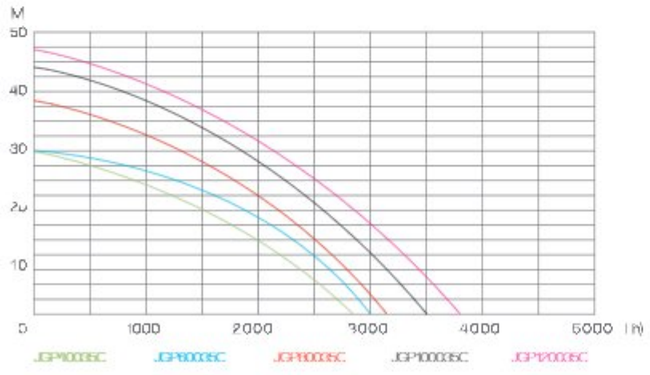

Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Automatic Booster System

JGPXXX35C INOX

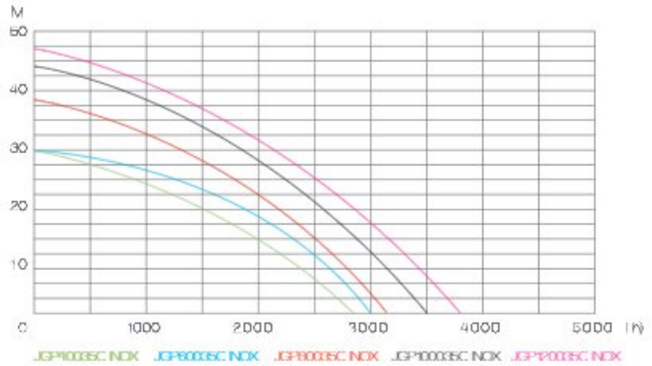

Automatic booster system coupled with stainless steel pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system

Specification					
Model No.	**JGP40035CINOX**	**JGP60035CINOX**	**JGP80035CINOX**	**JGP100035CINOX**	**JGP120035CINOX**
Rated Power	400W	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	30m	30m	38m	44m	46m
Max.pump rate	2800l/h	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m	8m
Working pressure	1.2-2.4bar	1.3-2.6bar	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L	19L
Single gift box size	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm
Single gross weight	11.5kg	12.1kg	12.7kg	13.3kg	14.1kg
Qty/20'GP	338pcs	338pcs	338pcs	338pcs	338pcs

Automatic Booster System

Specification					
Model No.	**JGP40036C**	**JGP60036C**	**JGP80036C**	**JGP100036C**	**JGP120036C**
Rated Power	400W	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	30m	30m	38m	44m	46m
Max.pump rate	2800l/h	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m	8m
Working pressure	1.2-2.4bar	1.3-2.6bar	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L	19L
Single gift box size	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm
Single gross weight	11.2kg	11.8kg	12.4kg	13kg	13.8kg
Qty/20'GP	338pcs	338pcs	338pcs	338pcs	338pcs

JGPXXX36C

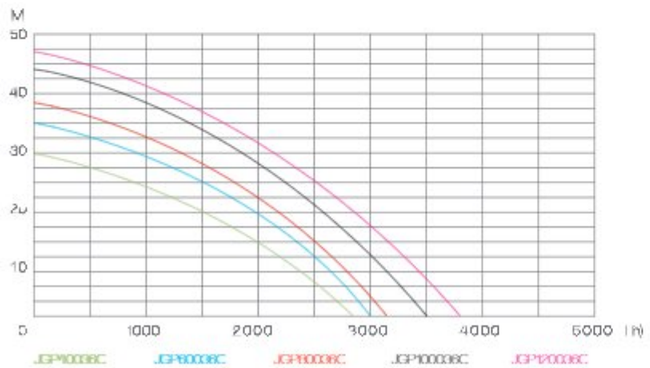

Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Automatic Booster System

JGPXXX36C INOX

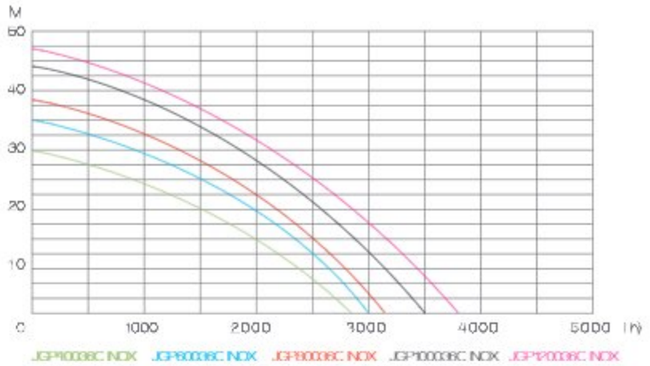

Automatic booster system coupled with stainless steel pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Specification					
Model No.	**JGP40036C**	**JGP60036C**	**JGP80036C**	**JGP100036C**	**JGP120036C**
Rated Power	400W	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	30m	30m	38m	44m	46m
Max.pump rate	2800l/h	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m	8m
Working pressure	1.2-2.4bar	1.3-2.6bar	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L	19L
Single gift box size	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm
Single gross weight	11.5kg	12.1kg	12.7kg	13.3kg	14.1kg
Qty/20'GP	338pcs	338pcs	338pcs	338pcs	338pcs

Automatic Booster System

Specification

Model No.	JGP40049C	JGP60049C	JGP80049C
Rated Power	400W	600W	800W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	35m	38m
Max.flow rate	2800l/h	3100l/h	3500l/h
Max.suction height	8m	8m	8m
Working pressure	1.2-2.4bar	1.3-2.6bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1pc	1pc	1pc
Pressure tank volume	19L	19L	19L
Signle gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Signle gross weight	10.5kg	11.7kg	12.4kg
Qty/20'GP	377pcs	377pcs	377pcs

JGPXXX49C

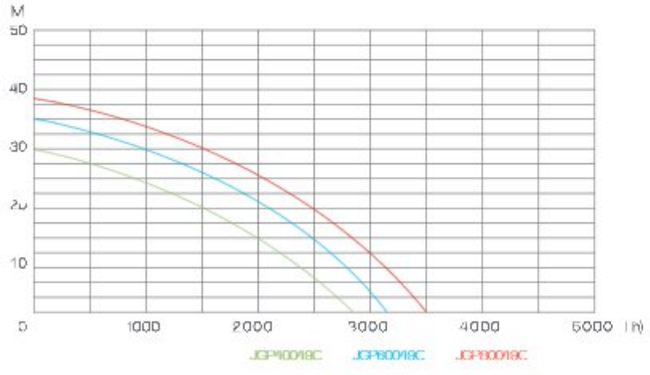

Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Automatic Booster System

JGPXXX49D INOX

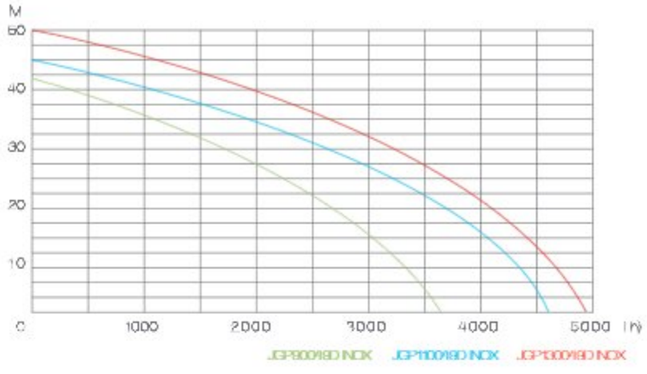

Automatic booster system coupled with plastic pump head and stainless steel casing on pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Specification

Model No.	JGP90049D INOX	JGP110049D INOX	JGP130049D INOX
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	2800l/h	3000l/h	3200l/h
Max.suction height	7m	7m	7m
Working pressure	1.5~3.0bar	1.5~3.0bar	1.5~3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1pc	1pc	1pc
Pressure tank volume	19L	19L	19L
Signle gift box size	48.5x30x60cm	48.5x30x60cm	48.5x30x60cm
Signle gross weight	12.8kg	13.5kg	13.9kg
Qty/20'GP	320pcs	320pcs	320pcs

Automatic Booster System

Specification			
Model No.	**JGP9007C**	**JGP11007C**	**JGP-JH-13007C**
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.suction height	8m	8m	8m
Working pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Pressure tank volume	24L	24L	24L
Single gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Single gross weight	13.5kg	14.5kg	15.6kg
Qty/20'GP	377pcs	377pcs	377pcs

JGPXXX7C

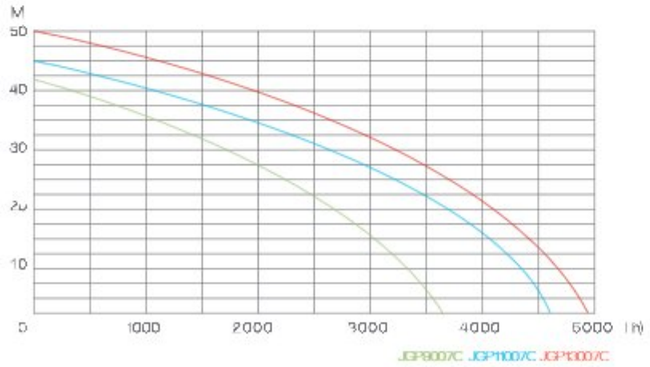

Automatic booster system coupled with plastic pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Automatic Booster System

JGPXXX7D INOX

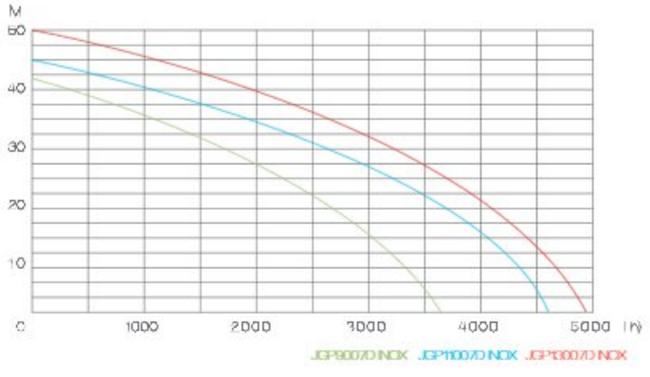

Automatic booster system coupled with stainless steel pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Specification			
Model No.	**JGP9007D INOX**	**JGP11007D INOX**	**JGP13007D INOX**
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.suction height	8m	8m	8m
Working pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Pressure tank volume	24L	24L	24L
Single gift box size	55x32x60cm	55x32x60cm	55x32x60cm
Single gross weight	14.5kg	15.4kg	16kg
Qty/20'GP	265pcs	265pcs	265pcs

Automatic Booster System

Specification			
Model No.	**JGP9008C**	**JGP11008C**	**JGP-JH-13008C**
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.suction height	8m	8m	8m
Working pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Pressure tank volume	24L	24L	24L
Single gift box size	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm
Single gross weight	13.5kg	14.5kg	15.6kg
Qty/20'GP	337pcs	337pcs	337pcs

JGPXXX8C

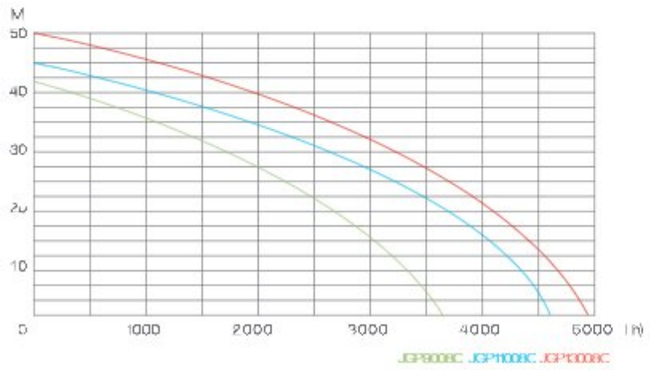

Automatic booster system coupled with plastic pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Automatic Booster System

JGPXXX8D INOX

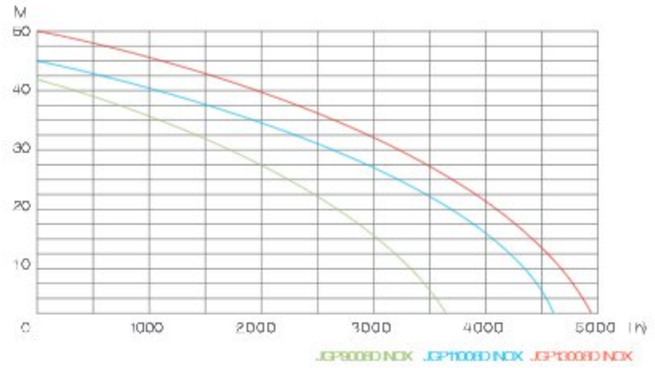

Automatic booster system coupled with stainless steel pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Specification			
Model No.	**JGP9008D INOX**	**JGP11008D INOX**	**JGP13008D INOX**
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.suction height	8m	8m	8m
Working pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Pressure tank volume	24L	24L	24L
Single gift box size	55x32x60cm	55x32x60cm	55x32x60cm
Single gross weight	14.5kg	15.4kg	16kg
Qty/20'GP	265pcs	265pcs	265pcs

Automatic Booster System

Specification

Model No.	JGP9009C	JGP11009C	JGP13009C
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.suction height	8m	8m	8m
Working pressure	1.5~3.0bar	1.5~3.0bar	1.5~3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Pressure tank volume	24L	24L	24L
Single gift box size	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm
Single gross weight	13.5kg	14.5kg	15.6kg
Qty/20'GP	337pcs	337pcs	337pcs

JGPXXX9C

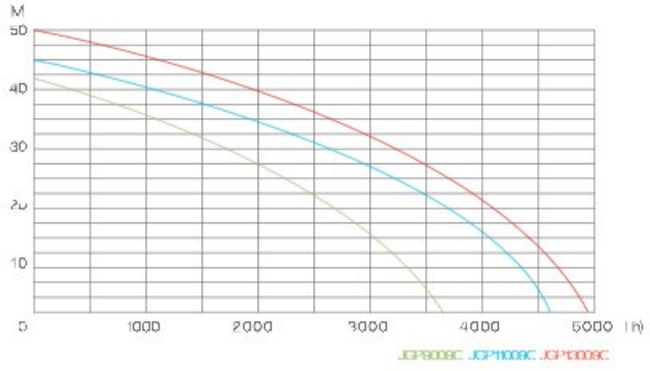

Automatic booster system coupled with plastic pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Automatic Booster System

JGPXXX9D INOX

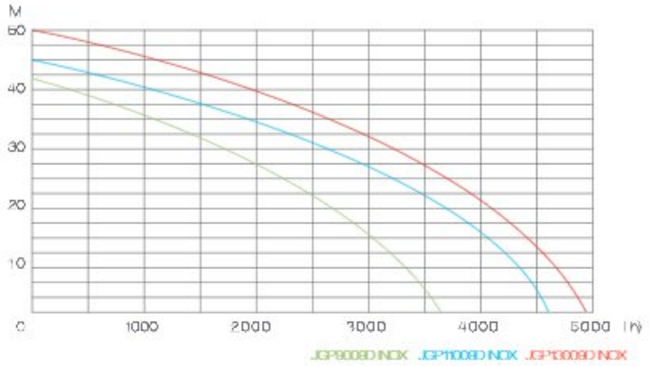

Automatic booster system coupled with stainless steel pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Specification

Model No.	JGP9009D INOX	JGP11009D INOX	JGP13009D INOX
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.suction height	8m	8m	8m
Working pressure	1.5~3.0bar	1.5~3.0bar	1.5~3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Pressure tank volume	24L	24L	24L
Single gift box size	55x32x60cm	55x32x60cm	55x32x60cm
Single gross weight	14.5kg	15.4kg	16kg
Qty/20'GP	265pcs	265pcs	265pcs

LD-0837

Automatic Booster System

JGPXXX1CHT

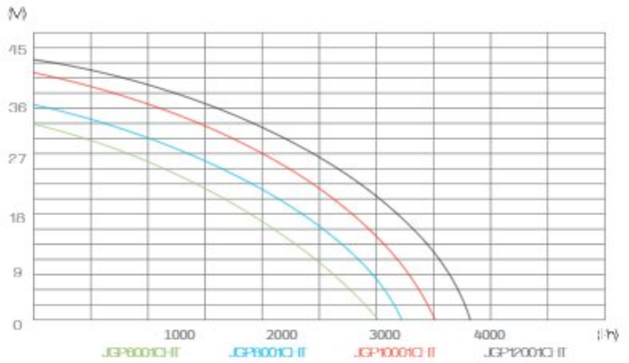

Automatic booster system coupled with cast iron pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water systemm.

Specification

Model No.	JGP6001CHT	JGP8001CHT	JGP10001CHT	JGP12001CHT
Rated Power	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	3000l/h	3200l/h	3500l/h	3700l/h
Max.suction height	8m	8m	8m	8m
Working pressure	1.3-2.6bar	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L
Single gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Single gross weight	11.8kg	12kg	12.5kg	12.8kg
Qty/20'GP	377pcs	377pcs	377pcs	377pcs

Automatic Booster System

Specification

Model No.	JGP40041CHT	JGP60041CHT	JGP80041CHT
Rated Power	400W	600W	800W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	35m	38m
Max.flow rate	2800l/h	3000l/h	3200l/h
Max.suction height	8m	8m	8m
Working pressure	1.2-2.4bar	1.3-2.6bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L
Single gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Single gross weight	11.8kg	12kg	12.5kg
Qty/20'GP	377pcs	377pcs	377pcs

JGPXXX41CHT

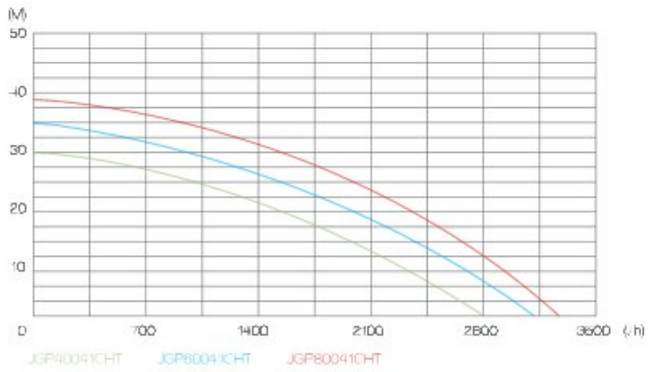

Automatic booster system coupled with cast iron pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Automatic Booster System

JGPXXX41CHT

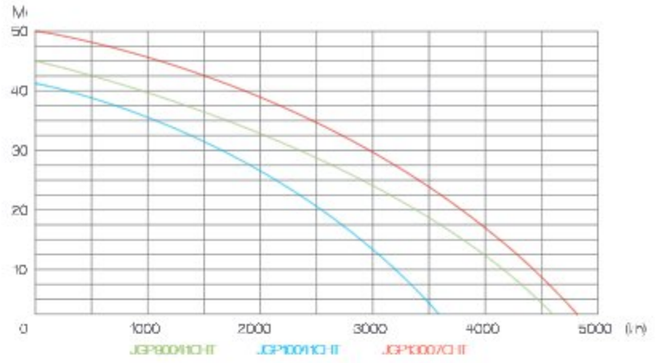

Automatic booster system coupled with cast iron pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water systeme.

Specification

Model No.	JGP90041CHT	JGP110041CHT	JGP13007CHT
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600l/h	4600l/h	4800l/h
Max.suction height	8m	8m	8m
Working pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	85	85	85
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	1PC	1PC	1PC
Pressure tank volume	24L	24L	24L
Single gift box size	55x32x52cm	55x32x52cm	55x32x52cm
Single gross weight	14.5kg	15kg	15.5kg
Qty/20'GP	306pcs	306pcs	306pcs

Automatic Booster System

Specification

Model No.	JGP9007DS INOX-3P	JGP11007DS INOX-4P	JGP13007DS INOX-5P
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	46m	55m
Max.flow rate	5400l/h	5400l/h	5400l/h
Max.suction height	8m	8m	8m
Working pressure	1.5~3.0bar	1.5~3.0bar	1.5~3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	80	80	80
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	3PCS	4PCS	5PCS
Pressure tank volume	24L	24L	24L
Single gift box size	55x32x60cm	55x32x60cm	55x32x60cm
Single gross weight	16kg	17.5kg	18kg
Qty/20'GP	265pcs	265pcs	265pcs

JGPXXX7DS INOX-XP

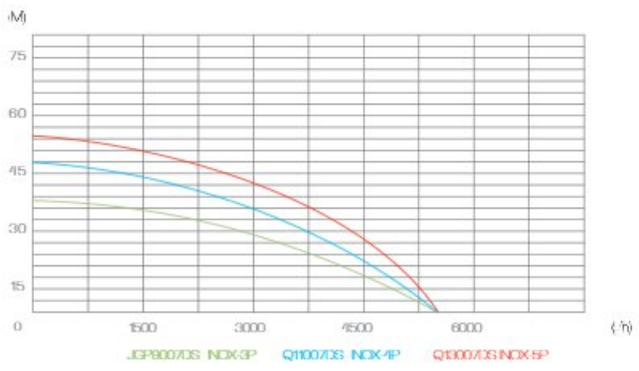

Automatic booster system coupled with multi-stage impeller jet pump with stainless steel pump head and 24L stainless steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Automatic Booster System

JGPXXX8DS INOX-XP

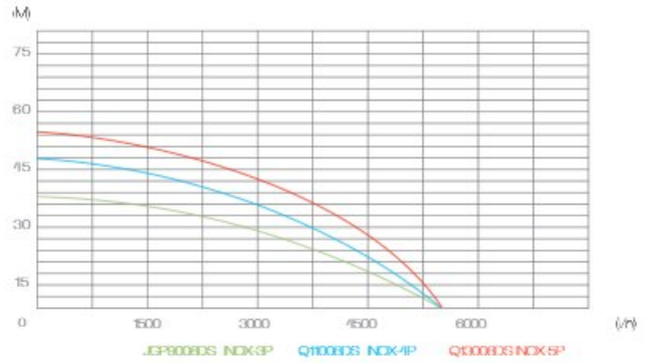

Automatic booster system coupled with multi-stage impeller jet pump with stainless steel pump head and 24L stainless steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Specification

Model No.	JGP9008DS INOX-3P	JGP11008DS INOX-4P	JGP13008DS INOX-5P
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	46m	55m
Max.flow rate	5400l/h	5400l/h	5400l/h
Max.suction height	8m	8m	8m
Working pressure	1.5~3.0bar	1.5~3.0bar	1.5~3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	80	80	80
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	3PCS	4PCS	5PCS
Pressure tank volume	24L	24L	24L
Single gift box size	55x32x60cm	55x32x60cm	55x32x60cm
Single gross weight	16kg	17.5kg	18kg
Qty/20'GP	265pcs	265pcs	265pcs

Automatic Booster System

Specification			
Model No.	**JGP9009DS INOX-3P**	**JGP11009DS INOX-4P**	**JGP13009DS INOX-4P**
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	46m	55m
Max.flow rate	5400l/h	5400l/h	5400l/h
Max.suction height	8m	8m	8m
Working pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	80	80	80
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	3PCS	4PCS	5PCS
Pressure tank volume	24L	24L	24L
Single gift box size	55x32x60cm	55x32x60cm	55x32x60cm
Single gross weight	16kg	17.5kg	18kg
Qty/20'GP	265pcs	265pcs	265pcs

JGPXXX9DS INOX-XP

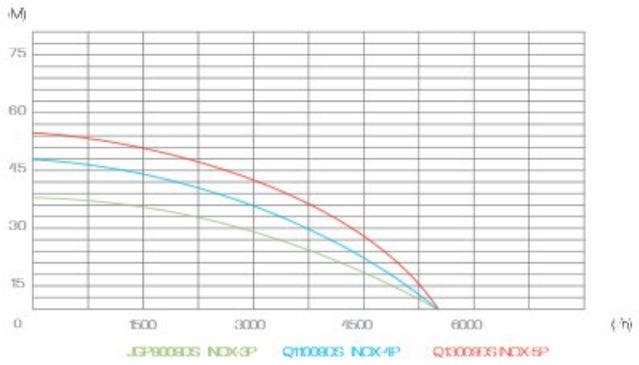

Automatic booster system coupled with multi-stage impeller jet pump with stainless steel pump head and 24L stainless steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Automatic Booster System

JGPXXX15D-XP

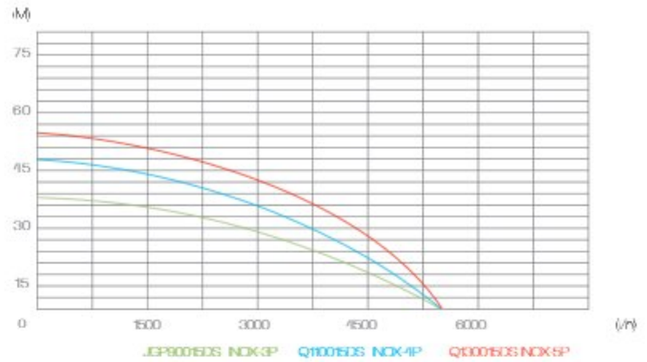

Automatic booster system coupled with multi-stage impeller jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Specification			
Model No.	**JGP90015D-3P**	**JGP110015D-4P**	**JGP130015D-5P**
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	36m	48m	55m
Max.flow rate	5400l/h	5400l/h	5400l/h
Max.suction height	8m	8m	8m
Working pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	80	80	80
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	3PCS	4PCS	5PCS
Pressure tank volume	24L	24L	24L
Single gift box size	55x32x67cm	55x32x67cm	55x32x67cm
Single gross weight	16kg	17.5kg	18kg
Qty/20'GP	237pcs	237pcs	237pcs

Automatic Booster System

Model No.	CMP900D-3P	CMP1100D-4P	CMP1300D-5P
Rated Power	900W	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	36m	48m	55m
Max.flow rate	6000l/h	6000l/h	6000l/h
Max.suction height	1.5m	1.5m	1.5m
Working pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise(dB)	80	80	80
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m	1m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	3PCS	4PCS	5PCS
Pressure tank volume	24L	24L	24L
Single gift box size	55x32x60cm	55x32x60cm	55x32x60cm
Single gross weight	19kg	21kg	22kg
Qty/20'GP	265pcs	265pcs	265pcs

CMPXXXD-XP

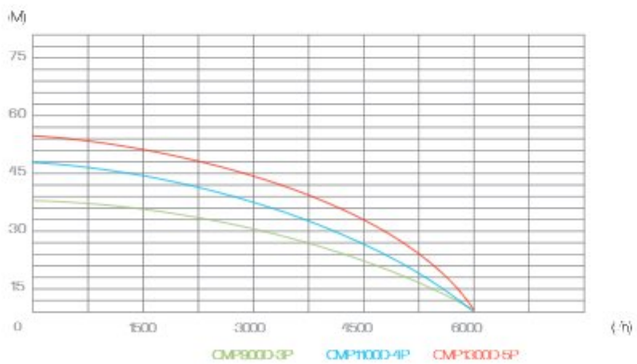

Automatic booster system coupled with multi-stage impeller jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Automatic Booster System

AUDJPXXXDHT

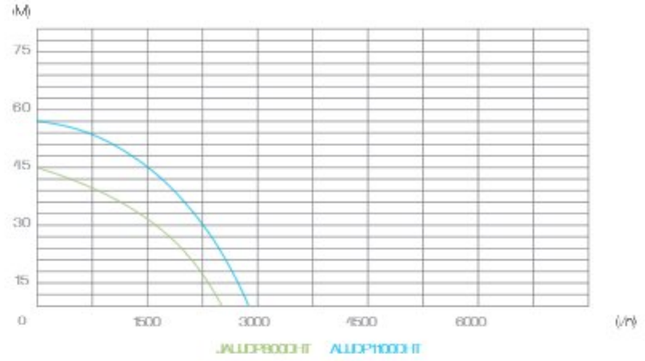

Automatic booster system coupled with cast iron pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. With the injector this pump could reach a big suction height.

Model No.	AUJDP800DHT	AUJDP1100DHT
Rated Power	800W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.Head	45m	56m
Max.flow rate	2400l/h	2600l/h
Max.suction height	20m	25m
Working pressure	1.0-2.2bar	1.5-3.0bar
Max.grain size	1mm	1mm
Max.Noise(dB)	85	85
Dia of connecting pipe.	G1"1 1/4"	G1"、G1 1/4"
Cable specification	HO7RN-F3G0.75mm²	HO7RN-F3G1.0mm²
Length of cable	1m	1m
Max.medium temperature	35℃	35℃
Qty of Impeller	1PC	1PC
Pressure tank volume	24L	24L
Single gift box size	55x37x60cm	55x37x60cm
Single gross weight	22.4kg	23.9kg
Qty/20'GP	229pcs	229pcs

Submersible Fountain Pump

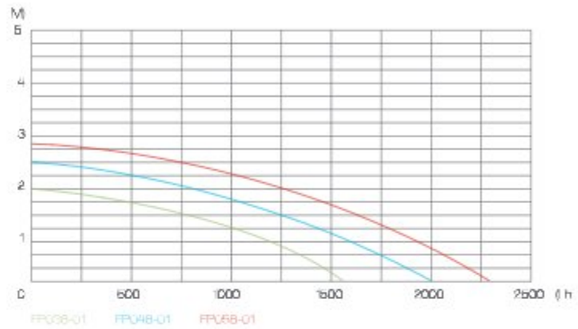

FPXXX-01

Submersible fountain pump with plastic pump body and 4pcs interchangeable plastic nozzles to obtain different water plays. The pump motors are of low power consumption. It is ideal to install in ponds or basins with a water capacity of 800 to 2200 liters.

Model No.	FP038-01	FP048-01	FP058-01
Rated Power	38W	48W	58W
Vol. & Fre	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	2m	2.5m	2.7m
Max.pump rate	1600l/h	2000l/h	2300l/h
Max.submersible depth	3m	3m	3m
Max. Pressure	0.2bar	0.25bar	0.27bar
Dia of connecting pipe	G1/2"	G1/2"	G1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable	10m	10m	10m
Lowerst pump starting level	20cm	20cm	20cm
Max.medium temperature	35℃	35℃	35℃
Qty in carton box	4PCS	4PCS	4PCS
Master carton box size	36x35x32cm	36x35x32cm	36x35x32cm
Master carton box gross weight	12.5kg	13kg	13.5kg
Qty/20'GP	2780pcs	2780pcs	2780pcs

HYP07-018

HYP15-028

Submersible Fountain Pump

HYP28-038

HYP36-050

Submersible Fountain Pump

HYP50-075

HYP70-110

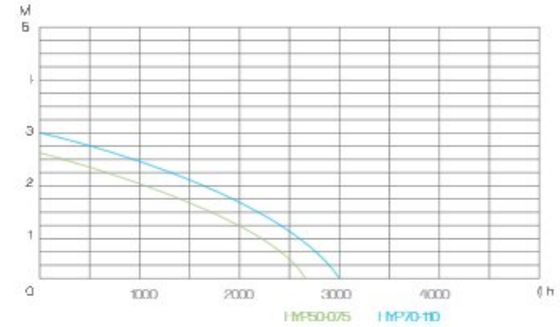

Submersible fountain pump with plastic pump body and 3pcs interchangeable plastic nozzles to obtain different water plays. The pump motors are of low power consumption. It is ideal to install in ponds or basins with a water capacity of 800 to 2200 liters.

Model No.	HYP07-018	HYP15-028	HYP28-038	HYP36-050
Rated Power	18W	28W	38W	50W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	1.4m	1.6m	2.0m	2.5m
Max.pump rate	900l/h	1200l/h	1500l/h	2000l/h
Max.subersible depth	3m	3m	3m	3m
Max.pressure	0.14bar	0.16bar	0.2bar	0.25bar
Dia of connecting pipe.	G1/2"	G1/2"	G1/2"	G1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	15cm	15cm	20cm	20cm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty in carton box	12pcs	12pcs	8pcs	8pcs
Master carton box size	42x42x36cm	42x42x36cm	42x42x32cm	42x42x32cm
Master carton box gross weight	20.5kg	20.5kg	16.5kg	18.5kg
Qty/20'GP	5280pcs	5280pcs	3968pcs	3968pcs

Model No.	HYP50-075	HYP70-110
Rated Power	75W	110W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	2.6m	3m
Max.pump rate	2600l/h	3000l/h
Max.subersible depth	3m	3m
Max.pressure	0.26bar	0.3bar
Dia of connecting pipe.	G1"	G1"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable	10m	10m
Lowerst pump starting level	25cm	25cm
Max.medium temperature	35℃	35℃
Qty in carton box	6pcs	6pcs
Master carton box size	48x25x54cm	48x25x54cm
Master carton box gross weight	20.5kg	23kg
Qty/20'GP	2592pcs	2592pcs

Submersible Fountain Pump

HYP28-038B

HYP36-050B

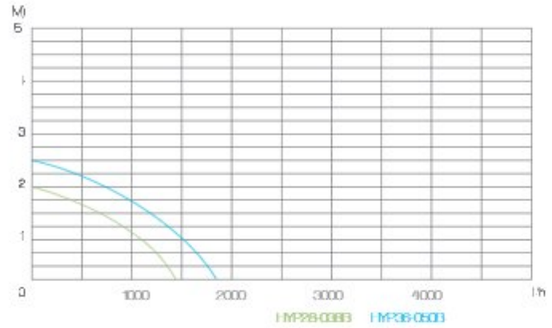

Submersible fountain pump with stainless steel pump body and 4pcs interchangeable plastic nozzles to obtain different water plays. The pump motors are of low power consumption. It is ideal to install in ponds or basins with a water capacity of 800 to 2200 liters.

Model No.	HYP28-038B	HYP36-050B
Rated Power	38W	50W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	1.9m	2.3m
Max.pump rate	1400l/h	1750l/h
Max.subersible depth	3m	3m
Max.pressure	0.19bar	0.23bar
Dia of connecting pipe.	G1/2"	G1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable	10m	10m
Lowerst pump starting level	25cm	25cm
Max.medium temperature	35℃	35℃
Qty in carton box	8pcs	8pcs
Master carton box size	42x42x36cm	42x42x36cm
Master carton box gross weight	19kg	20.5kg
Qty/20'GP	3500pcs	3500pcs

Submersible Fountain Pump

HYP50-075B

HYP70-110B

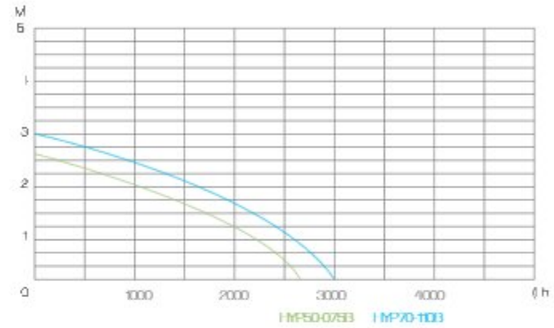

Submersible fountain pump with plastic pump body and 3pcs interchangeable plastic nozzles to obtain different water plays. The pump motors are of low power consumption. It is ideal to install in ponds or basins with a water capacity of 800 to 2200 liters.

Model No.	HYP50-075B	HYP70-110B
Rated Power	75W	110W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	2.6m	3m
Max.pump rate	2600l/h	3000l/h
Max.subersible depth	3m	3m
Max.pressure	0.26bar	0.3bar
Dia of connecting pipe.	G1"	G1"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable	10m	10m
Lowerst pump starting level	30cm	30cm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	48x25x40cm	48x25x40cm
Master carton box gross weight	16kg	17.5kg
Qty/20'GP	2340pcs	2340pcs

Submersible Fountain Pump

PFP38-1500

PFP50-2000

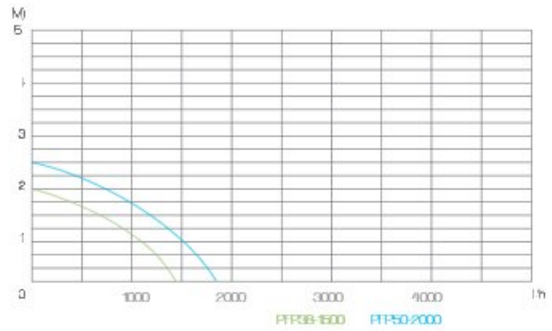

Submersible fountain pump with stainless steel pump body and 4pcs interchangeable plastic nozzles to obtain different water plays. The pump motors are of low power consumption. It is ideal to install in ponds or basins with a water capacity of 800 to 2200 liters.

Model No.	PFP38-1500	PFP50-2000
Rated Power	38W	50W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	2.0m	2.5m
Max.pump rate	1500l/h	2000l/h
Max.subersible depth	3m	3m
Max.pressure	0.2bar	0.25bar
Dia of connecting pipe.	G1/2"	G1/2"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable	10m	10m
Lowerst pump starting level	10cm	20cm
Max.medium temperature	35℃	35℃
Qty in carton box	4pcs	4pcs
Master carton box size	43.5xx33.5x30cm	43.5xx33.5x30cm
Master carton box gross weight	14kg	15kg
Qty/20'GP	2560pcs	2560pcs

Submersible Fountain Pump

PFP85-3000

PFP120-3600

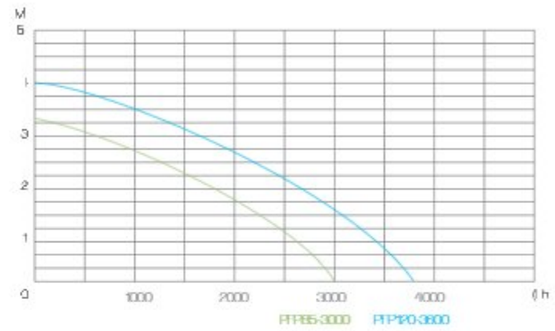

Submersible fountain pump with plastic pump body and 3pcs interchangeable plastic nozzles to obtain different water plays. The pump motors are of low power consumption. It is ideal to install in ponds or basins with a water capacity of 800 to 2200 liters.

Model No.	PFP85-3000	PFP120-3600
Rated Power	85W	120W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	3.4m	4m
Max.pump rate	3000l/h	3600l/h
Max.subersible depth	3m	3m
Max.pressure	0.34bar	0.4bar
Dia of connecting pipe.	G1"	G1"
Cable specification	H05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Length of cable	10m	10m
Lowerst pump starting level	25cm	20cm
Max.medium temperature	35℃	35℃
Qty in carton box	2pcs	4pcs
Master carton box size	43.5x29.5x36cm	43.5x29.5x36cm
Master carton box gross weight	9.5kg	10kg
Qty/20'GP	1212pcs	1212pcs

Deep Well Pump

MSPXXXAM02T

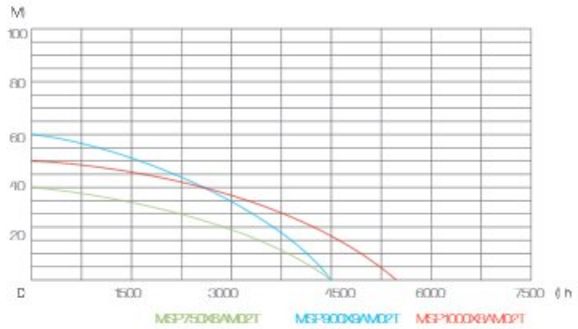

Deep well pump with stainless pump body and multi-stage plastic impellers for clean water only. 20m length cable with plug, 20m nylon rope for lifting the pump up in a well. The control switch box has included overload protector and capacitor and on/off water proof switch. It is one of the best selling deep well pump in European DIY market.

Model No.	MSP750X6AM02T	MSP900X9AM02T	MSP1000X8AM02T
Rated Power	750W	900W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	40m	60m	55m
Max.pump rate	4500l/h	4500l/h	5200l/h
Max.submersible depth	16m	16m	16m
Max.grain size	1.5mm	1.5mm	1.5mm
Max.pressure	4bar	6bar	5.5bar
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	H07RN-F4G1.0mm²	H07RN-F4G1.0mm²	H07RN-F4G1.0mm²
Length of cable	20m	20m	20m
Lowerst pump starting level	241mm	321mm	327mm
Lowerst pump sucking level	26mm	26mm	26mm
Max.medium temperature	35℃	35℃	35℃
Qty of impellerx	6pcs	9pcs	8pcs
Master carton box size	58.5x37x24.5cm/2pcs	64.5x37x24.5cm/2pcs	65.5x37x24.5cm/2pcs
Master carton box gross weight	25kg	25.5kg	27kg
Qty/20'GP	1058pcs	965pcs	950pcs

Deep Well Pump

100QJD4-24 100QJD4-32 100QJD4-40 100QJD4-56

4" deep well pump multi-stage impellers with high performance, especially recommended for elevation, distribution and pressurisation in civil and agricultural application. Assembly in prssure units, cisterns, irrigation, washing systems, etc.

Model No.	100QJD4-24	100QJD4-32	100QJD4-40	100QJD4-56
Rated Power	700W	950W	1300W	1700W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	40m	54m	66m	94m
Max.pump rate	6000l/h	6000l/h	6000l/h	6000l/h
Max.submersible depth	50m	50m	50m	50m
Max.grain size	1.5mm	1.5mm	1.5mm	1.5mm
Max.pressure	0.4MPa	0.54MPa	0.66MPa	0.94MPa
Dia of connecting pipe.	G1.25"G1.5"	G1.25"G1.5"	G1.25"G1.5"	G1.25"G1.5"
Cable specification	HO7RN-F4G1.0mm²	HO7RN-F4G1.0mm²	HO7RN-F4G1.0mm²	HO7RN-F4G1.0mm²
Lowerst pump starting level	577mm	596mm	728mm	920mm
Lowerst pump sucking level	351mm	366mm	386mm	426mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of impeller	6pcs	8pcs	10pcs	14pcs
Master carton box size	22.5x17.5x84.5cm/1pc	22.5x17.5x94cm/1pc	22.5x17.5x100cm/1pc	22.5x17.5x100cm/1pc
Master carton box gross weight	15.8kg	16kg	16.2kg	16.7kg
Qty/20'GP	842pcs	757pcs	711pcs	603pcs

Deep Well Pump

100QJD3-21 100QJD3-30 100QJD3-39 100QJD3-54

4" deep well pump multi-stage impellers with high performance, especially recommended for elevation, distribution and pressurisation in civil and agricultural application. Assembly in prssure units, cisterns, irrigation, washing systems, etc.

Model No.	100QJD3-21	100QJD3-30	100QJD3-39	100QJD3-54
Rated Power	700W	950W	1300W	1700W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	42m	62m	80m	112m
Max.pump rate	4500l/h	4500l/h	4500l/h	4500l/h
Max.submersible depth	50m	50m	50m	50m
Max.grain size	1.5mm	1.5mm	1.5mm	1.5mm
Max.pressure	0.42MPa	0.62MPa	0.8MPa	1.12MPa
Dia of connecting pipe.	G1.25"G1.5"	G1.25"G1.5"	G1.25"G1.5"	G1.25"G1.5"
Cable specification	HO7RN-F4G1.0mm²	HO7RN-F4G1.0mm²	HO7RN-F4G1.0mm²	HO7RN-F4G1.0mm²
Lowerst pump starting level	593mm	689mm	826mm	1001mm
Lowerst pump sucking level	351mm	366mm	386mm	426mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of impeller	7pcs	10pcs	13pcs	18pcs
Master carton box size	22.5x17.5x88cm/1pc	22.5x17.5x88cm/1pc	22.5x17.5x111cm/1pc	22.5x17.5x130cm/1pc
Master carton box gross weight	14.5kg	16.4kg	18.3kg	20.8kg
Qty/20'GP	808pcs	711pcs	641pcs	547pcs

Deep Well Pump

4SPM2-7-0.37Y　　4SPM3-6-0.37Y　　4SPM5-4-0.37Y

4" deep well pump multi-stage impellers with high performance, especially recommended for elevation, distribution and pressurisation in civil and agricultural application. Assembly in prssure units, cisterns, irrigation, washing systems, etc.

Model No.	4SPM2-7-0.37Y	4SPM3-6-0.37Y	4SPM5-4-0.37Y
Rated Power	750W	750W	750W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	42m	36m	24m
Max.pump rate	3800l/h	4500l/h	7800l/h
Max.submersible depth	50m	50m	50m
Max.grain size	2mm	3mm	3mm
Max.pressure	0.42MPa	0.36MPa	0.24MPa
Dia of connecting pipe.	G1.25"	G1.25"	G1.5"
Cable specification	HO7RN-F4G0.75mm²	HO7RN-F4G0.75mm²	HO7RN-F4G0.75mm²
Lowerst pump starting level	533mm	512mm	482mm
Lowerst pump sucking level	386mm	386mm	386mm
Max.medium temperature	35℃	35℃	35℃
Qty of impeller	7pcs	6pcs	4pcs

Deep Well Pump

4SPM2-11-0.55Y　　4SPM3-9-0.55Y　　4SPM5-6-0.55Y

4" deep well pump multi-stage impellers with high performance, especially recommended for elevation, distribution and pressurisation in civil and agricultural application. Assembly in prssure units, cisterns, irrigation, washing systems, etc.

Model No.	4SPM2-11-0.55Y	4SPM3-9-0.55Y	4SPM5-6-0.55Y
Rated Power	900W	900W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	59m	54m	35m
Max.pump rate	3800l/h	4500l/h	7800l/h
Max.submersible depth	50m	50m	50m
Max.grain size	2mm	3mm	3mm
Max.pressure	0.59MPa	0.54MPa	0.35MPa
Dia of connecting pipe.	G1.25"	G1.25"	G1.5"
Cable specification	HO7RN-F4G0.75mm²	HO7RN-F4G0.75mm²	HO7RN-F4G0.75mm²
Lowerst pump starting level	632mm	590mm	545mm
Lowerst pump sucking level	401mm	401mm	401mm
Max.medium temperature	35℃	35℃	35℃
Qty of impeller	11pcs	9pcs	6pcs

Deep Well Pump

4SPM2-15-0.75Y 4SPM3-12-0.75Y 4SPM5-8-0.75Y 4SPM8-5-0.75Y

4" deep well pump multi-stage impellers with high performance, especially recommended for elevation, distribution and pressurisation in civil and agricultural application. Assembly in prssure units, cisterns, irrigation, washing systems, etc.

Model No.	4SPM2-15-0.75Y	4SPM3-12-0.75Y	4SPM5-8-0.75Y	4SPM8-5-0.75Y
Rated Power	1300W	1300W	1300W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	86m	72m	48m	29m
Max.pump rate	3800l/h	4500l/h	7800l/h	14500l/h
Max.submersible depth	50m	50m	50m	50m
Max.grain size	2mm	3mm	3mm	3mm
Max.pressure	0.86MPa	0.72MPa	0.48MPa	0.29MPa
Dia of connecting pipe.	G1.25"	G1.25"	G1.5"	G1.5"
Cable specification	HO7RN-F4G0.75mm²	HO7RN-F4G0.75mm²	HO7RN-F4G0.75mm²	HO7RN-F4G0.75mm²
Lowerst pump starting level	736mm	673mm	613mm	665mm
Lowerst pump sucking level	421mm	421mm	421mm	455mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of impeller	15pcs	12pcs	8pcs	5pcs

Deep Well Pump

4SPM2-22-1.1Y 4SPM3-15-1.1Y 4SPM5-10-1.1Y 4SPM8-6-1.1Y

4" deep well pump multi-stage impellers with high performance, especially recommended for elevation, distribution and pressurisation in civil and agricultural application. Assembly in prssure units, cisterns, irrigation, washing systems, etc.

Model No.	4SPM2-22-1.1Y	4SPM3-15-1.1Y	4SPM5-10-1.1Y	4SPM8-6-1.1Y
Rated Power	1300W	1300W	1300W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	86m	72m	48m	29m
Max.pump rate	3800l/h	4500l/h	7800l/h	14500l/h
Max.submersible depth	50m	50m	50m	50m
Max.grain size	2mm	3mm	3mm	3mm
Max.pressure	0.86MPa	0.72MPa	0.48MPa	0.29MPa
Dia of connecting pipe.	G1.25"	G1.25"	G1.5"	G1.5"
Cable specification	HO7RN-F4G0.75mm²	HO7RN-F4G0.75mm²	HO7RN-F4G0.75mm²	HO7RN-F4G0.75mm²
Lowerst pump starting level	736mm	673mm	613mm	665mm
Lowerst pump sucking level	421mm	421mm	421mm	455mm
Max.medium temperature	35℃	35℃	35℃	35℃
Qty of impeller	15pcs	12pcs	8pcs	5pcs

Deep Well Pump

75QJD2-23

75QJD2-32

75QJD2-41

3" deep well pump multi-stage impellers with high performance, especially recommended for elevation, distribution and pressurisation in civil and agricultural application. Assembly in prssure units, cisterns, irrigation, washing systems, etc.

Model No.	75QJD2-23	75QJD2-32	75QJD2-41
Rated Power	500W	600W	800W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	30m	45m	60m
Max.pump rate	4200l/h	4200l/h	4200l/h
Max.submersible depth	50m	50m	50m
Max.grain size	1.5mm	1.5mm	1.5mm
Max.pressure	0.3MPa	0.3MPa	0.6MPa
Dia of connecting pipe.	G1"	G1"	G1"
Cable specification	HO7RN-F4G1.0mm²	HO7RN-F4G0.75mm²	HO7RN-F4G0.75mm²
Lowerst pump starting level	655mm	807mm	932mm
Lowerst pump sucking level	406mm	426mm	446mm
Max.medium temperature	35℃	35℃	35℃
Qty of impeller	8pcs	12pcs	16pcs

Pump Accessories

FS-JH-01

Floater switch

FS-JH-02

Floater switch

FS-JH-03

Floater switch

FS-JH-04

Floater switch

FS-JH-05

Floater switch

FS-JH-06

Floater switch

FT-JH-01

High pressure tube

FT-JH-02

High pressure tube

PG-JH-01

Pressure gauge

PG-JH-02

Pressure gauge

NV-JH-01/02

Brass non-return valve

BF-JH-01/02

Brass 5-Way fitting

AT-1

7m Water suction hose

AT-1
- Inner diameter:1" (Φ25mm)
- Max.pressure:6bar
- Working temperature: 1-35℃

AT-2

7m Water suction hose

AT-2
- Inner diameter:1" (Φ25mm)
- Max.pressure:6bar
- Working temperature: 1-35℃

AT-3

7m Water suction hose

AT-3
- Inner diameter:3/4" (Φ19mm)
- Max.pressure:6bar
- Working temperature: 1-35℃

AT-4

7m Water suction hose

AT-4
- Inner diameter:1" (Φ25mm)
- Max.pressure:6bar
- Working temperature: 1-35℃

AT-5

7m Water suction hose

AT-5
- Inner diameter:1" (Φ25mm)
- Max.pressure:6bar
- Working temperature: 1-35℃

PC-JH-01

Power cable

PC-JH-01
H05RN3G0.75MM
H05RN3G1.0MM
H07RN3G1.0MM
H07RN4G1.0MM
10m

PC-JH-02

Power cable

PC-JH-02
H05RN3G0.75MM
H05RN3G1.0MM
H07RN3G1.0MM
H07RN4G1.0MM
20m

EDWC2013

Electronic pressure control switch

EDWC2013
- 220~240V/50~60HZ
- Max.1Mpa(10bar)
- Max.10A
- Max.60℃
- IP65

SC-HY1L

1L water filter

SC-HY1L
- 1L
- G1"
- 15x13x19.5cm
- 54x47x41cm/24pcs
- 16kg/19kg
- QTY/20'CTN:6460pcs

SC-HY2L

2L water filter

SC-HY2L
- 2L
- G1"
- 15x13x29.5cm
- 49x29x61cm/12pcs
- 10kg/13kg
- QTY/20'CTN:3880pcs

CT-JH-01

19L carbon steel pressure tank with plastic platform and feet

CT-JH-01
- Inflation pressure: 1.8-2.0bar
- Volume:19L
- Max.working pressure: 6.0bar
- Tmax.:45℃

CT-JH-02

19L carbon steel pressure tank with iron platform and feet

CT-JH-02
- Inflation pressure: 1.8-2.0bar
- Volume:19L
- Max.working pressure: 6.0bar
- Tmax.:45℃

CT-JH-03

24L carbon steel pressure tank with plastic platform and feet

CT-JH-03
- Inflation pressure: 1.8-2.0bar
- Volume:24L
- Max.working pressure: 6.0bar
- Tmax.:45℃

CT-JH-04

24L carbon steel pressure tank with iron platform and feet

CT-JH-04
- Inflation pressure: 1.8-2.0bar
- Volume:24L
- Max.working pressure: 6.0bar
- Tmax.:45℃

CT-JH-05

50L carbon steel pressure tank with iron platform and feet

CT-JH-05
- Inflation pressure: 1.8-2.0bar
- Volume:50L
- Max.working pressure: 6.0bar
- Tmax.:45℃

DP-JH-01

Drill Pump

DP-JH-01
- Max.height:2.5m
- Max.surking heigh:1m
- Dia.of pipe:NPT3/4
- 57.5x40x39/12pcs[20'CTN:39500pcs]
- 40.5x30x15.5/12pcs（20' CTN:19140pcs）

ST-JH-01

19L stainless steel pressure tank with plastic platform and feet

ST-JH-01
- Inflation pressure : 1.8-2.0bar
- Volume : 19L
- Max.working pressure: 6.0bar
- Tmax.:45℃

ST-JH-02

24L stainless steel pressure tank with plastic platform and feet

ST-JH-02
- Inflation pressure : 1.8-2.0bar
- Volume : 24L
- Max.working pressure: 6.0bar
- Tmax.:45℃

MS-JH-01

Mechanical pressure switch

MS-JH-01(Male Thread)
- V&Hz : 250V/50Hz
- Working pressure: 1.3-2.6bar/1.5-3.0bar
- Protection grade : IP44

MS-JH-02

Mechanical pressure switch

MS-JH-02(Female Thread)
- V&Hz : 250V/50Hz
- Working pressure: 1.3-2.6bar/1.5-3.0bar
- Protection grade : IP44

ST-JH-03

24L stainless steel pressure tank with stainless steel platform and feet

ST-JH-03
- Inflation pressure : 1.8-2.0bar
- Volume : 24L
- Max.working pressure: 6.0bar
- Tmax.:45℃

ST-JH-04

50L stainless steel pressure tank with stainless steel platform and feet

ST-JH-04
- Inflation pressure : 1.8-2.0bar
- Volume : 50L
- Max.working pressure: 6.0bar
- Tmax.:45℃

TM-JH-01

19L pressure tank membrane

TM-JH-01
- Material : EPDM
- Volume : 19L

TM-JH-02

24L pressure tank membrane

TM-JH-02
- Material : EPDM
- Volume : 24L

TM-JH-03

50L pressure tank membrane

TM-JH-03
- Material : EPDM
- Volume : 50L

GREEN HOUSE
SERIES

Item No.	WM001
Size	69*49*160CM
Carton Meas.	47*7.5*70CM
N.W./G.W.	4.1/4.7KGS
CBM	CBM:0.025

GREEN HOUSE
SERIES

WM002

Size	69*49*95CM
Carton Meas.	47*6.5*70CM
N.W./G.W.	2.2/2.6KGS
CBM	0.021

WM003

Size	69*49*128CM
Carton Meas.	47*7*70CM
N.W./G.W.	3.0/3.6KGS
CBM	0.023

GREEN HOUSE
SERIES

GREEN HOUSE
SERIES

WM004

Size	50*45*105CM
Carton Meas.	44*7*51CM
N.W./G.W.	2.9/3.3KGS
CBM	0.016

WM005

Size	50*45*130CM
Carton Meas.	44*7*51CM
N.W./G.W.	3.1/3.5KGS
CBM	0.016

WM006

Size	59*39*126CM
Carton Meas.	40*5.5*60CM
N.W./G.W.	1.9/2.4KGS
CBM	0.013

WM007

Size	58*38*195CM
Carton Meas.	42*7*58CM
N.W./G.W.	3.0/3.5KGS
CBM	0.017

GREEN HOUSE
SERIES

GREEN HOUSE
SERIES

WM008

Size	46×24×80CM
Carton Meas.	26×5×44.5CM
N.W./G.W.	1.0/1.3KGS
CBM	0.006

WM009

Size	46×24×105CM
Carton Meas.	26×6×44.5CM
N.W./G.W.	1.3/1.6KGS
CBM	0.007

WM010

Size	60×30×125CM
Carton Meas.	30×9×70CM
N.W./G.W.	2.9/3.3KGS
CBM	0.019

WM011

Size	69×49×193CM
Carton Meas.	48×9×70CM
N.W./G.W.	5.2/5.7KGS
CBM	0.024

WM012

Size	80*45*160CM
Carton Meas.	44*8*81CM
N.W./G.W.	4.5/5.1KGS
CBM	0.029

WM013

Size	102*49*160CM
Carton Meas.	103*48*8.5CM
N.W./G.W.	5.7/6.8KGS
CBM	0.042

WM014

Size	144×48×152CM
Carton Meas.	49×8.5×74CM
N.W./G.W.	5.8/6.4KGS
CBM	0.031

WM015

Size	90×45×160CM
Carton Meas.	47×7×85CM
N.W./G.W.	3.2/3.8KGS
CBM	0.028

WM016

Size	180×90×90CM
Carton Meas.	22×8×89CM
N.W./G.W.	2.8/3.3KGS
CBM	0.016

GREEN HOUSE
SERIES

GREEN HOUSE
SERIES

WM017

Size	70*50*70CM
Carton Meas.	26*6*71CM
N.W./G.W.	1.1/1.5KGS
CBM	0.009

WM018

Size	130*60*50CM
Carton Meas.	26*6*63CM
N.W./G.W.	1.2/1.7KGS
CBM	0.01

WM019

Size	90*90*92CM
Carton Meas.	18*7*88CM
N.W./G.W.	1.8/2.2KGS
CBM	0.011

WM020

Size	120*60*60CM
Carton Meas.	18*8*59CM
N.W./G.W.	1.5/1.8KGS
CBM	0.009

WM021

Size	118*78*60CM
Carton Meas.	22*8*60CM
N.W./G.W.	1.4/1.9KGS
CBM	0.01

WM022

Size	115*75*90/50CM
Carton Meas.	20*7*112CM
N.W./G.W.	2.3/2.8KGS
CBM	0.016

WM023

Size	130*65*85CM
Carton Meas.	25*8*65CM
N.W./G.W.	2.8/3.2KGS
CBM	0.013

WM024

Size	180*142*80CM
Carton Meas.	25*10*89CM
N.W./G.W.	3.4/3.8KGS
CBM	0.022

GREEN HOUSE
SERIES

GREEN HOUSE
SERIES

WM025

Size	270*90*90CM
Carton Meas.	25*10*89CM
N.W./G.W.	3.7/4.3KGS
CBM	0.022

WM026

Size	100*200*215CM
Carton Meas.	28*8*108CM
N.W./G.W.	5.0/5.5KGS
CBM	0.024

WM027

Size	160*160*180CM
Carton Meas.	22*8*104CM
N.W./G.W.	3.3/3.8KGS
CBM	0.018

GREEN HOUSE
SERIES

Item No.	**WM028**
Size	100*50*150CM
Carton Meas.	20*7*96CM
N.W./G.W.	1.8/2.3KGS
CBM	0.001

GREEN HOUSE
SERIES

GREEN HOUSE
SERIES

WM029

Size	86*45*150/170CM
Carton Meas.	20*8*87CM
N.W./G.W.	2.2/2.6KGS
CBM	0.014

WM030

Size	100*60*174/143CM
Carton Meas.	21*8*96CM
N.W./G.W.	2.3/2.9KGS
CBM	0.016

WM031

Size	120*86*151CM
Carton Meas.	18*9*81CM
N.W./G.W.	2.8/3.2KGS
CBM	0.013

WM032

Size	116*76*160CM
Carton Meas.	18*7.5*114CM
N.W./G.W.	2.5/3.0KGS
CBM	0.015

GREEN HOUSE
SERIES

GREEN HOUSE
SERIES

WM033

Size	198*78*200/180CM
Carton Meas.	24*12*104CM
N.W./G.W.	4.6/5.3KGS
CBM	0.026

WM034

Size	200*77*169/149CM
Carton Meas.	30*7*101CM
N.W./G.W.	4/4.5KGS
CBM	0.021

WM035

Size	200*100*180CM
Carton Meas.	30*7*98CM
N.W./G.W.	4.9/5.5KGS
CBM	0.02

WM036

Size	200*77*169/1480CM
Carton Meas.	97*13*19CM
N.W./G.W.	4.5/5.0KGS
CBM	0.024

GREEN HOUSE
SERIES

Item No.	WM037
Size	143*143*195CM
Carton Meas.	36.5*14*98CM
N.W./G.W.	9.2/10.2KGS
CBM	0.049

WM038



Size	140*72*195CM
Carton Meas.	39*7*89.5CM
N.W./G.W.	5.0/5.4KGS
CBM	0.024

WM039

Size	143*73*195CM
Carton Meas.	36.5*9.5*97CM
N.W./G.W.	5.6/6.5KGS
CBM	0.034

WM040

Size	120*186*190CM
Carton Meas.	33.5*12.5*100CM
N.W./G.W.	6.6/7.4KGS
CBM	0.042

WM041

Size	120*190*190CM
Carton Meas.	31*11*106CM
N.W./G.W.	7.7/8.6KGS
CBM	0.036

WM042

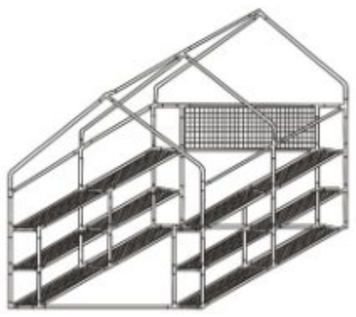

Size	143*143*195CM
Carton Meas.	36.5*15*97CM
N.W./G.G.	10.7/11.7KGS
CBM	0.053

WM043

Size	100*200*215CM
Carton Meas.	31*11*106CM
N.W./G.W.	7.5/8.2KGS
CBM	0.036

WM044

Size	148*300*215CM
Carton Meas.	39*18*107CM
N.W./G.W.	11.7/13KGS
CBM	0.075

GREEN HOUSE
SERIES

WM045

Size	143*213*195CM
Carton Meas.	41*18*102CM
N.W./G.W.	12.5/13.5KGS
CBM	0.075

WM046

Size	200*200*220CM
Carton Meas.	36*19*121CM
N.W./G.W.	14.0/15.5KGS
CBM	0.083

GREEN HOUSE
SERIES

Item No.	**WM047**
Size	200*300*200CM
Carton Meas.	42*17*129CM
N.W./G.W.	17/19KGS
CBM	0.092

WM048

Size	200*300*190CM
Carton Meas.	155*34*17CM
N.W./G.W.	15.6/18KGS
CBM	0.089

WM049





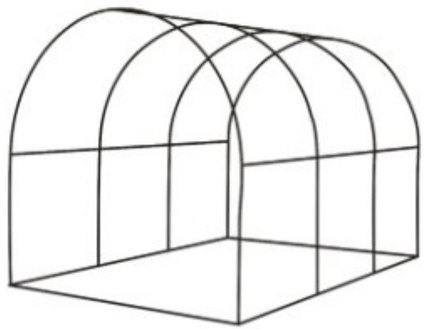

Size	200*300*190CM
Carton Meas.	102*41*18CM
N.W./G.W.	17.5/18.5KGS
CBM	0.075

GREEN HOUSE
SERIES

WM050

Size	200*300*190CM
Carton Meas.	114*33*24CM
N.W./G.G.	17.3/19KGS
CBM	0.09

WM051

Size	180*180*197CM
Carton Meas.	102*35*18CM
N.W./G.G.	11/12.7KGS
CBM	0.087

GREEN HOUSE
SERIES

WM052

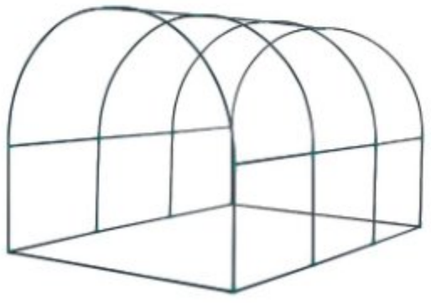

Size	200*300*180CM
Carton Meas.	33*10*102CM
N.W./G.W.	7.2/7.8KGS
CBM	0.034

WM053

Size	250*400*200CM
Carton Meas.	129*42*19CM
N.W./G.W.	21/23.7KGS
CBM	0.103

GREEN HOUSE
SERIES

WM054

Size	300*300*200CM
Carton Meas.	120*38*19CM
N.W./G.G.	21/23.3KGS
CBM	0.087

WM055

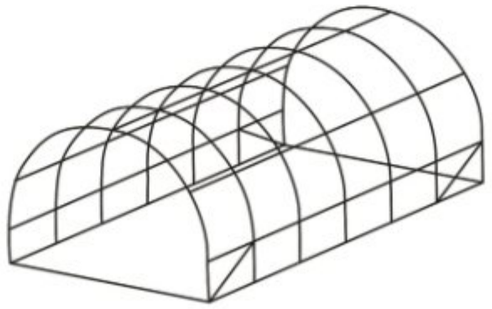

Size	300*600*200CM
Carton Meas.	120*38*32CM
N.W./G.W.	36.8/38.9KGS
CBM	0.146

WM056



Size	300*600*200CM
Carton Meas.	158*36*23CM
N.W./G.W.	25/28KGS
CBM	0.0131

WM057



Size	300*600*245CM
Carton Meas.	157*42*19CM
N.W./G.W.	27.3/30KGS
CBM	0.125

RAISED BED
SERIES

Item No.	**WM058**
Size	60*60*152CM
Carton Meas.	61*8*73CM
N.W./G.W.	8.3/9.2KGS
CBM	0.036

RAISED BED
SERIES

Item No.	WM059
Size	102×45×80CM
Carton Meas.	47×7×97CM
N.W./G.W.	9.4/10.5KGS
CBM	0.032

Item No.	WM060
Size	185*95*92CM
Carton Meas.	31*10*92CM
N.W./G.W.	11.7/12.4KGS
CBM	0.029

RAISED BED
SERIES

RAISED BED
SERIES

Item No.	**WM061**
Size	80.5*43*130CM
Carton Meas.	45*7*82CM
N.W./G.W.	9.1/10 KGS
CBM	0.026

Item No.	**WM062**
Size	120*60*152CM
Carton Meas.	61*7*122CM
N.W./G.W.	11.2/12.5KGS
CBM	0.052

Item No.	**WM063**
Size	90*90*30CM
Carton Meas.	31*5.5*78CM
N.W./G.W.	4.5/5.0KGS
CBM	0.013

Item No.	**WM064**
Size	120*90*30CM
Carton Meas.	31*5.5*107CM
N.W./G.W.	6.0/7.0KGS
CBM	0.018

Item No.	**WM065**
Size	180*90*56CM
Carton Meas.	60*7.5*97CM
N.W./G.W.	17/18KGS
CBM	0.044

RAISED BED
SERIES

RAISED BED
SERIES

Item No.	**WM066**
Size	60*60*30CM
Carton Meas.	57*37*16.5CM
N.W./G.W.	3.0/4.1KGS
CBM	0.035

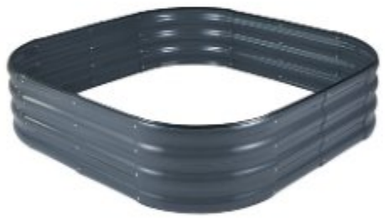

Item No.	**WM067**
Size	120*120*30CM
Carton Meas.	57*37*16.5CM
N.W./G.W.	7.4/8.5KGS
CBM	0.035

Item No.	**WM068**
Size	180*90*30CM
Carton Meas.	57*37*12.5CM
N.W./G.W.	6.2/6.9KGS
CBM	0.026

Item No.	**WM069**
Size	60*27*45CM
Carton Meas.	27*8*62CM
N.W./G.W.	3.8/4.2KGS
CBM	0.013

Item No.	**WM070**
Size	90*27*80CM
Carton Meas.	29*6*99CM
N.W./G.W.	8.5/9.2KGS
CBM	0.017

Item No.	**WM071**
Size	102x41x82CM
Carton Meas.	40*7*102CM
N.W./G.W.	7.2/8 .0KGS
CBM	0.029

Item No.	WM072
Size	51*21*94CM
Carton Meas.	53*40*17CM
N.W./G.W.	3/3.5KGS
CBM	0.036

Item No.	WM073
Size	51*21*125CM
Carton Meas.	53*40*17CM
N.W./G.W.	4.0/4.5KGS
CBM	0.036

Item No.	WM074
Size	54.5*50*115CM
Carton Meas.	58*56*21CM
N.W./G.W.	6.7/7.5KGS
CBM	0.068

Item No.	WM075
Size	52*70*52/34CM
Carton Meas.	26*16*66CM
N.W./G.W.	4.5/5KGS
CBM	0.027

Item No.	WM076
Size	52*80*63/43CM
Carton Meas.	26*16*82CM
N.W./G.W.	4.6/5.6KGS
CBM	0.034

Shade Net

Shade Net can simply shading for any areas needed

Shade Net

Shade Net can supply shading for any areas desired

★ Tape shade net

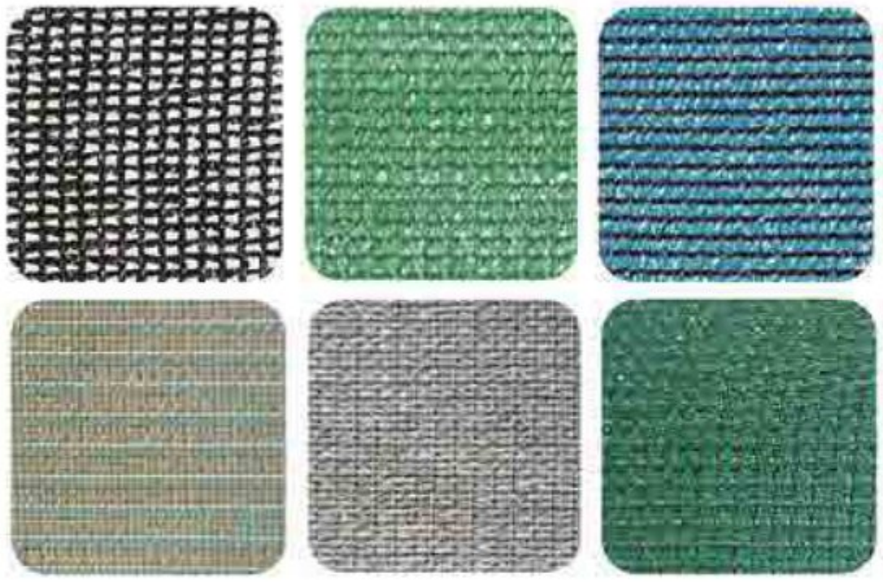

Application:

- ◆ Shade net can be used for greenhouses,playhouse,privacy fence,awnings
- ◆ Block sun & heat,can provide 30%-95% shades and lower the temperature
- ◆ Protect against harmful UV Rays
- ◆ Easy to install with optional accessories if necessary

★ Mono shade net

Mono Shade Net / Tape Shade Net

- ◆ Material: High density Polyethylene with U.V. stabilizer
- ◆ Color: Green,Black,Blue and can be customized
- ◆ Shade Factor: 30%-95%
- ◆ Size: 4x50m,2x100m etc it can be customized
- ◆ Reinforcement edges with knitting eyelets available
- ◆ Packing by rolls with hard paper tube inside

Shade Net

Shade Net can provide shading for any areas needed

SHADE NET ACCESSORIES

SHADE NET CLIPS

CABLE TIES

ROPES

WEBBING

GROMMETS

Hail Net

Hail Net can protect crops and orchard from hail damage

Anti-Hail Net is used to prevent hail damage

1. Strong high density polyethylene mono-filament fabric with UV stabilizer
2. Transparent Color/White Color/ Black Color can be Customized
3. Weight is from 45gsm to 60gsm, Flexible, light and easy to install
4. Mesh shape can be diamond, triangle and square customized
5. Reinforcement edges with knitting eyelets
6. Packed by Rolls with hard paper tube inside

Olive Net

Olive Net is ideal for olive harvest collection.

Olive Net

Olive Net is ideal for olive harvest collection

Features:

- Mono-filament HDPE yarn with UV stabilizer
- Weight: 70gsm-100gsm and can be customized
- Size: 5x10m,6x12m and can be customized
- Color: Full Green or Green with Orange enforcement
- Reinforcement Edges with Aluminium Eyelets for four corners
- Reinforcement Corners with Triangle PE Tarpaulin
- Each piece per Poly Bag and several pcs per Woven Bag

Bird Net

Anti-Bird Net is used to protect crops and orchard from bird damage

Bird Net

Anti-Bird Net is used to protect crops and orchard from bird damage

★ knotless

★ knotty

Anti-Bird Net has two types, Knotless and Knotted ,it can be in variety of shapes.
Material: HDPE U.V.
Mesh Size: 15*15mm;25*25mm etc.
Size: 4x5m,4x25m,4x50m,10x25m etc.
Color: White,Black,Green,Blue etc.
Custom size and color as per requirement

Ground Cover

Ground cover used for agriculture,
block sunshine and control weed growth.



Ground Cover

Material: PE or PP with U.V. Stabilizer
Weight: 70g–150g and can be customized
Size: 1x10m,2x5m etc and can be customized
Popular Color: Black with Green Lines/ White Lines
Packing: By rolls with paper tube inside with colorful label

Features:

- Long useful life ,low cost, light and fold easily
- Easy to use,environmental friendly
- Allows air and water to pass through and minimized light penetration to suppress weed growth

Garden Bag

Garden Bag with the crown for garden cleanings and other landscape work

Specification:

- Made from high strength polypropylene with one side lamination 150gsm
- Flexible plastic band that holds the top of the bag open
- 272L,120L and it can be customized

Features:

- Durable light weight,Tear Resistant,Water Resistant
- Good design and easy to carry
- Perfect for leaves,grass clippings,lawn debris,gardening products and mulch

Pop-Up Bag

VOLUME	120L	85L
Material	600D Oxford PET fabric	600D Oxford PET fabric
HEIGHT	76cm	50cm
DIAMETER	47cm	47cm
TOTAL WEIGHT	1020g	1050g
LOAD CAPACITY	65kg	50kg

Features

- Durable and Tear-Resistant
- Flexible Pop-Up setting helps the garden sack stand freely and keeps the bag open and stable
- Portable and Foldable with Velcro for easy to carry and storage
- Size and Color etc can be customized

Shade Sail

*Shade sail can be used
anywhere protection from the sun is required*

Shade Sail

*Shade Sail can be used
anywhere protection from the sun is required*

Shade Sail

Shade Sail can be used
anywhere protection from the sun is required

Colors Available

Custom Size and Shape

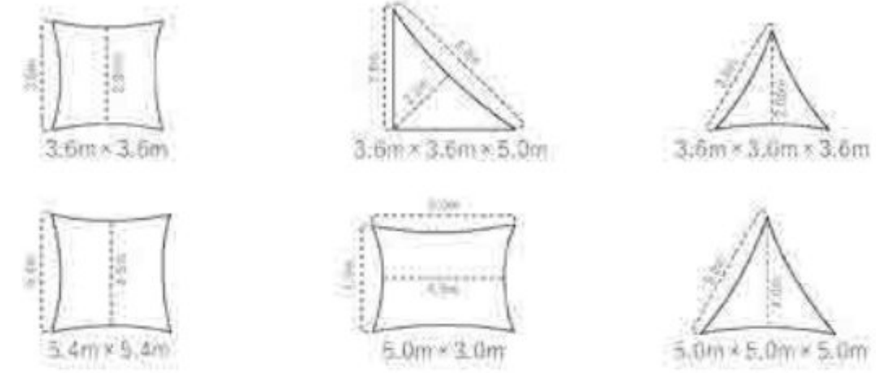

Hardware kit

Shade Sails are designed to protect and shade outdoor areas from the harmful effects of UV Rays of the Sun.
Shade sail is ideal for using in public outdoor areas–at shopping centers,car yards,mine sites,community centers,child care centers,construction sites,schools,outdoor playground and other activity areas and sporting venues.
Shade Sail can be easily assembled and removed if necessary.

Features:

- Very Strong HDPE Knitted Fabric with high UV Stabilizer
- Up to 96% protection against damaging UV rays
- Shapes: Triangle,Square,Rectangular etc Can be Customized
- Size: 3x3x3m,3.6x3.6x3.6m Can be Customized
- Heavy Duty 50mm / 38mm Webbing double stitched around the perimeter
- Each Corner contains double layers of webbing and Stainless Steel D–rings
- Stitching is tight up to the stainless steel D–rings Preventing the rings from turning off
- Rope and other accessories can be added as Set

Balcony Screen

Balcony Screen gives you all year round protection against Sun,Wind,Dust and glances as well as providing Privacy for your leisure and recreational pursuits.

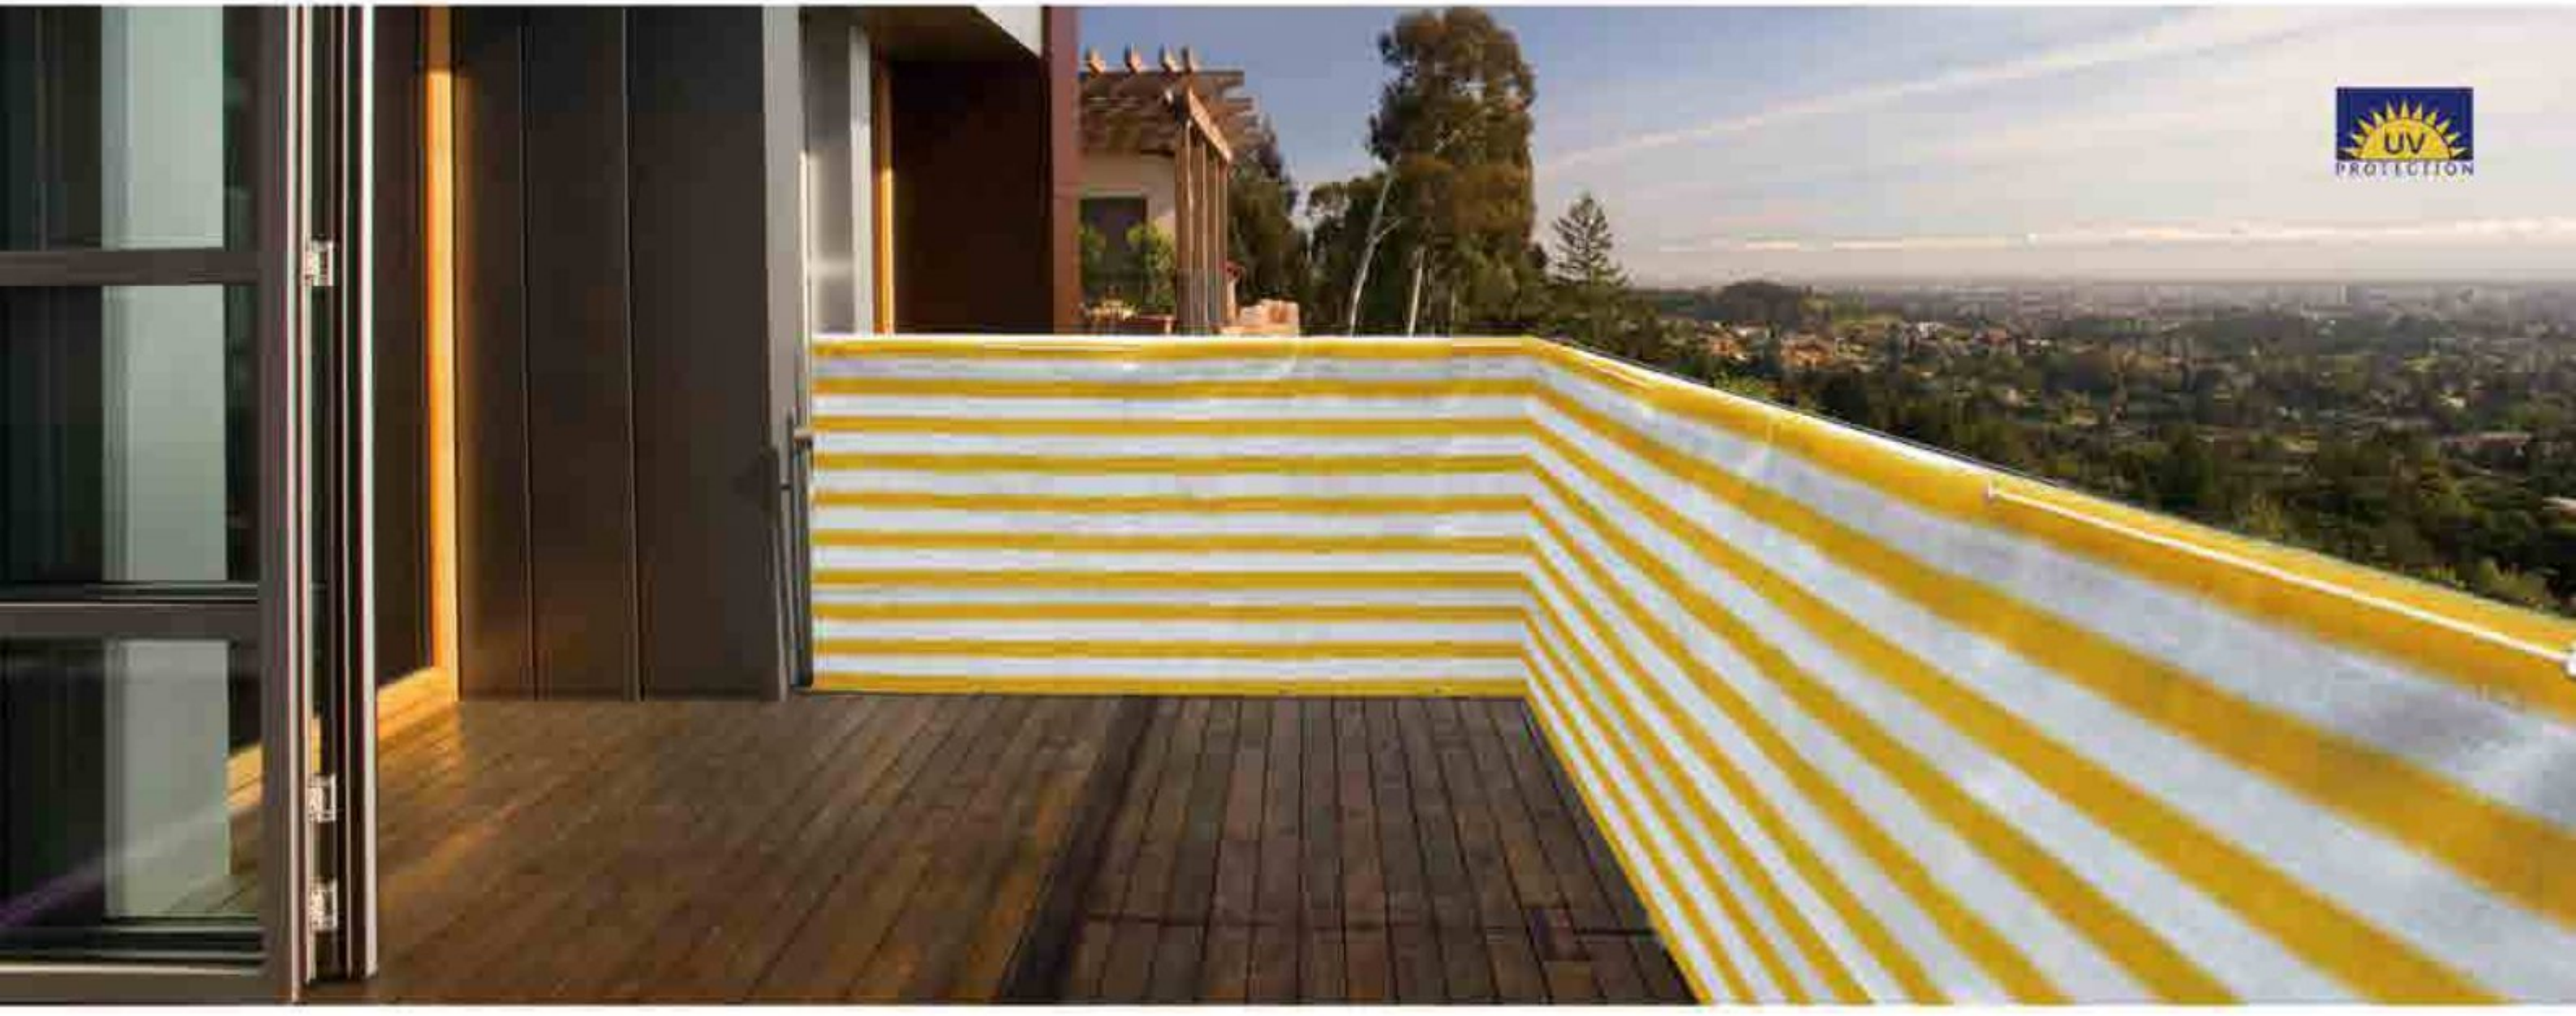

Balcony Screen

Balcony Screen gives you an easy-to-use protective solution against Sunlight,Dust and glances as well as providing Privacy for your leisure and recreational pursuits.It can be easily assembled with metal eyelets and fixing cords.

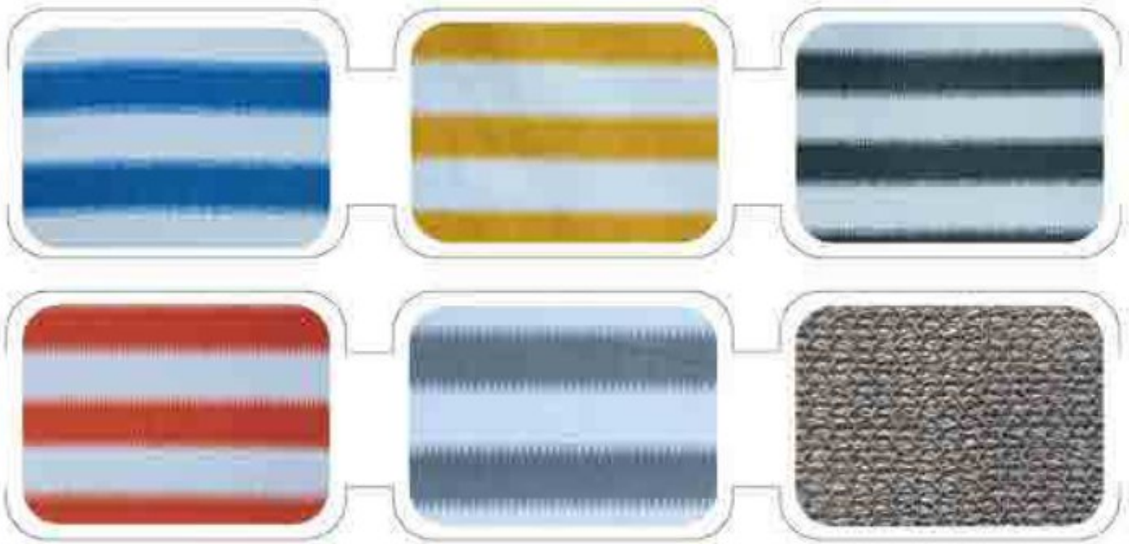

Material: 100% High Density Polyethylene with high U.V. Protection

Fabric: 180gsm

Size: 75x600cm / 90x500cm

Color: White/Green, White/Blue, White/Yellow,White/Red,Full Forest Green

24 Aluminium Eyelets with 24m fixing cords

Custom Size and Color as per requirement

Colors Available

Outdoor Curtain

Outdoor Curtain can supply shade protection for the most needed

Shade Wave Sails

Reinforcement Band 4cm wide

Stainless Steel Grommet

Features:

- Very Strong HDPE Knitted Fabric with high U.V. Stabilizer
- Up to 90% protection against damaging UV Rays
- Heavy Duty 38mm Webbing double stitched around the perimeter
- Steel Grommet for Each Corner
- Rope and other accessories can be added as set
- Custom Size and Color

Pool Cover

Pool Cover is used to protect Children or pet's safety from getting into pool.
Pool cover can also be used to collect fallen leaves easily and keep your pool clean.

2 Layers for Pool Cover

Bottom Layer is with big mesh with knotted/ knotless pattern

Material: PP/PE with U.V. stabilizer
Color: Blue,Black,Green etc.
Rope Dia.: 3mm-6mm
Mesh Size: 35*35mm/50*50mm etc.

Up Layer is with fine mesh

Material：HDPE with U.V. stabilizer
Color: Green,Black etc.
Weight:150g-240g etc.
Reinforcement Edges with Black PP webbing with Brass Grommets

Size and Shape can be customized as per requirement

Safety Net

Knotless Pattern / Knotty Pattern
(Conforming to EN1263-1 Standard)

Material: Polyester/ Nylon/ PP/PE can be customized
Rope Dia: 5mm–6mm Can be customized
Mesh Size: 5x5cm/10x10cm etc Can be customized
Size: 5x10m/6x10m etc Can be Customized
Enforcement Edges with Rope all around
It also can be combined with PE fine Mesh together
Rope and other accessories can be added

Debris Netting

Debris Netting is widely used in Construction Scaffolding Building Protection

Debris Netting

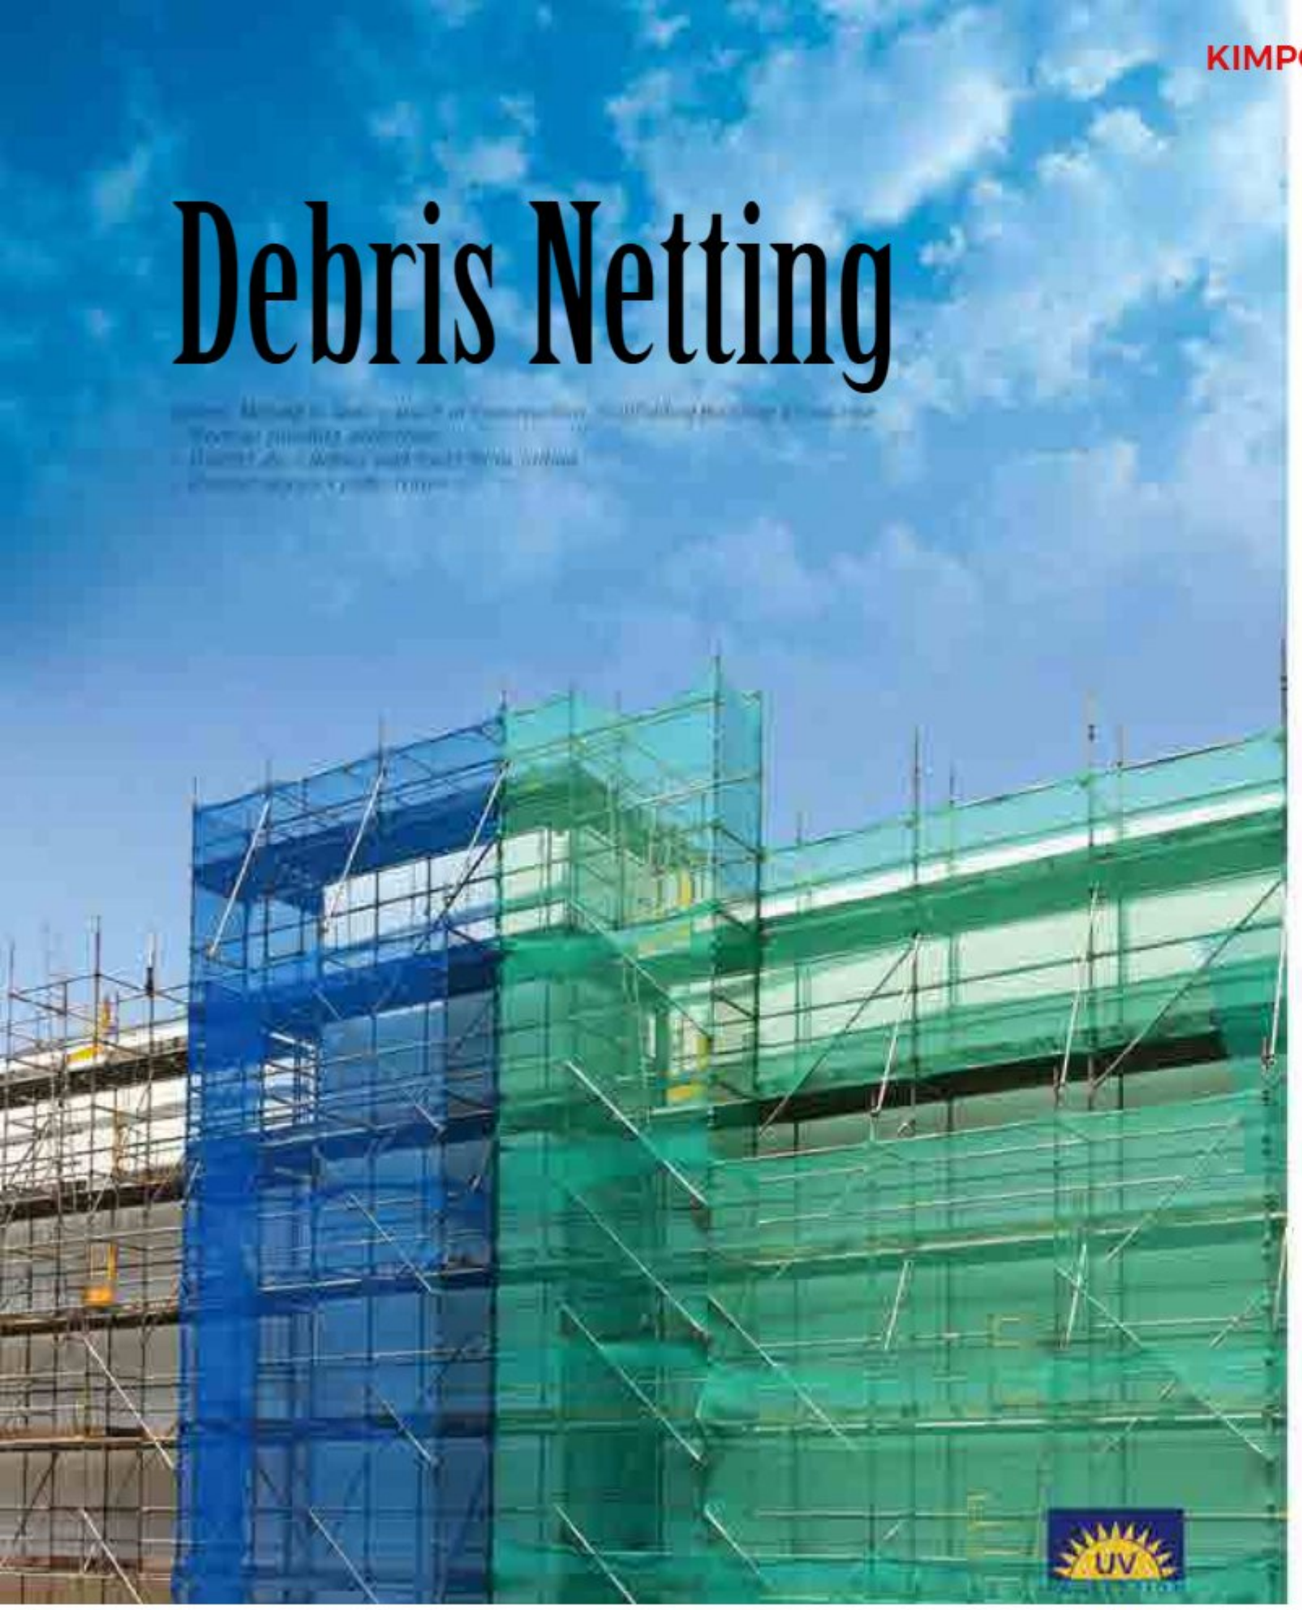

- High density knitted polyethylene Monofilament
- UV Protection
- Custom Size:2x50m;3x50m
- Knitted eyelets along both edges and through the centre

- High density knitted polyethylene Scaffolding net
- UV Protection
- Reinforced Edges with rope/webbing with Grommets at interval 50cm
- Custom Size,Color and Weight
- Fire Retardant

Debris Netting

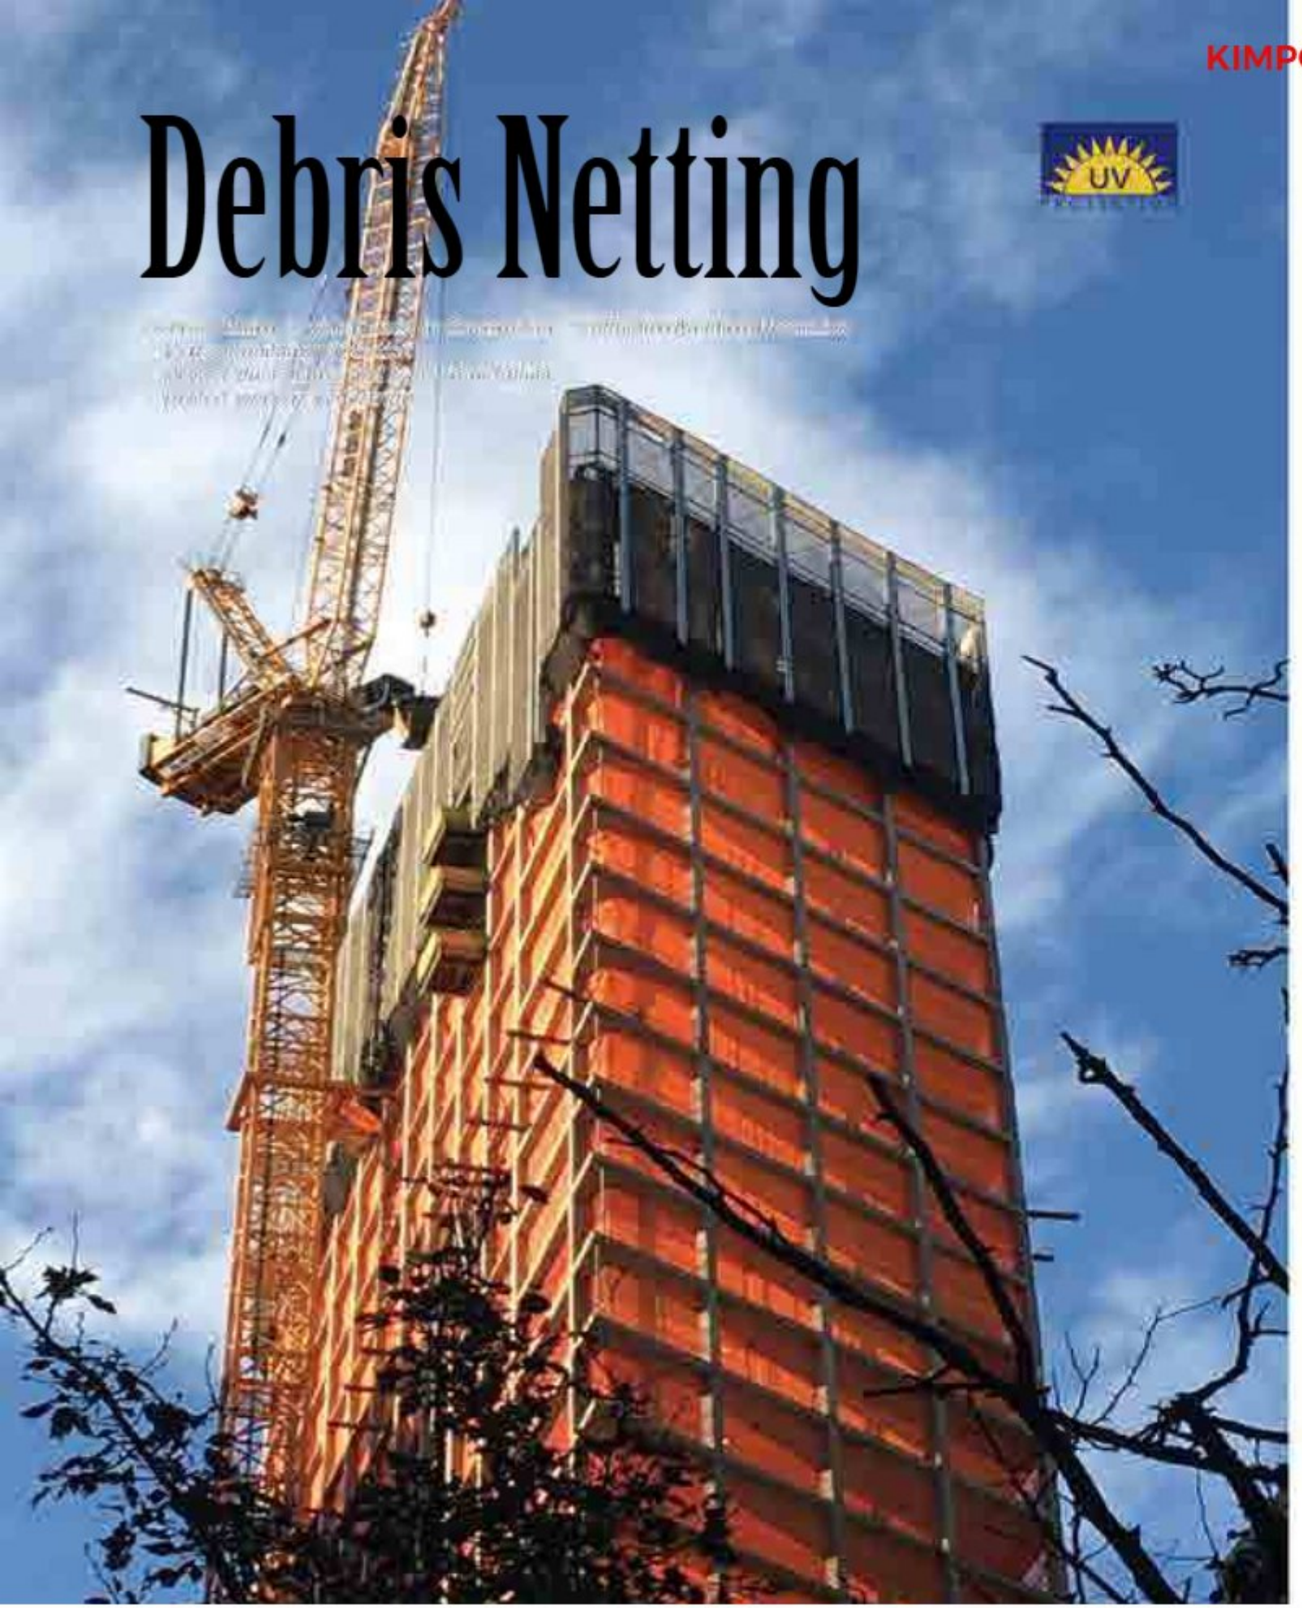

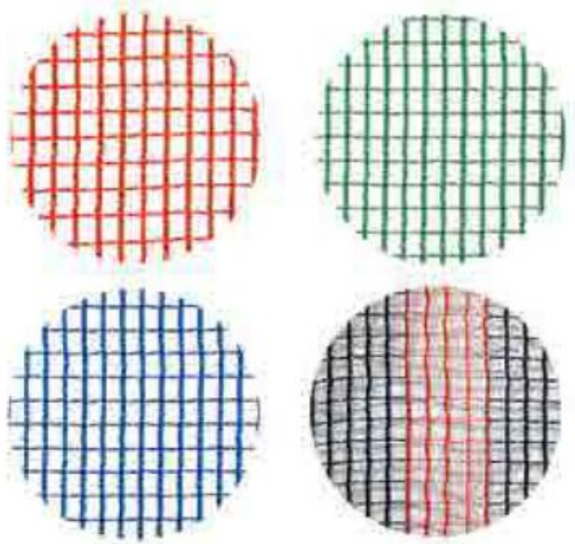

- High density knitted polyethylene Debris Netting
- 1/4"mesh hole openings
- Edges include reinforced borders for fastening
- Custom Roll Size:
  4'x150'
  5'6"x150'
  8'6"x150'
- UV protection
- Fire Retardant

- High Density Knitted Polyethylene Debris Netting
- 1/16" mesh holes openings
- Reinforced edges with knitting eyelets
- Custom Size:
  8'x150'
  8'6"x150'
- UV Protection
- Fire Retardant

Fence Screen

Fence Screen can be used as fence for Safety and Privacy

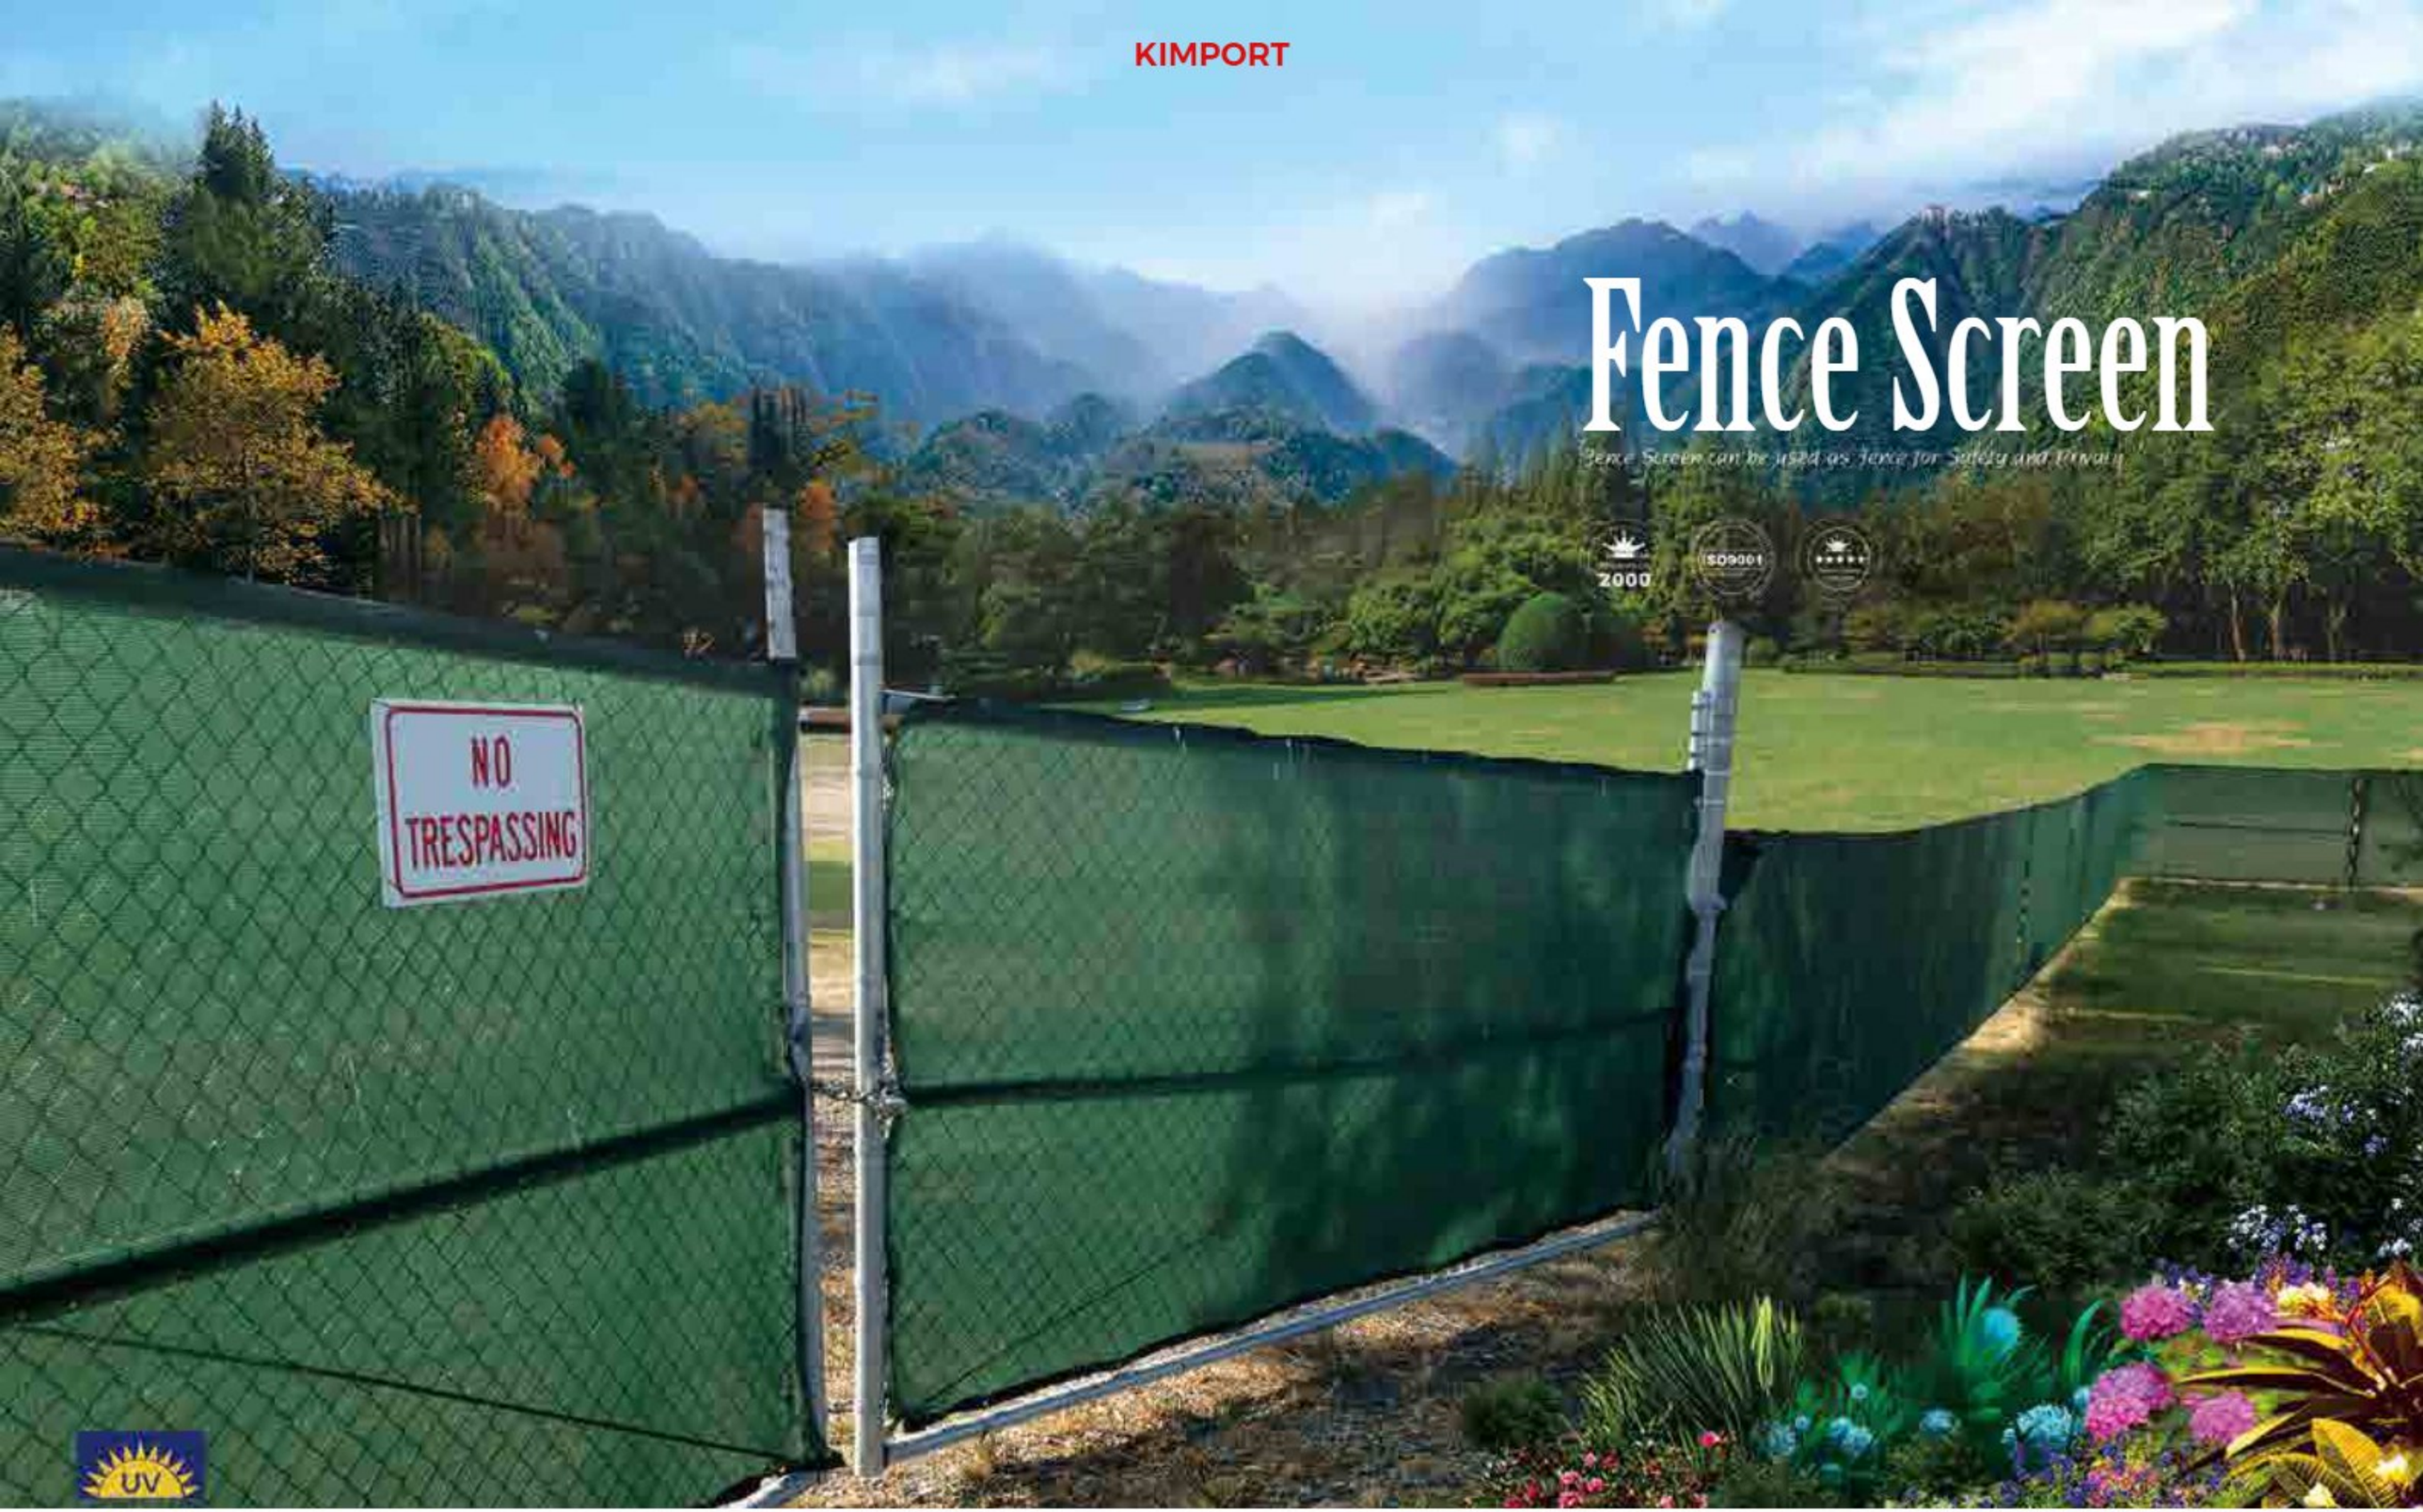

LD-1035

Fence Screen

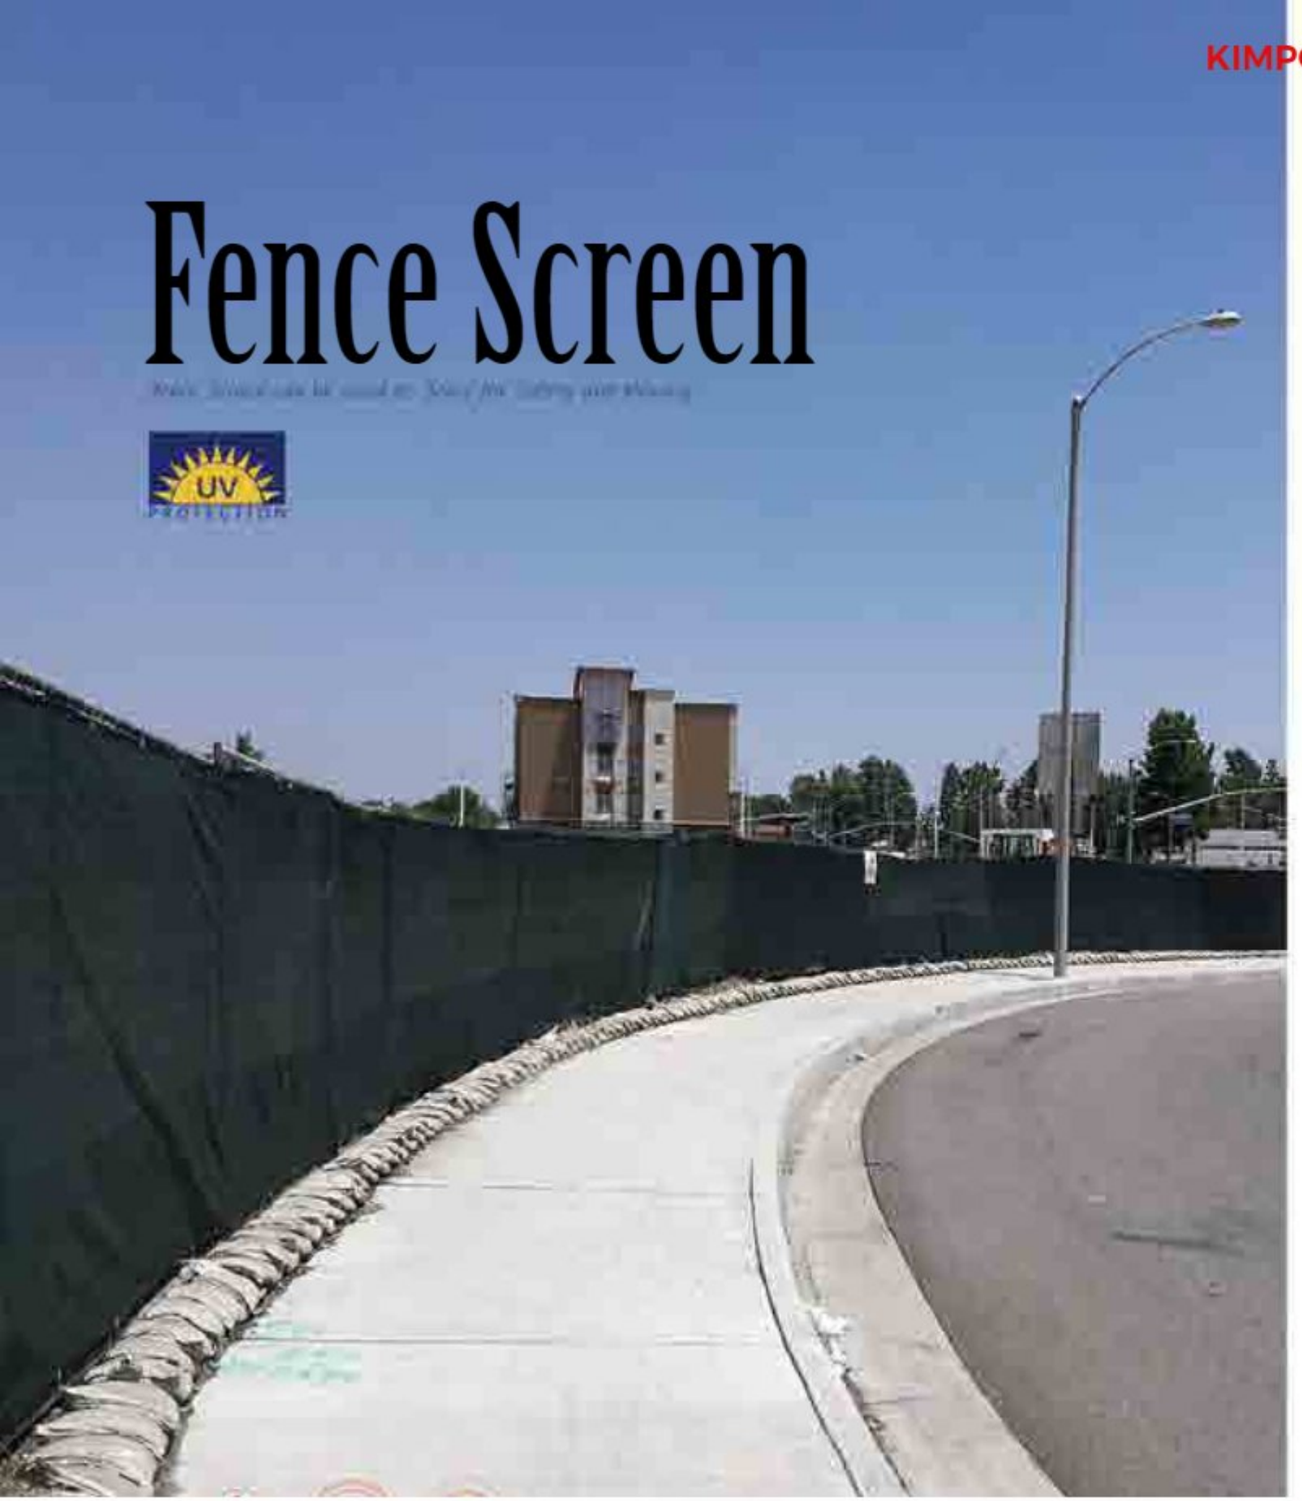

Fence Screen for Safety and Privacy

Type: Mono Pattern and Tape Pattern

Material: HDPE U.V. Stabilizer

Weight: 150g–240g can be customized

Reinforced Edges with Grommets(Brass/Steel/ Aluminium) / or with knitting eyelets

Custom Size and Color

Application:

Provide a visual barrier for Privacy

Protect dust & debris on the construction site

Create a windscreen block or shade cloth

Anti Wind Net

Anti-Wind Net is widely used to protect the building and agricultural plants from the wind

Material: HDPE knitted netting with U.V. Stabilizer
Weight: 70-90g and can be customized
Shade Rate: 30%-70% and can be customized
Color: Black,Blue,Green etc and can be customized
Size: 2.44x90m etc and can be customized
Enforcement Edges with adjustable mesh size

Cargo Net

Cargo Net is widely used for protection and carrying cargo better

Cargo Net

UV PROTECTION

Cargo Net is widely used for protection and carrying cargo better.

Material: PP woven webbing
Width of webbing: 2.5cm–10cm
Mesh: 3cm*3cm, 4cm*4cm, 8cm*8cm
Diameter of net rope: 1mm – 12mm
Net Size: 2m*3m, 3m*3m, 3m*4m

Specifications

- Protect goods from dropping out
- Suitable for trailer,truck,pickup,container
- With fix part (hooks,loops)
- Customized

PP CARGO NET

PP Cargo Net is widely used for protection and carrying Cargo matter



★ PP Knotless Cargo Net

Technology: single needle and double needles

Material: High Tenacity Polypropylene with U.V. Stabilizer

Dia.:1.8–5mm

Mesh Size: 15*15mm /35*35mm/45*45mm

Border Rope: PE or PP 3–strands rope or Braided Rope

Elastic Rope: 6–8mm

Color: Green,Black,Blue etc

Cargo Net can be Customized as per requirement

Popular Size （ Custom Size are accepted ）					
1500x2200mm	1500x2700mm	2000x3000mm	2500x3500mm	3000x4000mm	1500x2200mm
1500x2700mm	2000x3500mm	3500x5000mm	3500x6000mm	3500x7000mm	3500x8000mm

PE Knotted Cargo Net

Cargo Net is widely used for protection and carrying Cargo better

Material: HDPE with U.V. Stabilizer

Dia.: 1.3–2.2mm

Mesh Size: 35*35mm/45*45mm/50*50mm

Border Rope: PE or PP 3–strand rope or Braided Rope

Elastic Rope: 6–8mm

Color: Green,Black,Blue etc

Cargo Net can be Customized as per requirement

Popular Size (Custom Size are accepted)					
1500x2200mm	1500x2700mm	2000x3000mm	2500x3500mm	3000x4000mm	1500x2200mm
1500x2700mm	2000x3500mm	2000x3500mm	3500x5000mm	3500x6000mm	3500x8000mm

PE BRAIDED KNOTTED CARGO NET

Cargo Net is widely used for protection and carrying Cargo better

Material: HDPE with U.V. Stabilizer

Dia.: 2–6mm

Mesh Size: 30*30mm/45*45mm/50*50mm

Border Rope: PE or PP 3–strand rope or Braided Rope

Elastic Rope: 6–8mm

Color: Black,Blue,Red etc

Cargo Net can be Customized as per requirement

Mesh Tarp

Mesh Tarp is designed for outdoor applications such as truck, container, fence, net and shade cloth.

Material: High Density Polyethylene
High U.V. treatment
Weight: 150g–280g and can be customized
Size: 6'x8' , 20'x50' etc and can be customized
Color: Black, Green,Blue,White and can be customized
Reinforcement Edges with Black PP webbing with Brass Grommets
Elastic Rope can be added.

Luggage Net

Luggage Net is used for items storage and keep the items visible and safety and keep good visibility and clean

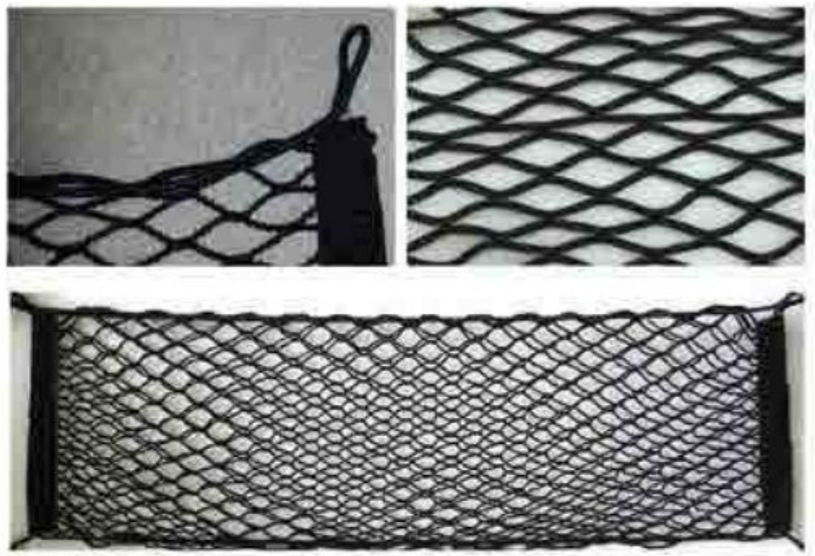

Material: High Tenacity Polypropylene
Dia.: 2.2mm
Mesh Size:20x20mm
Color: Black
Size:
20cmx40cm
25cmx30cm
40cmx100cm
60cmx115cm
4 Plastic hooks to fix easily

Sports Net

JINGUAN SPORTS
BRAND NAME OF SHANDONG

Badminton Net

Material	Polyester/PP
Type	Knotless
Size	610*76cm
Mesh Size	2cm
Color	Brown
Logo	Custom
Enforcement Band on the top and the other three sides	

Football Net

Material	Type	Polyester/PP	Dia.(mm)	Color
PP	Knotless	Square 100x100mm	3.0mm,4.0mm	White
PP	Knotless	Square 120x120mm	3.0mm,4.0mm	White
PP	Knotless	Hexagon 90x90mm	3.0mm,4.0mm	White
PP	Knotless	Square 100x100mm	2.0mm,3.0mm	White

Basketball Net

Material	High Tenacity PP / Polyester
Size	12 loops*6knots*50cm 13 looks*6knots*55cm Custom
Color	Full white, White/Red,Red/White/Blue, Red/White/Blue Custom

Tennis Net

Material	Type	Size	Dia.(mm)	Color
PP	Knotless	12.8x1.07m	3.0mm,3.5mm	Black
PE	Knotless	12.8x1.07m	3.0mm,3.5mm	Black
PE	Knotless	12.8x1.07m	2.3mm,3.0mm	Black
1. Reinforced with White Band 2.Steel Cable fitted (5mm)				

Sports Net

JINGUAN SPORTS
BRAND NAME OF SHANDONG

Volleyball Net

Material	Type	Size	Dia.(mm)	Color
PP	Knotless	9.5x1.0m	3.0mm,4.0mm	Black
PE	Knotless	9.5x1.0m	2.3mm,3.0mm	Black
PE	Knotted	9.5x1.0m	2.3mm	Black
1. Reinforced with White Band 2.Steel Cable fitted 3.Fiberglass Pole				

Sports Fence Net

Material	Type	Dia.(mm)
PP	Knotless	3.0mm,4.0mm
PE	Knotless	2.0mm,3.0mm
PE	Knotted	2.3mm,3.0mm
PE	Braided	3.0mm,4.0mm
1. Custom Size 2. Custom Color		

Golf Net

Material	Type	Dia.(mm)	Mesh Size (mm)	Size
PET/PP	Knotless	2.0mm	20*20mm	8'x7'x5' 9'x7'x5' 10'x7'x5' 10.5'x7'x6'
PE	Knotless	2.5mm	25*25mm	3x3x3m
Oxford Fabric at the bottom 9.5m fiberglass poles / 2.5mm cable				

Trampoline Net

Trampoline Net is a safety net surrounding the outside of the Trampoline and provides added trampolining security. Using trampoline net will help prevent the bouncer accidentally falling off the trampoline bed or jumping off when dismounting.

Material: HDPE with U.V. stabilizer Monofilament

Weight: 120gsm

Color: Black

Reinforcement Edges with black webbing

Ropes and other accessories can be added.

Outward Bound Net

Hand made outward bound net/Climbing net
Material: Polyester/Nylon/PE
Rope dia: 4mm–10mm
Mesh size: 4*4cm–15*15cm
Mesh shape: square
Rope type: braided rope/ stranded rope

Feature:

SAFE&CHALLENGE&FUN

KDV-1607 • 143x73x195CM

- walk in greenhouse
- PVC cover
- 16*0.3mm powder-coating Iron pipes
- 8pcs 2.0mm thickness wire meshes
- PP connector
- 4pcs peg and 4pcs wind rope
- Packing Dimension(m3):0.029
- GW(kgs): 6.4
- MOQ: 300pcs

KDE-1602 • 143x143x195CM

- walk in greenhouse
- PE cover
- 16*0.3mm powder-coating Iron pipes
- 8pcs 2.0mm thickness wire meshes
- PP connector
- 4pcs peg and 4pcs wind rope
- Packing Dimension(m3):0.05
- GW(kgs): 10.2
- MOQ: 300pcs

KDV-1603 • 69x49x160CM

- 4 tier greenhouse Recessed
- 16X0.3mm tube, powder coated
- PVC cover
- 1.8mm wire mesh 4pcs
- pp connector
- BROWN BOX+COLOR LABEL
- Packing Dimension (m3):0.023
- GW(kgs): 4.7
- MOQ: 300pcs

KDE-1603 • 69x49x160CM

- 4 tier greenhouse Recessed
- 16X0.3mm tube, powder coated
- PP cover
- 1.8mm wire mesh 4pcs
- pp connector
- BROWN BOX+COLOR LABEL
- Packing Dimension (m3):0.023
- GW(kgs): 4.7
- MOQ: 300pcs

KDV-1604 • 60x30x125CM

- Little 4 tier greenhouse Recessed
- 16X0.3mm tube, powder coated
- PVC cover
- 1.8mm wire mesh 4pcs
- pp connector
- BROWN BOX+COLOR LABEL
- Packing Dimension (m3):0.019
- GW(kgs): 3.5
- MOQ: 300pcs

KDV-1605 • 69x49x160CM

- Mini Greenhouse
- 16X0.3mm tube, powder coated
- PVC cover
- pp connector
- BROWN BOX+COLOR LABEL
- Packing Dimension (m3):0.023
- GW(kgs): 4.5
- MOQ: 300pcs

KDV-1203 • 120X60X60CM

- 12X0.3mm tube, powder coated
- PVC cover
- 1.8mm wire mesh 4pcs
- pp connector
- BROWN BOX+COLOR LABEL
- Packing Dimension (m3):0.009
- GW(kgs): 1.8
- MOQ: 300pcs

KDE-1203 • 120X60X60CM

- 12X0.3mm tube, powder coated
- PE cover
- pp connector
- BROWN BOX+COLOR LABEL
- Packing Dimension (m3):0.009
- GW(kgs): 1.8
- MOQ: 300pcs

KDGH-S Series (Without Base)

- 1.0mm thickness aluminum tube,
- 4mm thickness PC board
- BROWN BOX+COLOR LABEL
- 2 Package Boxes : one is for the frame tube, one is for PC board.
- MOQ: 100pcs

Silver Color

Item Code	Item Size(cm） L x W x H	Cartons	Carton Size(cm)	G.W(kg)
KDGH-S01A	128*182*183.3	A	177x23.5x15.5	17.5
		B	127x63x8	7.3
KDGH-S02A	182*182*183.3	A	186x25x16	21.7
		B	127x63x9.5	9.0
KDGH-S03A	243*182*183.3	A	177x28.5x19.5	26.5
		B	127x63x11	10.7
KDGH-S01B	182*190*195	A	174.5*25*23	18.0
		B	136*63*10	11.7
KDGH-S02B	242*190*195	A	174.5*25*25.5	20.4
		B	136*63*11	12.2
KDGH-S01C	242*250*195	A	168*26.5*28	23.3
		B	136*63*15.5	13.6
KDGH-S02C	302*250*195	A	168*26.5*32	26.1
		B	136*63*15.5	15.8
KDGH-S03C	362*250*195	A	168*26.5*32	27.0
		B	136*63*17.5	20.6

KDGH-S Series (With Base)

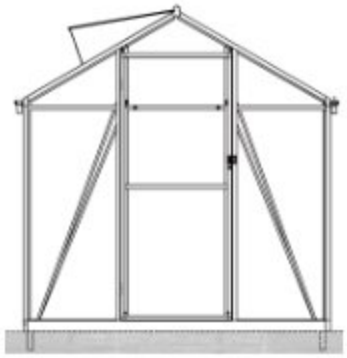

Silver Color

- 1.0mm thickness aluminum tube,
- 4mm thickness PC board
- BROWN BOX+COLOR LABEL
- 2 Package Boxes : one is for the frame tube, one is for PC board.
- MOQ: 100pcs

Item Code	Item Size(cm） L x W x H	Cartons	Carton Size(cm)	G.W(kg)
KDGH-S01A	128*182*183.3	A	177x23.5x15.5	20.5
		B	127x63x8	7.3
KDGH-S02A	182*182*183.3	A	186x25x16	24.7
		B	127x63x9.5	9.0
KDGH-S03A	243*182*183.3	A	177x28.5x19.5	29.5
		B	127x63x11	10.7
KDGH-S01B	182*190*195	A	174.5*25*23	21.0
		B	136*63*10	11.7
KDGH-S02B	242*190*195	A	174.5*25*25.5	23.4
		B	136*63*11	12.2
KDGH-S01C	242*250*195	A	168*26.5*28	26.3
		B	136*63*15.5	13.6
KDGH-S02C	302*250*195	A	168*26.5*32	29.1
		B	136*63*15.5	15.8
KDGH-S03C	362*250*195	A	168*26.5*32	30.0
		B	136*63*17.5	20.6

KDGH-G Series (Without Base)

- 1.0mm thickness aluminum tube, powder coated
- 4mm thickness PC board
- BROWN BOX+COLOR LABEL
- 2 Package Boxes : one is for the frame tube, one is for PC board.
- MOQ:100pcs

Green Color

Item Code	Item Size(cm) L x W x H	Cartons	Carton Size(cm)	G.W(kg)
KDGH-S01A	128*182*183.3	A	177x23.5x15.5	17.5
		B	127x63x8	7.3
KDGH-S02A	182*182*183.3	A	186x25x16	21.7
		B	127x63x9.5	9.0
KDGH-S03A	243*182*183.3	A	177x28.5x19.5	26.5
		B	127x63x11	10.7
KDGH-S01B	182*190*195	A	174.5*25*23	18.0
		B	136*63*10	11.7
KDGH-S02B	242*190*195	A	174.5*25*25.5	20.4
		B	136*63*11	12.2
KDGH-S01C	242*250*195	A	168*26.5*28	23.3
		B	136*63*15.5	13.6
KDGH-S02C	302*250*195	A	168*26.5*32	26.1
		B	136*63*15.5	15.8
KDGH-S03C	362*250*195	A	168*26.5*32	27.0
		B	136*63*17.5	20.6

KDGH-G Series (With Base)

- 1.0mm thickness aluminum tube, powder coated
- 4mm thickness PC board
- BROWN BOX+COLOR LABEL
- 2 Package Boxes : one is for the frame tube, one is for PC board.
- MOQ:100pcs

Green Color

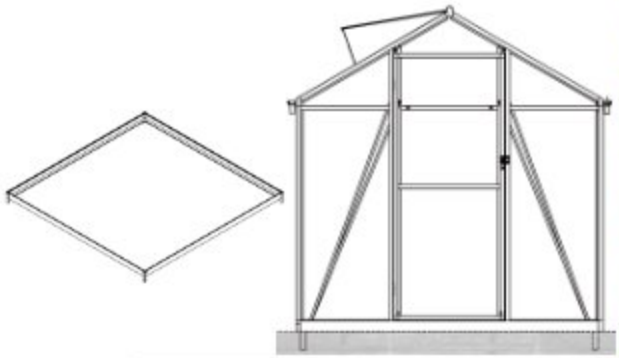

Item Code	Item Size(cm) L x W x H	Cartons	Carton Size(cm)	G.W(kg)
KDGH-V01A	128*182*183.3	A	177x23.5x15.5	20.5
		B	127x63x8	7.3
KDGH-V02A	182*182*183.3	A	186x25x16	24.7
		B	127x63x9.5	9.0
KDGH-V03A	243*182*183.3	A	177x28.5x19.5	29.5
		B	127x63x11	10.7
KDGH-V01B	182*190*195	A	174.5*25*23	21.0
		B	136*63*10	11.7
KDGH-V02B	242*190*195	A	174.5*25*25.5	23.4
		B	136*63*11	12.2
KDGH-V01C	242*250*195	A	168*26.5*28	26.3
		B	136*63*15.5	13.6
KDGH-V02C	302*250*195	A	168*26.5*32	29.1
		B	136*63*15.5	15.8
KDGH-V03C	362*250*195	A	168*26.5*32	30.0
		B	136*63*17.5	20.6

Solar Irrigation for 15-50pcs plants

Solar powered with no need for wiring work, environmental friendly and safe

Automatically and precisely watering every day

Suitable for plant bed, green house and balcony

G336II-1

G336II-2

G337

Drips: adjustable dripper 15-50 sets
Hose: 1/8" 5-15 meters
Water Level Switch
Spare parts: Anti-siphon Valve; "T" adaptor; Stopper; Ground Stake

Submersible pond filtration system

No wiring needed - easy to set-up

Solar Panel • Pump•UVC light•Filter box•Control box with Backup Battery

Suitable for small ponds up to 1600Ltrs(352 Gallons)

P026B

4 in 1 Filter Kit with Pump

Fountain

UV Clarifier

Filter



Pump

1.Built-in Water Pump 400/800LPH & Two Different Fountain Patterns

2.Powerful & Effective Four Level Filtering

KIMPORT

Solar Pump 100-380LPH

Solar Panel • Backup Battery • LED Lights • Remote control

No wiring needed - easy to set-up

Work individual in ponds or as pump for water features/fountains

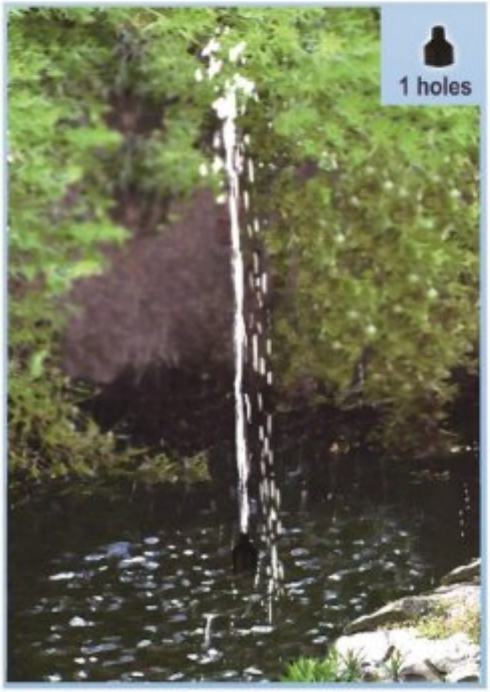

Art.: P001A1
Water Flow: 240LPH
Backup Battery: N/A
Light: N/A

Art.: P002H1
Water Flow: 250LPH
Backup Battery: N/A
Light: N/A

Art.: P021A
Water Flow: 250LPH
Backup Battery: Lead-acid 6V-4AH
Light: Optional, white or color
Remote Control: A/B Button

Art.: P002C
Water Flow: 500LPH
Backup Battery: Lead-acid 6V-4AH
Light: Optional, white or color

Art.: P003B
Water Flow: 200LPH
Backup Battery: Li-ion 3.7V-2AH
Light: Optional, white or color

Art.: P003CR
Water Flow: 260LPH
Backup Battery: Lead-acid 7.4V-2AH
Light: Optional, white or color

Art.: P003F
Water Flow: 210LPH
Backup Battery: Ni-MH 1.2V x4pcs
Light: Optional, white or color

Art.: P022C
Water Flow: 250LPH
Backup Battery: Ni-MH 1.2V x4pcs
Light: Optional, white or color

Solar Pump 400-1600LPH

Solar Panel • Backup Battery • LED Lights • Remote control
No wiring needed - easy to set-up
Work individual in ponds or as pump for water features/fountains

Art.: P009A
Water Flow: 480LPH
Backup Battery: Li-ion 7.4V-2AH
Light: Optional, white or color

Art.: P009DR
Water Flow: 1000LPH
Backup Battery: Li-ion 7.4V-4AH
Light: Optional, white or color
Remote control: A/B/C/D Button

Art.: P009G3
Water Flow: 530LPH
Backup Battery: Li-ion 7.4V-2AH
Light: Optional, white or color

Art.: P002H3
Water Flow: 560LPH
Backup Battery: N/A
Light: N/A

Art.: P010C
Water Flow: 970LPH
Backup Battery: Lead-acid 12V-4AH
Light: Optional, white or color

Art.: P019C
Water Flow: 1600LPH
Backup Battery: Lead-acid 12V-4AH
Light: Optional, white or color

Solar Pump 3000/5000LPH

Art.: P019H 3000LPH & P019H2 5000LPH

The most powerful solar pump designed for garden pond use.

The high quality pump is powered by two large solar panels generating 40/60 Watts of power, comes complete with battery pack and mains adapter. Meaning that the pump can run in cloud or night as well as usual sunny conditions.

No fountain heads are included in this set - this powerful pump is designed to run as a filter/waterfall pump.



Solar Oxygenator

Art.: P008D1
1 air Stone
Air Flow: 50LPH
Backup Battery: Li-ion

Art.: P008B1
1 air Stone
Air Flow: 50LPH
Backup Battery: N/A

Art.: P007C1
2 air Stone
Air Flow: 100LPH
Backup Battery: Ni-MH

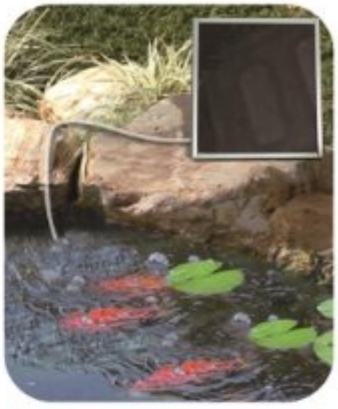

Art.: P008C
1 air Stone
Air Flow: 50LPH
Backup Battery: Li-ion

Solar Floating Fountain

Art.: P005A6
Water Flow: 150LPH
Light : N/A
Backup Battery: N/A
Remote Control: N/A

Art.: P015C2
Water Flow: 150LPH
Light : 4 white LEDs
Backup Battery: Li-ion
Remote Control: A/B/C/D Button

Art.: P015E1
Water Flow: 250LPH
Light: 4 colorful LEDs
Backup Battery: Li-ion
Remote Control: A/B/C/D Button

Art.: P015H2
Water Flow: 500LPH
Light: 4 colorful LEDs
Backup Battery: Li-ion
Remote Control: A/B/C/D Button

Art.: P066A
Water Flow: 165LPH
Light : 6 colorful LEDs
Backup Battery: Li-Po

Art.: P066B
Water Flow: 165LPH
Light : N/A
Backup Battery: N/A

Solar Fountains/Water Features

Sphere Water Features



L120X

28 x 22.5 x 49 cm

L777L

45 x 45 x 41 cm

F991A

36.5 x 36.5 x 36.5 cm

L787C

30 x 30 x 50 cm

L119X

26 x 25.5 x 98.5 cm

F815A2

34.5 x 34.5 x 82.5 cm

Bowls, Jugs Water Features

L111X

36 x 33 x 76 cm

F934

30 x 30 x 66 cm

L148PY

33 x 30 x 51.5 cm

F201

38 x 38 x 53 cm

F935

36 x 39 x 70 cm

F956

37 x 37x 70 cm

Rock Cascade Water Features

L149X
40 x 31.5 x 78.2 cm

F951
38 x 46 x 85 cm

F954
55 x53 x 100 cm

L150X
48 x 41 x 96.5 cm

F933
36 x 26 x 58.5 cm

F940
31 x 31 x 42 cm

Vase Water Feature

L756A1C
39 x 39 x 43 cm

L106C1
34 x 34 x 51.5 cm

F943
31 x 28 x 51 cm

L916PY
31.5 x 30 x 24.5 cm

L151X
27.5 x 26 x 43 cm

F912XB
25 x 25 x 50 cm

Amimal Water Feaatures

F206G

H20 x W35 cm

AF082PY

36 x 30 x 30 cm

L164X

38 x 31.5 x 35.5cm

L163X

43 x 29.5 x 56 cm

AF084PY

37 x 24 x 50.5 cm

L162X

31 x 25 x 58 cm

Standing Water Walls

L105Q

48 x 26 x 100 cm

F985

36 x 22 x 72 cm

F984

37.5 x 20.5 x 97 cm

F983

34 x 31 x 77cm

L160X

25 x 21 x 48 cm

L161X

27 x 15.7 x 49 cm

Wall Hanging Fountains

L122X

32 x 20.5 x 67 cm

F941

43.5 x 26 x 73 cm

L706

39.5 x 21 x 72 cm

Bamboo Water Features

L166PY

37.5 x 37.5 x 58.5 cm

L167PY

23 x 22.5 x 40 cm

L165X

28 x 21 x 46 cm

Birdbaths

F921G

56.5 x 56.5 x 112 cm

F989

51 x 51 x 74 cm

F936

32.5 x 32.5 x 63 cm

L924L

D50.5 x H71.5 cm

L921L

D55.5 x H94 cm

F988

51 x 51 x 40 cm

Pond Spitters

F510

13 x 17.5 x 17 cm

F511

13.5 x 21 x 11 cm

F519

17 x 22 x 21 cm

F520

42 x 17.5 x 27 cm

F522

33 x 23.5 x 21 cm

Tabletop Water Features

AF072PY

28 x 28 x 32.5 cm

AF028PY

21 x 18.3 x 24.5 cm

AF029PY

21 x 18.3x 25 cm

AF085PY

20.5 x 18 x 28.5 cm

AF087X

21 x 21 x 26 cm

AF086PY

23.5 x 23.5 x 23 cm

KIMPORT

MZ181 series

Artificial Fence

Product introduction

MZ181009A

- Size: 100x300cm,150x300cm,200x300cm
- Wire: Ø1.3mm
- 99% occultation
- All-weather resistant
- Treatment Anti-UV
- PVC haute quality

Artificial Fence

MZ181001A Bicolor

MZ181001A single color

MZ181003A

MZ181004A

MZ181001B

MZ181001C

MZ181005A

MZ181009A

MZ181001M

MZ181002A

PACKING DIAGRAM

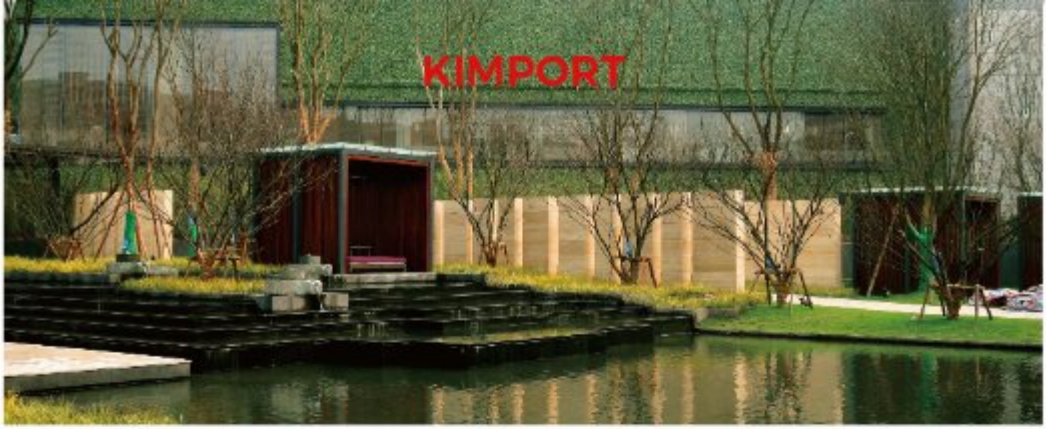

Our high quality Artificial Lanscape leaves and Artificial Hedge are perfect for adding a touch of nature to any space, without sacrificing time and money and maintenance. Instantly, let' s transform your backyard, courtyard, balcony, interior, office, commercial or retail space.

This product is

- Quick and easy to install
- UV Stable
- Flexible
- Weatherproof
- Free maintain
- No insects

MZ186 series

Willow Trellis

- Expanded size: 100x200cm
- Maintenance free, easy to install
- Hide unsightly areas
- A stylish alternative to traditional fence options
- Use vertically or horizontally

KIMPORT

MZ183008A
Size: 100x300cm
150x300cm
Available in 4 models

MZ183011B
Size: 100x300cm
150x300cm
Available in 5 models

MZ18300/A

MZ18300/B

MZ183008B

MZ183011A

MZ183011C

MZ183011D

MZ183012A

MZ183001A
Size: 100x300cm
150x300cm
Available in 12 models

MZ183003B

MZ183003D

MZ183001B

MZ183001C

MZ183005A

MZ183004A

MZ183002A

MZ183003A

MZ183005B

MZ183006A

MZ183021A

PACKING DIAGRAM

Artificial Leaf Fence

- Instant results no need to wait for growth
- No maintenance: no pruning, unlike real hedges
- UV stabilised fabric will keep its colour even after prolonged exposure to sunlight
- Woven onto a plastic mesh strong, durable foundation, easily tie to fences and structures

Premium Green Wall

MZ189001A
Size:100x100cm

MZ189001B
Size:100x100cm

MZ189009D
Size:100x100cm

MZ189010C
Size:100x100cm

MZ189003A
Size:100x100cm

MZ189005A
Size:100x100cm

MZ189014A
Size:100x100cm

MZ189018A
Size:100x100cm

MZ189006A
Size:100x100cm

MZ189008A
Size:100x100cm

MZ189021A
Size:100x100cm

MZ189025A
Size:100x100cm

KIMPORT

PACKING DIAGRAM

Series 1

Series 2

Series 3

MZ190003A

MZ190004B

MZ190008A

MZ190013A

MZ189 series

Premium Green Wall

- Size: 100x100cm
- Quick and easy to install
- 5 years UV stable
- Flexible
- Weatherproof
- Premium mold and finish for a natural look
- Evergreens / No maintenance
- Versatile/ Ideal for residential and commercial

MZ189023A
Size:100x100cm

MZ189023C
Size:100x100cm

KIMPORT

M/188036A

M/188044B

M/188060B

M/188060C

M/188046B

M/188048B

M/188062A

M/188063A

M/188054A

M/188060A

M/188066A

M/188067A

Green Wall

M/188019B

M/188020A

M/188026A

M/188027A

M/188022A

M/188022B

M/188032A

M/188033A

M/188024C

M/188025A

M/188033B

M/188035A

KIMPORT

MZ188013A

MZ188014A

MZ188016A

MZ188017A

MZ188014B

MZ188014C

MZ188017B

MZ188017C

MZ188014E

MZ188015A

MZ188018D

MZ188019A

MZ188004P

MZ188005A

MZ188008D

MZ188009A

MZ188005B

MZ188006A

MZ188010A

MZ188010B

MZ188006B

MZ188008A

MZ188010C

MZ188011A

KIMPORT

MZ188001A

MZ188002A

MZ188003G

MZ188004A

MZ188002B

MZ188003A

MZ188004B

MZ188004L

MZ188003B

MZ188003C

MZ188004E

MZ188004M

MZ188 series

Green Wall

- Size:50x50cm,100x100cm
- Quick and easy to install
- 5 years UVstable
- Flexible
- Weatherproof
- Premium mold and finish for a natural look
- Evergreens / No maintenance
- Versatile/ Ideal for residential and commercial

KIMPORT

MZ182001A
Width: 20mm(double face)
Weight:1.8kg/m²
Available in 14 colors

MZ182005T
Width: 7mm(double face)
Weight:1.0kg/m²
Available in 14 colors

MZ182002E
Width: 16mm(double face)
Weight:1.6kg/m²
Available in 14 colors

MZ182050G
Width:18mm(single face)
Weight:1.1kg/m²
Available in 14 colors

MZ182004C
Width: 12mm(double face)
Weight:1.35kg/m²
Available in 14 colors

MZ182051B
Width:18mm(single face)
Weight:0.9kg/m²
Available in 14 colors

MZ182 series

PVC Fence

- Provides complete privacy
- Wind protection for outdoor use
- Constructed using multiple PVC pipes
- All-weather resistant
- Easy to maintain, with mold resistant quick drying PVC
- Simple installation with the use of garden wire or ties

PACKING DIAGRAM

Available in 14 colors

KIMPORT

MZ187022A

MZ187032A

MZ187045D

MZ187045G

MZ187041A

MZ187043A

MZ187045H

MZ187045N

MZ187045A

MZ187045B

MZ187045P

MZ187047A

PVC Trellis

MZ187

MZ192001C

MZ192001A

MZ192001B

MZ187006A

MZ187006D

MZ187012F

MZ187012H

MZ187012J

MZ187018A

KIMPORT

MZ185007A

MZ185008A

MZ185017A

MZ185017B

MZ185010A

MZ185012A

MZ185017D

MZ185017C

MZ185012C

MZ185016A

MZ185017F

MZ185018A

MZ185001A

MZ185001B

MZ185004A

MZ185005A

MZ185001C

MZ185002A

MZ185005B

MZ185005C

MZ185003A

MZ185003D

MZ185005D

MZ185006A

KIMPORT

MZ195001A

MZ195002A

MZ195004A

MZ195006A

MZ195003A

MZ195003B

MZ195007A

MZ195012A

MZ185 series

Sphere

- UV proof
- 5 years outdoor warranty
- Available in 6 sizes

LD-1521

KIMPORT

MZ186007H

MZ186007J

MZ186010A

MZ186015A

MZ186011A

MZ186005D

MZ186016A

MZ195 series

Assembling Hedge

- Size: 75x25x100cm, 75x25x75cm
- UV proof
- 5 years outdoor warranty

MZ195010A

MZ195012B

Willow Trellis

MZ186002A

MZ186002B

MZ186006A

MZ186001A

MZ186002C

MZ186002D

MZ186003A

MZ186003B

MZ186004D

MZ186008A

MZ186009A

MZ186009B

MZ186004E

MZ186004F

MZ186007

MZ192 series

PVC Trellis

- Expanded size:100x200cm
- UV proof
- 5 years outdoor warranty

front

back

MZ192006A

MZ192007B

MZ192021A

MZ192022A

Meet the new lithium battery series

LI-ION BATTERY

Li-B40

40V Battery Leaf Blower

Voltage	Load power	Power Type	Air Volume	Air Speed
40V	900W	Battery	Boost:107M³/H High:108M³/H Low:72M³/H	Boost:530CFM High:442CFM Low:353CFM

Li-CS40

40V Battery Brush cutter

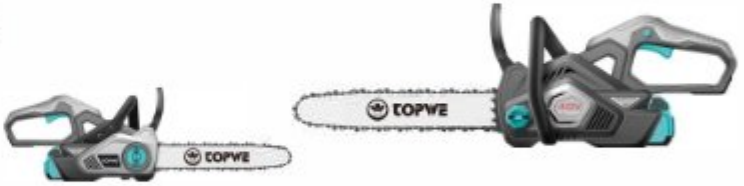

Feature	Power Source	Voltage	Chain speed	Oregon bar and Oregon chain
Anti-slip	Battery	40V	12m/s	14inch or 355mm

Li-HT40

40V Battery Hedge Trimmer

Battery	No-load speed	Cutting length	Cutting dia
2.0Ah/40v	1300/mins	510MM	16MM
Working time	No-load time	Weight	
25 min	35-45 mins	2.16KGS	

LI-C40

40V Battery Concrete Cutter

Power source	Voltage	Load power	Blade diameter	Blade hole diameter	Max cutting depth
Battery	4.0AH/40V	1600W	9inch/230mm	22.23mm	88mm

Li-BC40

40V Battery Brush cutter

Voltage	Power Source	Rated Speed	Trimmer Cutting Dia	Brush Cutter Dia
40V, 40V (2 x 20V)	Battery	0-7000rpm	350mm	255mm

Li-CC40

40V Battery Chain Saw

Power source	Voltage	Load power	Bar size	Chain pitch
Battery	4.0AH/40V	1600W	16inch/400mm	3/8

Meet the new lithium battery series

LI-ION BATTERY

LI-EA40 — 40V Battery Earth Auger

Battery	Charging time	Load power	Earth Auger bit
4.0Ah/40v	4-5H	1600W	200mm

LI-T40 — 40V Battery Tiller

Voltage	Power Source	Charging time
40V, 40V (2 x 20V)	Battery	4-5H

LI-B40 — 40V Battery Blower

Battery	Load power	Power Type	Air Volume	Air Speed
4.0Ah/40v	900W	Battery	2528cm/h	1200m/h

AC-CS220 — 220V Concrete Saw

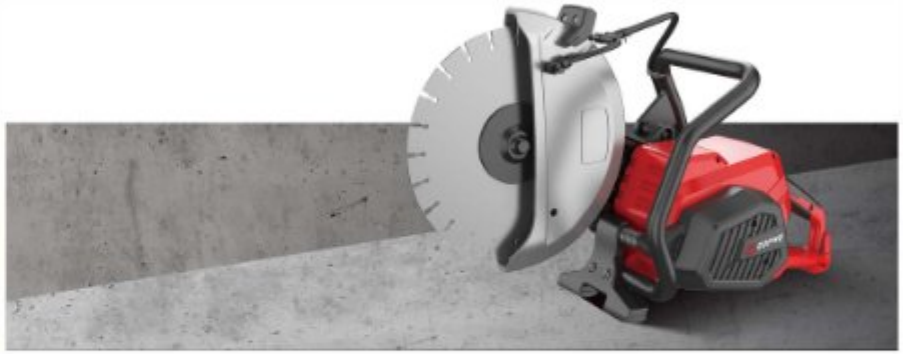

Rated Voltage	Rated Input Power	Blade size	Blade hole diameter	Cutting depth
220V	7000W	350mm	25.4mm	125mm

GT6508S / GT6208S

Engine type	Displacement	Rated output power	Fuel tank capacity	Blade diameter
Air-cooled,2-stroke, single cylinder	58/65cc	2.4/2.9kw(3.2/3.8HP)	750ml	300/350mm
Max cutting depth	Blade speed	Idling speed	G.W	N.W
105/125mm	4800r/min	2800-3200r/min	15.00KG	15.00KG

GT7208S

Engine type	Displacement	Rated output power	Fuel tank capacity	Blade diameter	SMC size
Air-cooled,2-stroke, single cylinder	74cc	4.5kw(6.1HP)	950ml	350/400mm	72x30x54.5cm
Max cutting depth	Blade speed	Idling speed	G.W	N.W	Styrofoam box	Paper lining
125/150mm	4800r/min	2800-3200r/min	14.50KG	13.50KG	76x55x15cm	70x25.5x48cm

GT9708S

Engine type	Displacement	Rated output power	Fuel tank capacity	Blade diameter
Air-cooled,2-stroke, single cylinder	93.6cc	4.8kw(6.5hp)	950ml	350/400mm
Max cutting depth	Blade speed	Idling speed	G.W	N.W
125/150mm	4800r/min	2800-3200r/min	15.50KG	14.50KG

GT1270S

Engine type	Displacement	Rated output power	Fuel tank capacity	Blade diameter
Air-cooled,2-stroke, single cylinder	119cc	5.8kw(7.9hp)	950ml	350/400mm
Max cutting depth	Blade speed	Idling speed	G.W	N.W
125/150mm	4800r/min	2800-3200r/min	16.00KG	15.00KG

GT9708R
Gasoline Ring saw

Engine type	Displacement	Rated output power	Fuel tank capacity	Blade diameter
Air-cooled,2-stroke, single cylinder	93.6cc	4.8kw(6.5hp)	950ml	350/400mm
Max cutting depth	Blade speed	Idling speed	G.W	N.W
125/150mm	4800r/min	2800-3200r/min	15.50KG	14.50KG

CN9708S SAW

Engine type	Displacement	Rated output power	Fuel tank capacity	Bar size
Air-cooled,2-stroke, single cylinder	93.6cc	4.8kw(6.5hp)	950ml	14inch/350mm
Max cutting depth	Chain pitch	Idling speed	G.W	N.W
350mm	3/8	2800-3200r/min	13.00KG	12.00KG

New appearance, structure design

CN-58D

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw	20"(50cm)/22"(55cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.8/7.8kg

CN-65D

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	65cc	2.9 kw	20"(50cm)/22"(55cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.8/7.8kg

Chain Saw

CN-25

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	25cc	0.75kw/8500r/min	10"(25cm)/12"(30cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
3/8	230ml	210ml	3200r/min	4.5/3.8kg

CN-38

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	37.22cc	1.25kw/8500r/min	14"(35cm)/16"(40cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
3/8	310ml	210ml	3200r/min	6.5/5.1kg

CN-40

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	40cc	1.6kw/8500r/min	14"(35cm)/16"(40cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
3/8 0.325"	400ml	250ml	3200r/min	6.0/5.0kg

CN-4501

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	45cc	1.75kw/8500r/min	16"(40cm)/18"(45cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.0kg

Chain Saw

CN-25

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	25.4CC	0.75kw/8500r/min	10"(25cm)/12"(30cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
3/8	230ml	210ml	3200r/min	4.5/3.8kg

CN-52H

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	52CC	1.9w/8500r/min	16"(40cm)18"(45cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
3/8	550ml	260ml	3200r/min	6.5/5.1kg

CN-58H

1.9w/8500r/min

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58CC	2.4kw/8500r/min	18"(45cm)20"(50cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
3/8 0.325"	550ml	260ml	3200r/min	6.0/5.0kg

CN-45H

Engine type	Displacement	Rated output power	Guidebar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	45cc	1.7kw/8000r/min	16"(40cm)/18"(45cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.0/6.7kg

CN-65D

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	65CC	2.9kw/8500r/min	20" (50cm)22" (55cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.0kg

Chain Saw

CN-45F

Engine type	Displacement	Rated output power	Guidebar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	45cc	1.7kw/8000r/min	16"(40cm)/18"(45cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.0/6.7kg

CN-52F

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	52cc	1.9kw/8500r/min	18"(45cm)/20"(50cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.5kg

CN-58F

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw/8500r/min	18"(45cm)/20"(50cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.5kg

CN-62F

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	65cc	2.9kw/8500r/min	20" (50cm)22" (55cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.5kg

Chain Saw

CN-58A

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw/8500r/min	18"(45cm)/20"(50cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.5kg

CN-58B

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw/8500r/min	18"(45cm)/20"(50cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.5kg

CN-58E

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw/8500r/min	18"(45cm)/20"(50cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.5kg

CN-58G

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw/8500r/min	18"(45cm)/20"(50cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.5kg

CN-58K

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw/8500r/min	18"(45cm)/20"(50cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.5kg

Chain Saw

CN-5801

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw/8500r/min	18"(45cm)/20"(50cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.5kg

CN-5803

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw/8500r/min	18"(45cm)/20"(50cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.5kg

CN-5800

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw/8500r/min	18"(45cm)/20"(50cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.5kg

CN-5804

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw/8500r/min	18"(45cm)/20"(50cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.5kg

CN-5802

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw/8500r/min	18"(45cm)/20"(50cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.5kg

CN-5805

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw/8500r/min	18"(45cm)/20"(50cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.1KG

CN-5806

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw/8500r/min	18"(45cm)/20"(50cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.5kg

CN-5807

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw/8500r/min	18"(45cm)/20"(50cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.5/7.5kg

CN-6200

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	62cc	2.9kw	20"(50cm)/22"(55cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	550ml	260ml	2800-3200r/min	8.8/7.8kg

Super Power

CHAIN SAW

Double Efficient

CN-8800

Engine type	Displacement	Rated output power	Guide bar size	Two-cycle Oil / Gasoline mixing ratio
Air-cooled,2-stroke, single cylinder	82cc	3.5kw/8500r/min	24"(60cm)/36"(90cm)	1:40
Chain pitch	Fuel tank capacity	Engine oil tank capacity	Idling speed	G.W/N.W
0.325"	960ml	550ml	2800-3200r/min	10.0/9.0kg

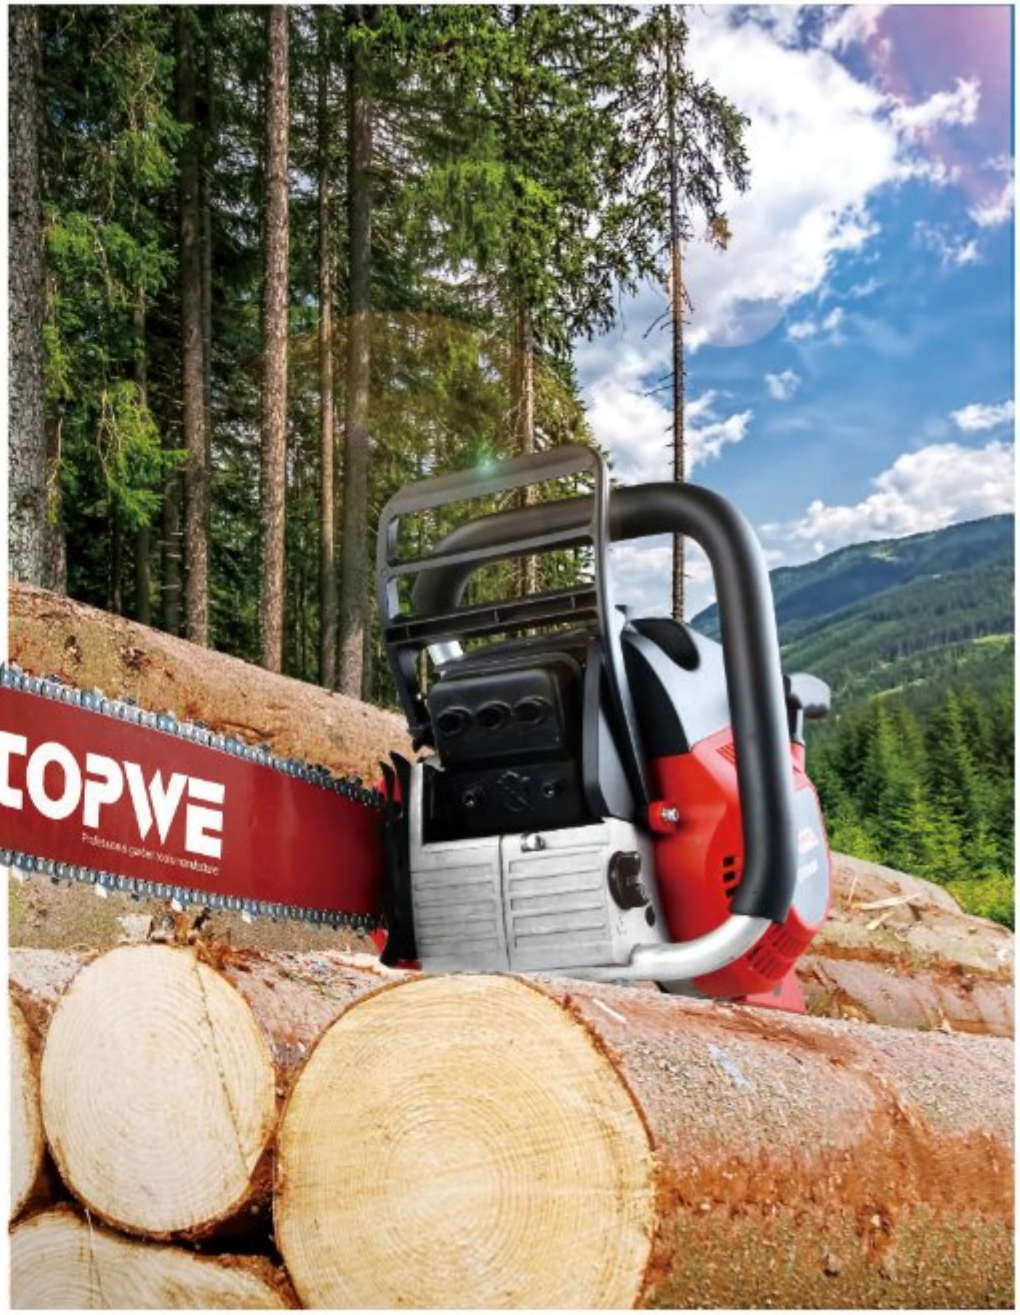

Brush Cutter

NEW

New appearance, structure design

TOPWE Brush cutter & grass trimmer series, ideal for around the garden jobs. Equipped with new engine for more power, lower emission levels and lower fuel consumption. Quick and easy to start, purge and combined choke/stop controls.

CN-520F

Engine type	Displacement	Rated output power	Idling speed	Two-cycle Oil/ Gasoline mixting ratio
Air cooled,2 stroke, single cylinder	52cc	1.6kw/7500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
1000ml	28mm	160 cm	9.0kg	8.0kg

BP520F

Engine type	Displacement	Rated output power	Idling speed	Two-cycle Oil/ Gasoline mixting ra
Air cooled,2 stroke, single cylinder	52cc	1.6kw/7500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
1000ml	28mm	160 cm	9.0kg	8.0kg

BP139F

4-Stroke

Engine type	Displacement	Rated output power	Idling speed	Fuel tank capacity
Air-cooled,4-stroke, single cylinder	51.0cc	0.8kw/8500r/min	2800-3200r/min	900ml
Shaft Diameter	Shaft Length	G.W	N.W	
26 mm	160 cm	9.0kg	8.0kg	

Brush Cutter

CN-520A

Engine type	Displacement	Rated output power	Idling speed	Two-cycle Oil/Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	52cc	1.45kw/7500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
1250ml	26 mm	160 cm	9.0kg	8.0kg

CN-520F

Engine type	Displacement	Rated output power	Idling speed	Two-cycle Oil/Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	52cc	1.6kw/7500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
1000ml	28 mm	160 cm	9.0kg	8.0kg

CN-580S

Engine type	Displacement	Rated output power	Idling speed	Two-cycle Oil/Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw/8500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
1250ml	26/28mm	160 cm	9.0kg	8.0kg

CN-139S

Engine type	Displacement	Rated output power	Idling speed	Fuel tank capacity
Air-cooled,4-stroke, single cylinder	31.0cc	0.8kw/6500r/min	2800-3200r/min	900ml
Shaft Diameter	Shaft Length	G.W	N.W	
26 mm	160 cm	9.0kg	8.0kg	-

CN-139F

Engine type	Displacement	Rated output power	Idling speed	Fuel tank capacity
Air-cooled,4-stroke, single cylinder	31.0cc	0.8kw/6500r/min	2800-3200r/min	900ml
Shaft Diameter	Shaft Length	G.W	N.W	
26 mm	160 cm	9.0kg	8.0kg	-

GX-35

Engine type	Displacement	Rated output power	Idling speed	Fuel tank capacity
Air-cooled,4-stroke, single cylinder	35.8cc	0.9kw/6500r/min	2800-3200r/min	1250ml
Shaft Diameter	Shaft Length	G.W	N.W	
26 mm	160 cm	9.0kg	8.0kg	

Brush Cutter

CN-520D NEW

Engine type	Displacement	Rated output power	Idling speed	Two cycle Oil/Gasoline mixing ratio
Air-cooled,2-stroke, single cylinder	41cc	1.25kw/7500r/min	2800~3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
1250ML	28mm	160 cm	9.0kg	8.0kg

CN-520B NEW

Engine type	Displacement	Rated output power	Idling speed	Two cycle Oil/Gasoline mixing ratio
Air-cooled,2-stroke, single cylinder	52cc	1.45kw/7500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
1250ML	28cc	160 cm	9.0kg	8.0kg

CN-520S

Engine type	Displacement	Rated output power	Idling speed	Two-cycle Oil/Gasoline mixing ratio
Air-cooled,2-stroke, single cylinder	52cc	1.45kw/7500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
1250ml	28mm	160 cm	9.0kg	8.0kg

CN-260

Engine type	Displacement	Rated output power	Idling speed	Two cycle Oil/Gasoline mixing ratio
Air-cooled,2-stroke, single cylinder	25.4CC	0.75kw/7500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
800ml	26 mm	160 cm	7.5kg	6.5kg

CN-260A

Engine type	Displacement	Rated output power	Idling speed	Two cycle Oil/Gasoline mixing ratio
Air-cooled,2-stroke, single cylinder	25.4CC	0.75kw/7500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
800ml	26 mm	160 cm	7.5kg	6.5kg

CN-330

Engine type	Displacement	Rated output power	Idling speed	Two-cycle Oil/Gasoline mixing ratio
Air-cooled,2-stroke, single cylinder	32.5CC	1.05kw/7500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
800ml	26 mm	160 cm	8.0kg	7.2kg

CN-411

Engine type	Displacement	Rated output power	Idling speed	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	40.2cc	1.4kw/7500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
1250ml	26 mm	160 cm	10.0kg	8.5kg

CN-430

Engine type	Displacement	Rated output power	Idling speed	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	43cc	1.25kw/7500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
1250ml	26 mm	160 cm	9.0kg	8.0kg

CN-520

Engine type	Displacement	Rated output power	Idling speed	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	52cc	1.45kw/7500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
1250ml	26 mm	160 cm	9.0kg	8.0kg

Brush Cutter

CN-40-6

Engine type	Displacement	Rated output power	Idling speed	Two-cycle Oil/Gasoline mixing ratio
Air-cooled,2-stroke, single cylinder	40.2cc	1.4kw/7500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
1250ml	26 mm	160 cm	10.0kg	8.5kg

CN-BG328

Engine type	Displacement	Rated output power	Idling speed	Two-cycle Oil/Gasoline mixing ratio
Air-cooled,2-stroke, single cylinder	32.6cc	0.8 kw/7500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
1200ml	26 mm	160 cm	10.5kg	9.0kg

CN-328

Engine type	Displacement	Rated output power	Idling speed	Two-cycle Oil/Gasoline mixing ratio
Air-cooled,2-stroke, single cylinder	32.6cc	0.81kw/7500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
1250ml	26 mm	160 cm	9.0kg	8.0kg

CN-BP430

Engine type	Displacement	Rated output power	Idling speed	Two-cycle Oil/Gasoline mixing ratio
Air-cooled,2-stroke, single cylinder	43cc	1.45kw/7500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
1250ml	26 mm	160 cm	10.5kg	9.0kg

CN-BP35

4 Stroke

Engine type	Displacement	Rated output power	Idling speed	Fuel tank capacity
Air-cooled,4-stroke, single cylinder	35.8cc	0.9kw/6500r/min	2800-3200r/min	1250ml
Shaft Diameter	Shaft Length	G.W	N.W	
26 mm	160 cm	9.0kg	8.0kg	

CN-BP580S

Engine type	Displacement	Rated output power	Idling speed	Two-cycle Oil/Gasoline mixing ratio
Air-cooled,2-stroke, single cylinder	58cc	2.4kw/8500r/min	2800-3200r/min	1:40
Fuel tank capacity	Shaft Diameter	Shaft Length	G.W	N.W
1250ml	26 mm	160 cm	10.5kg	9.0kg

Blower

BL-5001

Engine type	Displacement	Rated output power	Idling speed	Air volume(m^3/h)
Air-cooled,2-stroke, single cylinder	52cc	1.45kw/7500r/min	2800-3200r/min	759
Ignition	Noise	Carburetor Type	G.W / N.W	Air speed
C.D.I	96 Db(A)	Diaphragm Type	8kg / 7kg	67m/s

BL-5201

Engine type	Displacement	Rated output power	Idling speed	Air volume(m^3/h)
Air-cooled,2-stroke, single cylinder	52cc	1.45kw/7500r/min	2800-3200r/min	890
Ignition	Noise	Carburetor Type	G.W / N.W	Air speed
C.D.I	96 Db(A)	Diaphragm Type	8kg / 7kg	78m/s

BL-4301

Engine type	Displacement	Rated output power	Idling speed	Air volume(m^3/h)
Air-cooled,2-stroke, single cylinder	43cc	1.2kw/7000r/min	2800-3200r/min	759
Ignition	Noise	Carburetor Type	G.W / N.W	Air speed
C.D.I	96 Db(A)	Diaphragm Type	8kg / 7kg	67m/s

BL-5202

Engine type	Displacement	Rated output power	Idling speed	Air volume(m^3/h)
Air-cooled,2-stroke, single cylinder	52cc	1.45kw/7500r/min	2800-3200r/min	890
Ignition	Noise	Carburetor Type	G.W / N.W	Air speed
C.D.I	96 Db(A)	Diaphragm Type	8kg / 7kg	78m/s

Blower

BL-8662

Engine type	Displacement	Rated output power	Idling speed	Air volume(m³/h)
Air-cooled,2-stroke, single cylinder	63.3cc	2.8kw/7500r/min	2800-3200r/min	1080
Ignition	Noise	Carburetor Type	G.W / N.W	Air speed
C.D.I	96 Db(A)	Diaphragm Type	8kg / 7kg	90m/s

BL-9662

Engine type	Displacement	Rated output power	Idling speed	Air volume(m /h)
Air-cooled,2-stroke, single cylinder	79cc	3.5kw/8000r/min	3300r/min	1520
Ignition	Noise	Carburetor Type	G.W / N.W	Air speed
C.D.I	96 Db(A)	Diaphragm Type	8kg / 7kg	90m/s

BL-7662

4-Stroke

Engine type	Displacement	Rated output power	Idling speed	Air volume(m³/ h)
Air-cooled, 4-stroke, single cylinder	75.6cc	2.2kw/7000r/min	2800-3200r/min	910
Ignition	Noise	Carburetor Type	G.W / N.W	Air speed

BL-7661

4-Stroke

Engine type	Displacement	Rated output power	Idling speed	Air volume(m^3/h)
Air-cooled,4-stroke, single cylinder	75.6cc	2.2kw/7000r/min	2800-3200r/min	910
Ignition	Noise	Carburetor Type	G.W / N.W	Air speed
C.D.I	96 Db(A)	Diaphragm Type	8kg / 7kg	86m/s

BL-8661

Engine type	Displacement	Rated output power	Idling speed	Air volume(m^3/h)
Air-cooled,2-stroke, single cylinder	63.3cc	2.8kw/7500r/min	2800-3200r/min	1080
Ignition	Noise	Carburetor Type	G.W / N.W	Air speed
C.D.I	96 Db(A)	Diaphragm Type	8kg / 7kg	90m/s

BL-9661

Engine type	Displacement	Rated output power	Idling speed	Air volume(m /h)
Air-cooled,2-stroke, single cylinder	79cc	3.5kw/8000r/min	3300r/min	1520
Ignition	Noise	Carburetor Type	G.W / N.W	Air speed
C.D.I	96 Db(A)	Diaphragm Type	8kg / 7kg	90m/s

BL-7663

4 Stroke

Engine type	Displacement	Rated output power	Idling speed	Air volume(m³/h)
Air-cooled, 4-stroke, single cylinder	75.6cc	2.2kw/7500r/min	2800-3200r/min	910
Ignition	Noise	Carburetor Type	G.W / N.W	Air speed
C.D.I	96 Db(A)	Diaphragm Type	8kg / 7kg	86m/s

BL-8663

Engine type	Displacement	Rated output power	Idling speed	Air volume(m³/h)
Air-cooled,2-stroke, single cylinder	63cc	2.8kw/7000r/min	2800-3200r/min	1080
Ignition	Noise	Carburetor Type	G.W / N.W	Air speed
C.D.I	96 Db(A)	Diaphragm Type	8kg / 7kg	90m/s

BL-9663

Engine type	Displacement	Rated output power	Idling speed	Air volume(m³/h)
Air-cooled, 4-stroke, single cylinder	79cc	3.5kw/8000r/min	2800-3200r/min	1520
Ignition	Noise	Carburetor Type	G.W / N.W	Air speed
C.D.I	96 Db(A)	Diaphragm Type	8kg / 7kg	90m/s

Blower

BL-260

Engine type	Displacement	Rated output power	Idling speed	Air volume(m³/h)	
Air-cooled,2-stroke, single cylinder	25.4cc	0.75kw/7000r/min	2800-3200r/min	540	
Ignition	Noise	Carburetor Type	G.W/N.W	Air speed	Leaf bag
CDI	90Db(A)	Diaphragm Type	7.4kg/6.4kg	68m/s	350m³

BL-5800 | 8800

Engine type	Displacement	Rated output power	Idling speed	Air volume(m³/ h)
Air-cooled,2-stroke, single cylinder	58cc/88cc	2.2kw/6000r/min | 3.5kw/8000r/min	2800-3200r/min	970|1530
Ignition	Noise	Carburetor Type	G.W/N.W	Air speed
C.D.I	96 Db(A)	Diaphragm Type	6.0kg / 6.5kg | 10kg / 9.0kg	70m/s | 95m/s

Spray

SP-40A

Engine type	Displacement	Rated output power	Two-cycle Oil/ Gasoline mixing ratio	Lift H. max(m)
Air cooled,2 stroke, single cylinder	43cc	1.25kw/7500r/min	1:40	18m
Ignition	Fuel tank capacity	Idling speed	Max. range	Chemical tank
C.D.I	1.5L	2800-3200r/min	12m	14L

Spray

SP-52

Engine type	Displacement	Rated output power	Two cycle Oil/ Gasoline mixing ratio	Lift H.max(m)
Air cooled,2 stroke, single cylinder	52cc	1.45kw/7500r/min	1:40	18m
Ignition	Fuel tank capacity	Idling speed	Max. range	Chemical tank
C.D.I	1.5L	2800-3200r/min	12m	14L

SP-63

Engine type	Displacement	Rated output power	Two cycle Oil/ Gasoline mixing ratio	Lift H.max(m)
Air cooled,2 stroke, single cylinder	63cc	2.8kw/7000r/min	1:40	25m
Ignition	Fuel tank capacity	Idling speed	Max. range	Chemical tank
C.D.I	2L	2800-3200r/min	16m	25L

Water Pump

GT-5201A

Engine type	Displacement	Rated output power	Outlet Size	Inlet size
Air-cooled,2-stroke, single cylinder	52cc	1.6kw/7500r/min	1/1.5inch	1/1.5inch
ment Q:max(m3/h)	Lift H:max(m)	Fuel Tank Capacity (L)	Fuel Consumption(g/Kw.h)	Idling speed
9/12M	34M	1.2L	≤610	2800-3200r/min

WP-411

Engine type	Displacement	Rated output power	Outlet Size	Inlet size
Air-cooled,2-stroke, single cylinder	41.1cc	1.2kw/7500r/min	1.5inch	1.5inch
ment Q:max(m3/h)	Lift H:max(m)	Fuel Tank Capacity (L)	Fuel Consumption(g/Kw.h)	Idling speed
20M	30M	1.2L	≤610	2800-3200r/min

WP-520

Engine type	Displacement	Rated output power	Outlet Size	Inlet size
Air-cooled,2-stroke, single cylinder	52cc	1.45kw/7500r/min	1/1.5inch	1/1.5inch
ment Q:max(m3/h)	Lift H:max(m)	Fuel Tank Capacity (L)	Fuel Consumption(g/Kw.h)	Idling speed
8/12M	22	1.25L	≤610	2800-3200r/min

TOPWE

- Finally a Quality Pumping Solution is Available
- Pump body made of light-weight but strong aluminum alloy
- Cast iron volute and impeller
- High-quality ceramic mechanical sealing

WP-5201

Engine type	Displacement	Rated output power	Outlet Size	Inlet size
Air-cooled,2-stroke, single cylinder	52cc	1.45kw/7500r/min	1/1.5inch	1/1.5inch
ment Q:max(m3/h)	Lift H:max(m)	Fuel Tank Capacity (L)	Fuel Consumption(g/Kw.h)	Idling speed
12M	22	1.25L	≤610	2800-3200r/min

WP-580

Engine type	Displacement	Rated output power	Outlet Size	Inlet size
Air-cooled,2-stroke, single cylinder	58cc	2.2kw/7500r/min	1/1.5inch	1/1.5inch
ment Q:max(m3/h)	Lift H:max(m)	Fuel Tank Capacity (L)	Fuel Consumption(g/Kw.h)	Idling speed
16	22	1.25L	≤610	2800-3200r/min

TP6500 TP8800

360° rotary handle with self-lock
It can run 45 minutes with a full tank(1.2L)

Propeller

Gear box

Throttle handle

Kill off switch

Engine type	Displacement	Rated output power
Air-cooled,2-stroke, single cylinder	38cc / 82cc	2.4kw/3.5kw/8000r/min
Fuel tank capacity	Propeller diameter	Diameter for the tube
1200ml	180mm	100 250mm

GROUND DRILL

D144F

NEW

Engine type	Displacement	Rated output power	Transmissible system	Fuel tank capacity
Air-cooled,4-stroke, single cylinder	52.7cc	1.5kw/7500r/min	Worm gear & shaft design	1200ml
Idling speed	Drill diameter	G.W	N.W	
2800-3200r/min	30~300mm	6.0KG	5.0KG	

D520F

NEW

Engine type	Displacement	Rated output power	Transmissible system	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	52cc	1.6kw/7500r/min	Worm gear & shaft design	1:40
Fuel tank capacity	Idling speed	Drill diameter	G.W	N.W
1250ml	2800-3200r/min	30~200mm	5.5KG	5.0KG

Ground Drill

D520A

Engine type	Displacement	Rated output power	Transmissible system	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	52cc	1.45kw/7500r/min	Worm gear & shaft design	1:40
Fuel tank capacity	Idling speed	Drill diameter	G.W	N.W
1250ml	2800-3200r/min	30~200mm	5.5KG	5.0KG

D580S

Engine type	Displacement	Rated output power	Transmissible system	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.6kw/8500r/min	Worm gear & shaft design	1:40
Fuel tank capacity	Idling speed	Drill diameter	G.W	N.W
1250ml	2800-3200r/min	100 -250mm	7.5KG	6.5KG

D520B

Engine type	Displacement	Rated output power	Transmissible system	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	52cc	1.45kw/7500r/min	Worm gear & shaft design	1:40
Fuel tank capacity	Idling speed	Drill diameter	G.W	N.W
1250ml	2800-3200r/min	30~200mm	5.5KG	5.0KG

D580A

Engine type	Displacement	Rated output power	Transmissible system	Two-cycle Oil/ Gasoline mixting ratio
Air-cooled,2-stroke, single cylinder	58cc	2.6kw/8500r/min	Worm gear & shaft design	1:40
Fuel tank capacity	Idling speed	Drill diameter	G.W	N.W
1250ml	2800-3200r/min	100~250mm	7.9KG	6.3KG

Ground Drill

D880A

Engine type	Displacement	Rated output power	Transmissible system	Two-cycle Oil/ Gasoline mixing ratio
Air-cooled,2-stroke, single cylinder	82cc	3.5kw/8000r/mn	Worm gear & shaft design	1:40
Fuel tank capacity	Idling speed	Drill diameter	G.W	N.W
1200ml	2800-3200r/min	100--300mm	9.8KG	8.5KG

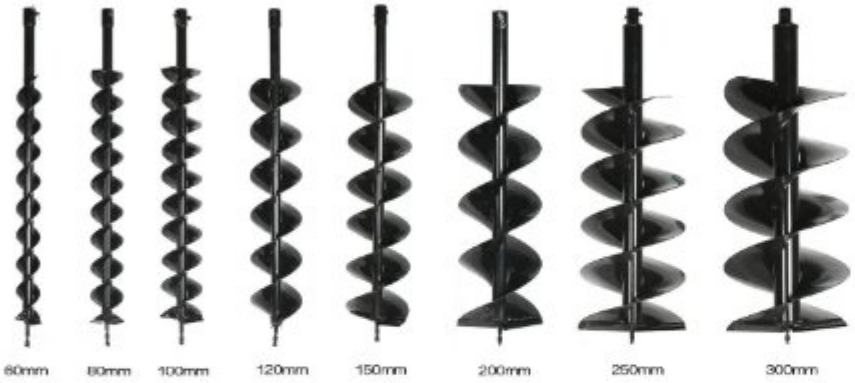

Hedge Trimmer

HT-750

- Adjustable blade screw
- Long lasting air filter
- 180 degree adjustable handle

Engine type	Displacement	Rated output power	Two-cycle Oil/ Gasoline mixing ratio	Handle Type
Air-cooled,2-stroke, single cylinder	25.4cc	0.75kw/7500r/min	1:40	Super rolling (180°)
Fuel tank capacity	Blade	Idling speed	Pruning Length	G.W/N.WT
230ml	Duble side	2800-3200r/min	600mm	7.0/6.0kg

HT-7510

- Excellent Anti-vibration and low noise
- Adjustable blade screw
- Long lasting air filter
- 180 degree adjustable handle

Engine type	Displacement	Rated output power	Two-cycle Oil/ Gasoline mixing ratio	Handle Type
Air-cooled,2-stroke, single cylinder	25.4cc	0.75kw/7500r/min	1:40	Super rolling (180°)
Fuel tank capacity	Blade	Idling speed	Pruning Length	G.W/N.WT
230ml	Duble side	2800-3200r/min	600mm	7.0/6.0kg

HT-7520

- Excellent Anti-vibration and low noise
- Adjustable blade screw
- Long lasting air filter

Engine type	Displacement	Rated output power	Two-cycle Oil/ Gasoline mixing ratio	Handle Type
Air-cooled,2-stroke, single cylinder	25.4cc	0.75kw/8000r/min	1:40	Fixed
Fuel tank capacity	Blade	Idling speed	Pruning Length	G.W/N.WT
230ml	Duble side	2800-3200r/min	600mm	7.0/6.0kg

S-52

1

2

Know throughout the world for its superior quality, performance and results.

Engine type	Displacement	Rated output power	Spool cutting diameter	Carburetor Type
Air cooled,2stroke, single-cylinder	43cc/52cc	1.25/1.45kw	450mm	Diaphragm Type
Idling speed	Fuel tank capacity	Two-cycle Oil/ Gasoline mixting ratio	G.W.	N.W.
2800-3200r/min	1250ml	1:40	12KGS	11KGS

S-52A

1

2

3

4

Engine type	Displacement	Rated output power	diameter	Carburetor Type
Air cooled,2stroke, single-cylinder	43cc/52cc	1.25/1.45kw	450mm	Diaphragm Type
Idling speed	Fuel tank capacity	Two-cycle Oil/ Gasoline mixting ratio	G.W.	N.W.
2800-3200r/min	1250ml	1:40	12KGS	11KGS

Gasoline Tiller

DT-5801

Engine type	Displacement	Rated output power	Working width	Working depth
Air-cooled,2-stroke, single cylinder	63.3cc	2.4kw	30cm	10~15cm
Idling speed	G.W	N.W	Fuel tank capacity	Two-cycle Oil/Gasoline mixting ratio
2800-3200r/min	14.5KG	15.5KG	1250ml	1:40

GT-630B

Engine type	Displacement	Rated output power	Working width	Working depth
Air-cooled4-stroke, single cylinder	52.7cc	1.5kw	40cm	20cm
Idling speed	G.W	N.W	Fuel tank capacity	Two-cycle Oil/Gasoline mixting ratio
2800-3200r/min	14.5KG..	15.5KG..	1250ml	1:40

COPWE

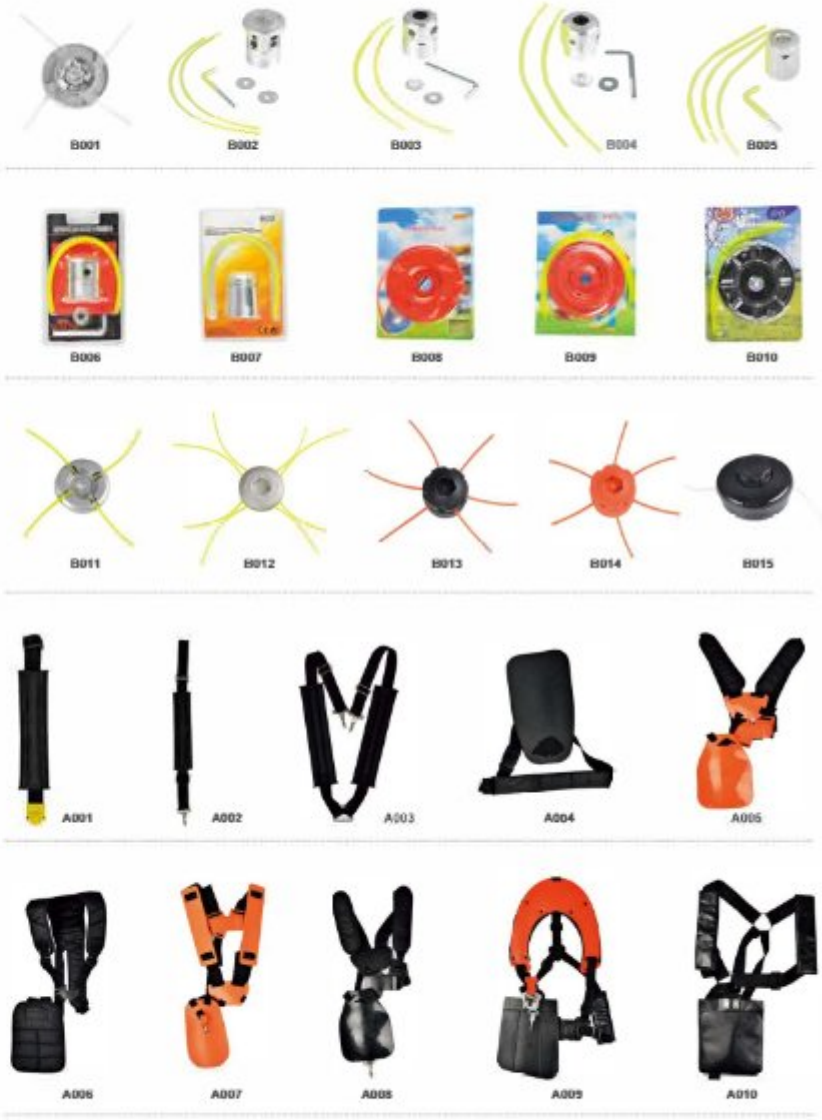
B001
B002
B003
B004
B005
B006
B007
B008
B009
B010
B011
B012
B013
B014
B015
A001
A002
A003
A004
A005
A006
A007
A008
A009
A010

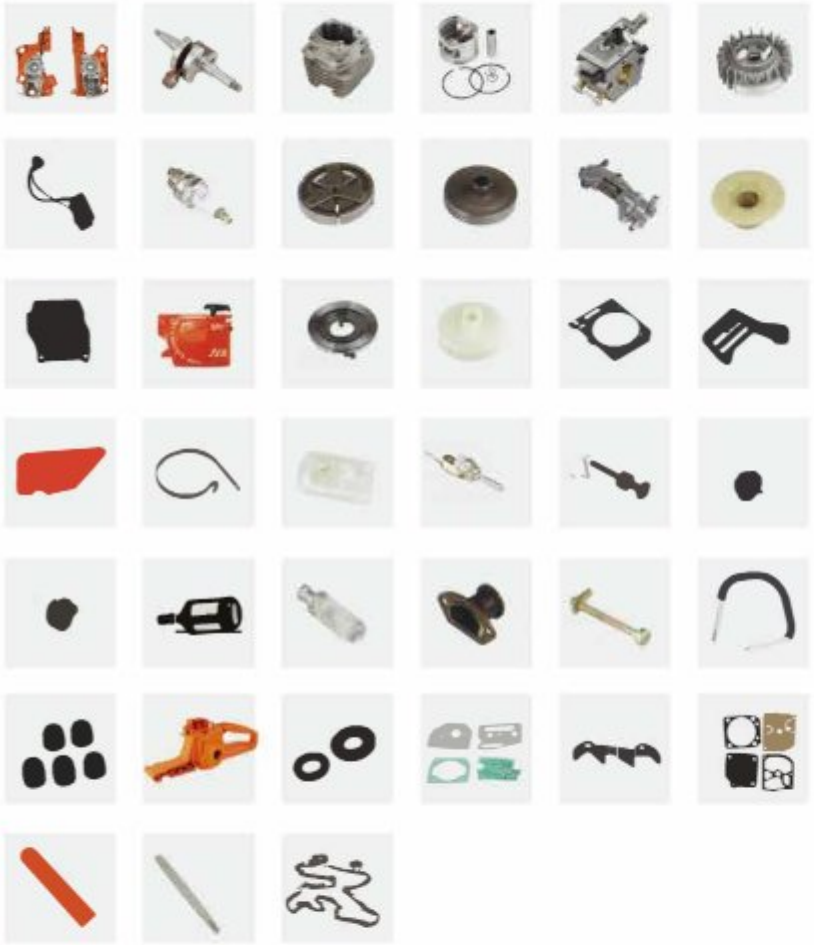

SAW CHAIN BASICS

CHAIN SPECIFICATIONS

PITCH

is determined by measuring the distance between the centers of any three consecutive rivets and dividing by two.

CHAIN PITCH
3/16"
1/4"
3/8"LP
.325"
3/8"
.404"
3/4"

GAUGE

of a chain is the thickness of the drive link measured at the tang.It's essential that the drive link thickness correctly matches the width of the groove in the guide bar.

CHAIN GAUGES
.043"(1,1mm)
.050"(1,3mm)
.058"(1,5mm)
.063"(1,6mm)
.080"(2,0mm)
.122"(3,1mm)

KERF

is the width of the cut in the wood made by the saw chain cutters. Optimum kerf for a saw chain is dependent on the chain saw's horsepower,saw chain speed.length of the guide bar and the size,hardness and type of timber being cut.Saw chain is available with the ideal kerf for every combination of equipment and timber.

CUTTER STYLES

SEMI-CHISEL CUTTERS

have a smaller radius than the Chipper Cutter's leading edge allowing it to stay sharper longer and cut faster in dirty and gritty cutting conditions.Ideal for consumer use.

FULL CHISEL CUTTERS

are designed for fast,smooth cutting at high-speeds in clean conditions. The square cutter edge is specifically designed to reduce cutting friction for an extremely smooth,clean cut and fast chip clearance.Preferred by professional users.

CHIPPER CUTTERS

have a larger radius than other leading edges designed specifically for cutting parallel to the wood grain.Chipper cutters are meant for use in saw chain mills;not recommended for handheld saw use.

SAW CHAIN SEQUENCES

There are 4 different sequences of saw chain:

FULL COMPLEMENT CHAIN: One tie strap between each cutter

SEMI SKIP: Chain pattern alternates one tie strap and two tie straps between each cutter

FULL SKIP: Chain has two tie straps between each cutter(half the cutting teeth of full complement chain)

Full House: Chain has a cutter on every link does not have any spaces between cutters.

SAFETY SAW CHAIN

Safety saw chain incorporates bumper link or guard link, and ramped depth gauges to allow smooth high speed cutting
while reducing kickback and vibration. All safety saw chain is low kickback UL tested and UL approved.

BUMPER LINK SAFETY SAW CHAIN

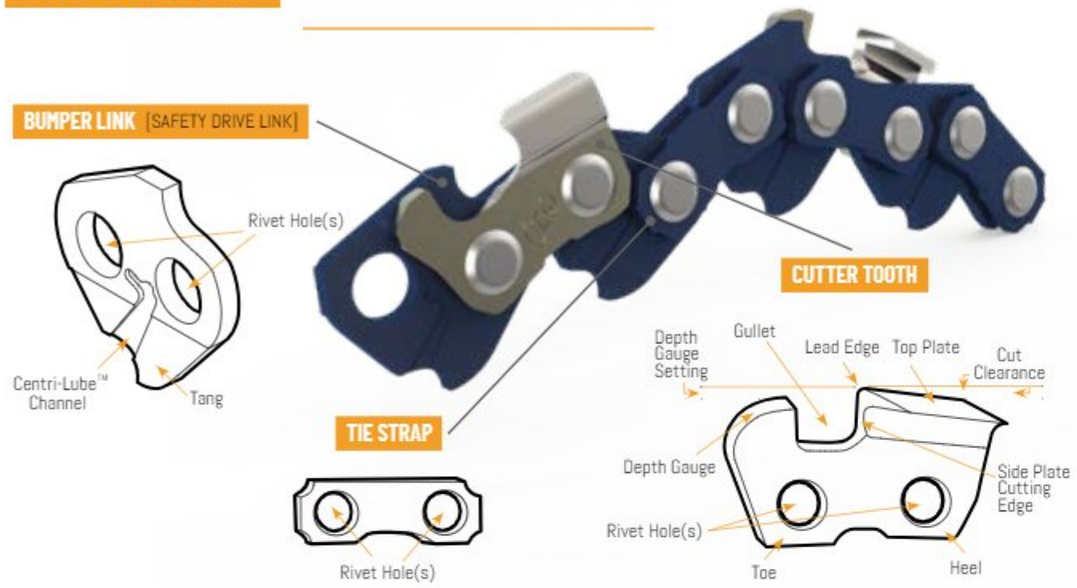

GUARD LINK SAFETY SAW CHAIN

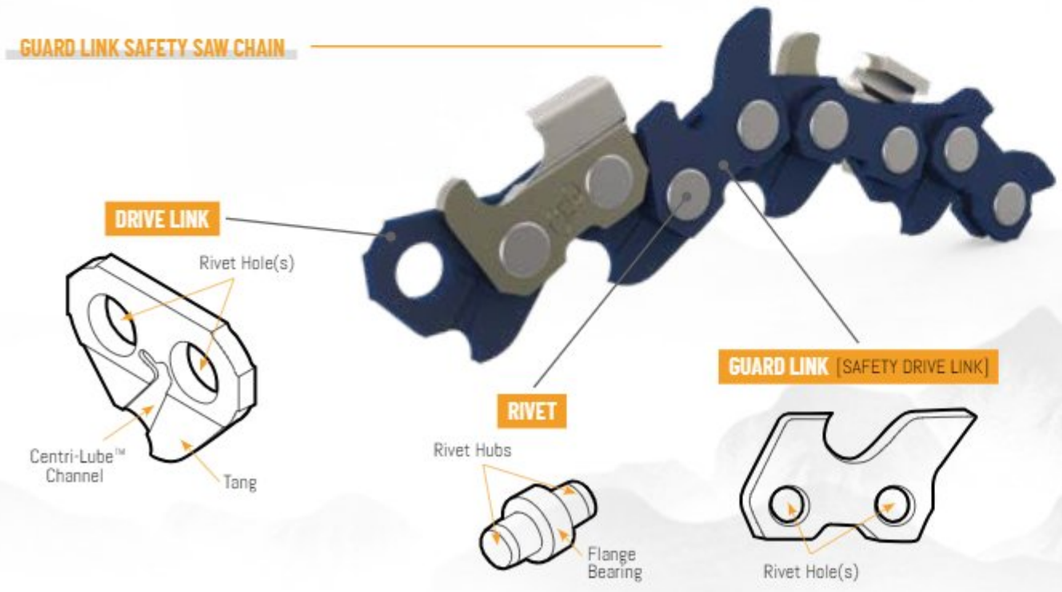

PROFESSIONAL SAW CHAIN

Professional saw chain is designed specifically for professional cutters.Professional saw chains are engineered for fast,smooth cutting at high speeds in clean cutting conditions.

PROFESSIONAL SEMI CHISEL SAW CHAIN

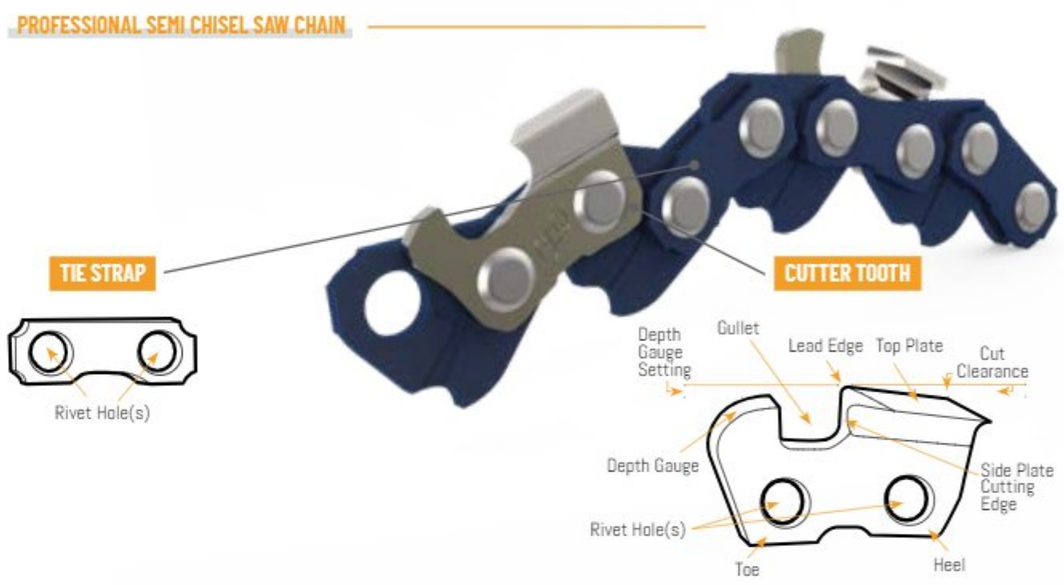

PROFESSIONAL FULL CHISEL SAW CHAIN

SAW CHAIN DESIGN FEATURES

Lubrication is the key element in maintaining and extending the life of your chain and guide bar.Lack of proper lubrication develops friction between chain components and the guide bar.This results in decreased cutting performance,lower chain life,and increased stress on engine and drive components. Increased lubrication along the bar and between chain components will increase the life of the chain and provide better cutting performance.

CENTRI LUBE™

Chain has a specially designed channel in each drive link that picks up oil from the bar and distributes it to the rivets reducing friction and increasing saw chain life.

In an effort to enhance cutting performance and chain life,Saw Chain has introduced our Centri-Lube™ Oiling System.Centri-Lube™ saw chain has a specially designed channel in each drive link that picks up oil from the bar and distributes it to the rivets that act as bearings on a chain.As the chain travels around the bar tip and drive sprocket,centrifugal force moves the oil up this channel and distributes it to the rivets in each link.This reduces friction and heat build-up in the chain and guide bar thereby increasing cutting performance and chain life.Your chain lasts longer and the job is done faster.

BETTER LUBRICATION INCREASES THE LIFE OF YOUR CHAIN AND IT'S CUTTING PERFORMANCE

- saw chain is available in 25 ft.reels,100ft.reels,and pre-cut loops
- When ordering bulk chain in 25 ft.or 100 ft.sizes,please specify the pitch,gauge and chain type number
- For loops,please also include the drive link count
- All reels iclude presets and tie straps

- Manufactured to exacting standards of quality,strength and durability
- Chromed cutters for longer life and a sharper edge
- Engineered for precision,balance and low vibration
- UL listed chains meet all ANSI standards for low kickback chain

PART NUMBERS AND PACKAGING

individual chain loops are offered in a wide range of packaging options.All retail chains are packed with full color inserts,an instruction sheet,and can be heat sealed to reduce pilferage or remain resealable for chain comparison.The exception is the poly bagged product which will be labeled with an item description and part number.Poly bagged product will not include instruction sheets.

BULK REELS

STANDARD DIMENSIONS: 8.63"L × 8.88"W × 8.6 3"H
220mm L × 225mm W × 220mm H

8.63"L × 8.88"W × 5.63"H
225mm L × 130mm W × 105mm H

- Availabele in 100 ft. and 25 ft. reels
- Full Color Box Artwork
- Includes joining kits and loop boxes for repackaging

CHAIN LOOP BOXES

STANDARD DIMENSIONS: 3.35"L × 1.38"W × 5.52"H
85mm L × 35mm W × 140mm H

4.02"L × 1.38"W × 7.05"H
102mm L × 35mm W × 179mm H

- Full Color Box Artwork
- Resealable
- Includes saw chain instruction sheet

UNIVERSAL CLAMSHELLS

STANDARD DIMENSIONS: 4.13"L × 1.13"W × 7.50"H
105mm L × 29mm W × 191mm H

- Full Color Insert
- Heat Sealed or Resealable
- Includes saw chain instruction sheet
- Shipped in PDQs of 5 Pieces

ZIP PACKS

STANDARD DIMENSIONS: 2.63"L × 1.38"W × 7.75"H
67mm L × 35mm W × 197mm H

- Full Color Sticker Labels
- Resealable
- Includes saw chain instruction sheet
- Shipped in PDQs of 5 Pieces

NEW!

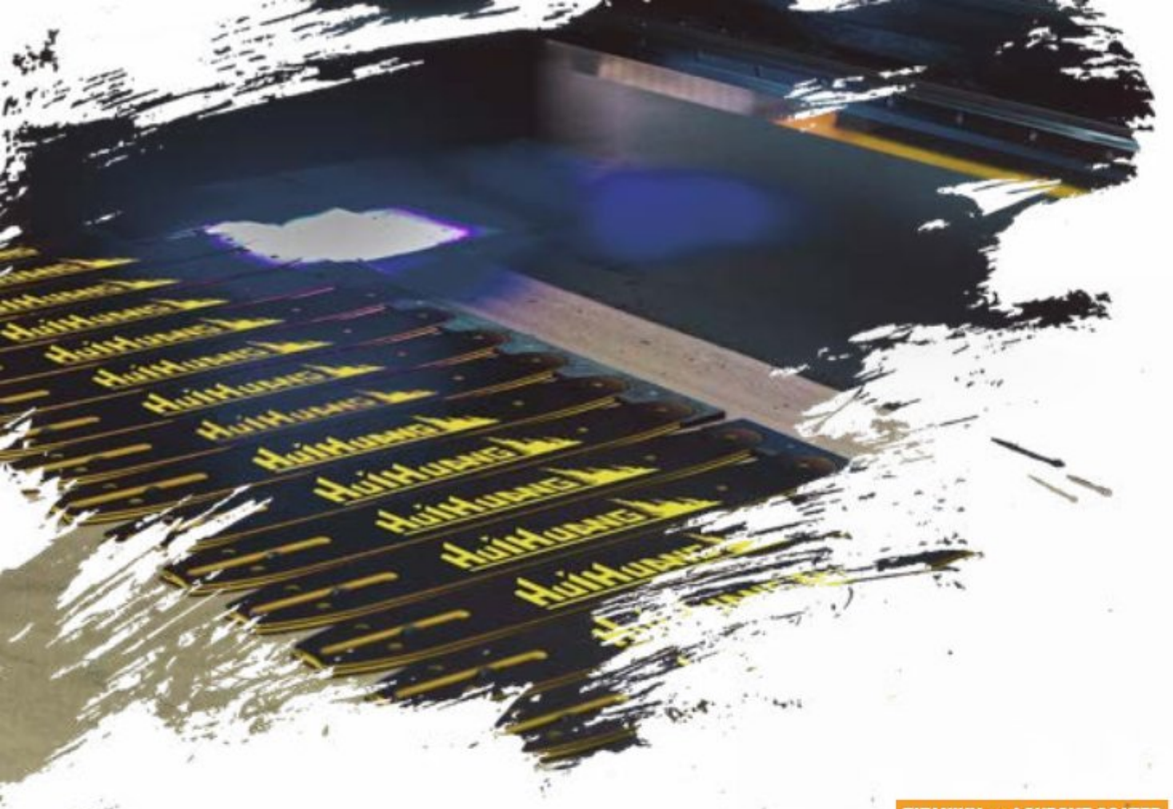

CUTS faster than semi-chisel saw chain

Introducing our new titanium and chrome coated full chisel chain available in 3/8LP, .325, and 3/8 STD pitches.

The chain is a full chisel chain designed for fast smooth cutting at high speeds in clean cutting conditions. The cutters are both chrome and titanium coateo for longer life and a sharper edge.All saw chain has been engineered designed and manufactured with precision full chisel cutters for a clean cut and fast chip clearance.

TITANIUM and CHROME COATED

CENTRI-LUBEM LUBRICATION FEATURE

NEW PRODUCT RELEASE

SERIES

High performance premium quality full chisel saw chain: introducing our new high performance premium quality full chisel saw chains available in 325 and 3/8 STD pitches.

These chains are improvely designed by removing a small amount of material from the bottoms of the heels on cutters and tie straps, slightly different cutter back forming, and revised cutter sharpening angles for professional applications with low vibration features, smooth cutting behaviour, low chatter, and high cutting and borning performance. All these chains are made of special high quality steel.

Saw Chain Numbering System

Example Part Number

Centri-Lube™Indicator
If included indicates Centri-Lube™Chain

Chain Gauge
43=.043"
50=.050"
58=.058"
63=.063"
80=.080"
122=.122"

Chain Length
Loop Chain:
Drive Link Count
56=56 Links

Bulk Reel Chain:
Footage Count
BR100=100 Ft.
BR50=50 Ft.
BR25=25 Ft.

Brand

CL 2 58 (BR100) 56 X* (BL) NS TL**

Chain Pitch

5=3/16"	Semi-Chisel
Q=1/4"	Semi-Chisel
1=3/8"LP	Semi-Chisel
2=.325"	Semi-Chisel
3=3/8"Std.	Semi-Chisel
4=.404"	Semi-Chisel
6=3/8"LP	Full Chisel
7=.325"	Full Chisel
8=3/8" Std.	Full Chisel
9=.404"	Full Chisel
HV80=.404"080	Semi-Chisel
HV95=3/4"	Semi-Chisel

Chain Sequence*
X=Full Skip
Y=Semi Skip
F=FTL Skip
If nothing listed then chain is standard sequence

Non-Safety Indicator**
If included indicates Professional Non-safety Low Kickback Chain

*will not be included in the part number for standard chains
**3/8" STD with bumper links will have "BL" before "NS" in the part number

Saw Chain Stamping Codes

SEMI-CHISEL	CHISEL
0A = 1/4", .043"	
0B = 1/4", .050"	
1A = 3/8"LP, .043"	
1B = 3/8"LP, .050"	6B = 3/8"LP, .050"
2B = .325", .050"	7B = .325", .050"
2C = .325", .058"	7C = .325", .058"
2D = .325", .063"	7D = .325", .063"
3B = 3/8", .050"	8B = 3/8", .050"
3C = 3/8", .058"	8C = 3/8", .058"
3T = 3/8", .063"	8T = 3/8", .063"
4C = .404", .058"	9C = .404", .058"
4D = .404", .063"	9D = .404", .063"
4H = .404", .080"	
C9 = 3/4", .122"	

BULK REEL CHAIN

BULK REEL CHAIN PACKAGING

saw chain bulk reel chains can be packaged in footage rolls of either 25 foot or 100 foot lengths.Each reel comes with a full color outer box with an inner spool and includes inddividual chain boxes and joining links.

Each **100** foot roll comes with **40** joining kits and **30** chain loop boxes.

Each **25** foot roll comes with **10** joining kits and **10** chain loop boxes.

25FT.REELS BULK CHAIN FULL CHISEL

PART NO.	DESCRIPTION
CL650BR25TL	3/8"LP-.050"
CL650BR25NSTL	3/8"LP-.050"
CL750BR25TL	.325"-.050"
CL750BR25NSTL	.325"-.050"
CL758BR25TL	.325"-.058"
CL758BR25NSTL	.325"-.058"
CL763BR25TL	.325"-.063"
CL763BR25NSTL	.325"-.063"
CL850BR25TL	3/8"-.050"
CL850BR25NSTL	3/8"-.050"
CL850BR25BLNSTL	3/8"-.050"
CL858BR25TL	3/8-.058"
CL858BR25NSTL	3/8"-.058"
CL858BR25BLNSTL	3/8"-.058"
CL863BR25TL	3/8"-.063"
CL863BR25NSTL	3/8"-.063"
CL863BR25BLNSTL	3/8"-.063"
958BR25NSTL	.404"-.058"
963BR25NSTL	.404"-.063"

50FT.REELS

PART NO.	DESCRIPTION
HV95BR50NSTL	3/4"-.122"

25FT.REELS BULK CHAIN SEMI-CHISEL

PART NO.	DESCRIPTION
Q43BR25TL	1/4"-.043"
Q43BR25NSTL	1/4"-.043"
Q50BR25TL	1/4"-.050"
Q50BR25NSTL	1/4"-.050"
CL143BR25TL	3/8"LP-.043"
CL143BR25NSTL	3/8"LP-.043"
CL150BR25TL	3/8"LP-.050"
CL150BR25NSTL	3/8"LP-.050"
CL250BR25TL	.325"-.050"
CL250BR25NSTL	.325"-.050"
CL258BR25NSTL	.325"-.058"
CL258BR25NSTL	.325"-.058"
CL263BR25TL	.325"-.063"
CL263BR25NSTL	.325"-.063"
CL350BR25TL	3/8"-.050"
CL350BR25NSTL	3/8"-.050"
CL350BR25BLNSTL	3/8"-.050"
CL358BR25TL	3/8"-.058"
CL358BR25NSTL	3/8"-.058"
CL358BR25BLNSTL	3/8"-.058"
CL363BR25TL	3/8"-.063"
CL363BR25NSTL	3/8"-.063"
CL363BR25BLNSTL	3/8"-.063"
458BR25TL	.404"-.058"
458BR25NSTL	.404"-.058"
463BR25TL	.404"-.063"
463BR25NSTL	.404"-.063"

JOINING KITS (10/BAG)

PART NO.	DESCRIPTION
Q43JK10TL	1/4"-.043"
Q50JK10TL	1/4"-.050"
143JK10TL	3/8"LP-.043"
150JK10TL	3/8"LP-.050"
250JK10TL	.325"-.050"
258JK10TL	.325"-.058"
263JK10TL	.325"-.063"
350JK10TL	3/8"-.050"
358JK10TL	3/8"-.058"
363JK10TL	3/8"-.063"
458JK10TL	.404"-.058"
463JK10TL	.404"-.063"

JOINING KITS (10/BAG)

PART NO.	DESCRIPTION
650JK10TL	3/8"LP-.050"
750JK10TL	.325"-.050"
758JK10TL	.325"-.058"
763JK10TL	.325"-.063"
850JK10TL	3/8"-.050"
858JK10TL	3/8"-.058"
863JK10TL	3/8"-.063"
958JK10TL	.404"-.058"
963JK10TL	.404"-.063"
HV80JK10TL	.404"-.080"
HV95JK10TL	3/4"-.122"

100FT.REELS BULK CHAIN SEMI-CHISEL

PART NO.	DESCRIPTION
Q43BR100TL	1/4"-.043"
Q43BR100NSTL	1/4"-.050"
Q50BR100TL	1/4"-.050"
Q50BR100NSTL	1/4"-.050"
CL143BR100TL	3/8"LP-.043"
CL143BR100NSTL	3/8"LP-.043"
CL150BR100TL	3/8"LP-.050"
CL150BR100NSTL	3/8"LP-.050"
CL250BR100TL	.325"-.050"
CL250BR100NSTL	.325"-.050"
CL258BR100TL	.325"-.058"
CL258BR100NSTL	.325"-.058"
CL263BR100TL	.325"-.063"
CL263BR100NSTL	.325"-.063"
CL350BR100TL	3/8"-.050"
CL350BR100NSTL	3/8"-.050"
CL350BR100BLNSTL	3/8"-.050"
CL358BR100TL	3/8"-.058"
CL358BR100NSTL	3/8"-.058"
CL358BR100BLNSTL	3/8"-.058"
CL363BR100TL	3/8"-.063"
CL363BR100NSTL	3/8"-.063"
CL363BR100BLNSTL	3/8"-.063"
458BR100TL	.404"-.058"
458BR100NSTL	.404"-.058"
463BR100TL	.404"-.063"
463BR100NSTL	.404"-.063"
HV80BR100NSTL	.404"-.080"

100FT.REELS BULK CHAIN FULL CHISEL

PART NO.	DESCRIPTION
CL650BR100TL	3/8"LP-.050"
CL650BR100NSTL	3/8"LP-.050"
CL750BR100TL	.325"-.050"
CL750BR100NSTL	.325"-.050"
CL758BR100TL	.325"-.058"
CL758BR100NSTL	.325"-.058"
CL763BR100TL	.325"-.063"
CL763BR100NSTL	.325"-.063"
CL850BR100TL	3/8"-.050"
CL850BR100NSTL	3/8"-.050"
CL850BR100BLNSTL	3/8"-.050"
CL858BR100TL	3/8"-.058"
CL858BR100NSTL	3/8"-.058"
CL858BR100BLNSTL	3/8"-.058"
CL863BR100TL	3/8"-.063"
CL863BR100NSTL	3/8"-.063"
CL863BR100BLNSTL	3/8"-.063"
958BR100NSTL	.404"-.058"
963BR100NSTL	.404"-.063"

SEMI CHISEL SAW CHAIN

Saw Chain semi chisel chains incorporate the semi chisel cutter that cuts faster and stays sharper longer in dirty and gritty cutting conditions.

Saw Chains are engineered for precision,balance and low vibration.All chains are manufactures with advanced heat treatment and hard chrome to allow for improved cutter performance.

1/4"

1/4" Semi Chisel w/Bumper Link

STYLE NO.	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
Q43TL	.043"	1/8"	30°	.020"
Q50TL	.050"	5/32"	30°	.022"

- Ramped depth gauges allows smooth high speed cutting while reducing kickback and vibration
- Safety chain meets all standards for ANSI Low Kickback chain
- Recommended for saws up to 40 cc

1/4"

1/4" Semi Chisel Professional

STYLE NO.	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
Q43NSTL	.043"	1/8"	30°	.020"
Q50NSTL	.050"	5/32"	30°	.022"

- Recommended for saws up to 40 cc

3/8" LP

3/8"LP Semi Chisel w/Bumper Link

STYLE NO.	PITCH	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
CL143TL	3/8"LP	.043"	5/32"	30°	.022"
CL150TL	3/8"LP	.050"	5/32"	30°	.022"

- Ramped depth gauges allows smooth high speed cutting while reducing kickback and vibration
- Safety chain meets all standards for ANSI Low Kickback chain
- Recommended for saws up to 40 cc



3/8" LP

3/8"LP Semi Chisel Professional

STYLE NO.	PITCH	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
CL143NSTL	3/8"LP	.043"	5/32"	30°	.022"
CL150NSTL	3/8"LP	.050"	5/32"	30°	.022"

- Recommended for saws up to 40 cc

.325"

.325" Semi Chisel w/Bumper Link

STYLE NO.	PITCH	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
CL250TL	.325"	.050"	3/16"	30°	.022"
CL258TL	.325"	.058"	3/16"	30°	.022"
CL263TL	.325"	.063"	3/16"	30°	.022"

- Ramped depth gauges allows smooth high speed cutting while reducing kickback and vibration
- Safety chain meets all standards for ANSI Low Kickback chain
- Recommended for saws up to 40 cc - 60 cc



.325"

.325" Semi Chisel Professional

STYLE NO.	PITCH	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
CL250NSTL	.325"	.050"	3/16"	30°	.022"
CL258NSTL	.325"	.058"	3/16"	30°	.022"
CL263NSTL	.325"	.063"	3/16"	30°	.022"

- Recommended for saws up to 40 cc - 60 cc

3/8"

3/8" Semi Chisel w/Guard Link

STYLE NO.	PITCH	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
CL350TL	3/8"	.050"	7/32"	30°	.028"
CL358TL	3/8"	.058"	7/32"	30°	.028"
CL363TL	3/8"	.063"	7/32"	30°	.028"

- Ramped depth gauges allows smooth high speed cutting while reducing kickback and vibration
- Safety chain meets all standards for ANSI Low Kickback chain
- Recommended for saws up to 40 cc - 60 cc



3/8"

3/8" Semi Chisel Professional w/Bumper Link

STYLE NO.	PITCH	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
CL350BLNSTL	3/8"	.050"	7/32"	30°	.028"
CL358BLNSTL	3/8"	.058"	7/32"	30°	.028"
CL363BLNSTL	3/8"	.063"	7/32"	30°	.028"

- Recommended for saws up to 40 cc - 60 cc

FULL CHISEL SAW CHAIN

Saw Chain full chisel chains are designed specifically for the professional sutter.

Saw Chains are engineered for fast,smooth cutting at high speeds in clean conditions.The square cutter edge is specifically designed to reduce cutting friction for an extremely smooth clean cut and fast chip clearance.

3/8"

3/8" Semi Chisel Professional

STYLE NO.	PITCH	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
CL350NSTL	3/8"	.050"	7/32"	30°	.028"
CL358NSTL	3/8"	.058"	7/32"	30°	.028"
CL363NSTL	3/8"	.063"	7/32"	30°	.028"

- Recommended for saws up to 40 cc - 60 cc

.404"

.404" Semi Chisel Professional

STYLE NO.	PITCH	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
CL458NSTL	.404"	.058"	7/32"	30°	.035"
CL463NSTL	.404"	.063"	7/32"	30°	.035"

.404"

.404" Semi Chisel Professional

STYLE NO.	PITCH	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
CL480NSTL	.404"	.080"	7/32"	30°	.035"

- Recommended for saws over 70 cc
- .404" Machine Harvester available in .080" gauge item number 480NSTL

3/8" LP

3/8"LP Full Chisel w/Bumper Link

STYLE NO.	PITCH	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
CL650TL	3/8"LP	.050"	5/32"	30°	.022"

- Full chisel cutters engineered for fast,smooth cutting at high speeds
- Advanced heat treatment and hard chrome processes allow for improved cutter performance
- Safety chain meets all standards for ANSI Low Kickback chain

3/8" LP

3/8"LP Full Chisel Professional

STYLE NO.	PITCH	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
CL650NSTL	3/8"LP	.050"	5/32"	30°	.022"

- Full chisel cutters engineered for fast,smooth cutting at high speeds
- Advanced heat treament and hard chrome processes allow for improved cutter performance

.325" Full Chisel w/Bumper Link

STYLE NO.	PITCH	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
CL750TL	.325"	.050"	3/16"	30°	.028"
CL758TL	.325"	.058"	3/16"	30°	.028"
CL763TL	.325"	.063"	3/16"	30°	.028"

- Full chisel cutters engineered for fast,smooth cutting at high speeds
- Advanced heat treatment and hard chrome processes allow for improved cutter performance
- Safety chain meets all standards for ANSI Low Kickback chain

28DX

LOWKICKBACK SAW CHAIN: The chain in this package is a low-kickback chain. It met the kickback performance requirements ANSI B175.1-2012, paragraph 5.11.2.4, and CSA Z62.3 and significantly reduces the hazard of chain saw kickback when tested on a representative sample of chainsaws.

CHAÎNE DE SCIE À FAIBLE REBOND: Il s'agit d'une chaîne à faible rebond conforme aux normes de performances ANSI B175.1-2012, paragraphe 5.11.2.4, and CSA Z62.3 relatives aux rebonds qui réduit de manière significative le danger de rebond de la tronçonneuse lorsque testé sur un échantillon représentatif de scies à chaîne.

CADENA PARA MOTOSIERRA DE BAJO REBOTE: Este es una cadena de bajo rebote y cumple con los requisitos de rendimiento en caso de rebote de las normas ANSI B175.1-2012, párrafo 5.11.2.4, y CSA Z62.3. También reduce significativamente el peligro de rebote de la motosierra al someterse a pruebas en una muestra representativa de motosierras.

.325" Full Chisel Professional

STYLE NO.	PITCH	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
CL750NSTL	.325"	.050"	3/16"	30°	.028"
CL758NSTL	.325"	.058"	3/16"	30°	.028"
CL763NSTL	.325"	.063"	3/16"	30°	.028"

- Full chisel cutters engineered for fast,smooth cutting at high speeds
- Advanced heat treament and hard chrome processes allow for improved cutter performance

3/8" Full Chisel w/Guard Link

STYLE NO.	PITCH	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
CL850TL	3/8"	.050"	7/32"	30°	.028"
CL858TL	3/8"	.058"	7/32"	30°	.028"
CL863TL	3/8"	.063"	7/32"	30°	.028"

- Full chisel cutters engineered for fast,smooth cutting at high speeds
- Advanced heat treatment and hard chrome processes allow for improved cutter performance
- Safety chain meets all standards for ANSI Low Kickback chain

28DX

LOWKICKBACK SAW CHAIN: The chain in this package is a low-kickback chain. It met the kickback performance requirements ANSI B175.1-2012, paragraph 5.11.2.4, and CSA Z62.3 and significantly reduces the hazard of chain saw kickback when tested on a representative sample of chainsaws.

CHAÎNE DE SCIE À FAIBLE REBOND: Il s'agit d'une chaîne à faible rebond conforme aux normes de performances ANSI B175.1-2012, paragraphe 5.11.2.4, and CSA Z62.3 relatives aux rebonds qui réduit de manière significative le danger de rebond de la tronçonneuse lorsque testé sur un échantillon représentatif de scies à chaîne.

CADENA PARA MOTOSIERRA DE BAJO REBOTE: Este es una cadena de bajo rebote y cumple con los requisitos de rendimiento en caso de rebote de las normas ANSI B175.1-2012, párrafo 5.11.2.4, y CSA Z62.3. También reduce significativamente el peligro de rebote de la motosierra al someterse a pruebas en una muestra representativa de motosierras.

3/8" Full Chisel Professional w/Bumper Link

STYLE NO.	PITCH	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
CL850BLNSTL	3/8"	.050"	7/32"	30°	.028"
CL858BLNSTL	3/8"	.058"	7/32"	30°	.028"
CL863BLNSTL	3/8"	.063"	7/32"	30°	.028"

- Full chisel cutters engineered for fast,smooth cutting at high speeds
- Advanced heat treament and hard chrome processes allow for improved cutter performance

3/8" Full Chisel Professional

STYLE NO.	PITCH	GAUGE	FILE	GRINDING ANGLE	DEPTH GAUCE
CL850NSTL	3/8"	.050"	7/32"	30°	.028"
CL858NSTL	3/8"	.058"	7/32"	30°	.028"
CL863NSTL	3/8"	.063"	7/32"	30°	.028"

- Full chisel cutters engineered for fast,smooth cutting at high speeds
- Advanced heat treament and hard chrome processes allow for improved cutter performance

DRIVE LINK FOOTAGE CHARTS

Drive link footage charts:saw chain loop footage and meter length based on our chain pitch and drive link counts.

1/4" Pitch

DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS
20	0.833	0,254	40	1.667	0,508	61	2.542	0,775	82	3.417	1,041
21	0.875	0,267	41	1.708	0,521	62	2.583	0,787	83	3.458	1,054
22	0.917	0,279	42	1.750	0,533	63	2.625	0,800	84	3.500	1,067
23	0.958	0,292	43	1.792	0,546	64	2.667	0,813	85	3.542	1,080
24	0.833	0,254	44	1.833	0,559	65	2.708	0,826	86	3.583	1,092
25	1.000	0,305	45	7.875	0,572	66	2.750	0,838	87	3.625	1,105
26	1.083	0,330	46	1.917	0,584	67	2.795	0,851	88	3.667	1,118
27	1.125	0,343	47	1.958	0,597	68	2.833	0,864	89	3.708	1,130
28	1.167	0,356	48	2.000	0,610	69	2.875	0,876	90	3.750	1,143
29	1.208	0,368	49	2.042	0,662	70	2.917	0,889	91	3.792	1,156
30	1.250	0,381	50	2.083	0,635	71	2.958	0,902	92	3.833	1,168
31	1.292	0,394	51	2.125	0,648	72	3.000	0,914	93	3.875	1,181
32	1.333	0,406	52	2.167	0,660	73	3.042	0,927	94	3.917	1,194
33	1.375	0,419	53	2.208	0,673	74	3.083	0,940	95	3.958	1,207
34	1.147	0,432	54	2.250	0,686	75	3.125	0,953	96	4.000	1,219
35	1.458	0,445	55	2.292	0,699	76	3.167	0,965	97	4.042	1,232
36	1.500	0,457	56	2.333	0,711	77	3.208	0,978	98	4.083	1,245
37	1.542	0,470	57	2.375	0,724	78	3.250	0,991	99	4.125	1,257
38	1.583	0,483	58	2.417	0,737	79	3.292	1,003	100	4.167	1,270
39	1.625	0,495	59	2.458	0,749	80	3.333	1,016			
40	1.667	0,508	60	2.500	0,762	81	3.375	1,029			

3/8"LP Pitch

DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS
20	1.220	0,372	40	2.451	0,747	60	3.676	1,120
21	1.281	0,390	41	2.512	0,766	61	6.738	1,139
22	1.342	0,409	42	2.574	0,784	62	3.799	1,158
23	1.403	0,428	43	2.635	0,803	63	3.860	1,177
24	1.464	0,446	44	2.696	0,822	64	3.992	1,195
25	1.525	0,465	45	2.757	0,840	65	3.983	1,214
26	1.586	0,483	46	2.819	0,859	66	4.044	1,233
27	1.647	0,502	47	2.880	0,878	67	4.105	1,251
28	1.708	0,521	48	2.941	0,896	68	4.167	1,270
29	1.769	0,539	49	3.002	0,915	69	4.228	1,289
30	1.838	0,560	50	3.064	0,934	70	4.289	1,307
31	1.900	0,579	51	3.126	0,953	71	4.360	1,326
32	1.961	0,598	52	3.186	0,971	72	4.412	1,345
33	2.022	0,616	53	3.248	0,990	73	4.473	1,363
34	2.084	0,635	54	3.309	1,009	74	4.534	1,382
35	2.145	0,654	55	3.370	1,027	75	4.596	1,401
36	2.206	0,672	56	3.431	1,065	76	4.657	1,419
37	2.267	0,691	57	3.493	1,083	77	4.718	1,438
38	2.328	0,710	58	3.554	1,083	78	4.779	1,457
39	2.390	0,728	59	3.615	1,102	79	4.841	1,475
						80	4.902	1,494

3/8" Pitch

DRIVE LINKS	FEET	METERS
30	1.830	0,558
31	1.891	0,576
32	1.952	0,595
33	2.013	0,613
34	2.074	0,632
35	2.135	0,651
36	2.196	0,669
37	2.257	0,688
38	2.318	0,706
39	2.379	0,725
40	2.457	0,747
41	2.513	0,766
42	2.574	0,735
43	2.635	0,803
44	2.696	0,822
45	2.758	0,841
46	2.819	0,859
47	2.880	0,878
48	2.942	0,897
49	3.003	0,915

DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS
50	3.064	0,934	70	4.290	1,308	90	5.516	1,681	110	6.741	2,055
51	3.125	0,953	71	4.350	1,326	91	5.577	1,700	111	6.802	2,076
52	6.187	0,971	72	4.412	1,345	92	5.638	1,718	112	6.864	2,092
53	3.248	0,990	73	4.474	1,364	93	5.699	1,737	113	6.925	2,111
54	3.309	1,005	74	4.535	1,382	94	5.761	1,756	114	6.986	2,129
55	3.371	1,027	75	4.596	1,401	95	5.822	1,775	115	7.048	2,148
56	3.432	1,046	76	4.658	1,420	96	5.883	1,793	116	7.109	2,167
57	3.493	1,065	77	4.719	1,438	97	5.944	1,812	117	7.170	2,185
58	3.554	1,083	78	4.780	1,457	98	6.006	1,831	118	7.231	2,204
59	3.616	1,102	79	4.841	1,476	99	6.067	1,849	119	7.293	2,223
60	3.676	1,120	80	4.903	1,494	100	6.128	1,868	120	7.354	2,247
61	3.738	1,139	81	4.964	1,513	101	6.190	1,887			
62	3.800	1,158	82	5.025	1,532	102	6.251	1,905			
63	3.861	1,177	83	5.087	1,550	103	6.312	1,924			
64	3.922	1,195	84	5.148	1,569	104	6.373	1,943			
65	3.983	1,214	85	5.209	1,588	105	6.435	1,961			
66	4.045	1,233	86	5.270	1,606	106	6.496	1,980			
67	4.106	1,252	87	2.352	1,625	107	6.557	1,999			
68	4.167	1,270	88	5.393	1,644	108	6.619	2,017			
69	4.229	1,289	89	5.454	1,662	109	6.680	2,036			

.325" Pitch

DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS
30	1.620	0,494	50	2.706	0,825	70	3.788	1,155	90	4.871	1,485
31	1.674	0,510	51	2.760	0,841	71	3.842	1,171	91	4.925	1,501
32	1.728	0,527	52	2.814	0,858	72	3.896	1,188	92	4.979	1,518
33	1.782	0,543	53	2.868	0,874	73	3.951	1,204	93	5.033	1,534
34	1.836	0,560	54	2.922	0,891	74	4.004	1,220	94	5.087	1,551
35	1.890	0,576	55	2.976	0,907	75	4.059	1,237	95	5.141	1,567
36	1.944	0,593	56	3.030	0,924	76	4.113	1,254	96	5.195	1,583
37	1.998	0,609	57	3.084	0,940	77	4.167	1,270	97	5.249	1,600
38	2.052	0,625	58	3.139	0,957	78	4.221	1,287	98	5.303	1,616
39	2.106	0,642	59	3.193	0,973	79	4.275	1,303	99	5.358	1,633
40	2.165	0,660	60	3.247	0,990	80	4.329	1,320	100	5.412	1,649
41	2.219	0,676	61	3.301	1,006	81	4.383	1,336	101	5.466	1,666
42	2.273	0,693	62	3.355	1,023	82	4.438	1,353	102	5.520	1,682
43	2.327	0,709	63	3.409	1,039	83	4.492	1,369	103	5.574	1,699
44	2.381	0,726	64	3.463	1,056	84	4.546	1,386	104	5.628	1,715
45	2.435	0,742	65	3.517	1,072	85	4.600	1,402	105	5.682	1,732
46	2.489	0,759	66	3.571	1,088	86	4.654	1,419	106	5.736	1,748
47	2.543	0,775	67	2.626	1,105	87	4.708	1,435	107	5.790	1,765
48	2.597	0,792	68	3.680	1,122	88	4.762	1,452	108	5.845	1,781
49	2.652	0,808	69	3.734	1,138	89	4.816	1,468	109	5.899	1,798

DRIVE LINKS	FEET	METERS
110	5.953	1,814
111	6.007	1,831
112	6.061	1,847
113	6.115	1,864
114	6.169	1,880
115	6.223	1,897
116	6.278	1,913
117	6.332	1,930
118	6.386	1,946
119	6.440	1,963
120	6.494	1,979

.404" Pitch

DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS
40	2.682	0,825	60	4.032	1,229	80	5.376	1,639	100	6.720	2,048
41	2.755	0,840	61	4.099	1,249	81	5.444	1,655	101	6.788	2,069
42	2.823	0,860	62	4.167	1,270	82	5.511	1,680	102	6.855	2,089
43	5.890	0,881	63	4.234	1,291	83	5.578	1,708	103	6.922	2,110
44	2.957	0,901	64	4.301	1,311	84	5.645	1,721	104	6.989	2,130
45	3.024	0,922	65	4.368	1,331	85	6.712	1,741	105	7.056	2,151
46	3.091	0,942	66	4.435	1,352	86	6.780	1,762	106	7.124	2,171
47	3.159	0,963	67	4.503	1,373	87	5.847	1,782	107	7.191	2,192
48	3.226	0,983	68	4.570	1,393	88	5.914	1,803	108	7.258	2,212
49	3.293	1,004	69	4.637	1,413	89	5.981	1,823	109	7.326	2,233
50	3.360	1,024	70	4.704	1,434	90	6.048	1,843	110	7.392	2,253
51	3.427	1,045	71	4.772	1,454	91	6.116	1,864	111	7.473	2,278
52	3.495	1,065	72	4.839	1,475	92	6.183	1,885	112	7.540	2,298
53	3.562	1,086	73	4.906	1,495	93	6.250	1,905	113	7.607	2,319
54	3.629	1,106	74	4.973	1,516	94	6.317	1,925	114	7.675	2,339
55	3.696	1,127	75	5.040	1,536	95	6.384	1,946	115	7.742	2,360
56	3.763	1,147	76	5.108	1,557	96	6.452	1,967	116	7.809	2,380
57	3.831	1,168	77	5.175	1,577	97	6.519	1,987	117	7.877	2,401
58	3.898	1,188	78	5.242	1,598	98	6.586	2,008	118	7.944	2,421
59	3.965	1,209	79	5.309	1,618	99	6.653	2,028	119	8.011	2,442

DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS
120	8.079	2,462	141	9.493	2,893	161	10.839	3,304	181	12.185	3,714
121	8.146	2,483	142	9.560	2,914	162	10.906	3,324	182	12.253	3,735
123	8.213	2,503	143	9.627	2,934	163	10.974	3,345	183	12.320	3,755
124	8.281	2,524	144	9.694	2,955	164	11.041	3,365	184	12.387	3,776
125	8.348	2,544	145	9.762	2,975	165	11.108	3,386	185	12.455	3,796
126	8.415	2,565	146	9.829	2,996	166	11.176	3,406	186	12.522	3,817
127	8.483	2,586	147	9.896	3,016	167	11.243	3,427	187	12.589	3,837
128	8.550	2,606	148	9.964	3,037	168	11.310	3,447	188	12.657	3,858
129	8.617	2,627	149	10.031	3,057	169	11.378	3,468	189	12.724	3,878
130	8.685	2,647	150	10.098	3,078	170	11.445	3,488	190	12.791	3,899
131	8.752	2,668	151	10.166	3,099	171	11.512	3,509	191	12.859	3,919
132	8.819	2,688	152	10.233	3,119	172	11.580	3,529	192	12.926	3,940
133	8.887	2,709	153	10.300	3,140	173	11.647	3,550	193	12.993	3,960
134	8.954	2,729	154	10.368	3,160	174	11.714	3,570	194	13.061	3,981
135	9.021	2,750	155	10.435	3,181	175	11.781	3,591	195	13.128	4,001
136	9.089	2,770	156	10.502	3,201	176	11.849	3,612	196	13.195	4,022
137	9.156	2,791	157	10.570	3,222	177	11.916	3,632	197	13.263	4,042
138	9.223	2,811	158	10.637	3,242	178	11.983	3,653	198	13.330	4,063
139	9.291	2,832	159	10.704	3,263	179	12.051	3,673	199	13.397	4,083
140	9.358	2,852	160	10.772	3,283	180	12.118	3,694	200	13.465	4,104
									270	18.177	5,540

SAW CHAIN CONVERSION CHART

3/4" Pitch

DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS	DRIVE LINKS	FEET	METERS
20	2.013	0,614	40	4.026	1,227	60	6.039	1,841	80	8.052	2,454
21	2.114	0,644	41	4.127	1,258	61	6.140	1,871	81	8.153	2,485
22	2.214	0,675	42	4.228	1,289	62	6.241	1,902	82	8.254	2,516
23	2.315	0,706	43	4.328	1,319	63	6.341	1,933	83	8.354	2,546
24	2.416	0,736	44	4.429	1,350	64	6.442	1,964	84	8.455	2,577
25	2.516	0,767	45	4.530	1,381	65	6.543	1,994	85	8.556	2,608
26	2.617	0,798	46	4.630	1,411	66	6.643	2,025	86	8.656	2,638
27	2.718	0,828	47	4.731	1,442	67	6.744	2,056	87	8.757	2,669
28	2.818	0,859	48	4.831	1,473	68	6.845	2,086	88	8.858	2,700
29	2.919	0,890	49	4.932	1,503	69	6.945	2,117	89	8.958	2,731
30	3.020	0,920	50	5.033	1,534	70	7.046	2,148	90	9.059	2,761
31	3.120	0,951	51	5.133	1,565	71	7.147	2,178	91	9.160	2,792
32	3.221	0,982	52	5.234	1,595	72	7.247	2,209	92	9.260	2,823
33	3.322	1,012	53	5.335	1,626	73	7.348	2,240	93	9.361	2,853
34	3.422	1,043	54	5.435	1,657	74	7.449	2,270	94	9.462	2,884
35	3.523	1,074	55	5.637	1,687	75	7.549	2,301	95	9.562	2,915
36	3.624	1,104	56	5.737	1,718	76	7.650	2,332	96	9.663	2,945
37	3.724	1,135	57	5.838	1,749	77	7.751	2,362	97	9.764	2,976
38	3.825	1,166	58	5.939	1,779	78	7.851	2,393	98	9.864	3,007
39	4.026	1,197	59	6.039	1,810	79	7.952	2,424	99	9.656	3,037

DRIVE LINKS	FEET	METERS
100	10.066	3,068
101	10.166	3,099
102	10.267	3,129
103	10.368	3,160
104	10.468	3,191
105	10.569	3,221
106	10.670	3,252
107	10.770	3,283
108	10.871	3,313
109	10.972	3,344
110	11.072	3,375
111	11.173	3,405
112	11.273	3,436
113	11.374	3,467
114	11.475	3,498
115	11.575	3,528
116	11.676	3,559
117	11.777	3,590
118	11.877	3,620
119	11.978	3,651
120	12.079	3,682

BULK CHAIN REELS

PITCH	FEET	METERS	DRIVE LINKS
1/4"	25	7,62	598
3/8"LP	25	7,62	410
.325"	25	7,62	462
3/8"	25	7,62	412
.404"	25	7,62	372
3/4"	25	14,24	192
.404"	50	14,24	740

BULK CHAIN REELS

PITCH	FEET	METERS	DRIVE LINKS
3/4"	50	14,24	384
1/4"	100	30,48	2392
3/8"LP	100	30,48	1635
.325"	100	30,48	1840
3/8"	100	30,48	1635
.404"	100	30,48	1480

SEMI-CHISEI-CHAIN

PART NO.	CHAIN DESCRIPTION	PITCH	GAUCE	CARLTON PART NO.	OREGON PART NO.	STIHL PART NO.
CLQ43NSTL	Non-Safety Semi Chisel Chain	1/4"	.043"			
CLQ43TL	Safety Semi Chisel Chain with Bumper Link	1/4"	.043"			
CLQ50NSTL	Non-Safety Semi Chisel Chain	1/4"	.050"			
CLQ50TL	Safety Semi Chisel Chain with Bumper Link	1/4"	.050"			
CL143NSTL	Non-Safety Semi Chisel Chain	3/8"LP	.043"	N4C	-	61PMN
CL143TL	Safety Semi Chisel Chain with Bumper Link	3/8"LP	.043"	N4C-BL	90SG	61PMN1
CL150NSTL	Non-Satety Semi Chisel Chain	3/8"LP	.050"	N1C	91VS	63PM
CL150TL	Safety Semi Chisel Chain with Bumper Link	3/8"LP	.050"	N1C-BL	91VG	63PM1
CL250NSTL	Non-Safety Semi Chisel Chain	.325"	.050"	K1C	-	-
CL258NSTL	Non-Safety Semi Chisel Chain	.325"	.058"	K2C	-	-
CL263NSTL	Non-Safety Semi Chisel Chain	.325"	.063"	K3C	-	-
CL250TL	Safety Semi Chisel Chain with Bumper Link	.325"	.050"	K1C-BL	20BP	23RM
CL258TL	Safety Semi Chisel Chain with Bumper Link	.325"	.058"	K2C-BL	21BP	25RM
CL263TL	Safety Semi Chisel Chain with Bumper Link	.325"	.063"	K3C-BL	22BP	26RM
CL350NSTL	Non-Satety Semi Chisel Chain	3/8"	.050"	A1EP	72DG	33RM
CL358NSTL	Non-Safety Semi Chisel Chain	3/8"	.058"	A2EP	73DG	35RM
CL363NSTL	Non-Salety Semi Chisel Chain	3/8"	.063"	A3EP	75DG	36RM
CL350BLNSTL	Semi Chisel Chain with Bumper Link	3/8"	.050"	A1EP-BL	72DP	33RM
CL358BLNSTL	Semi Chisel Chain with Bumper Link	3/8"	.058"	A2EP-BL	73DP	35RM
CL363BLNSTL	Semi Chisel Chain with Bumper Link	3/8"	.063"	A3EP-BL	75DP	36RM
CL350TL	Safety Semi Chisel Chain with Guard Link	3/8"	.050"	A1EP-GL	72SG	33RM2
CL358TL	Safety Semi Chisel Chain with Guard Link	3/8"	.058"	A2EP-GL	73SG	35RM2
CL363TL	Safety Semi Chisel Chain with Guard Link	3/8"	.063"	A3EP-GL	75SG	36RM2
CL458NSTL	Non-Safety Semi Chisel Chain	.404"	.058"	B2EP	58	45RM
CL463NSTL	Non-Safety Semi Chisel Chain	.404"	.063"	B3EP	59	46RM
HV80NSTL	Non-Safety Harvester Chain	.404"	.080"	B3M	18HX	46HM
HV95NSTL	Non-Safety Harvester Chain	3/4"	.122"		11BC	

GUIDE BAR PART NUMBERS

FULL CHISEI-CHAIN

PART NO.	CHAIN DESCRIPTION	PITCH	GAUCE	CARLTON PART NO.	OREGON PART NO.	STIHL PART NO.
CL650NSTL	Non-Safety Semi Chisel Chain	3/8"LP	.050"			
CL650TL	Safety Semi Chisel Chain with Bumper Link	3/8"LP	.050"			
CL750NSTL	Non-Salety Chisel Chain	.325"	.050"	K1L	33LG	23RS
CL758NSTL	Non-Safety Chisel Chain	.325"	.058"	K2L	34LG	25RS
CL763NSTL	Non-Safety Chisel Chain	.325"	.063"	K3L	35LG	26RS
CL750TL	Safety Chisel Chain with Bumper Link	.325"	.050"	K1L-BL	20LP/33SL	23RM2
CL758TL	Safety Chisel Chain with Bumper Link	.325"	.058"	K2L-BL	21LP/34SL	25RM2
CL763TL	Safety Chisel Chain with Buriper Link	.325"	.063"	K3L-BL	22LP/35SL	26RM2
CL850NSTL	Non-Safety Chisel Chain	3/8"	.050"	A1LM	72LG	33RS
CL858NSTL	Non-Safety Chisel Chain	3/8"	.058"	A2LM	73LG	35RS
CL863NSTL	Non-Safety Chisel Chain	3/8"	.063"	A3LM	75LG	36RS
CL850NSTL	Non-Safety Chisel Chain with Bumper Link	3/8"	.050"	A1LM-BL	72LP	33RS
CL858NSTL	Non-Satety Chisel Chain with Bumper Link	3/8"	.058"	A2LM-BL	73LP	35RS
CL863NSTL	Non-Safety Chisel Chain with Bumper Link	3/8"	.063"	A3LM-BL	75LP	36RS
CL850TL	Safety Chisel Chain with Guard Link	3/8"	.050"	A1LM-GL	-	-
CL858TL	Safety Chisel Chain with Guard Link	3/8"	.058"	A2LM-GL	-	-
CL863TL	Safety Chisel Chain with Guard Link	3/8"	.063"	A3LM-GL	-	-

Our guide bars are designed to provide a guide and support rail for the moving saw chain.Our guide bar types include:Carving Bars,Mini Laminate Sprocket Nose,Laminate Sprocket Nose,Replaceable Sprocket Nose,and Hard Nose bars.

- **Solid bars are laser cut for precision fit to exact tolerances**
- **Guide bar rails are hardened for extra wear**
- **Stellite™ tips are laser welded on all hard nose bars**

Bar Type
N=No Sprocket
M=Mini Laminate (all 3/8"LP)
L=Laminate
R=Replaceable Sprocket Nose
H=Hard Nose
CB=Carving Bar

Chain Pitch
Q=1/4"
1=3/8"LP
2=.325"
3=3/8"
4=.404"
5=3/16"

Chain Gauge
43=.043"
50=.050"
58=.058"
63=.063"
80=.080"

Bar Length
4"-42"

L 3 58 15 56 - 4009 TL

Drivelink Count
66=66 drivelinks

Bar Mount
Applications List

Brand

solid nose bars,constructed from a solid piece of steel,and
designed for trimming and pruning.The small nose radius is designed for precision shape cutting.These bars are available in 8" and 12" configurations.

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
CBQ500439-1318	CARVING BAR	4"(10.16cm)	39	1/4"	.050"		
CBQ500642-XXXX*	CARVING BAR	6"(15.24cm)	42	1/4"	.050"		
CB1500837-XXXX*	CARVING BAR	8"(20.32cm)	37	3/8"LP	.050"	-	-
CBQ500852-XXXX	CARVING BAR	8"(20.32cm)	52	1/4"	.050"	-	-
CB1501242-XXXX*	CARVING BAR	12"(30.48cm)	42	3/8"LP	.050"	535047	-
CB1501244-1041	CARVING BAR	12"(30.48cm)	44	3/8"LP	.050"		
CB1501245-XXXX*	CARVING BAR	12"(30.48cm)	45	3/8"LP	.050"		
CBQ431264-XXXX	CARVING BAR	12"(30.48cm)	64	1/4"	.043"		
CBQ501260-XXXX	CARVING BAR	12"(30.48cm)	60	1/4"	.050"		
CBQ501264-XXXX	CARVING BAR	12"(30.48cm)	64	1/4"	.050"		
CBQ501268-XXXX	CARVING BAR	12"(30.48cm)	68	1/4"	.050"		
CB1501660-1040	CARVING BAR	16"(40.64cm)	60	3/8"LP	.050"		
CB1502070-1040	CARVING BAR	20"(50.80cm)	70	3/8"LP	.050"		

*Guide bars are made to fit 1041,11041,1095 and 11095 mounts
CARVING BARS continued on page 41

CARVING BARS (continued)

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
NQ430322-1318TL		3"(7.62cm)	22	1/4"	.043"		
NQ430428-1041TL		4"(10.16cm)	28	1/4"	.043"		
NQ430432-1041TL		4"(10.16cm)	32	1/4"	.043"		
NQ430432-1318TL		4"(10.16cm)	32	1/4"	.043"		
NQ430638-1041TL		6"(15.24cm)	38	1/4"	.043"		
NQ430640-1041TL		6"(15.24cm)	40	1/4"	.043"		
N4630730-1074TL		7"(17.78cm)	30	.404"	.063"		
N1500829-1114TL		8"(20.32cm)	29	3/8"LP	.050"		
N1430833-1041TL		8"(20.32cm)	33	3/8"LP	.043"		
N1500833-1041TL		8"(20.32cm)	33	3/8"LP	.050"		
N1430834-1041TL		8"(20.32cm)	34	3/8"LP	.043"		
NQ430841-1041TL		8"(20.32cm)	41	1/4"	.043"		
NQ430848-1041TL		8"(20.32cm)	48	1/4"	.043"		
N1501040-1189TL		10"(25.40cm)	40	3/8"LP	.050"		
N46311540-1074TL		11.5"(29.21cm)	40	.404"	.063"		
N1501245-1189TL		12"(30.48cm)	45	3/8"LP	.050"		
NQ431264-1074TL		12"(30.48cm)	64	1/4"	.043"		
NQ431266-1041TL		12"(30.48cm)	66	1/4"	.043"		
N1501450-1189TL		14"(35.56cm)	50	3/8"LP	.050"		
NQ431472-1074TL		14"(35.56cm)	72	1/4"	.043"		
NQ431476-1041TL		14"(35.56cm)	76	1/4"	.043"		
N1501656-1171TL		16"(40.64cm)	56	3/8"LP	.050"		
N1501657-1041TL		16"(40.64cm)	57	3/8"LP	.050"		
N2631876-11095TL		18"(45.72cm)	76	.325"	.063"		

Mini Laminate Sprocket Nose Bars continued on page 42

MINI LAMINATE SPROCKET NOSE BARS

have a rotating sprocket located at the tip of the bar with a single rivet construction.As the chain moves along the bar,the sprocket teeth carry the chain around the tip quickly with little friction or reduction in cutting speed.These bars are available in 6"-18" configurations.

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
M1430423-1042TL		4"(10.16cm)	23	3/8"LP	.043"		
M1500423-1042TL		4"(10.16cm)	23	3/8"LP	.050"		
M2430426-1042TL		4"(10.16cm)	26	.325"	.043"		
MQ430432-1042TL		4"(10.16cm)	32	1/4"	.043"		
MQ500430-1042TL		4"(10.16cm)	30	1/4"	.050"		
MQ430432-1074TL		4"(10.16cm)	32	1/4"	.043"		
MQ430534-1041TL		5"(12.70cm)	34	1/4"	.043"		
M1430628-1041TL		6"(15.24cm)	28	3/8"LP	.043"		
M1430629-1041TL	MINI LAM. NK	6"(15.24cm)	29	3/8"LP	.043"	064MLEA041	6-10-N4-MHC
M1500629-1041TL	MINI LAM.	6"(15.24cm)	29	3/8"LP	.050"	060SDEA041	6-10-N1-MHC
M1430629-11041TL	MINI LAM. NK	6"(15.24cm)	29	3/8"LP	.043"	064MLEK041	06-10W-N4-MHC
M2430632-1042TL		6"(15.24cm)	32	.325"	.043"		
MQ430638-1041TL		6"(15.24cm)	38	1/4"	.043"		
MQ430640-1041TL		6"(15.24cm)	40	1/4"	.043"		
MQ430640-1042TL		6"(15.24cm)	40	1/4"	.043"		
MQ500638-1042TL		6"(15.24cm)	38	1/4"	.050"		
M1430833-1041TL	MINI LAM. NK	8"(20.32cm)	33	3/8"LP	.043"	084MLEA041	08-10-N4-MHC
M1500833-1041TL	MINI LAM.	8"(20.32cm)	33	3/8"LP	.050"	080SDEA041	08-10-N1-MHC

NK=Narrow Kerf

Mini Laminate Sprocket Nose Bars continued on page 43

MINI LAMINATE SPROCKET NOSE BARS (continued)

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
M1430833-1218TL	MINI LAM. NK	8"(20.32cm)	33	3/8"LP	.043"	084MLEA218	08-22-N4-MHC
M1430836-1041TL	MINI LAM. NK	8"(20.32cm)	36	3/8"LP	.043"	084MLEA041	08-10-N437MHC
MQ430845-1041TL		8"(20.32cm)	45	1/4"	.043"		
MQ430852-1041TL		8"(20.32cm)	52	1/4"	.043"		
MQ500852-1041TL		8"(20.32cm)	52	1/4"	.050"		
MQ500842-1114TL		8"(20.32cm)	42	1/4"	.050"		
M1431039-1318TL		10"(25.40cm)	39	3/8"LP	.043"		
M1501039-1318TL	MINI LAM.	10"(25.40cm)	39	3/8"LP	.050"	100SDEA318	10-29-N1-MHC
M1431039-1218TL	MINI LAM. NK	10"(25.40cm)	39	3/8"LP	.043"	104MLEA218	10-22-N4-MHC
M1501039-1218TL	MINI LAM.	10"(25.40cm)	39	3/8"LP	.050"	100SDEA218	10-22-N1-MHC
M1431040-1041TL	MINI LAM. NK	10"(25.40cm)	40	3/8"LP	.043"	104MLEA041	10-10-N4-MHC
M1501040-1041TL	MINI LAM.	10"(25.40cm)	40	3/8"LP	.050"	100SDEA041	10-10-N1-MHC
M1501040-1318TL		10"(25.40cm)	40	3/8"LP	.050"		
MQ431056-1041TL		10"(25.40cm)	56	1/4"	.043"		
MQ431056-1318TL		10"(25.40cm)	56	1/4"	.043"		
MQ501056-1318TL		10"(25.40cm)	56	1/4"	.050"		
MQ431056-1319TL		10"(25.40cm)	56	1/4"	.043"		
MQ431058-1041TL		10"(25.40cm)	58	1/4"	.043"		
MQ501058-1041TL		10"(25.40cm)	58	1/4"	.050"		
M1431244-1074TL	MINI LAM. NK	12"(30.48cm)	44	3/8"LP	.043"	124MLEA074	12-26-N4-MHC
M1501244-1074TL	MINI LAM.	12"(30.48cm)	44	3/8"LP	.050"	120SPEA074	12-26-N1-HC
M1501244-1074TL	MINI LAM.	12"(30.48cm)	44	3/8"LP	.050"	120SDEA074	12-26-N1-MHC
M1501244-1318TL	MINI LAM.	12"(30.48cm)	44	3/8"LP	.050"	120SPEA318	12-29-N1-MHC
M1431245-1041TL	MINI LAM. NK	12"(30.48cm)	45	3/8"LP	.043"	124MLEA041	12-10-N444-MHC
M1501245-1041TL	MINI LAM.	12"(30.48cm)	45	3/8"LP	.050"	120DGEA041	12-10-N1-MHC
M1501245-1041TL	MINI LAM.	12"(30.48cm)	45	3/8"LP	.050"	120SDEA041	12-10-N1-MHC
M1501245-1041TL	MINI LAM.	12"(30.48cm)	45	3/8"LP	.050"	120GPEA041	12-10-N145-HC
M1501245-1041TL	MINI LAM.	12"(30.48cm)	45	3/8"LP	.050"	120SPEA041	12-10-N145-HC
M1501245-1095TL	MINI LAM.	12"(30.48cm)	45	3/8"LP	.050"	120SDEA095	12-01N1-HC
M1501248-1061TL	MINI LAM.	12"(30.48cm)	48	3/8"LP	.050"	120DGEA061	12-28-N1-MHC
MQ431264-1041TL		12"(30.48cm)	64	1/4"	.043"		
MQ501264-1041TL		12"(30.48cm)	64	1/4"	.050"		
MQ431264-1074TL		12"(30.48cm)	64	1/4"	.043"		
MQ431266-1041TL		12"(30.48cm)	66	1/4"	.043"		
MQ501266-1041TL		12"(30.48cm)	66	1/4"	.050"		
M1501449-1318TL	MINI LAM.	14"(35.56cm)	49	3/8"LP	.050"	140SDEA318	14-29-N1-MHC
M1501449-1318TL	MINI LAM.	14"(35.56cm)	49	3/8"LP	.050"	140SPEA318	14-29-N1-HC
M1431450-1074TL	MINI LAM. NK	14"(35.56cm)	50	3/8"LP	.043"	144MLEA074	14-26-N4-MHC
M1501450-1074TL	MINI LAM.7-9 NOSE TE	14"(35.56cm)	50	3/8"LP	.050"	140SDEA074	14-26-N1-MHC
M1501450-1074TL	MINI LAM.	14"(35.56cm)	50	3/8"LP	.050"	140SPEA074	14-26-N150-HC
M1501450-1318TL	MINI LAM.	14"(35.56cm)	50	3/8"LP	.050"	140SPEA074	14-29-N1-MHC
M1431452-1041TL	MINI LAM. NK	14"(35.56cm)	52	3/8"LP	.043"	144MLEA041	14-10-N4-MHC

MINI LAMINATE SPROCKET NOSE BARS (continued)

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
M1501452-1041TL	MINI LAM.	14"(35.56cm)	52	3/8"LP	.050"	140DGEA041	14-10-N1-MHC
M1501452-1041TL	MINI LAM.	14"(35.56cm)	52	3/8"LP	.050"	140SDEA041	14-10-N1-MHC
M1501452-1041TL	MINI LAM.	14"(35.56cm)	52	3/8"LP	.050"	140GPEA041	14-10-N152-HC
M1501452-1041TL	MINI LAM.	14"(35.56cm)	52	3/8"LP	.050"	140SPEA041	14-10-N1-HC
M1431452-1095TL	MINI LAM. NK	14"(35.56cm)	52	3/8"LP	.043"	144MLEA095	14-01-N4-MHC
M1501452-1095TL	MINI LAM.	14"(35.56cm)	52	3/8"LP	.050"	140SDEA095	14-01-N1-MHC
M1501452-1095TL	MINI LAM.	14"(35.56cm)	52	3/8"LP	.050"	140SPEA095	14-01-N152-HC
M1501453-1061TL	MINI LAM.	14"(35.56cm)	53	3/8"LP	.050"	140DGEA061	14-28-N1-MHC
MQ431472-1041TL		14"(35.56cm)	72	1/4"	.043"		
MQ431476-1041TL		14"(35.56cm)	76	1/4"	.043"		
MQ431476-1095TL		14"(35.56cm)	76	1/4"	.043"		
MQ501472-1041TL		14"(35.56cm)	72	1/4"	.050"		
MQ501476-1041TL		14"(35.56cm)	76	1/4"	.050"		
M1501654-1318TL	MINI LAM.	16"(40.64cm)	54	3/8"LP	.050"	160SDEA318	16-29-N1-MHC
M1501655-1074TL	MINI LAM.	16"(40.64cm)	55	3/8"LP	.050"	160SDEA074	16-26-N1-MHC
M1501655-1318TL	MINI LAM.	16"(40.64cm)	55	3/8"LP	.050"	160SDEA318	16-29-N1-MHC
M1431656-1041TL	MINI LAM. NK	16"(40.64cm)	56	3/8"LP	.043"	164MLEA041	16-10-N4-MHC
M1501656-1041TL	MINI LAM.	16"(40.64cm)	56	3/8"LP	.050"	160DGEA041	16-10-N1-MHC
M1501656-1041TL	MINI LAM.	16"(40.64cm)	56	3/8"LP	.050"	160GPEA041	16-10-N156-HC
M1501656-1041TL	MINI LAM.	16"(40.64cm)	56	3/8"LP	.050"	160SDEA041	16-10-N1-MHC
M1501656-1041TL	MINI LAM.	16"(40.64cm)	56	3/8"LP	.050"	160SPEA041	16-10-N156-HC
M1501656-1095TL	MINI LAM.	16"(40.64cm)	56	3/8"LP	.050"	160SDEA095	16-01-N1-MHC
M1431675-1041TL		16"(40.64cm)	57	3/8"LP	.043"		
M1501657-1041TL	MINI LAM.	16"(40.64cm)	57	3/8"LP	.050"	160SDEA041	16-01-N1-MHC
M1501657-1041TL	MINI LAM.	16"(40.64cm)	57	3/8"LP	.050"	160SPEA041	16-10-N156-HC
M1501659-1061TL	MINI LAM.	16"(40.64cm)	59	3/8"LP	.050"	160DGEA061	16-28-N1-MHC
MQ431682-1041TL		16"(40.64cm)	82	1/4"	.043"		
MQ431682-1095TL		16"(40.64cm)	82	1/4"	.043"		
MQ501682-1041TL		16"(40.64cm)	82	1/4"	.050"		
M1501860-1318TL	MINI LAM.	16"(40.64cm)	60	3/8"LP	.050"	180SDEA318	18-29-N1-MHC
M1501861-1074TL	MINI LAM.	18"(45.72cm)	61	3/8"LP	.050"	180SDEA074	18-26-N1-MHC
M1431862-1041TL		18"(45.72cm)	62	3/8"LP	.043"		
M1501862-1041TL	MINI LAM.	18"(45.72cm)	62	3/8"LP	.050"	180DGEA041	18-10-N1-MHC
M1501862-1041TL	MINI LAM.	18"(45.72cm)	62	3/8"LP	.050"	180SDEA041	18-10-N1-MHC
M1501862-1041TL	MINI LAM.	18"(45.72cm)	62	3/8"LP	.050"	180SPEA041	18-10-N1-HC
M1501862-1095TL	MINI LAM.	18"(45.72cm)	62	3/8"LP	.050"	180SDEA095	18-01-N1-MHC
M1501862-Z095TL		18"(45.72cm)	62	3/8"LP	.050"		
MQ501889-1041TL		18"(45.72cm)	89	1/4"	.050"		

NK=Narrow Kerf

LAMINATE SPROCKET NOSE BARS

are light weight bars that are typically used on consumer saws for the occasional or semi-professional user.These bars are available in many applications from 13"-20" and are the best value for the consumer.Laminate Sprocket Nose Bars have a rotaing sprocket located at the tip of the bar with a sturdy four rivet construction.

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
L46311540-1074TL		11.5"(29.21cm)	40	.404"	.063"		
L1501040-1041TL	LAM.	10"(25.40cm)	40	3/8"LP	.050"	100SDEA041	10-10-N1-HC
L2501045-1041TL		10"(25.40cm)	45	.325"	.050"		
L1501244-1074TL	LAM.	12"(30.48cm)	44	3/8"LP	.050"	120SPEA074	12-26-N1-HC
L1501245-1041TL	LAM.	12"(30.48cm)	45	3/8"LP	.050"	120SPEA041	12-10-N145-HC
L1501245-1041TL	LAM.	12"(30.48cm)	45	3/8"LP	.050"	120GPEA041	12-10-N145-HC
L1501245-11095TL		12"(30.48cm)	45	3/8"LP	.050"		
LQ431264-1074TL		12"(30.48cm)	64	1/4"	.043"		
LQ501264-1041TL		12"(30.48cm)	64	1/4"	.050"		
L2581356-4025TL		13"(33.02cm)	56	.325"	.058"		
L2631356-4025TL		13"(33.02cm)	56	.325"	.063"		
L2501356-11095TL	LAM.	13"(33.02cm)	56	.325"	.050"	130MLBK095	13-01W-K1-NKC
L2501356-11095TL	LAM.	13"(33.02cm)	56	.325"	.050"	130MPBK095	13-01W-K1-NKC
L2581356-11095TL	LAM.	13"(33.02cm)	56	.325"	.058"	138SLBK095	13-012-K2-TC12
L1501449-1318TL	LAM.	14"(35.56cm)	49	3/8"LP	.050"	140SPEA318	14-29-N1-HC
L1501450-1074TL	LAM.	14"(35.56cm)	50	3/8"LP	.050"	140SPEA074	14-26-N150-HC
L1431452-1041TL		14"(35.56cm)	52	3/8"LP	.043"		
L1501452-1041TL	LAM.	14"(35.56cm)	52	3/8"LP	.050"	140SPEA041	14-10-N1-HC
L1501452-1041TL	LAM.	14"(36.56cm)	52	3/8"LP	.050"	140GPEA041	14-10-N152-HC
L1501452-11095TL	LAM.	14"(35.56cm)	52	3/8"LP	.050"	140SPEK095	14-01-N152-HC
L3501453-1041TL		14"(35.56cm)	53	3/8"	.050"		
L2581456-1074TL		14"(35.56cm)	56	.325"	.058"		
L2631456-1074TL		14"(35.56cm)	56	.325"	.063"		
L3581556-4009TL	LAM.	15"(38.10cm)	56	3/8"	.058"	158SLHD009	15-81-A256-TC11
L3631556-4009TL	LAM.	15"(38.10cm)	56	3/8"	.063"	153SLHD009	15-81-A356-TC11
L3501556-4025TL	LAM.	15"(38.10cm)	56	3/8"	.050"	150SLHD025	15-42-K163-TC12
L3581556-4025TL	LAM.	15"(38.10cm)	56	3/8"	.058"	158SLHD025	15-42-K263-TC12
L3631556-4025TL		15"(38.10cm)	56	3/8"	.063"		
L2501562-4025TL	LAM.	15"(38.10cm)	62	.325"	.050"	150SLHD025	15-42-K163-TC12
L2581562-4025TL	LAM.	15"(38.10cm)	62	.325"	.058"	158SLHD025	15-42-K263-TC12
L2631562-4025TL	LAM.	15"(38.10cm)	62	.325"	.063"	153SLHD025	15-42-K363-TC
L2501563-4025TL		15"(38.10cm)	63	.325"	.050"		
L2501564-11041TL	LAM. NK	15"(38.10cm)	64	.325"	.050"	150MLBK041	15-10W-K1-NKC
L2581564-11041TL	LAM.	15"(38.10cm)	64	.325"	.058"	158SLGK041	15-10W-K264-TC12
L2501564-11095TL	LAM. NK	15"(38.10cm)	64	.325"	.050"	150MLBK095	15-01W-K1-NKC
L2501564-11095TL	LAM. NK	15"(38.10cm)	64	.325"	.050"	150MPBK095	15-01W-K2-NKC
L2581564-11095TL	LAM.	15"(38.10cm)	64	.325"	.058"	158SLBK095	15-01W-K264-TC

NK=Narrow Kerf

Laminate Sprocket Nose Bars continued on page 46

LAMINATE SPROCKET NOSE BARS

(continued)

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
L2581554-11095TL	LAM.	15"(38.10cm)	64	.325"	.058"	158SLGK095	15-01W-K2-TC12
L1501655-1074TL		16"(40.64cm)	55	3/8"LP	.050"		
L1501656-1041TL	LAM.	16"(40.64cm)	56	3/8"LP	.050"	160SPEA041	16-10-N156-HC
L1501656-1041TL	LAM.	16"(40.64cm)	56	3/8"LP	.050"	160GPEA041	16-10-N156-HC
L1431657-1041TL		16"(40.64cm)	57	3/8"LP	.043"		
L1501657-1041TL	LAM.	16"(40.64cm)	57	3/8"LP	.050"	160SPEA041	16-10-N156-HC
L1501659-1041TL		16"(40.64cm)	59	3/8"LP	.050"		
L3501660-4196TL	LAM.	16"(40.64cm)	60	3/8"	.050"	160GLHD196	16-21-A160-TC11
L3581660-4196TL	LAM.	16"(40.64cm)	60	3/8"	.058"	168GLHD196	16-21-A260-TC11
L3501659-11095TL	LAM.	16"(40.64cm)	59	3/8"	.050"	160PXDK095	16-01W-A159-TC11
L3501660-4009TL	LAM.	16"(40.64cm)	60	3/8"	.050"	160SLHD009	16-81-A160-TC11
L3581660-4009TL	LAM.	16"(40.64cm)	60	3/8"	.058"	168SLHD009	16-81-A260TC
L3501660-4025TL	LAM.	16"(40.64cm)	60	3/8"	.050"	160SLHD025	16-42-A160-TC11
L3581660-4025TL	LAM.	16"(40.64cm)	60	3/8"	.058"	168SLHD025	15-42-A250-TC11
L3631660-4025TL	LAM.	16"(40.64cm)	60	3/8"	.063"	163SLHD025	16-42-A360-TC11
L3501660-4176TL	LAM.	16"(40.64cm)	60	3/8"	.050"	160SLHD176	16-41-A160-TC11
L3581660-4176TL	LAM.	16"(40.64cm)	60	3/8"	.058"	168GLHD176	16-41-A260-TC11
L3501660-11095TL	LAM.	16"(40.64cm)	60	3/8"	.050"	160SLHK095	16-01W-A160-TC11
L3581660-11095TL	LAM.	16"(40.64cm)	60	3/8"	.058"	168SLHK095	16-01W-A3-TC11
L3581660-11095TL	LAM.	16"(40.64cm)	60	3/8"	.058"	168SLHK095	16-01W-A3-TC
L3631660-11095TL		16"(40.64cm)	60	3/8"	.063"		
L2501662-1074TL	LAM.	16"(40.64cm)	62	.325"	.050"	160SLBA074	16-26-K162-TC
L2501662-1074TL	LAM. NK	16"(40.64cm)	62	.325"	.050"	160MPBA074	16-26-K1-NKC
L2581662-1074TL		16"(40.64cm)	62	.325"	.058"		
L2631662-1074TL	LAM.	16"(40.64cm)	62	.325"	.063"	163MPBA074	16-26-K362-TC
L2581664-11095TL		16"(40.64cm)	64	.325"	.058"		
L2631664-11095TL		16"(40.64cm)	64	.325"	.063"		
L2501666-1041TL		16"(40.64cm)	66	.325"	.050"		
L2581666-1041TL		16"(40.64cm)	66	.325"	.058"		
L2501666-11041TL	LAM.	16"(40.64cm)	66	.325"	.050"	160GDBK041	16-10W-K1-HC
L2501666-11041TL	LAM. NK	16"(40.64cm)	66	.325"	.050"	160MLBK041	16-10W-K1-NKC
L2581666-11041TL	LAM.	16"(40.64cm)	66	.325"	.058"	168SLGK041	16-09-K266-TC12
L2501666-11095TL	LAM. NK	16"(40.64cm)	66	.325"	.050"	160MLBK095	16-01W-K1-NKC
L2501666-11095TL	LAM.	16"(40.64cm)	66	.325"	.050"	160PXBK095	16-01W-K1-HC
L2501666-11095TL	LAM.	16"(40.64cm)	66	.325"	.050"	160MPBK095	16-01W-K1-NKC
L2501666-11095TL	LAM.	16"(40.64cm)	66	.325"	.050"	160SLGK095	16-01W-K166-TC12
L2581666-11095TL	LAM.	16"(40.64cm)	66	.325"	.058"	168PXBK095	16-01W-K266-HC
L2581666-11095TL	LAM.	16"(40.64cm)	66	.325"	.058"	168SLBK095	16-01W-K266-TC
L2581666-11095TL	LAM.	16"(40.64cm)	66	.325"	.058"	168SLGK095	16-01W-K2-TC12
L2501666-11216TL		16"(40.64cm)	66	.325"	.050"		

NK=Narrow Kerf

Laminate Sprocket Nose Bars continued on page 47

LAMINATE SPROCKET NOSE BARS

(continued)

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
L2501667-4025TL	LAM.	16"(40.64cm)	67	.325"	.050"	160SLGD025	16-42-K167-TC12
L2581667-4025TL	LAM.	16"(40.64cm)	67	.325"	.058"	168SLGD025	16-42-K267-TC
L2631667-4025TL	LAM.	16"(40.64cm)	67	.325"	.063"	163SLGD025	16-42-K367-TC12
L1501862-1041TL	LAM.	18"(45.72cm)	62	3/8"LP	.050"	180SPEA041	18-10-N1-HC
L1501864-4176TL	LAM.	18"(45.72cm)	64	3/8"LP	.050"	180SLHD176	18-41-N1-HC
L3501864-11095TL	LAM.	18"(45.72cm)	64	3/8"	.050"	180SLHK095	18-01W-A164-TC11
L3581864-11095TL	LAM.	18"(45.72cm)	64	3/8"	.058"	188SLHK095	18-01W-A264-TC11
L3501866-4025TL	LAM.	18"(45.72cm)	66	3/8"	.050"	180SLHD025	18-42-A166-TC11
L3581866-4025TL	LAM.	18"(45.72cm)	66	3/8"	.058"	188SLHD026	18-42-A266-TC11
L3631866-4025TL	LAM.	18"(45.72cm)	66	3/8"	.063"	183SLHD025	18-42-A366-TC11
L3501866-4176TL	LAM.	18"(45.72cm)	66	3/8"	.050"	180GDDD176	18-41-A166-TC
L3581866-4176TL	LAM.	18"(45.72cm)	66	3/8"	.058"	188PXDD176	18-41-A266-TC
L3631866-4176TL		18"(45.72cm)	66	3/8"	.063"		
L2501868-1074TL		18"(45.72cm)	68	.325"	.050"		
L2581868-1074TL		18"(45.72cm)	68	.325"	.058"		
L2631868-1074TL		18"(45.72cm)	68	.325"	.063"		
L3501868-4009TL	LAM.	18"(45.72cm)	68	3/8"	.050"	180SLHD009	18-81-A168-TC11
L3581868-4009TL	LAM.	18"(45.72cm)	68	3/8"	.058"	188SLHD009	18-81-A268-TC
L3631868-4009TL	LAM.	18"(45.72cm)	68	3/8"	.063"	183SLHD009	18-81-A368-TC11
L2631872-1041TL		18"(45.72cm)	72	.325"	.063"		
L2501872-1095TL		18"(45.72cm)	72	.325"	.050"		
L2581872-1095TL		18"(45.72cm)	72	.325"	.058"		
L2631872-1095TL		18"(45.72cm)	72	.325"	.063"		
L2501872-11041TL	LAM.	18"(45.72cm)	72	.325"	.050"	180GDBK041	18-10W-K1-HC
L2501872-11041TL	LAM. NK	18"(45.72cm)	72	.325"	.050"	180MLBK041	18-10W-K1-NKC
L2501872-11041TL	LAM.	18"(45.72cm)	72	.325"	.050"	180SLBK041	18-09-K172-TC
L2501872-11041TL	LAM.	18"(45.72cm)	72	.325"	.050"	180SLGK041	18-09-K1-TC12
L2581872-11041TL	LAM.	18"(45.72cm)	72	.325"	.058"	188SLGK041	18-10W-K272-TC12
L2501872-11095TL	LAM. NK	18"(45.72cm)	72	.325"	.050"	180MLBK095	18-01W-K1-NKC
L2501872-11095TL	LAM. NK	18"(45.72cm)	72	.325"	.050"	180MPBK095	18-01W-K1-NKC
L2501872-11095TL	LAM.	18"(45.72cm)	72	.325"	.050"	180SLGK095	18-01W-K1-TC12
L2501872-11095TL	LAM.	18"(45.72cm)	72	.325"	.050"	180SLBK095	180-01W-K172-TC
L2501872-11095TL	LAM. NK	18"(45.72cm)	72	.325"	.050"	180MPBK095	18-01W-K1-TC12
L2581872-11095TL	LAM.	18"(45.72cm)	72	.325"	.058"	188SLBK095	18-01W-K272-TC
L2581872-11095TL	LAM.	18"(45.72cm)	72	.325"	.058"	188PXBK095	18-01W-K272-TC12
L2581872-11095TL	LAM.	18"(45.72cm)	72	.325"	.058"	188SLGK095	18-01W-K2-TC12
L2631872-11095TL		18"(45.72cm)	72	.325"	.063"		
L2501872-11216TL		18"(45.72cm)	72	.325"	.050"		
L2501874-4025TL	LAM.	18"(45.72cm)	74	.325"	.050"	180SLGD025	18-42-K174-TC12
L2581874-4025TL	LAM.	18"(45.72cm)	74	.325"	.058"	188SLGD025	18-42-K274-TC

NK=Narrow Kerf

Laminate Sprocket Nose Bars continued on page 48

LAMINATE SPROCKET NOSE BARS (continued)

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
L2631874-4025TL	LAM.	18"(45.72cm)	74	.325"	.063"	183SLGD025	18-42-K3-TC12
L2501874-4176TL	LAM.	18"(45.72cm)	74	.325"	.050"	180PXBD176	18-41-K174-TC10
L3502068-1095TL		20"(50.80cm)	68	3/8"	.050"		
L3582068-1095TL		20"(50.80cm)	68	3/8"	.058"		
L3632068-1095TL		20"(50.80cm)	68	3/8"	.063"		
L3632068-11095TL		20"(50.80cm)	68	3/8"	.063"		
L3502069-1041TL		20"(50.80cm)	69	3/8"	.050"		
L1502070-1041TL		20"(50.80cm)	70	3/8"LP	.050"		
L3502070-4176TL	LAM.	20"(50.80cm)	70	3/8"	.050"	200GLHD176	20-41-A170-TC12
L3582070-4176TL	LAM.	20"(50.80cm)	70	3/8"	.058"	208 PXDD176	20-41-A270-TC
L3632070-4176TL	LAM.	20"(50.80cm)	70	3/8"	.063"	203SLHD176	20-41-A370-TC11
L3502070-4196TL		20"(50.80cm)	70	3/8"	.050"		
L3502072-11095TL		20"(50.80cm)	72	3/8"	.050"		
L3582072-11095TL		20"(50.80cm)	72	3/8"	.058"		
L3632072-11095TL		20"(50.80cm)	72	3/8"	.063"		
L3502072-4009TL	LAM.	20"(50.80cm)	72	3/8"	.050"	200SLHD009	20-81-A172-TC11
L3582072-4009TL	LAM.	20"(50.80cm)	72	3/8"	.058"	208SFHD009	20-81-A272-TC
L3632072-4009TL	LAM.	20"(50.80cm)	72	3/8"	.063"	203SLHD009	20-81-A372-TC11
L3502072-4025TL	LAM.	20"(50.80cm)	72	3/8"	.050"	200SLHD025	20-42-A172-TC11
L3582072-4025TL	LAM.	20"(50.80cm)	72	3/8"	.058"	208SLHD025	20-42-A272-TC11
L3632072-4025TL	LAM.	20"(50.80cm)	72	3/8"	.063"	203SLHD025	20-42-A372-TC11
L2502076-1041TL		20"(50.80cm)	76	.325"	.050"		
L2582076-1095TL		20"(50.80cm)	76	.325"	.068"		
L2632076-1095TL		20"(50.80cm)	76	.325"	.063"		
L2632076-11095TL		20"(50.80cm)	76	.325"	.063"		
L2502078-1041TL	LAM.	20"(50.80cm)	78	.325"	.050"	200SLGA041	20-10-K1-TC
L2502078-11041TL	LAM.	20"(50.80cm)	78	.325"	.050"	200SLGK041	20-10W-K1-TC12
L2502078-11041TL	LAM.	20"(50.80cm)	78	.325"	.050"	200PXBK041	20-10W-K178-TC
L2582078-11041TL	LAM.	20"(50.80cm)	78	.325"	.058"	208SLGK041	20-10W-K278-TC12
L2502078-11095TL		20"(50.80cm)	78	.325"	.050"		
L2582078-11095TL		20"(50.80cm)	78	.325"	.058"		
L2502078-11216TL		20"(50.80cm)	78	.325"	.060"		
L2502080-11095TL		20"(50.80cm)	80	.325"	.050"		
L2502081-4025TL		20"(50.80cm)	81	.325"	.050"		
L2582081-4025TL	LAM.	20"(50.80cm)	81	.325"	.068"	208SLGD025	20-42-K281-TC12
L2632081-4025TL	LAM.	20"(50.80cm)	81	.325"	.063"	203SLGD025	20-42-K381-TC12
L2632000-12104TL		20"(50.80cm)	100	.325"	.063"		

REPLACEABLE SPROCKET NOSE BARS

have a solid steel body with a replaceable sprocket nose tip.This tip can be changed as it wears out without having to reduce the entire bar.These bars are manufactured for gigh speed,heavy duty saws and are preferred by the professional and semi-professional cutter;available in 13"-36" configurations.

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
R3581352-4009TL	REPL.SPRC.NOSE	13"(33.02cm)	52	3/8"	.058"	138RNDD009	13-81-A252-PS
R3631352-4009TL	REPL.SPRC.NOSE	13"(33.02cm)	52	3/8"	.063"	133RNDD009	13-81-A352-PS
R3581352-4025TL	REPL.SPRC.NOSE	13"(33.02cm)	52	3/8"	.058"	138RNDD025	13-42-A252-PS
R3631352-4025TL	REPL.SPRC.NOSE	13"(33.02cm)	52	3/8"	.063"	133RNDD025	13-42-352-PS
R2581359-4009TL	REPL.SPRC.NOSE	13"(33.02cm)	59	.325"	.068"	138RNBD009	13-81-K256-PS
R2631359-4009TL	REPL.SPRC.NOSE	13"(33.02cm)	59	.325"	.063"	133RNBD009	13-81-K356-PS
R2581359-4025TL	REPL.SPRC.NOSE	13"(33.02cm)	59	.325"	.058"	138RNBD025	13-42-K256-PS
R2631359-4025TL	REPL.SPRC.NOSE	13"(33.02cm)	59	.325"	.063"	133RNBD025	13-42-K356-PS
R3581556-4009TL	REPL.SPRC.NOSE	15"(38.10cm)	56	3/8"	.058"	158RNDD009	15-81-A256-PS
R3631556-4009TL	REPL.SPRC.NOSE	15"(38.10cm)	56	3/8"	.063"	153RNDD009	15-81-A3-PS
R3581556-4025TL	REPL.SPRC.NOSE NK	15"(38.10cm)	56	3/8"	.058"	158RNDD025	15-42-A256-PS
R3631556-4025TL	REPL.SPRC.NOSE NK	15"(38.10cm)	56	3/8"	.063"	153RNDD025	15-42-A356-PS
R3581556-11095TL	REPL.SPRC.NOSE	15"(38.10cm)	56	3/8"	.068"	158RNDK095	15-01W-A256-PS
R3631556-11095TL	REPL.SPRC.NOSE	15"(38.10cm)	56	3/8"	.063"	153RNDK095	15-01W-A356-PS
R2581564-1041TL		15"(38.10cm)	64	.325"	.058"	158RNBK095	15-01W-K264-PS
R2581564-11095TL	REPL.SPRC.NOSE	15"(38.10cm)	64	.325"	.058"		
R2631564-11095TL	REPL.SPRC.NOSE	15"(38.10cm)	64	.325"	.063"	153RNBK095	15-01W-K3-PS
R3501659-11095TL		16"(40.64cm)	59	3/8"	.060"	168RNDK095	16-01W-A2-PS
R3581659-11095TL	REPL.SPRC.NOSE	16"(40.64cm)	59	3/8"	.058"		
R3581659-11095TL	REPL.SPRC.NOSE	16"(40.64cm)	59	3/8"	.058"	168RNDK095	16-01W-A260-PS
R3631659-11095TL	REPL.SPRC.NOSE	16"(40.64cm)	59	3/8"	.063"	163RNDK095	16-01W-A3-PS
R3631659-11095TL	REPL.SPRC.NOSE	16"(40.64cm)	59	3/8"	.063"	163RNDK095	16-01W-A360-PS
R3581660-4009TL	REPL.SPRC.NOSE	16"(40.64cm)	60	3/8"	.068"	168RNDD009	16-81-A260-PS
R3631660-4009TL	REPL.SPRC.NOSE	16"(40.64cm)	60	3/8"	.063"	163RNDD009	16-81-A360-PS
R3581660-4025TL	REPL.SPRC.NOSE	16"(40.64cm)	60	3/8"	.058"	168RNDD025	16-42-A260-PS
R3631650-4025TL	REPL.SPRC.NOSE	16"(40.64cm)	60	3/8"	.063"	163RNDD025	16-42-A360-PS
R3581660-4176TL	REPL.SPRC.NOSE	16"(40.64cm)	60	3/8"	.058"	168RNDD176	16-41-A2-PS
R3581660-4176TL	REPL.SPRC.NOSE	16"(40.64cm)	60	3/8"	.068"	168RNDD176	16-41-A260-PS
R3631660-4176TL	REPL.SPRC.NOSE	16"(40.64cm)	60	3/8"	.063"	163RNDD176	16-41-A3-PS
R3631660-4176TL	REPL.SPRC.NOSE	16"(40.64cm)	60	3/8"	.063"	163RNDD176	16-41-A360-PS
R3581660-4196TL	REPL.SPRC.NOSE	16"(40.64cm)	60	3/8"	.058"	168RNDD196	16-21-A260-PS
R3631660-4196TL	REPL.SPRC.NOSE	16"(40.64cm)	60	3/8"	.063"	163RNDD196	16-21-A360-PS
R3581660-11095TL		16"(40.64cm)	60	3/8"	.068"		
R2581664-4176TL		16"(40.64cm)	64	.325"	.058"		
R2581666-4009TL		16"(40.64cm)	66	.325"	.058"		
R2581666-11095TL	REPL.SPRC.NOSE	16"(40.64cm)	66	.325"	.068"	168RNBK095	16-01W-K266-PS

NK=Narrow Kerf

Replaceable Sprocket Nose Bars continued on page 50

REPLACEABLE SPROCKET NOSE BARS (continued)

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
R2631666-11095TL	REPL. SPRC. NOSE	16"(40.64cm)	66	.325"	.063"	163RNBK095	16-01W-K3-PS
R3581764-4009TL	REPL. SPRC. NOSE	17"(43.18cm)	64	3/8"	.058"	178RNDD009	17-81-A264-PS
R3631764-4009TL	REPL. SPRC. NOSE	17"(43.18cm)	64	3/8"	.063"	173RNDD009	17-81-A364-PS
R3581764-4025TL	REPL. SPRC. NOSE	17"(43.18cm)	64	3/8"	.058"	178RNDD025	17-42-A264-PS
R3631764-4025TL	REPL. SPRC. NOSE	17"(43.18cm)	64	3/8"	.063"	173RNDD025	17-42-A364-PS
R3581866-4025TL	REPL. SPRC. NOSE	18"(45.72cm)	66	3/8"	.058"	188RNDD025	18-42-A266-PS
R3631866-4025TL	REPL. SPRC. NOSE	18"(45.72cm)	66	3/8"	.063"	183RNDD025	18-42-A366-PS
R3501866-4176TL		18"(45.72cm)	66	3/8"	.050"		
R2581868-1074TL		18"(45.72cm)	68	.325"	.058"		
R3631868-4009TL		18"(45.72cm)	68	3/8"	.063"		
R3581858-4009TL	REPL. SPRC. NOSE	18"(45.72cm)	68	3/8"	.058"	188RNDD009	18-81-A268-PS
R3631868-4009TL	REPL. SPRC. NOSE	18"(45.72cm)	68	3/8"	.063"	183RNDD009	18-81-A368-PS
R3581868-11095TL	REPL.SPRC.NOSE	18"(45.72cm)	68	3/8"	.058"	188RNDK095	18-01W-A264-PS
R3631868-11095TL	REPL.SPRC.NOSE	18"(45.72cm)	68	3/8"	.063"	183RNDK095	18-01W-A364-PS
R2581872-4176TL		18"(45.72cm)	72	.325"	.058"		
R2581872-11041TL	REPL.SPRC.NOSE	18"(45.72cm)	72	.325"	.058"	188RNBA041	18-10W-A272-PS
R2631872-11041TL	REPL.SPRC.NOSE	18"(45.72cm)	72	.325"	.053"	183RNBK041	18-10W-K372-PS
R2581872-11095TL	REPL.SPRC.NOSE	18"(45.72cm)	72	.325"	.058"	188RNBK095	18-01W-K272-PS
R2631872-11095TL	REPL.SPRC.NOSE	18"(45.72cm)	72	.325"	.063"	183RNBK095	18-01W-K372-PS
R2581874-4025TL	REPL.SPRC.NOSE	18"(45.72cm)	74	.325"	.058"	188RNBD025	18-42-K274-PS
R2631874-4025TL	REPL.SPRC.NOSE	18"(45.72cm)	74	.325"	.063"	183RNBD025	18-42-K374-PS
R2631876-4009TL		18"(45.72cm)	76	.325"	.063"		
R2631876-11095TL		18"(45.72cm)	76	.325"	.063"		
R4632062-13015TL	REPL.SPRC.NOSE	20"(50.80cm)	62	.404"	.063"	203RNFM015	20-81-B362-PS
R4632064-4009TL		20"(50.80cm)	64	.404"	.053"		
R4632065-4009TL	REPL.SPRC.NOSE	20"(50.80cm)	65	.404"	.063"	203RNFD009	20-81-B365-PS
R4632066-4025TL		20"(50.80cm)	66	.404"	.063"		
R3632068-11095TL		20"(50.80cm)	68	3/8"	.063"		
R3502070-4176TL		20"(50.80cm)	70	3/8"	.050"		
R3582070-4176TL	REPL.SPRC.NOSE	20"(50.80cm)	70	3/8"	.058"	208RNDD176	20-41-A270-PS
R3582070-4196TL	REPL.SPRC.NOSE	20"(50.80cm)	70	3/8"	.058"	208RNDD196	20-21-A270-PS
R3632070-4176TL	REPL.SPRC.NOSE	20"(50.80cm)	70	3/8"	.063"	203RNDD176	20-41-A370-PS
R3632070-4196TL	REPL.SPRC.NOSE	20"(50.80cm)	70	3/8"	.063"	203RNDD196	20-21-A370-PS
R3582072-4009TL	REPL.SPRC.NOSE	20"(50.80cm)	72	3/8"	.058"	208RNDD009	20-81-A272-PS
R3632072-4009TL	REPL.SPRC.NOSE	20"(50.80cm)	72	3/8"	.053"	203RNDD009	20-81-A372-PS
R3582072-4025TL	REPL.SPRC.NOSE	20"(50.80cm)	72	3/8"	.058"	208RNDD025	20-42-A272-PS
R3632072-4025TL	REPL.SPRC.NOSE	20"(50.80cm)	72	3/8"	.063"	203RNDD025	20-42-A372-PS
R3582072-4176TL	REPL.SPRC.NOSE	20"(50.80cm)	72	3/8"	.058"	208RNDD176	20-41-A272-PS
R3632072-4176TL	REPL.SPRC.NOSE	20"(50.80cm)	72	3/8"	.063"	203RNDD176	20-41-A372-PS
R3582072-11095TL	REPL.SPRC.NOSE	20"(50.80cm)	72	3/8"	.058"	208RNDK095	20-01W-A272-PS

Laminate Sprocket Nose Bars continued on page 51

REPLACEABLE SPROCKET NOSE BARS (continued)

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
R3632072-11095TL	REPL.SPRC.NOSE	20"(50.80cm)	72	3/8"	.063"	203RNDK095	20-01W-A372-PS
R2582076-4176TL		20"(50.80cm)	76	.325"	.058"		
R2582078-11095TL	REPL.SPRC.NOSE	20"(50.80cm)	78	.325"	.058"	208RNBK095	20-01W-K278-PS
R2632078-11095TL	REPL.SPRC.NOSE	20"(50.80cm)	78	.325"	.063"	203RNBK095	20-01W-K378-PS
R2502081-4025TL	REPL.SPRC.NOSE	20"(50.80cm)	81	.325"	.050"	208RNBD025	20-42-K281-PS
R2582081-4025TL		20"(50.80cm)	81	.325"	.058"		
R2632081-4025TL	REPL.SPRC.NOSE	20"(50.80cm)	81	.325"	.063"	203RNBD025	20-42-K378-PS
R4632168-5031TL	REPL.SPRC.NOSE	21"(53.34cm)	68	.404"	.063"	213RNFE031	21-07-B368-PS
R3582276-4009TL	REPL.SPRC.NOSE	22"(55.88cm)	76	3/8"	.058"	228RNDD009	22-81-A276-PS
R3632276-4009TL	REPL.SPRC.NOSE	22"(55.88cm)	76	3/8"	.063"	223RNDD009	22-81-A376-PS
R3582276-4025TL	REPL.SPRC.NOSE	22"(55.88cm)	76	3/8"	.058"	228RNDD025	22-42-A276-PS
R3632276-4025TL	REPL.SPRC.NOSE	22"(55.88cm)	76	3/8"	.063"	223RNDD025	22-42-A376-PS
R2582286-0000TL		22"(55.88cm)	86	.325"	.058"		
R3582380-4009TL	REPL.SPRC.NOSE	23"(58.42cm)	80	3/8"	.058"	238RNDD009	23-81-A280-PS
R3632380-4009TL	REPL.SPRC.NOSE	23"(58.42cm)	80	3/8"	.063"	233RNDD009	23-81-A380-PS
R3582380-4025TL	REPL.SPRC.NOSE	23"(58.42cm)	80	3/8"	.058"	238RNDD025	23-42-A280-PS
R3632380-4025TL	REPL.SPRC.NOSE	23"(58.42cm)	80	3/8"	.063"	233RNDD025	23-42-A380-PS
R4632476-4009TL	REPL.SPRC.NOSE	24"(60.96cm)	76	.404"	.063"	243RNFD009	24-81-B376-PS
R3502481-4176TL		24"(60.96cm)	81	3/8"	.050"		
R3582481-4176TL	REPL.SPRC.NOSE	24"(60.96cm)	81	3/8"	.058"	248RNDD176	24-41-A281-PS
R3632481-4176TL	REPL.SPRC.NOSE	24"(60.96cm)	81	3/8"	.063"	243RNDD176	24-41-A381-PS
R3582481-4196TL	REPL.SPRC.NOSE	24"(60.96cm)	81	3/8"	.058"	248RNDD196	24-41-A281-PS
R3632481-4196TL	REPL.SPRC.NOSE	24"(60.96cm)	81	3/8"	.063"	243RNDD196	24-21-A381-PS
R3632482-4025TL		24"(60.96cm)	82	3/8"	.063"		
R3582484-4009TL	REPL.SPRC.NOSE	24"(60.96cm)	84	3/8"	.058"	248RNDD009	24-81-A284-PS
R3632484-4009TL	REPL.SPRC.NOSE	24"(60.96cm)	84	3/8"	.063"	243RNDD009	24-81-A384-PS
R3582484-4025TL	REPL.SPRC.NOSE	24"(60.96cm)	84	3/8"	.058"	248RNDD025	24-82-A284-PS
R3632484-4025TL	REPL.SPRC.NOSE	24"(60.96cm)	84	3/8"	.063"	243RNDD025	24-82-A384-PS
R2502490-4025TL		24"(60.96cm)	90	.325"	.050"		
R2502490-11095TL		24"(60.96cm)	90	.325"	.050"		
R2582490-11095TL	REPL.SPRC.NOSE	24"(60.96cm)	90	.325"	.058"	248RNBK095	24-01W-K290-PS
R2632490-11095TL	REPL.SPRC.NOSE	24"(60.96cm)	90	.325"	.063"	243RNBK095	24-01W-K390-PS
R2502494-11095TL		24"(60.96cm)	94	.325"	.050"		
R4632580-5031TL	REPL.SPRC.NOSE	25"(63.50cm)	80	.404"	.063"	253RNFE031	25-07-B380-PS
R3582584-4009TL		25"(63.50cm)	84	3/8"	.058"		
R3632584-4025TL		25"(63.50cm)	84	3/8"	.063"		
R2502696-1095TL		26"(66.04cm)	96	.325"	.050"		
R4632883-4176TL		28"(71.12cm)	83	.404"	.063"		
R3502891-4025TL		28"(71.12cm)	91	3/8"	.050"		
R3582891-4025TL	REPL.SPRC.NOSE	28"(71.12cm)	91	3/8"	.058"	288RNDD025	28-42-A292-PS

Laminate Sprocket Nose Bars continued on page 52

REPLACEABLE SPROCKET NOSE BARS (continued)

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
R3632891-4025TL		28"(71.12cm)	91	3/8"	.063"		
R3502892-4009TL	REPL SPRC.NOSE	28"(71.12cm)	92	3/8"	.050"	280RNHD009	28-81-A192-PS
R3582892-4009TL	REPL SPRC.NOSE	28"(71.12cm)	92	3/8"	.058"	288RNDD009	28-81-A292-PS
R3582892-4009TL	REPL SPRC.NOSE	28"(71.12cm)	92	3/8"	.058"	288RNHD009	28-81-A292-PS
R3632892-4009TL	REPL SPRC.NOSE	28"(71.12cm)	92	3/8"	.063"	283RNDD009	28-81-A393-PS
R3632892-4009TL	REPL SPRC.NOSE	28"(71.12cm)	92	3/8"	.063"	283RNHD009	28-81-A392-PS
R3632892-4025TL	REPL SPRC.NOSE	28"(71.12cm)	92	3/8"	.063"	283RNDD025	28-42-A392-PS
R4633092-5031TL	REPL SPRC.NOSE	30"(76.20cm)	92	.404"	.063"	303RNFE031	30-07-B392-PS
R3583098-4025TL	REPL SPRC.NOSE	30"(76.20cm)	98	3/8"	.058"	308RNDD025	30-42-A298-PS
R3633098-4025TL	REPL SPRC.NOSE	30"(76.20cm)	98	3/8"	.063"	303RNDD025	30-42-A398-PS
R35032105-4025TL		32"(81.28cm)	105				
R35836114-4025TL	REPL SPRC.NOSE	36"(91.44cm)	114	3/8"	.058"	368RNDD025	36-42-A2114-PS
R36336114-4025TL	REPL SPRC.NOSE	36"(91.44cm)	114	3/8"	.063"	363RNDD025	36-42-A3114-PS
R35836115-4009TL	REPL SPRC.NOSE	36"(91.44cm)	115	3/8"	.058"	368RNDD009	36-81-A2115-PS
R36336115-4009TL	REPL SPRC.NOSE	36"(91.44cm)	115	3/8"	.063"	363RNDD009	36-81-A3115-PS
R36342135-4009TL		42"(106.68cm)	135	3/8"	.063"		
R36342135-4025TL		42"(106.68cm)	135	3/8"	.063"		
R36342135-5031TL		42"(106.68cm)	135	3/8"	.063"		
R36352172-5031TL		52"(132.08cm)	172	3/8"	.063"		

SOLID HARD NOSE BARS

are constructed from one solid piece of steel with Stellite™ alloy laser welded onto the tip.Solid nose bars are designed for dirty cutting conditions as they have no moving bearings to get clogged.These bars are also frequently used for bore cutting. HuiHuang Solid Hard Nose Bars are typically used by professional cutters because of their extreme strength and durability.

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
H46311540-1074TL		11.5"(29.21cm)	40	.404"	.063"		
H1501245-1041TL		12"(30.48cm)	45	3/8"LP	.050"		
H1581245-1041TL	HARD NOSE 1.33"	12"(30.48cm)	45	3/8"LP	.058"	128ATMA041	12-10-N245-PH
H3581352-4009TL	HARD NOSE 1.33"	13"(33.02cm)	52	3/8"	.058"	138ATMD009	13-81-A252-PH

Hard Nose Bars continued on page 53

SOLID HARD NOSE BARS (continued)

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
H3631352-4009TL	HARD NOSE 1.33"	13"(33.02cm)	52	3/8"	.063"	133ATMD009	13-81-A352-PH
H3581352-4025TL	HARD NOSE 1.33"	13"(33.02cm)	52	3/8"	.058"	138ATMD025	13-42-A252-PH
H3631352-4025TL	HARD NOSE 1.33"	13"(33.02cm)	52	3/8"	.063"	133ATMD025	13-42-4352-PH
H2631359-4009TL	HARD NOSE 1.33"	13"(33.02cm)	59	.325"	.063"	133ATMD009	13-81-K356-PH
H2581359-4025TL	HARD NOSE 1.33"	13"(33.02cm)	59	.325"	.058"	138ATMD025	13-42-K256-PH
H1581453-1041TL	HARD NOSE 1.33"	14"(35.56cm)	53	3/8"LP	.058"	148ATMA041	14-10-N253-PH
H3581556-4009TL	HARD NOSE 1.33"	15"(38.10cm)	56	3/8"	.058"	158ATMD009	15-81-A256-PH
H3631556-4009TL	HARD NOSE 1.33"	15"(38.10cm)	56	3/8"	.063"	153ATMD009	15-81-A356-PH
H3581556-4025TL	HARD NOSE 1.33"	15"(38.10cm)	56	3/8"	.058"	158ATMD025	15-42-A256-PH
H3631556-4025TL	HARD NOSE 1.33"	15"(38.10cm)	56	3/8"	.063"	153ATMD025	15-42-A356-PH
H3581556-11095TL	HARD NOSE 1.33"	15"(38.10cm)	56	3/8"	.068"	158ATMK095	15-01W-A256-PH
H3631556-11095TL	HARD NOSE 1.33"	15"(38.10cm)	56	3/8"	.063"	153ATMK095	15-01W-A356-PH
H2581564-11095TL	HARD NOSE 1.33"	15"(38.10cm)	64	.325"	.058"	158ATMK095	15-01W-K264-PH
H2631564-11095TL	HARD NOSE 1.33"	15"(38.10cm)	64	.325"	.063"	153ATMK095	15-01W-K364-PH
H1581655-1074TL	HARD NOSE 1.33"	16"(40.64cm)	55	3/8"LP	.058"	168ATMA074	16-26-N255-PH
H1501657-11095TL		16"(40.64cm)	57	3/8"LP	.050"		
H3581659-4176TL	HARD NOSE 1.33"	16"(40.64cm)	59	3/8"	.058"	168ATMD176	16-41-A259-PH
H3631659-4176TL	HARD NOSE 1.33"	16"(40.64cm)	59	3/8"	.063"	163ATMD176	16-41-A359-PH
H3581659-11095TL	HARD NOSE 1.33"	16"(40.64cm)	59	3/8"	.058"	168ATMK095	16-01W-A259-PH
H3631659-11095TL	HARD NOSE 1.33"	16"(40.64cm)	59	3/8"	.063"	163ATMK095	16-01W-A359-PH
H3581660-1074TL		16"(40.64cm)	60	3/8"	.068"		
H3581660-4009TL	HARD NOSE 1.33"	16"(40.64cm)	60	3/8"	.058"	168ATMD009	16-81-A260-PH
H3631660-4009TL	HARD NOSE 1.33"	16"(40.64cm)	60	3/8"	.063"	163ATMD009	16-81-A360-PH
H3581660-4025TL	HARD NOSE 1.33"	16"(40.64cm)	60	3/8"	.058"	168ATMD025	16-42-A360-PH
H3631660-4025TL	HARD NOSE 1.33"	16"(40.64cm)	60	3/8"	.063"	163ATMD025	16-42-4360-PH
H3581660-4176TL	HARD NOSE 1.33"	16"(40.64cm)	60	3/8"	.058"	168ATMD176	16-41-A260-PH
H3631660-4176TL	HARD NOSE 1.33"	16"(40.64cm)	60	3/8"	.063"	163ATMD176	16-41-A360-PH
H3581660-4196TL	HARD NOSE 1.33"	16"(40.64cm)	60	3/8"	.068"	168ATMD196	16-21-A260-PH
H3631660-4196TL	HARD NOSE 1.33"	16"(40.64cm)	60	3/8"	.063"	163ATMD196	16-21-A360-PH
H3501660-11095TL		16"(40.64cm)	60	3/8"	.050"		
H3581660-11095TL	HARD NOSE 1.33"	16"(40.64cm)	60	3/8"	.058"	168AT MK095	16-01W-058-PH
H3631660-11095TL	HARD NOSE 1.33"	16"(40.64cm)	60	3/8"	.063"	163ATMK095	16-01W-A360-PH
H2581662-1074TL		16"(40.64cm)	62	.325"	.068"		
H2581664-1041TL	HARD NOSE 1.33"	16"(40.64cm)	64	.325"	.058"	168ATMA041	16-10-K264-PH
H2631664-1041TL	HARD NOSE 1.33"	16"(40.64cm)	64	.325"	.063"	163ATMA041	16-10-K364-PH
H2581666-11095TL	HARD NOSE 1.33"	16"(40.64cm)	66	.325"	.058"	168ATMK095	16-01W-K266-PH
H2631666-11095TL	HARD NOSE 1.33"	16"(40.64cm)	66	.325"	.063"	163ATMK095	16-01W-K366-PH
H4631760-5099TL	HARD NOSE 1.33"	17"(43.18cm)	60	.404"	.063"	173ATME099	17-?-B360-PH
H4631761-5033TL	HARD NOSE 1.33"	17"(43.18cm)	61	.404"	.063"	173ATME033	

Hard Nose Bars continued on page 54

SOLID HARD NOSE BARS (continued)

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
H3581764-4009TL	HARD NOSE 1.33"	17"(43.18cm)	64	3/8"	.058"	178ATMD009	17-81-A264-PH
H3631764-4009TL	HARD NOSE 1.33"	17"(43.18cm)	64	3/8"	.063"	173ATMD009	17-81-A364-PH
H3581764-4025TL	HARD NOSE 1.33"	17"(43.18cm)	64	3/8"	.058"	178ATMD025	17-42-A264-PH
H3631764-4025TL	HARD NOSE 1.33"	17"(43.18cm)	64	3/8"	.063"	173ATMD025	17-42-A364-PH
H3681860-1074TL	HARD NOSE 1.33"	18"(45.72cm)	60	3/8"	.058"	188ATMA074	18-26-N260-PH
H3631860-1074TL		18"(45.72cm)	60	3/8"	.063"		
H3581864-4196TL	HARD NOSE 1.33"	18"(45.72cm)	64	3/8"	.058"	188ATMD196	18-21-A264-PH
H3631864-4196TL	HARD NOSE 1.33"	18"(45.72cm)	64	3/8"	.063"	183ATMD196	18-21-A364-PH
H3581864-11095TL	HARD NOSE 1.33"	18"(45.72cm)	64	3/8"	.058"	188ATMK095	18-01W-058-PH
H3631864-11095TL	HARD NOSE 1.33"	18"(45.72cm)	64	3/8"	.063"	183ATMK095	18-01W-A364-PH
H3581856-4025TL	HARD NOSE 1.33"	18"(45.72cm)	66	3/8"	.058"	188ATMD025	18-42-A266-PH
H3631866-4025TL	HARD NOSE 1.33"	18"(45.72cm)	66	3/8"	.063"	183LAMD025	18-42-A366-PH
H2581868-1074TL		18"(45.72cm)	68	.325"	.058"		
H3581868-4009TL	HARD NOSE 1.33"	18"(45.72cm)	68	3/8"	.058"	188ATMD009	18-81-A268-PH
H3631868-4009TL	HARD NOSE 1.33"	18"(45.72cm)	68	3/8"	.063"	183LAMD009	18-81-A368-PH
H3501868-11095TL		18"(45.72cm)	68	3/8"	.050"		
H3581868-11095TL	HARD NOSE 1.33"	18"(45.72cm)	68	3/8"	.058"	188ATMK095	18-01W-058-PH
H3631868-11095TL	HARD NOSE 1.33"	18"(45.72cm)	68	3/8"	.063"	183ATMK095	18-01W-A364-PH
H2581872-11041TL	HARD NOSE 1.33"	18"(45.72cm)	72	.325"	.058"	188ATMK041	18-01W-K272-PH
H2631872-11041TL	HARD NOSE 1.33"	18"(45.72cm)	72	.325"	.063"	183ATMK041	18-10W-K372-PH
H2501872-11095TL		18"(45.72cm)	72	.325"	.050"		
H2631872-11095TL	HARD NOSE 1.33"	18"(45.72cm)	72	.325"	.063"	183ATMK095	18-01W-K372-PH
H2581874-4025TL	HARD NOSE 1.33"	18"(45.72cm)	74	.325"	.058"	188ATMD025	18-42-K274-PH
H2631874-4025TL	HARD NOSE 1.33"	18"(45.72cm)	74	.325"	.063"	183ATMD025	18-42-K374-PH
H4632065-4009TL	HARD NOSE 1.33"	20"(50.80cm)	65	.404"	.063"	203ATMD009	20-81-B365-PH
H3582070-1074TL	HARD NOSE 1.33"	20"(50.80cm)	70	3/8"	.068"	208ATMA074	20-26-N270-PH
H3502070-4176TL		20"(50.80cm)	70	3/8"	.050"		
H3582070-4176TL	HARD NOSE 1.33"	20"(50.80cm)	70	3/8"	.058"	208ATMD176	20-41-A270-PH
H3632070-4176TL	HARD NOSE 1.33"	20"(50.80cm)	70	3/8"	.063"	203ATMD176	20-41-A370-PH
H3582070-4196TL	HARD NOSE 1.33"	20"(50.80cm)	70	3/8"	.058"	208ATMD196	20-21-A270-PH
H3632070-4196TL	HARD NOSE 1.33"	20"(50.80cm)	70	3/8"	.063"	203ATMD196	20-21-A370-PH
H3582072-4009TL	HARD NOSE 1.33"	20"(50.80cm)	72	3/8"	.058"	208ATMD009	20-81-A272-PH
H3632072-4009TL	HARD NOSE 1.33"	20"(50.80cm)	72	3/8"	.063"	203ATMD009	20-81-A372-PH
H3632072-4024TL	HARD NOSE 1.33"	20"(50.80cm)	72	3/8"	.063"	203ATMD024	20-71-A372-PH
H3582072-4025TL	HARD NOSE 1.33"	20"(50.80cm)	72	3/8"	.058"	208ATMD025	20-42-A272-PH
H3632072-4025TL	HARD NOSE 1.33"	20"(50.80cm)	72	3/8"	.063"	203ATMD025	20-42-A372-PH
H3582072-4176TL	HARD NOSE 1.33"	20"(50.80cm)	72	3/8"	.058"	208ATMD176	20-41-A270-PH
H3632072-4176TL	HARD NOSE 1.33"	20"(50.80cm)	72	3/8"	.063"	203ATMD176	20-41-A372-PH
H3582072-11095TL	HARD NOSE 1.33"	20"(50.80cm)	72	3/8"	.058"	208ATMK095	20-01W-A272-PH

Hard Nose Bars continued on page 55

SOLID HARD NOSE BARS (continued)

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
H3632072-11095TL	HARD NOSE 1.33"	20"(50.80cm)	72	3/8"	.063"	203ATMK095	20-01W-A372-PH
H2582078-11041TL	HARD NOSE 1.33"	20"(50.80cm)	78	.325"	.058"	208ATMK041	20-10W-K278-PH
H2632078-11041TL	HARD NOSE 1.33"	20"(50.80cm)	78	.325"	.063"	203ATNK041	20-10W-K378-PH
H2682078-11095TL	HARD NOSE 1.33"	20"(50.80cm)	78	.325"	.058"	208ATMK095	20-01W-K278-PH
H2632078-11095TL	HARD NOSE 1.33"	20"(50.80cm)	78	.325"	.063"	203ATMK095	20-01W-K378-PH
H2582081-4025TL	HARD NOSE 1.33"	20"(50.80cm)	81	.325"	.058"	208ATMD025	20-42-K281-PH
H2632081-4025TL	HARD NOSE 1.33"	20"(50.80cm)	81	.325"	.063"	203ATMD025	20-42-K381-PH
H4632168-5031TL	HARD NOSE 1.33"	21"(53.34cm)	68	.404"	.063"	213ATME031	21-57-B368-PH
H3632172-2083TL	HARD NOSE 1.33"	21"(53.34cm)	72	3/8"	.063"	213ATMB083	21-?-A372-PH
H4632172-5099TL	HARD NOSE 1.33"	21"(53.34cm)	72	.404"	.063"	213ATME099	21-?-B372-PH
H4632268-4009TL	HARD NOSE 1.33"	22"(55.88cm)	68	.404"	.063"	223ATMD009	22-81-B368-PH
H3582276-4009TL	HARD NOSE 1.33"	22"(56.88cm)	76	3/8"	.068"	228ATMD009	22-81-A276-PH
H3632276-4009TL	HARD NOSE 1.33"	22"(55.88cm)	76	3/8"	.063"	223ATMD009	22-81-A376-PH
H3582276-4025TL	HARD NOSE 1.33"	22"(55.88cm)	76	3/8"	.058"	228ATMD025	22-42-A276-PH
H3632276-4025TL	HARD NOSE 1.33"	22"(55.88cm)	76	3/8"	.063"	223ATMD025	22-42-A376-PH
H3582276-11095TL	HARD NOSE 1.33"	22"(55.88cm)	76	3/8"	.058"	228ATMK095	22-01W-A276-PH
H4632372-4009TL	HARD NOSE 1.33"	23"(58.42cm)	72	.404"	.063"	223ATMD009	23-81-B372-PH
H3582380-4009TL	HARD NOSE 1.33"	23"(58.42cm)	80	3/8"	.058"	238ATMD009	23-81-A280-PH
H3632380-4009TL	HARD NOSE 1.33"	23"(58.42cm)	80	3/8"	.063"	233ATMD009	23-81-A380-PH
H3582380-4025TL	HARD NOSE 1.33"	23"(68.42cm)	80	3/8"	.068"	238ATMD025	23-42-A280-PH
H3632380-4025TL	HARD NOSE 1.33"	23"(58.42cm)	80	3/8"	.063"	233ATMD025	23-42-A380-PH
H4632476-4009TL	HARD NOSE 1.33"	24"(60.96cm)	76	.404"	.063"	243ATMD009	24-81-B376-PH
H4632480-5099TL		24"(60.96cm)	80	.404"	.063"		
H3502481-4176TL		24"(60.96cm)	81	3/8"	.050"		
H3582481-4176TL	HARD NOSE 1.33"	24"(60.96cm)	81	3/8"	.068"	248ATMD176	24-41-A281-PH
H3632481-4176TL	HARD NOSE 1.33"	24"(60.96cm)	81	3/8"	.063"	2434TMD176	24-41-A381-PH
H3582481-4196TL	HARD NOSE 1.33"	24"(60.96cm)	81	3/8"	.058"	248ATMD196	24-21-A281-PH
H3632481-4196TL	HARD NOSE 1.33"	24"(60.96cm)	81	3/8"	.063"	243ATMD196	24-21-A381-PH
H3582484-4009TL	HARD NOSE 1.33"	24"(60.96cm)	84	3/8"	.058"	248ATMD009	24-81-A284-PH
H3632484-4009TL	HARD NOSE 1.33"	24"(60.96cm)	84	3/8"	.063"	243ATMD009	24-81-A384-PH
H3582484-4025TL	HARD NOSE 1.33"	24"(60,96cm)	84	3/8"	.058"	248ATMD025	24-42-A284-PH
H3632484-4025TL	HARD NOSE 1.33"	24"(60.96cm)	84	3/8"	.063"	243ATMD025	24-42-A384-PH
H2582490-11095TL	HARD NOSE 1.33"	24"(60.96cm)	90	.325"	.058"	248AT MK095	24-01W-K290-PH
H2632490-11095TL	HARD NOSE 1.33"	24"(60.96cm)	90	.325"	.063"	243ATMK095	24-01W-K390-PH
H4632580-5031TL	HARD NOSE 1.33"	25"(63.50cm)	80	.404"	.063"	253ATME031	25-57-B380-PH
H4632584-5099TL	HARD NOSE 1.33"	25"(63.50cm)	84	.404"	.063"	253ATME099	25-7-B384-PH
H3632592-5099TL	HARD NOSE 1.33"	25"(63.50cm)	92	3/8"	.063"	253ATME099	25-7-A392-PH
H4632888-5099TL		28"(71.12cm)	88	.404"	.063"		
H3582891-4025TL	HARD NOSE 1.33"	28"(71.12cm)	91	3/8"	.058"	288ATMD025	28-42-A291-PH
H3582892-4009TL	HARD NOSE 1.33"	28"(71.12cm)	92	3/8"	.068"	288ATMD009	28-81-A292-PH

Hard Nose Bars continued on page 56

SOLID HARD NOSE BARS (continued)

PART NO.	BAR TYPE	BAR LENGTH	DRIVE LINKS	PITCH	GAUGE	OREGON PART NO.	CARLTON PART NO.
H3632892-4009TL	HARD NOSE 1.33"	28"(71.12cm)	92	3/8"	.063"	283ATMD009	28-81-A392-PH
H3632892-4025TL	HARD NOSE 1.33"	28"(71.12cm)	92	3/8"	.063"	283ATMD025	28-42-A392-PH
H3632893-4009TL	HARD NOSE 1.33"	28"(71.12cm)	93	3/8"	.063"	283ATMD009	28-81-A393-PH
H4633089-4025TL		28"(71.12cm)	89	.404"	.063"		
H4633089-4009TL	HARD NOSE 1.33"	30"(76.20cm)	89	.404"	.063"	303ATMD009	30-81-B389-PH
H4633092-5031TL	HARD NOSE 1.33"	30"(76.20cm)	92	.404"	.063"	303ATME031	30-55-B392-PH
H4633092-5099TL	HARD NOSE 1.33"	30"(76.20cm)	92	.404"	.063"	303ATME099	30-7-B392-PH
H3583097-4025TL		30"(76.20cm)	97	3/8"	.063"		
H3633097-4025TL	HARD NOSE 1.33"	30"(76.20cm)	97	3/8"	.063"	303ATMD025	30-42-A397-PH
H3583098-4025TL	HARD NOSE 1.33"	30"(76.20cm)	98	3/8"	.058"	308ATMD025	30-42-A298-PH
H36330100-6099TL	HARD NOSE 1.33"	30"(76.20cm)	100	3/8"	.063"	303ATME099	30-?-A3100-PH
H46334100-5099TL	HARD NOSE 1.33"	34"(86.36cm)	100	.404"	.063"	343ATME099	34-7-B3100-PH
H46336104-4025TL	HARD NOSE 1.33"	36"(91.44cm)	104	.404"	.063"	363ATMD025	36-42-B3104-PH
H46336104-5099TL	HARD NOSE 1.33"	36"(91.44cm)	104	.404"	.063"	363ATME099	36-?-83104-PH
H35836114-4025TL	HARD NOSE 1.33"	36"(91.44cm)	114	3/8"	.058"	358ATMD025	36-42-A2114-PH
H36336114-4025TL	HARD NOSE 1.33"	36"(91.44cm)	114	3/8"	.063"	363ATMD025	36-42-B3114-PH
H36336114-5099TL	HARD NOSE 1.33"	36"(91.44cm)	114	3/8"	.063"	363ATME099	36-A3114-PH
H35836115-4009TL	HARD NOSE 1.33"	36"(91.44cm)	115	3/8"	.058"	358ATMD009	36-81-A2115-PH
H36336115-4009TL	HARD NOSE 1.33"	36"(91.44cm)	115	3/8"	.063"	363ATMD009	36-81-A3115-PH

REPLACEMENT SPROCKET NOSES

are a replaceable sprocket nose tip that can be changed as it wears out without having to replace the entire bar.These tips are manufactured for high speed,heavy duty saws and are preferred by the professional and semi-professional cutter. They are made to fit all of our replacement sprocket nose bars.

PART NO.	PITCH	GAUGE	NUMBER OF TEETH	HUIHUANG PART NO.	PITCH	GAUGE	NUMBER OF TEETH
RN25010	.325"	.050"	10	RN36309	3/8"	.063"	9
RN25810	.325"	.058"	10	RN35011	3/8"	.050"	11
RN26310	.325"	.063"	10	RN35811	3/8"	.058"	11
RN25012	.325"	.050"	12	RN36311	3/8"	.063"	11
RN25812	.325"	.058"	12	RN45810	.404"	.058"	10
RN26312	.325"	.063"	12	RN46310	.404"	.063"	10
RN35009	3/8"	.050"	9	RNH8012	.404"	.080"	12
RN35809	3/8"	.058"	9	RNH8014	.404"	.080"	14

GUIDE BAR MOUNT APPLICATIONGS

1041 | MINI LAMINATE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
M1430629-1041TL/14329TL	1041	05"(15.24cm)	3/8"LP	.043"	29
M1500629-1041TL/15029TL	1041	06"(15.24cm)	3/8"LP	.050"	29
M1430833-1041TL/14333TL	1041	08"(20.32cm)	3/8"LP	.043"	33
M1500833-1041TL/15033TL	1041	08"(20.32cm)	3/8"LP	.050"	33
M1430836-1041TL/14336TL	1041	08"(20.32cm)	3/8"LP	.043"	36
M1431040-1041TL/14340TL	1041	10"(25.40cm)	3/8"LP	.043"	40
M1501040-1041TL/15040TL	1041	10"(25.40cm)	3/8"LP	.050"	40
M1431245-1041TL/14345TL	1041	12"(30.48cm)	3/8"LP	.043"	45
M1501245-1041TL/15045TL	1041	12"(30.48cm)	3/8"LP	.050"	45
M1431452-1041TL/14352TL	1041	14"(35.56cm)	3/8"LP	.043"	52
M1501452-1041TL/15052TL	1041	14"(35.56cm)	3/8"LP	.050"	52
M1431656-1041TL/14356TL	1041	16"(40.64cm)	3/8"LP	.043"	56
M1501656-1041TL/15056TL	1041	16"(40.64cm)	3/8"LP	.050"	56
M1501657-1041TL/15057TL	1041	16"(40.64cm)	3/8"LP	.050"	57
M1501862-1041TL/15062TL	1041	18"(45.72cm)	3/8"LP	.050"	62





1061 | MINI LAMINATE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
M1501248-1061TL/15048TL	1061	12"(30.48cm)	3/8"LP	.050"	48
M1501453-1061TL/15053TL	1061	14"(35.56cm)	3/8"LP	.050"	53
M1501659-1061TL/15059TL	1061	16"(40.64cm)	3/8"LP	.050"	59

1074 | MINI LAMINATE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
M1431244-1074TL/14344TL	1074	12"(30.48cm)	3/8"LP	.043"	44
M1501244-1074TL/15044TL	1074	12"(30.48cm)	3/8"LP	.050"	44
M1431450-1074TL/14350TL	1074	14"(35.56cm)	3/8"LP	.043"	50
M1501450-1074TL/15050TL	1074	14"(35.56cm)	3/8"LP	.050"	50
M1501655-1074TL/15055TL	1074	16"(40.64cm)	3/8"LP	.050"	55
M1501861-1074TL/15061TL	1074	18"(45.72cm)	3/8"LP	.050"	61



1095 | MINI LAMINATE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
M1501245-1095TL/15045TL	1095	12"(30.48cm)	3/8"LP	.050"	45
M1431452-1095TL/14352TL	1095	14"(35.56cm)	3/8"LP	.043"	52
M1501452-1095TL/15052TL	1095	14"(35.56cm)	3/8"LP	.050"	52
M1501656-1095TL/15056TL	1095	16"(40.64cm)	3/8"LP	.050"	56
M1501852-1095TL/15062TL	1095	18"(45.72cm)	3/8"LP	.050"	62

11041 | MINI LAMINATE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
M1430629-11041TL/14329TL	11041	06"(15.24cm)	3/8"LP	.043"	29



1218 | MINI LAMINATE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
M1430833-1218TL/14333TL	1218	08"(20.32cm)	3/8"LP	.043"	33
M1431039-1218TL/14339TL	1218	10"(25.40cm)	3/8"LP	.043"	39
M1501039-1218TL/15039TL	1218	10"(25.40cm)	3/8"LP	.050"	39

1041 | LAMINATE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
L1501040-1041TL/15040TL	1041	10"(25.40cm)	3/8"LP	.050"	40
L1501245-1041TL/15045TL	1041	12"(30.48cm)	3/8"LP	.050"	45
L1501452-1041TL/15052TL	1041	14"(35.56cm)	3/8"LP	.050"	52
L1501656-1041TL/15056TL	1041	16"(40.64cm)	3/8"LP	.050"	56
L1501657-1041TL/15057TL	1041	16"(40.64cm)	3/8"LP	.050"	57
L1501862-1041TL/15062TL	1041	18"(45.72cm)	3/8"LP	.050"	62
L2502078-1041TL/25078TL	1041	20"(50.80cm)	.325"	.050"	78

1318 | MINI LAMINATE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
M1501039-1318TL/15039TL	1318	10"(25.40cm)	3/8"LP	.050"	39
M1501244-1318TL/15044TL	1318	12"(30.48cm)	3/8"LP	.050"	44
M1501449-1318TL/15049TL	1318	14"(35.56cm)	3/8"LP	.050"	49
M1501450-1318TL/15050TL	1318	14"(35.56cm)	3/8"LP	.050"	50
M1501654-1318TL/15054TL	1318	16"(40.64cm)	3/8"LP	.050"	54
M1501655-1318TL/15055TL	1318	16"(40.64cm)	3/8"LP	.050"	55
M1501860-1318TL/15060TL	1318	18"(45.72cm)	3/8"LP	.050"	60

1074 | LAMINATE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
L1501244-1074TL/15044TL	1074	12"(30.48cm)	3/8"LP	.050"	44
L1501450-1074TL/15050TL	1074	14"(35.56cm)	3/8"LP	.050"	50
L2501662-1074TL/25062TL	1074	16"(40.64cm)	.325"	.050"	62
L2631662-1074TL/26362TL	1074	16"(40.64cm)	.325"	.063"	62

4009 | LAMINATE



BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
L3581556-4009TL/35856TL	4009	15"(38.10cm)	3/8"	.058"	56
L3631556-4009TL/36356TL	4009	15"(38.10cm)	3/8"	.063"	56
L3501660-4009TL/35060TL	4009	16"(40.64cm)	3/8"	.050"	60
L3581660-4009TL/35860TL	4009	16"(40.64cm)	3/8"	.058"	60
L3501868-4009TL/35068TL	4009	18"(45.72cm)	3/8"	.050"	68
L3581868-4009TL/35868TL	4009	18"(45.72cm)	3/8"	.058"	68
L3631868-4009TL/36368TL	4009	18"(45.72cm)	3/8"	.063"	68
L3502072-4009TL/35072TL	4009	20"(50.80cm)	3/8"	.050"	72
L3582072-4009TL/35872TL	4009	20"(50.80cm)	3/8"	.058"	72
L3632072-4009TL/36372TL	4009	20"(50.80cm)	3/8"	.063"	72

4176 | LAMINATE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
L3501660-4176TL/35060TL	4176	16"(40.64cm)	3/8"	.050"	60
L3581660-4176TL/35860TL	4176	16"(40.64cm)	3/8"	.058"	60
L1501864-4176TL/15064TL	4176	18"(45.72cm)	3/8"LP	.050"	64
L3501864-4176TL/35064TL	4176	18"(45.72cm)	3/8"	.050"	64
L3501866-4176TL/35066TL	4176	18"(45.72cm)	3/8"	.050"	66
L3581866-4176TL/35866TL	4176	18"(45.72cm)	3/8"	.058"	66
L2501874-4176TL/25074TL	4176	18"(45.72cm)	.325"	.050"	74
L3502070-4176TL/35070TL	4176	20"(50.80cm)	3/8"	.050"	70
L3582070-4176TL/35870TL	4176	20"(50.80cm)	3/8"	.058"	70
L3632070-4176TL/36370TL	4176	20"(50.80cm)	3/8"	.063"	70

4025 | LAMINATE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
L3501556-4025TL/35056TL	4025	15"(38.10cm)	3/8"	.050"	56
L3581556-4025TL/35856TL	4025	15"(38.10cm)	3/8"	.058"	56
[2501562-4025TL/25062TL	4025	15"(38.10cm)	.325"	.050"	62
L2581562-4025TL/25862TL	4025	15"(38.10cm)	.325"	.058"	62
L2631562-4025TL/26362TL	4025	15"(38.10cm)	.325"	.063"	62
L3501660-4025TL/35060TL	4025	16"(40.64cm)	3/8"	.050"	60
[3581660-4025TL/35860TL	4025	16"(40.64cm)	3/8"	.058"	60
[3631660-4025TL/36360TL	4025	16"(40.64cm)	3/8"	.063"	60
[2501667-4025TL/25067TL	4025	16"(40.64cm)	.325"	.050"	67
L2581667-4025TL/25867TL	4025	16"(40.64cm)	.325"	.058"	67
L2631667-4025TL/26367TL	4025	16"(40.64cm)	.325"	.063"	67
L3501866-4025TL/35066TL	4025	18"(45.72cm)	3/8"	.050"	66
L3581866-4025TL/35866TL	4025	18"(45.72cm)	3/8"	.058"	66
L3631866-4025TL/36366TL	4025	18"(45.72cm)	3/8"	.063"	66
L2501874-4025TL/25074TL	4025	18"(45.72cm)	.325"	.050"	74
[2581874-4025TL/25874TL	4025	18"(45.72cm)	.325"	.058"	74
L2631874-4025TL/26374TL	4025	18"(45.72cm)	.325"	.063"	74
L3502072-4025TL/35072TL	4025	20"(50.80cm)	3/8"	.050"	72
L3582072-4025TL/35872TL	4025	20"(50.80cm)	3/8"	.058"	72
L3632072-4025TL/36372TL	4025	20"(50.80cm)	3/8"	.063"	72
L2582081-4025TL/25881TL	4025	20"(50.80cm)	.325"	.058"	81
L2632081-4025TL/26381TL	4025	20"(50.80cm)	.325"	.063"	81



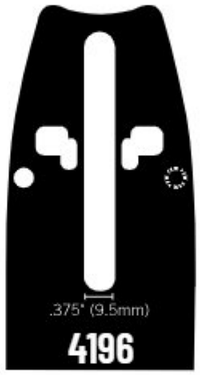

4196 | LAMINATE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
L3501659-4196TL/35059TL	4196	16"(40.64cm)	3/8"	.050"	59
L3581659-4196TL/35859TL	4196	16"(40.64cm)	3/8"	.058"	59

11041 | LAMINATE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
L2501564-11041TL/25064TL	11041	15"(38.10cm)	.325"	.050"	64
L2581564-11041TL/25864TL	11041	15"(38.10cm)	.325"	.058"	64
L2501666-11041TL/25066TL	11041	16"(40.64cm)	.325"	.050"	66
L2581666-11041TL/25866TL	11041	16"(40.64cm)	.325"	.058"	66
L2501872-11041TL/25072TL	11041	18"(45.72cm)	.325"	.050"	72
L2581872-11041TL/25872TL	11041	20"(50.80cm)	.325"	.058"	72
L2502078-11041TL/25078TL	11041	20"(50.80cm)	.325"	.050"	78
L2582078-11041TL/25878TL	11041	20"(50.80cm)	.325"	.058"	78

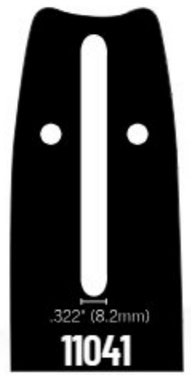

11095 | LAMINATE

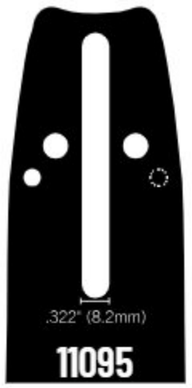

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
L2501356-11095TL/25056NKTL	11095	13"(33.02cm)	.325"	.050"	56
L2581356-11095TL/25856NKTL	11095	13"(33.02cm)	.325"	.058"	56
L1501452-11095TL/15052TL	11095	14"(35.56cm)	3/8"LP	.050"	52
L2501564-11095TL/25064NKTL	11095	15"(38.10cm)	.325"	.050"	64
L2581564-11095TL/25864TL	11095	15"(38.10cm)	.325"	.058"	64
L3501659-11095TL/35059TL	11095	16"(40.64cm)	3/8"	.050"	59
L3501660-11095TL/35060TL	11095	16"(40.64cm)	3/8"	.050"	60
L3581660-11095TL/35860TL	11095	16"(40.64cm)	3/8"	.058"	60
L2501666-11095TL/25066NKTL	11095	16"(40.64cm)	.325"	.050"	66
L2581666-11095TL/25866TL	11095	16"(40.64cm)	.325"	.058"	66
L3501864-11095TL/35064TL	11095	18"(45.72cm)	3/8"	.050"	64
L3581864-11095TL/35864TL	11095	18"(45.72cm)	3/8"	.058"	64
L2501872-11095TL/25072TL	11095	18"(45.72cm)	.325"	.050"	72
L2581872-11095TL/25872TL	11095	18"(45.72cm)	.325"	.058"	72
L2502078-11095TL/25078TL	11095	20"(50.80cm)	.325"	.050"	78
L2582078-11095TL/25878TL	11095	20"(50.80cm)	.325"	.058"	78

4009 | REPLACEABLE SPROCKET NOSE

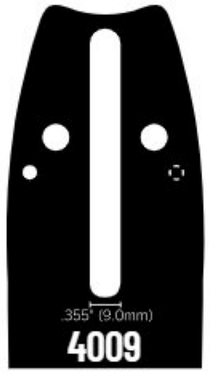

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
R3581352-4009TL/35852TL	4009	13"(33.02cm)	3/8"	.058"	52
R3631352-4009TL/36352TL	4009	13"(33.02cm)	3/8"	.063"	52
R2581359-4009TL/25859TL	4009	13"(33.02cm)	.325"	.058"	59
R2631359-4009TL/26359TL	4009	13"(33.02cm)	.325"	.063"	59
R3581556-4009TL/35856TL	4009	15"(38.10cm)	3/8"	.058"	56
R3631556-4009TL/36356TL	4009	15"(38.10cm)	3/8"	.063"	56
R3581660-4009TL/35860TL	4009	16"(40.64cm)	3/8"	.058"	60
R3631660-4009TL/36360TL	4009	16"(40.64cm)	3/8"	.063"	60
R3581764-4009TL/35864TL	4009	17"(43.18cm)	3/8"	.058"	64
R3631764-4009TL/36364TL	4009	17"(43.18cm)	3/8"	.063"	64
R3581868-4009TL/35868TL	4009	18"(45.72cm)	3/8"	.058"	68
R3631868-4009TL/36368TL	4009	18"(45.72cm)	3/8"	.063"	68
R4632065-4009TL/46365TL	4009	20"(50.80cm)	.404"	.063"	65
R3582072-4009TL/35872TL	4009	20"(50.80cm)	3/8"	.058"	72
R3632072-4009TL/36372TL	4009	20"(50.80cm)	3/8"	.063"	72
R3582276-4009TL/35876TL	4009	22"(50.80cm)	3/8"	.058"	76
R3632276-4009TL/36376TL	4009	22"(50.80cm)	3/8"	.063"	76
R3582380-4009TL/35880TL	4009	23"(58.42cm)	3/8"	.058"	80
R3632380-4009TL/36380TL	4009	23"(58.42cm)	3/8"	.063"	80
R4632476-4009TL/46376TL	4009	24"(60.96cm)	.404"	.063"	76
R3582484-4009TL/35884TL	4009	24"(60.96cm)	3/8"	.058"	84
R3632484-4009TL/36384TL	4009	24"(60.96cm)	3/8"	.063"	84
R3502892-4009TL/35092TL	4009	28"(71.12cm)	3/8"	.050"	92
R3582892-4009TL/35892TL	4009	28"(71.12cm)	3/8"	.058"	92
R3632892-4009TL/36392TL	4009	28"(71.12cm)	3/8"	.063"	92
R35836115-4009TL/358115TL	4009	36"(91.44cm)	3/8"	.058"	115
R36336115-4009TL/363115TL	4009	36"(91.44cm)	3/8"	.063"	115

4025 | REPLACEABLE SPROCKET NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
R3581352-4025TL/35852TL	4025	13"(33.02cm)	3/8"	.058"	52
R3631352-4025TL/36352TL	4025	13"(33.02cm)	3/8"	.063"	52
R2581359-4025TL/25859TL	4025	13"(33.02cm)	.325"	.058"	59
R2631359-4025TL/26359TL	4025	13"(33.02cm)	.325"	.063"	59
R3581556-4025TL/35856TL	4025	15"(38.10cm)	3/8"	.058"	56
R3631556 4025TL/36356TL	4025	15"(38.10cm)	3/8"	.063"	56
R3581660-4025TL/35860TL	4025	16"(40.64cm)	3/8"	.058"	60
R3631660-4025TL/36360TL	4025	16"(40.64crn)	3/8"	.063"	60
R3581764-4025TL/35864TL	4025	17"(43.18cm)	3/8"	.058"	64
R3631764-4025TL/36364TL	4025	17"(43.18cm)	3/8"	.063"	64
R3581866-4025TL/35866TL	4025	18"(45.72cm)	3/8"	.058"	66
R3631866-4025TL/36366TL	4025	18"(45.72cm)	3/8"	.063"	66
R2581874-4025TL/25874TL	4025	18"(45.72cm)	.325"	.058"	74
R2631874-4025TL/26374TL	4025	18"(45.72cm)	.325"	.063"	74
R3582072-4025TL/35872TL	4025	20"(50.80cm)	3/8"	.058"	72
R3632072-4025TL/36372TL	4025	20"(50.80cm)	3/8"	.063"	72
R2582081-4025TL/25881TL	4025	20"(50.80cm)	.325"	.058"	81
R2632081-4025TL/26381TL	4025	20"(50.80cm)	.325"	.063"	81
R3582276-4025TL/35876TL	4025	22"(55.88cm)	3/8"	.058"	76
R3632276-4025TL/36376TL	4025	22"(55.88cm)	3/8"	.063"	76
R3582380-4025TL/35880TL	4025	23"(58.42cm)	3/8"	.058"	80
R3632380-4025TL/36380TL	4025	23"(58.42cm)	3/8"	.063"	80
R3582484-4025TL/35884TL	4025	24"(60.96cm)	3/8"	.058"	84
R3632484-4025TL/36384TL	4025	24"(60.96cm)	3/8"	.063"	84
R3582891-4025TL/35891TL	4025	28"(71.12cm)	3/8"	.058"	91
R3632892-4025TL/36392TL	4025	28"(71.12cm)	3/8"	.063"	92
R3583098-4025TL/35898TL	4025	30"(76.20cm)	3/8"	.058"	98
R3633098-4025TL/36398TL	4025	30"(76.20cm)	3/8"	.063"	98
R35836114-4025TL/358114TL	4025	36"(91.44cm)	3/8"	.058"	114
R36336114-4025TL/363114TL	4025	36"(91.44cm)	3/8"	.063"	114

4176 | REPLACEABLE SPROCKET NOSE

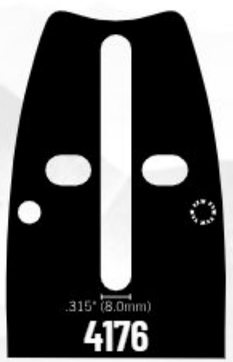

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
R3581660-4176TL/35860TL	4176	16"(40.64crn)	3/8"	.058"	60
R3631660-4176TL/36360TL	4176	16"(40.64crn)	3/8"	.063"	60
R3582070-4176TL/35870TL	4176	20"(50.80cm)	3/8"	.058"	70
R3632070 4176TL/36370TL	4176	20"(50.80cm)	3/8"	.063"	70
R3582072-4176TL/35872TL	4176	20"(50.80cm)	3/8"	.058"	72
R3632072-4176TL/36372TL	4176	20"(50.80cm)	3/8"	.063"	72
R2582481-4176TL/35881TL	4176	24"(60.96cm)	3/8"	.058"	81
R3692481-4176TL/36381TL	4176	24"(60.96cm)	3/8"	.063"	81

4196 | REPLACEABLE SPROCKET NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
R3581660-4196TL/35860TL	4196	16"(40.64cm)	3/8"	.058"	60
R3631660-4196TL/36360TL	4196	16"(40.64cm)	3/8"	.063"	60
R3582070-4196TL/35870TL	4196	20"(50.80cm)	3/8"	.058"	70
R3632070-4196TL/36370TL	4196	20"(50.80cm)	3/8"	.063"	70
R3582481-4196TL/35881TL	4196	24"(60.96cm)	3/8"	.058"	81
R3632481-4196TL/36381TL	4196	24"(60.96cm)	3/8"	.063"	81

5031 | REPLACEABLE SPROCKET NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
R4632168-5031TL/46368TL	5031	21"(53.34cm)	.404"	.063"	68
R4632580-5031TL/46380TL	5031	25"(63.50cm)	.404"	.063"	80
R4633092-5031TL/46392TL	5031	30"(76.20cm)	.404"	.063"	92

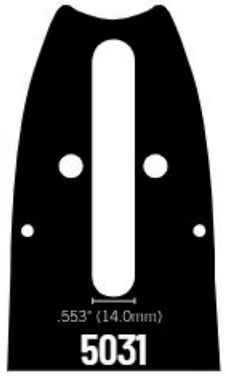

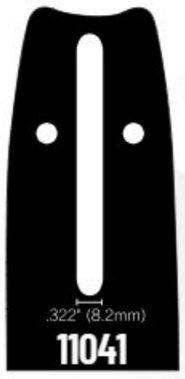

11041 | REPLACEABLE SPROCKET NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
R2581872-11041TL/25872TL	11041	18"(45.72cm)	.325"	.058"	72
R2631872-11041TL/26372TL	11041	18"(45.72cm)	.325"	.063"	72

11095 | REPLACEABLE SPROCKET NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
R3581556-11095TL/35856TL	11095	15"(38.10cm)	3/8"	.058"	56
R3631556-11095TL/36356TL	11095	15"(38.10cm)	3/8"	.063"	56
R2581564-11095TL/25864TL	11095	15"(38.10cm)	.325"	.058"	64
R2631564-11095TL/26364TL	11095	15"(38.10cm)	.325"	.063"	64
R3581659-11095TL/35859TL	11095	16"(40.64cm)	3/8"	.058"	59
R3631659-11095TL/36359TL	11095	16"(40.64cm)	3/8"	.063"	59
R2581666-11095TL/25866TL	11095	16"(40.64cm)	.325"	.058"	66
R2631666-10095TL/26366TL	11095	16"(40.64cm)	.325"	.063"	66
R3581868-11095TL/35868TL	11095	18"(45.72cm)	3/8"	.058"	68
R3631868-11095TL/36368TL	11095	18"(45.72cm)	3/8"	.063"	68
R2581872-11095TL/25872TL	11095	18"(45.72cm)	.325"	.058"	72
R2631872-11095TL/26372TL	11095	18"(45.72cm)	.325"	.063"	72
R3582072-11095TL/35872TL	11095	20"(50.80cm)	3/8"	.058"	72
R3632072-11095TL/36372TL	11095	20"(50.80cm)	3/8"	.063"	72
R2582078-11095TL/25878TL	11095	20"(50.80cm)	.325"	.058"	78
R2632078-11095TL/26378TL	11095	20"(50.80cm)	.325"	.063"	78
R2582490-11095TL/25890TL	11095	24"(60.96cm)	.325"	.058"	90
R2632490-11095TL/26390TL	11095	24"(60.96cm)	.325"	.063"	90

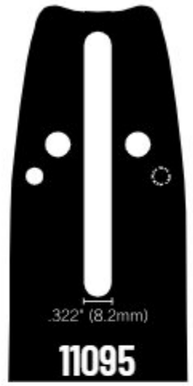

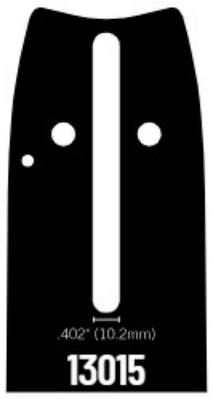

13015 | REPLACEABLE SPROCKET NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
R4632062-13015TL/46362TL	13015	20"(50.80cm)	.404"	.063"	62

1041 | SOLID HARD NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
H1581245-1041TL/15845TL	1041	12"(30.48cm)	3/8"LP	.058"	45
H1581453-1041TL/15853TL	1041	14"(35.56cm)	3/8"LP	.058"	53
H2581664-1041TL/25864TL	1041	16"(40.64cm)	.325"	.058"	64
H2631664-1041TL/26364TL	1041	16"(40.64cm)	.325"	.063"	64

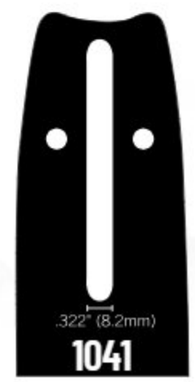

1074 | SOLID HARD NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
H1581655-1074TL/15855TL	1074	16"(40.64cm)	3/8"LP	.050"	55
H3581860-1074TL/35860TL	1074	18"(45.72cm)	3/8"	.058"	60
H3582070-1074TL/35870TL	1074	20"(50.80cm)	3/8"	.058"	70

2083 | SOLID HARD NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
H3632172-2083TL/36372TL	2083	21"(53.34cm)	3/8"	.063"	72

4024 | SOLID HARD NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
H3632072-4024TL / 36372TL	4024	20"(50.80cm)	3/8"	.063"	72

4009 | SOLID HARD NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
H3581352-4009TL/35852TL	4009	13"(33.02cm)	3/8"	.058"	52
H3631352-4009TL/36352TL	4009	13"(33.02cm)	3/8"	.063"	52
H2631359-4009TL/26359TL	4009	13"(33.02cm)	.325"	.063"	59
H3581556-4009TL/35856TL	4009	15"(38.10cm)	3/8"	.058"	56
H3631566-4009TL/36356TL	4009	15"(38.10cm)	3/8"	.063"	56
H3581660-4D09TL/35860TL	4009	16"(40.64cm)	3/8"	.058"	60
H3631660-4009TL/36360TL	4009	16"(40.64cm)	3/8"	.063"	60
H3581764-4009TL/35864TL	4009	17"(43.18cm)	3/8"	.058"	64
H3631764-4009TL/36364TL	4009	17"(43.18cm)	3/8"	.063"	64
H3581868-4009TL/35868TL	4009	18"(45.72cm)	3/8"	.058"	68
H3631868-4009TL/36368TL	4009	18"(45.72cm)	3/8"	.063"	68
H4632065-4009TL/46365TL	4009	20"(50.80cm)	.404"	.063"	65
H3582072-4009TL/35872TL	4009	20"(50.80cm)	3/8"	.058"	72
H3632072-4009TL/36372TL	4009	20"(50.80cm)	3/8"	.063"	72
H4632268-4009TL/46368TL	4009	22"(55.88cm)	.404"	.063"	68
H3582276-4009TL/35B76TL	4009	22"(55.88cm)	3/8"	.058"	76
H3632276-4009TL/36376TL	4009	22"(55.88cm)	3/8"	.063"	76
H4632372-4009TL/46372TL	4009	23"(58.42cm)	.404"	.063"	72
H3582380-4009TL/35880TL	4009	23"(58.42cm)	3/8"	.058"	80
H3632380-4009TL/38380TL	4009	23"(58.42cm)	3/8"	.063"	80
H4632476-4009TL/46376TL	4009	24"(60.96cm)	.404"	.063"	76
H3582484-4009TL/35884TL	4009	24"(60.96cm)	3/8"	.058"	84
H3632484-4009TL/36384TL	4009	24"(60.96cm)	3/8"	.063"	84
H3582892-4009TL/35892TL	4009	28"(71.12cm)	3/8"	.058"	92
H3632892-4009TL/36392TL	4009	28"(71.12cm)	3/8"	.063"	92
H3632893-4009TL/36393TL	4009	28"(71.12cm)	3/8"	.063"	93
H4633089-4009TL/46389TL	4009	30"(76.20cm)	.404"	.063"	89
H25836115-4009TL/358115TL	4009	36"(91.44cm)	3/8"	.058"	115
H36336115-4009TL/363115TL	4009	36"(91.44cm)	3/8"	.063"	115

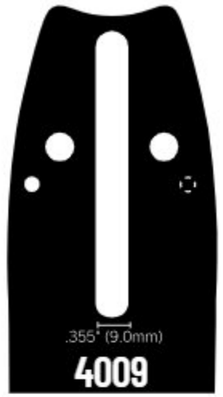

4176 | SOLID HARD NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
H3581659-4176TL/35859TL	4176	16"(40.64cm)	3/8"	.058"	59
H3631659-4176TL/36359TL	4176	16"(40.64cm)	3/8"	.063"	59
H3581660-4176TL/35860TL	4176	16"(40.64cm)	3/8"	.058"	60
H3631660-4176TL/36360TL	4176	16"(40.64cm)	3/8"	.063"	60
H3582070-4176TL/35870TL	4176	20"(50.80cm)	3/8"	.058"	70
H3632070-4176TL/36370TL	4176	20"(50.80cm)	3/8"	.063"	70
H3582072-4176TL/35872TL	4176	20"(50.80cm)	3/8"	.058"	72
H3632072-4176TL/36372TL	4176	20"(50.80cm)	3/8"	.063"	72
H3582481-4176TL/35881TL	4176	24"(60.96cm)	3/8"	.058"	81
H3632481-4176TL/36381TL	4176	24"(60.96cm)	3/8"	.063"	81

4025 | SOLID HARD NOSE

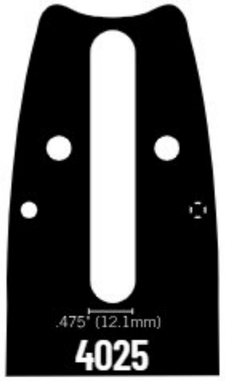

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
H3581352-4025TL/35852TL	4025	13"(33.02cm)	3/8"	.058"	52
H3631352-4025TL/36352TL	4025	13"(33.02cm)	3/8"	.063"	52
H2581359-4025TL/25859TL	4025	13"(33.02cm)	.325"	.058"	59
H3581556-4025TL/35856TL	4025	15"(38.10cm)	3/8"	.058"	56
H3631556-4025TL/36356TL	4025	15"(38.10cm)	3/8"	.063"	56
H3581660-4025TL/35860TL	4025	16"(40.64cm)	3/8"	.058"	60
H3631660-4025TL/36360TL	4025	16"(40.64cm)	3/8"	.063"	60
H3581764-4025TL/35864TL	4025	17"(43.18cm)	3/8"	.058"	64
H3631764-4025TL/36364TL	4025	17"(43.18cm)	3/8"	.063"	64
H3581866-4025TL/35866TL	4025	18"(45.72cm)	3/8"	.058"	66
H3631866-4025TL/36366TL	4025	18"(45.72cm)	3/8"	.063"	66
H2581874-4025TL/25874TL	4025	18"(45.72cm)	.325"	.058"	74
H2631874-4025TL/26374TL	4025	18"(45.72cm)	.325"	.063"	74
H3582072-4025TL/35872TL	4025	20"(50.80cm)	3/8"	.058"	72
H3632072-4025TL/36372TL	4025	20"(50.80cm)	3/8"	.063"	72
H2582081-4025TL/25881TL	4025	20"(50.80cm)	.325"	.058"	81
H2632081-4025TL/26381TL	4025	20"(50.80cm)	.325"	.063"	81
H3582276-4025TL/35876TL	4025	22"(55.88cm)	3/8"	.058"	76
H3632276-4025TL/36376TL	4025	22"(55.88cm)	3/8"	.063"	76
H3582380-4025TL/35880TL	4025	23"(58.42cm)	3/8"	.058"	80
H3632380-4025TL/36380TL	4025	23"(58.42cm)	3/8"	.063"	80
H3582484-4025TL/35884TL	4025	24"(60.96cm)	3/8"	.058"	84
H3632484-4025TL/36384TL	4025	24"(60.96cm)	3/8"	.063"	84
H3582891-4025TL/35891TL	4025	28"(71.12cm)	3/8"	.058"	91
H3632892-4025TL/36392TL	4025	28"(71.12cm)	3/8"	.063"	92
H3633097-4025TL/36397TL	4025	30"(76.20cm)	3/8"	.063"	97
H3583698-4025TL/35898TL	4025	36"(91.44cm)	3/8"	.058"	98
H46336104-4025TL/463104TL	4025	36"(91.44cm)	.404"	.063"	104
H35836114-4025TL/358114TL	4025	36"(91.44cm)	3/8"	.058"	114
H36336114-4025TL/363114TL	4025	36"(91.44cm)	3/8"	.063"	114

4196 | SOLID HARD NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
H3581660-4196TL/35860TL	4196	16"(40.64cm)	3/8"	.058"	60
H3631660-4196TL/36360TL	4196	16"(40.64cm)	3/8"	.063"	60
H3581864-4196TL/35864TL	4196	18"(45.72cm)	3/8"	.058"	64
H3631864-4196TL/36364TL	4196	18"(45.72cm)	3/8"	.063"	64
H3582070-4196TL/35870TL	4196	20"(50.80cm)	3/8"	.058"	70
H3632070-4196TL/36370TL	4196	20"(50.80cm)	3/8"	.063"	70
H3582481-4196TL/35881TL	4196	24"(60.96cm)	3/8"	.058"	81
H3632481-4196TL/36381TL	4196	24"(60.96cm)	3/8"	.063"	81

5031 | SOLID HARD NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
H4632168-5031TL/46368TL	5031	21"(53.34cm)	.404"	.063"	68
H4632580-5031TL/46380TL	5031	25"(63.50cm)	.404"	.063"	80
H4633092-5031TL/46392TL	5031	30"(76.20cm)	.404"	.063"	92

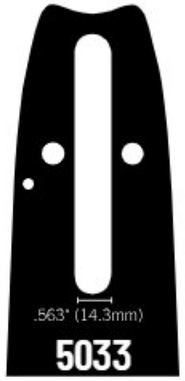

5033 | SOLID HARD NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
H4631761-5033TL/46361TL	5033	17"(43.18cm)	.404"	.063"	61

5099 | SOLID HARD NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
H4631760-5099TL/46360TL	5099	17"(43.18cm)	.404"	.063"	60
H4632172-5099TL/46372TL	5099	21"(53.34cm)	.404"	.063"	72
H4632584-5099TL/46384TL	5099	25"(63.50cm)	.404"	.063"	84
H3632592-5099TL/36392TL	5099	25"(63.50cm)	3/8"	.063"	92
H4633092-5099TL/46392TL	5099	30"(76.20cm)	.404"	.063"	92
H36330100-5099TL/363100TL	5099	30"(76.20cm)	3/8"	.063"	100
H46334100-5099TL/463100TL	5099	34"(86.36cm)	.404"	.063"	100
H46336104-5099TL/463104TL	5099	36"(91.44cm)	.404"	.063"	104
H36336114-5099TL/363114TL	5099	36"(91.44cm)	3/8"	.063"	114

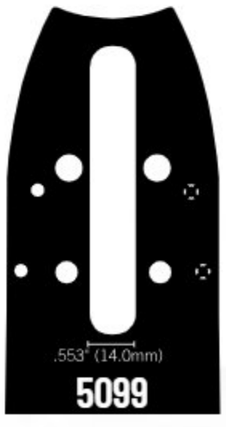

11041 | SOLID HARD NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
H2581872-11041TL/25872TL	11041	18"(45.72cm)	.325"	.058"	72
H2631872-11041TL/26372TL	11041	18"(45.72cm)	.325"	.063"	72
H2582078-11041TL/25878TL	11041	20"(50.80cm)	.325"	.058"	78
H2632078-11041TL/26378TL	11041	20"(50.80cm)	.325"	.063"	78

11095 | SOLID HARD NOSE

BAR NUMBER/CHAIN	MOUNT	LENGTH	PITCH	GAUGE	DRIVE LINKS
H3581556-11095TL/ 35856TL	11095	15"(38.10cm)	3/8"	.058"	56
H3631556-11095TL / 36356TL	11095	15"(38.10cm)	3/8"	.063"	56
H2581564-11095TL/ 25864TL	11095	15"(38.10cm)	.325"	.058"	64
H2631564-11095TL / 26364TL	11095	15"(38.10cm)	.325"	.063"	64
H3581659-11095TL / 35859TL	11095	16"(40.64cm)	3/8"	.058"	59
H3631659-11095TL / 36359TL	11095	16"(40.64cm)	3/8"	.063"	59
H3581660-11095TL / 35860TL	11095	16"(40.64cm)	3/8"	.058"	60
H3631660-11095TL / 36360TL	11095	16"(40.64cm)	3/8"	.063"	60
H2581666-11095TL/ 25866TL	11095	16"(40.64cm)	.325"	.058"	66
H2631666-11095TL/ 26366TL	11095	16"(40.64cm)	.325"	.063"	66
H3581864-11095TL / 35864TL	11095	18"(45.72cm)	3/8"	.058"	64
H3631864-11095TL / 36364TL	11095	18"(45.72cm)	3/8"	.063"	64
H3581868-11095TL/ 35868TL	11095	18"(45.72cm)	3/8"	.058"	68
H3631868-11095TL / 36368TL	11095	18"(45.72cm)	3/8"	.063"	68
H2631872-11095TL / 26372TL	11095	18"(45.72cm)	.325"	.063"	72
H3582072-11095TL / 35872TL	11095	20"(50.80cm)	3/8"	.058"	72
H3632072-11095TL/ 36372TL	11095	20"(50.80cm)	3/8"	.063"	72
H2582078-11095TL/ 25878TL	11095	20"(50.80cm)	.325"	.058"	78
H2632078-11095TL/ 26378TL	11095	20"(50.80cm)	.325"	.063"	78
H3582276-11095TL /35876TL	11095	22"(55.88cm)	3/8"	.058"	76
H2582490-11095TL / 25890TL	11095	24"(60.96cm)	.325"	.058"	90
H2632490-11095TL/ 26390TL	11095	24"(60.96cm)	.325"	.063"	90

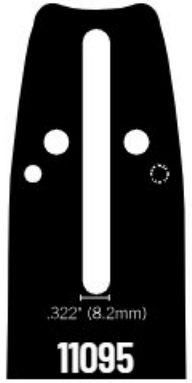

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

BLACK & DECKER

MODELS:PP2018,CSC818,LH1600,LOG HOG

8"(20.32cm)	33	3/8"LP NK	.043"(1,1mm)	CL14333TL	M1430833-1218TL			

CORONA

MODELS:CLIPPER POLE SAW

10"(25.40cm)	40	3/8"LP	.050"(1,3mm)	CL15040TL	M1501040-1218TL			

DOLMAR

MODELS:109,110,111,115,115I,PS-460,PS-510,PS-540,PS-5100S,PS-5105,PS-5105H

13"(33.02cm)	56	.325" NK	.050"(1,3mm)	CL25056NKTL		L2501356-11095TL		
13"(33.02cm)	56	.325"	.058"(1,5mm)	CL25856TL		L2581356-11095TL		
15"(38.10cm)	64	.325" NK	.050"(1,3mm)	CL25064NKTL		L2501564-11095TL		
15"(38.10cm)	64	.325"	.058"(1,5mm)	CL25864TL		L2581564-11095TL	R2581564-11095TL	H2581564-11095TL
16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL		L2581666-11095TL	R2581666-11095TL	H2581666-11095TL
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL		L2581872-11095TL	R2581872-11095TL	
20"(50.80cm)	78	.325"	.058"(1,5mm)	CL25878TL			R2582078-11095TL	H2582078-11095TL

MODELS:100,101,102,103,104,105,108,ES-161,ES-171,ES-173A,PS-34,PS-45,PS-340,PS-341,PS-350,PS-400,PS-401,PS-420,PS-3300TH,PS-3410TH

12"(30.48cm)	45	3/8"LP NK	.043"(1,1mm)	CL14345NKTL	M1431245-1041TL			
12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL			
14"(35.56cm)	52	3/8"LP NK	.043"(1,1mm)	CL14352NKTL	M1431452-1041TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL			
16"(40.64cm)	56	3/8"LP NK	.043"(1,1mm)	CL14356NKTL	M1431656-1041TL			
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL			
18"(45.72cm)	62	3/8"LP	.050"(1,3mm)	CL15062TL	M1501862-1041TL			

MODELS:PS-351,PS-421

12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL			
15"(38.10cm)	64	3/8"LP NK	.050"(1,3mm)	CL25064NKTL		L2501564-11041TL		
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL			
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072NKTL		L2501872-11041TL		

DOLMAR continued on page 73

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

DOLMAR (CONT.)

MODELS:110,111,112,113,114,115,116,116SI,117,118,119,PS-460,PS-510,PS450,PS-5100S,PS-5105,PS-6000I

16"(40.64cm)	59	3/8"	.050"(1,3mm)	CL35059TL		L3501659-11095TL		
16"(40.64cm)	59	3/8"	.058"(1,5mm)	CL35859TL			R3581659-11095TL	H3581659-11095TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-11095TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-11095TL		H3581660-11095TL
18"(45.72cm)	64	3/8"	.050"(1,3mm)	CL35064TL		L3501864-11095TL		
18"(45.72cm)	64	3/8"	.058"(1,5mm)	CL35864TL		L3581864-11095TL		H3581864-11095TL
18"(45.72cm)	68	3/8"	.058"(1,5mm)	CL35868TL			R3581868-11095TL	H3581868-11095TL
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL			R3582072-11095TL	H3582072-11095TL

MODELS:120,120 SUPER,120SI,PS-6800I

16"(40.64cm)	59	3/8"	.050"(1,3mm)	CL35059TL		L3501659-11095TL		
16"(40.64cm)	59	3/8"	.058"(1,5mm)	CL35859TL			R3581659-11095TL	H3581659-11095TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-11095TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-11095TL	R3581660-11095TL	H3581660-11095TL
18"(45.72cm)	64	3/8"	.050"(1,3mm)	CL35064TL		L3501864-11095TL		
18"(45.72cm)	64	3/8"	.058"(1,5mm)	CL35864TL		L3581864-11095TL		H3581864-11095TL
18"(45.72cm)	68	3/8"	.058"(1,5mm)	CL35868TL			R3581868-11095TL	H3581868-11095TL
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL			R3582072-11095TL	H3582072-11095TL

MODELS:PS-6400,PS-6400H,PS-6400W,PS-7300,PS-7300H,PS-7300W,PS-7900,PS-7900H,PS-7900W,PS-9000,PS-9010,PS-9010FL

16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4009TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-4009TL	R3581660-4009TL	H3581660-4009TL
18"(45.72cm)	68	3/8"	.050"(1,3mm)	CL35068TL		L3501868-4009TL		
18"(45.72cm)	68	3/8"	.058"(1,5mm)	CL35868TL		L3581868-4009TL	R3581868-4009TL	H3581868-4009TL
20"(50.80cm)	72	3/8"	.050"(1,3mm)	CL35072TL		L3502072-4009TL		
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL		L3582072-4009TL	R3582072-4009TL	H3582072-4009TL
20"(50.80cm)	72	3/8"	.063"(1,6mm)	CL36372TL		L3632072-4009TL	R3632072-4009TL	H3632072-4009TL
24"(60.96cm)	84	3/8"	.058"(1,5mm)	CL35884TL			R3582484-4009TL	H3582484-4009TL
24"(60.96cm)	84	3/8"	.063"(1,6mm)	CL36384TL			R3632484-4009TL	H3632484-4009TL
28"(71.12cm)	92	3/8"	.058"(1,5mm)	CL35892TL			R3582892-4009TL	H3582892-4009TL
28"(71.12cm)	92	3/8"	.063"(1,6mm)	CL36392TL			R3632892-4009TL	H3632892-4009TL
28"(71.12cm)	93	3/8"	.063"(1,6mm)	CL36393TL				H3632893-4009TL
36"(91.44cm)	115	3/8"	.058"(1,5mm)	CL358115TL			R35836115-4009TL	H35836115-4009TL
36"(91.44cm)	115	3/8"	.063"(1,6mm)	CL363115TL			R36336115-4009TL	H36336115-4009TL

MODELS:PS-9000,PS-9010,PS-9010FL

20"(50.80cm)	65	.404"	.063"(1,6mm)	CL46365TL			R4632065-4009TL	H4632065-4009TL

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

ECHO

MODELS:CS-280,CS-290,CS-300,CS-300EVL,CS-301,CS-302,CS-302S,CS-305,CS-306,CS-310,CS-315,CS-330EVL,CS-330T,CS-340,CS-341,CS-345, CS-346,CS-351,CS-330MX4,CS-352,CS-360,CS-360T,CS-370,CS-370T,CS-400,CS-3000,CS-3400,CS-3450,ECS-2000,ECS3000

12"(30.48cm)	45	3/8"LP NK	.043"(1,1mm)	CL14345NKTL	M1431245-1041TL			
12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL			
14"(35.56cm)	52	3/8"LP NK	.043"(1,1mm)	CL14352NKTL	M1431452-1041TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL			
16"(40.64cm)	56	3/8"LP NK	.043"(1,1mm)	CL14356NKTL	M1431656-1041TL			
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL			
16"(40.64cm)	57	3/8"LP	.050"(1,3mm)	CL15057TL	M1501657-1041TL			
18"(45.72cm)	62	3/8"LP	.050"(1,3mm)	CL15062TL	M1501862-1041TL			

MODELS:CS-271

10"(25.40cm)	40	3/8"LP	.050"(1,3mm)	CL15040TL	M1501040-1041TL			
12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL			

MODELS:CS-400EVL,CS-440,CS-440EVL,CS-510,CS-520,CS-3600,CS-3900,CS-4000,CS-4100,CS-4400,CS-4500,CS-4600,CS-5000

15"(38.10cm)	64	.325" NK	.050"(1,3mm)	CL25064NKTL		L2501564-11041TL		
16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11041TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11041TL		
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11041TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11041TL		
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L2502078-11041TL		

MODELS:CS-60,CS-60S,CS-451,CS 452,CS-CS-500,CS-501 EVL,CS510EVL,CS-550,CS-601,CS-602,CST-610,CS-610T,CS-706,CS-600P,CS-650,CS-660, CS-670,CS-680,CS-701,CS-702,CS-750,CS-6700,CS-8000

16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4176TL		
18"(45.72cm)	66	3/8"	.050"(1,3mm)	CL35066TL		L3501866-4176TL		
20"(50.80cm)	70	3/8"	.050"(1,3mm)	CL35070TL		L3502070-4176TL		

MODELS:CS-900,CS-1001

16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4196TL		

MODELS:POLE SAWS: PPT-280,PPF-280,PPT-265,PPT-265H,PPT-265S,PPT-266,PPT-266H,PPT-266S

10"(25.40cm)	40	3/8"LP NK	.043"(1,1mm)	CL14340TL	M1431040-1041TL			
10"(25.40cm)	40	3/8"LP	.050"(1,3mm)	CL15040TL	M1501040-1041TL			
12"(30.48cm)	45	3/8"LP NK	.043"(1,1mm)	CL14345TL	M1431245-1041TL			
12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL			
14"(35.56cm)	52	3/8"LP NK	.043"(1,1mm)	CL14352TL	M1431452-1041TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL			

ECHO continued on page 75

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

ECHO (CONT.)

MODELS:PPF-210,PPF-211,PPF-225,PPT-230,PPT-231,PPT-260,PPT-261,POWER PRUNER:PP300,PP400,PP600,PP800,PP1200,PP1250,PP1260, PP1400-D,PPF-2100,PPF-2400,PPSR-2122,PPSR-2433

10"(25.40cm)	39	3/8"LP NK	.043"(1,1mm)	CL14339TL	M1431039-1218TL			
10"(25.40cm)	39	3/8"LP	.050"(1,3mm)	CL15039TL	M1501039-1218TL			
12"(30.48cm)	45	3/8"LP NK	.043"(1,1mm)	CL14345TL	M1431245-1218TL			

EFCO

MODELS:1325,MT3500,MT3600,MT3700,MT3750,MT4000,MT4100

12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL			
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL			

MODELS:147,152

16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL		L2581666-11095TL	R2581666-11095TL	H2581666-11095TL
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL		L2581872-11095TL	R2581872-11095TL	
20"(50.80cm)	78	.325"	.058"(1,5mm)	CL25878TL			R2582078-11095TL	H2582078-11095TL

MODELS:156,165

16"(40.64cm)	59	3/8"	.058"(1,5mm)	CL35859TL			R3581659-11095TL	H3581659-11095TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-11095TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-11095TL		H3581660-11095TL
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL		L2581666-11095TL	R2581666-11095TL	H2581666-11095TL
18"(45.72cm)	64	3/8"	.058"(1,5mm)	CL35864TL		L3581864-11095TL		H3581864-11095TL
18"(45.72cm)	68	3/8"	.058"(1,5mm)	CL35868TL			R3581868-11095TL	H3581868-11095TL
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL		L2581872-11095TL	R2581872-11095TL	
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL			R3582072-11095TL	H3582072-11095TL
20"(50.80cm)	78	.325"	.058"(1,5mm)	CL35878TL			R2582078-11095TL	H2582078-11095TL

MODELS:181,MT7200,MT8200

20"(50.80cm)	72	3/8"	.050"(1,3mm)	CL35072TL		L3502072-4009TL		
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL		L3582072-4009TL	R3582072-4009TL	H3582072-4009TL
24"(60.96cm)	84	3/8"	.058"(1,5mm)	CL35884TL			R3582484-4009TL	H3582484-4009TL

NOTE: Low kickback requirements in the ANSI standard apply to saw models less than 3.8 cubic inches(62cc).
Low kickback performance requirements in tha ANSI standard do not apply to saws larger than 3.8 cubic inches.

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

FAIRMONT

MODELS:38568,43177,43178,HCS513,HCS516,HCS520,HPS513,LIMBLOPPER

13"(33.02cm)	56	.325" NK	.050"(1,3mm)	CL25056NKTL		L2501356-11095TL		
15"(38.10cm)	64	.325" NK	.050"(1,3mm)	CL25064NKTL		L2501564-11095TL		
15"(38.10cm)	64	.325"	.058"(1,5mm)	CL25864TL			R2581564-11095TL	H2581564-11095TL
16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL			R2581666-11095TL	H2581666-11095TL
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL			R2581872-11095TL	
20"(50.80cm)	78	.325"	.058"(1,5mm)	CL25878TL			R2582078-11095TL	H2582078-11095TL

MODELS:HCS816,HCS820,HCS824

16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-11095TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-10095TL		H3581660-11095TL
18"(45.72cm)	68	3/8"	.058"(1,5mm)	CL35868TL			R3581868-11095TL	H3581868-11095TL
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL			R3582072-11095TL	H3582072-11095TL

MODELS:H6200B

16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4176TL		

HOMELITE

MODELS:POWER PRUNERS:UT15520A,EXPAND-IT

10"(25.40cm)	40	3/8"LP NK	.043"(1,1mm)	CL14340TL	M1431040-1041TL			

MODELS: 25,27,4100,4500,4550,d4550b,i3850b,i4150b,i4550b,Super 240,Timberman,UT10518,UT10520,ZR10522,UT10526,UT10550,UT10552, UT10896,UT10910,UT10927A,UT10942A,UT10946A

16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11041TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11041TL		
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L2502078-11041TL		

MODELS:CS-40,CS-50,290

16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		

MODELS: 20,20AV,23,23AV,27,3300,3314,3316,3318,3350,3800,3850,4500,4550,CS-40,D3300,D3350B,D3850,I3350B,PS33,RANGER,UT10516, UT10517,UT10530,UT10530A,UT10540,ZR10540,UT10548,UT10560,ZR10560,UT10568,UT10564,UT10566,UT10580,ZR10580,UT10584,UT10586, UT10588,UT10901,UT10901A,UT10926,UT10947A,UT10947D,UT10947E,UT43100,UT43102,UT43103,UT43120,UT43122,Z3850

12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL			
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL			
18"(45.72cm)	62	3/8"LP	.050"(1,3mm)	CL15062TL	M1501862-1041TL			

HOMELITE continued on page 77

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

HOMELITE (CONT.)

MODELS: 180 Series,190,192,BANDIT,CLASSIC 192,ELECTRIC 200,240,240SL,245,LITTLE RED,LX-30,SUPER 2,SUPER 2CC,VI SUPER 2,XEL-14, XEL ELECTRIC,XL,XL2,XL-2CC,XL-10,XL-14,XL-16

12"(30.48cm)	48	3/8"LP	.050"(1,3mm)	CL15048TL	M1501248-1061TL			
14"(35.56cm)	53	3/8"LP	.050"(1,3mm)	CL15053TL	M1501453-1061TL			
16"(40.64cm)	59	3/8"LP	.050"(1,3mm)	CL15059TL	M1501659-1061TL			

MODELS:30,130,150,150A0,250,290,300,340,BIG RED,EZ250,MINI SL,SUPER EZ A0,XL-76,XL 100 Series

16"(40.64cm)	59	3/8"	.050"(1,3mm)	CL35059TL		L3501659-11095TL		

MODELS: 33SL,330,350,350HG,350SL,360,SUPER XL,SUPER XL-A0,XL-12,XL-15,400,410,450,460,540,550,650,700,75,800,850,900,922,933, SUPER XL 925,V-955,XL 400,XL 700 Series,XL 800 Series,XL 900 Series

16"(40.64cm)	59	3/8"	.050"(1,3mm)	CL35059TL		L3501659-4196TL		
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4196TL		

HUSQVARNA

MODELS:334T,335,335XPT,338XPT,1400,1600,316 ELECTRIC,T435

12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1095TL			
14"(35.56cm)	52	3/8"LP NK	.043"(1,1mm)	CL14352TL	M1431452-1095TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1095TL			
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1095TL			

MODELS:POLE PRUNERS:325P5X,326P4,P27P4,327P5X

12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1095TL			

MODELS: 33,44,45,49,50,51,55,55 RANCHER,57,133,154,234,238,242,246,254,257,261,262,336,340,345,346,350,351,353,242XP,254XP,262XP,339XP, 346XP,346XP E-TECH,346XPG,353 E-TECH,353G E-TECH,357XP,359,359 E-TECH,360,435,435E,440E,444,445,445E,450,450E,455,455E RANCHER, 455 RANCHER,460,460 RANCHER,466,545,550XP,550XPG

13"(33.02cm)	56	.325" NK	.050"(1,3mm)	CL25056NKTL		L2501356-11095TL		
15"(38.10cm)	64	.325" NK	.050"(1,3mm)	CL25064NKTL		L2501564-11095TL		
15"(38.10cm)	64	.325"	.058"(1,5mm)	CL25864TL		L2581564-11095TL	R2581564-11095TL	
16"(40.64cm)	59	3/8"	.050"(1,3mm)	CL35059TL		L3501659-11095TL		
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-11095TL		
16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL		L2581666-11095TL	R2581666-11095TL	
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL		L2581872-11095TL	R2581872-11095TL	
20"(50.80cm)	78	.325"	.058"(1,5mm)	CL25878TL			R2582078-11095TL	

HUSQVARNA continued on page 78

NOTE: Low kickback requirements in the ANSI standard apply to saw models less than 3.8 cubic inches(62cc).

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

HUSQVARNA (CONT.)

MODELS:23,36,41,136,137,141,142,235,235E,240,240E,243,249

12"(30.48cm)	45	3/8"LP NK	.043"(1,1mm)	CL14345TL	M1431245-1041TL			
12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL			
14"(35.56cm)	52	3/8"LP NK	.043"(1,1mm)	CL14352TL	M1431452-1041TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL			
16"(40.64cm)	56	3/8"LP NK	.043"(1,1mm)	CL14356TL	M1431656-1041TL			
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL			
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11041TL		
18"(45.72cm)	62	3/8"LP	.050"(1,3mm)	CL15062TL	M1501862-1041TL			
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11041TL		
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L2502078-11041TL		

MODELS:61,160,162,260

13"(33.02cm)	52	3/8"	.058"(1,5mm)	CL35852TL			R3581352-4009TL	H3581352-4009TL
15"(38.10cm)	56	3/8"	.058"(1,5mm)	CL35856TL		L3581556-4009TL	R3581556-4009TL	H3581556-4009TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4009TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-4009TL	R3581660-4009TL	H3581660-4009TL
18"(45.72cm)	68	3/8"	.050"(1,3mm)	CL35068TL		L3501868-4009TL		
18"(45.72cm)	68	3/8"	.058"(1,5mm)	CL35868TL		L3581868-4009TL	R3581868-4009TL	H3581868-4009TL
20"(50.80cm)	72	3/8"	.050"(1,3mm)	CL35072TL		L3502072-4009TL		
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL		L3582072-4009TL	R3582072-4009TL	H3582072-4009TL
20"(50.80cm)	72	3/8"	.063"(1,6mm)	CL36372TL		L3632072-4009TL	R3632072-4009TL	H3632072-4009TL
24"(60.96cm)	84	3/8"	.058"(1,5mm)	CL35884TL			R3582484-4009TL	H3582484-4009TL
24"(60.96cm)	84	3/8"	.063"(1,6mm)	CL36384TL			R3632484-4009TL	H3632484-4009TL
28"(71.12cm)	92	3/8"	.058"(1,5mm)	CL35892TL			R3582892-4009TL	H3582892-4009TL

MODELS:362,362XP

13"(33.02cm)	56	.325" NK	.050"(1,3mm)	CL25056NKTL		L2501356-11095TL		
15"(38.10cm)	64	.325" NK	.050"(1,3mm)	CL25064NKTL		L2501564-11095TL		
15"(38.10cm)	64	.325"	.058"(1,5mm)	CL25864TL		L2581564-11095TL		H2581564-11095TL
16"(40.64cm)	59	3/8"	.050"(1,3mm)	CL35059TL		L3501659-11095TL		
16"(40.64cm)	59	3/8"	.058"(1,5mm)	CL35859TL		L3581659-11095TL	R3581659-11095TL	H3581659-11095TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-11095TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-11095TL		H3581660-11095TL
16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL		L2581666-11095TL	R2581666-11095TL	H2581666-11095TL
18"(45.72cm)	64	3/8"	.058"(1,5mm)	CL35864TL		L3581864-11095TL		H3581864-11095TL
18"(45.72cm)	68	3/8"	.058"(1,5mm)	CL35868TL			R3581868-11095TL	H3581868-11095TL
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL		L2581872-11095TL	R2581872-11095TL	
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL			R3582072-11095TL	H3582072-11095TL
20"(50.80cm)	76	3/8"	.058"(1,5mm)	CL35876TL				H3582076-11095TL
22"(55.88cm)	78	.325"	.058"(1,5mm)	CL25878TL			R2582278-11095TL	H2582278-11095TL

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

HUSQVARNA (CONT.)

MODELS: L Series,65,66,70,77,181,185,266,268,272,281,285,288XP,LITE,298,365,371,372XP,372XPW,380,385,385XPG,385XPW,390XP,390XPG,390XPW, 394,394XP,395,395XP,395XPG,395XPW,480,562XP,562XPG,570,575XP,575XPG,575XPW,576XP,576XP AUTO TUNE,576XPG,576XPW,1100,2100,2101, 3120,3120XP,JUNGLE 3120

13"(33.02cm)	52	3/8"	.058(1,5mm)	CL35852TL			R3581352-4009TL	H3581352-4009TL
15"(38.10cm)	56	3/8"	.058"(1,5mm)	CL35856TL		L3581556-4009TL	R3581556-4009TL	H3581556-4009TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4009TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-4009TL	R3581660-4009TL	H3581660-4009TL
18"(45.72cm)	68	.3/8"	.050(1,3mm)	CL35068TL		L3501868-4009TL		
18"(45.72cm)	68	3/8"	.058(1,5mm)	CL35868TL		L3581868-4009TL	R3581868-4009TL	H3581868-4009TL
20"(50.80cm)	72	3/8"	.050"(1,3mm)	CL35072TL		L3502072-4009TL		
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL		L3582072-4009TL	R3582072-4009TL	H3582072-4009TL
20"(50.80cm)	72	3/8"	.063(1,6mm)	CL36372TL		L3632072-4009TL	R3632072-4009TL	H3632072-4009TL
24"(60.96cm)	84	3/8"	.058"(1,5mm)	CL35884TL			R3582484-4009TL	H3582484-4009TL
24"(60.96cm)	84	3/8"	.063'(1,6mm)	CL36384TL			R3632484-4009TL	H3632484-4009TL
28"(71.12cm)	92	3/8"	.058(1,5mm)	CL35892TL			R3582892-4009TL	H3582892-4009TL
28"(71.12cm)	92	3/8"	.063(1,6mm)	CL36392TL			R3632892-4009TL	H3632892-4009TL
28"(71.12cm)	93	3/8"	.063"(1,6mm)	CL36393TL				H3632893-4009TL
36"(91.44cm)	115	3/8"	.058(1,5mm)	CL358115TL			R35836115-4009TL	H35836115-4009TL
36"(91.44cm)	115	3/8"	.063"(1,6mm)	CL363115TL			R36336115-4009TL	H36336115-4009TL

NOTE: Low kickback requirements in the ANSI standard apply to saw models less than 3.8 cubic inches (62cc).
Low kickback performance requirements in the ANSI standard do not apply to saws larger than 3.8 cubic inches.

JOHN DEERE

MODELS: Quic-tatch Pruner PS2383,PS2683,PSA10

10"(25.40cm)	40	3/8"LP	.043"(1,1mm)	CL14340TL	M1431040-1041TL			

MODELS:25EV,28,28V,30,30V,35,35EV,40V,200CS,230CS,CS36,CS36LE,CS40,CS40V,J3816

10"(25.40cm)	40	3/8"LP NK	.043"(1,1mm)	CL14340TL	M1431040-1041TL			
10"(25.40cm)	40	3/8"LP	.050"(1,3mm)	CL15040TL	M1501040-1041TL			
12"(30.48cm)	45	3/8"LP NK	.043"(1,1mm)	CL14345TL	M1431245-1041TL			
12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL			
14"(35.56cm)	52	3/8"LP NK	.043"(1,1mm)	CL14352TL	M1431452-1041TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL			
16"(40.64cm)	56	3/8"LP NK	.043"(1,1mm)	CL14356TL	M1431656-1041TL			
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL			
18"(45.72cm)	62	3/8"LP	.050"(1,3mm)	CL15062TL	M1501862-1041TL			

MODELS:45EV,76EV,450V,300CS,350CS,46EV

16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11041TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11041TL		
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L2502078-11041TL		

JOHN DEERE continued on page 80

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

JOHN DEERE (CONT.)

MODELS: CS-46,CS-52,CS-56,CS-62

16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		

MODELS: 50AV,50V,51SV,55EV,55V,55SV,550CS,60V,65,65EV,65SV,66SV,80EV,800V

16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4176TL		
18"(45.72cm)	66	3/8"	.050"(1,3mm)	CL35066TL		L3501866-4176TL		
20"(50.80cm)	70	3/8"	.050"(1,3mm)	CL35070TL		L3502070-4176TL		

MODELS: CS62

16"(40.64cm)	59	3/8"	.050"(1,3mm)	CL35059TL		L3501659-11095TL		
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-11095TL		
18"(45.72cm)	64	3/8"	.050"(1,3mm)	CL35064TL		L3501864-11095TL		

JONSERED

MODELS: 2014,2016,2035,2036,2036 TURBO,2041,2045,2137,2138,CS2135,CS2137,CS2138,CS2152W,CS2283S

12"(30.48cm)	45	3/8"LP NK	.043"(1,1mm)	CL14345TL	M1431245-1041TL			
12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL			
14"(35.56cm)	52	3/8"LP NK	.043"(1,1mm)	CL14352TL	M1431452-1041TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL			
16"(40.64cm)	56	3/8"LP NK	.043"(1,1mm)	CL14356TL	M1431656-1041TL			
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL			

MODELS: 2050,2050 TURBO,2051,2054,2149,2149 TURBO,370,410,450,425,435,45,450,451,455,49,50,51,510,52,521,525,535,CS2145,CS2149 TURBO,CS2150,CS2152W,CS2153,CS2156,CS2159,CS2159C,CS2159WH,CS2163,CS2245,CS2250,CS2250S,CS2255

13"(33.02cm)	56	.325" NK	.050"(1,3mm)	CL25056NKTL		L2501356-11095TL		
15"(38.10cm)	64	.325" NK	.050"(1,3mm)	CL25064NKTL		L2501564-11095TL		
15"(38.10cm)	64	.325"	.058"(1,5mm)	CL25864TL		L2581564-11095TL	R2581564-11095TL	
16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL		L2581666-11095TL	R2581666-11095TL	
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL		L2581872-11095TL	R2581872-11095TL	
20"(50.80cm)	78	.325"	.058"(1,5mm)	CL25878TL			R2582078-11095TL	

JONSERED continued on page 81

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

JONSERED (CONT.)

MODELS: 2014,2016,2035,2036,2036 TURBO,2041,2045,2137,2138,CS2135,CS2137,CS2138,CS2152W,CS2283S

15"(38.10cm)	64	.325" NK	.050"(1,3mm)	CL25064NKTL		L2501564-11041TL		
16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11041TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11041TL		
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL		L2581666-11041TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL			R2581872-11041TL	H2581872-11041TL
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L2502078-11041TL		

MODELS: 490,520SP,525,535,590,2050,2055,2063,CS-2149,CS-2050,CS-2050 TURBO,CS-2054,CS-2156,CS-2159,CS-2159C,CS-2159CWH,CS-2156WH,2163,CS-2163,CS-2163WH,CS-2255

16"(40.64cm)	59	3/8"	.058"(1,5mm)	CL35859TL		L3581659-11095TL	R3581659-11095TL	H3581659-11095TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-11095TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-11095TL		H3581660-11095TL
18"(45.72cm)	64	3/8"	.050"(1,3mm)	CL35064TL		L3501864-11095TL		
18"(45.72cm)	64	3/8"	.058"(1,5mm)	CL35864TL		L3581864-11095TL		H3581864-11095TL
18"(45.72cm)	68	3/8"	.058"(1,5mm)	CL35868TL			R3581868-11095TL	H3581868-11095TL
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL			R3582072-11095TL	H3582072-11095TL
22"(55.88cm)	76	3/8"	.058"(1,5mm)	CL35876TL				H3582276-11095TL

MODELS: 625,630,630 SUPER,630 WEST COAST,2065,2071,2165,2171,CS-2165,CS-2171,CS-217WH,CS-2186,CS2186WH,CS-2188

13"(33.02cm)	52	3/8"	.058"(1,5mm)	CL35852TL			R3581352-4009TL	H3581352-4009TL
15"(38.10cm)	56	3/8"	.058"(1,5mm)	CL35856TL		L3581556-4009TL	R3581556-4009TL	H3581556-4009TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4009TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-4009TL	R3581660-4009TL	H3581660-4009TL
18"(45.72cm)	68	3/8"	.050"(1,3mm)	CL35068TL		L3501868-4009TL		
18"(45.72cm)	68	3/8"	.058"(1,5mm)	CL35868TL		L3581868-4009TL	R3581868-4009TL	H3581868-4009TL
20"(50.80cm)	72	3/8"	.050"(1,3mm)	CL35072TL		L3502072-4009TL		
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL		L3582072-4009TL	R3582072-4009TL	H3582072-4009TL
24"(60.96cm)	84	3/8"	.058"(1,5mm)	CL35884TL			R3582484-4009TL	H3582484-4009TL
28"(71.12cm)	92	3/8"	.058"(1,5mm)	CL35892TL			R3632484-4009TL	H3582892-4009TL
36"(91.44cm)	115	3/8"	.058"(1,5mm)	CL358115TL			R3582892-4009TL	H35836115-4009TL

MODELS: 60,61,62,621,2350

16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3501659-4196TL	R3581659-4196TL	
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL			R3582070-4196TL	
24"(60.96cm)	81	3/8"	.058"(1,5mm)	CL35881TL			R3582481-4196TL	

JONSERED continued on page 82

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

JONSERED (CONT.)

MODELS:670,670 WEST COAST,2083,2083II,2094,2095

13"(33.02cm)	52	3/8"	.058"(1,5mm)	CL35852TL			R3581352-4009TL	
15"(38.10cm)	56	3/8"	.058"(1,5mm)	CL35856TL		L3581556-4009TL	R3581556-4009TL	H3581556-4009TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4009TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-4009TL	R3581660-4009TL	H3581660-4009TL
18"(45.72cm)	68	3/8"	.050"(1,3mm)	CL35068TL		L3501868-4009TL		
18"(45.72cm)	68	3/8"	.058"(1,5mm)	CL35868TL		L3581868-4009TL	R3581868-4009TL	H3581868-4009TL
20"(50.80cm)	72	3/8"	.050"(1,3mm)	CL35072TL		L3502072-4009TL		
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL		L3582072-4009TL	R3582072-4009TL	H3582072-4009TL
20"(50.80cm)	72	3/8"	.063"(1,6mm)	CL36372TL		L3632072-4009TL	R3632072-4009TL	H3632072-4009TL
24"(60.69cm)	84	3/8"	.058"(1,5mm)	CL35884TL			R3582484-4009TL	H3582484-4009TL
24"(60.69cm)	84	3/8"	.063"(1,6mm)	CL36384TL			R3632484-4009TL	H3632484-4009TL
28"(71.12cm)	92	3/8"	.058"(1,5mm)	CL35892TL			R3582892-4009TL	H3582892-4009TL
28"(71.12cm)	92	3/8"	.063"(1,6mm)	CL36392TL			R3632892-4009TL	H3632892-4009TL
28"(71.12cm)	93	3/8"	.058"(1,5mm)	CL35893TL				H3582893-4009TL
28"(71.12cm)	93	3/8"	.063"(1,6mm)	CL36393TL				H3632893-4009TL
36"(91.44cm)	115	3/8"	.058"(1,5mm)	CL358115TL			R35836115-4009TL	H35836115-4009TL
36"(91.44cm)	115	3/8"	.063"(1,6mm)	CL363115TL			R36336115-4009TL	H36336115-4009TL

MODELS:670,670 WEST COAST,2077,2083,2094,2095

20"(50.80cm)	65	.404"	.063"(1,6mm)	CL46365TL				H4632065-4009TL

MAKITA

MODELS:5012B,5014NB,5016NB,DCS 330S,DCS 330TH,DCS 34,DCS340,DCS 341,DCS 390,DCS 390S,DCS 400,DCS 401,DCS 3416,UC3030A,UC3500, UC40000,UC4030A

12"(30.48cm)	45	3/8"LP NK	.043"(1,1mm)	CL14345TL	M1431245-1041TL			
12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL	L1501245-1041TL		
14"(35.56cm)	52	3/8"LP NK	.043"(1,1mm)	CL14352TL	M1431452-1041TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL	L1501452-1041TL		
16"(40.64cm)	56	3/8"LP NK	.043"(1,1mm)	CL14356TL	M1431656-1041TL			
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL	L1501656-1041TL		
18"(45.72cm)	62	3/8"LP	.050"(1,3mm)	CL15062TL	M1501862-1041TL	L1501862-1041TL		

MAKITA continued on page 83

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

MAKITA (CONT.)

MODELS:DCS 460,DSC 510,DCS 430,DCS 431,DCS 5121,DCS 520i,DCS 540,DCS 5200i

13"(33.02cm)	56	.325" NK	.050"(1,3mm)	CL25056NKTL		L2501356-11095TL		
15"(38.10cm)	64	.325" NK	.058"(1,5mm)	CL25064NKTL		L2501564-11095TL		
15"(38.10cm)	64	.325"	.058"(1,5mm)	CL25864TL		L2581564-11095TL	R2581564-11095TL	H2581564-11095TL
16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL		L2581666-11095TL	R2581666-11095TL	H2581666-11095TL
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL		L2581872-11095TL	R2581872-11095TL	
20"(50.80cm)	78	.325"	.058"(1,5mm)	CL25878TL			R2582078-11095TL	H2582078-11095TL

MODELS:DCS 460,DSC 510,DCS 5121,DCS 520i,DCS 540,DCS 5200i,DCS 6000i

16"(40.64cm)	59	3/8"	.050"(1,3mm)	CL35059TL		L3501659-11095TL		
16"(40.64cm)	59	3/8"	.058"(1,5mm)	CL35859TL				H3501659-11095TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-11095TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-11095TL		H3581660-11095TL
18"(45.72cm)	64	3/8"	.050"(1,3mm)	CL35064TL		L3501864-11095TL		
18"(45.72cm)	64	3/8"	.058"(1,5mm)	CL35864TL		L3581864-11095TL		H3581864-11095TL

MODELS:DCS 460,DSC 510,DCS 5121,DCS 520i,DCS 540,DCS 5200i,DCS 6000i

16"(40.64cm)	59	3/8"	.050"(1,3mm)	CL35059TL		L3501659-11095TL		
16"(40.64cm)	59	3/8"	.058"(1,5mm)	CL35859TL				H3501659-11095TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-11095TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-11095TL		H3581660-11095TL
18"(45.72cm)	64	3/8"	.050"(1,3mm)	CL35064TL		L3501864-11095TL		
18"(45.72cm)	64	3/8"	.058"(1,5mm)	CL35864TL		L3581864-11095TL		H3581864-11095TL

MODELS:670,670 WEST COAST,2083,2083II,2094,2095

13"(33.02cm)	52	3/8"	.058"(1,5mm)	CL35852TL			R3581352-4009TL	H3581352-4009TL
15"(38.10cm)	56	3/8"	.058"(1,5mm)	CL35856TL		L3581556-4009TL	R3581556-4009TL	H3581556-4009TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4009TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-4009TL	R3581660-4009TL	H3581660-4009TL
18"(45.72cm)	68	3/8"	.050"(1,3mm)	CL35068TL		L3501868-4009TL		
18"(45.72cm)	68	3/8"	.058"(1,5mm)	CL35868TL		L3581868-4009TL	R3581868-4009TL	H3581868-4009TL
20"(50.80cm)	72	3/8"	.050"(1,3mm)	CL35072TL		L3502072-4009TL		
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL		L3582072-4009TL	R3582072-4009TL	H3582072-4009TL
20"(50.80cm)	72	3/8"	.063"(1,6mm)	CL36372TL		L3632072-4009TL	R3632072-4009TL	H3632072-4009TL
24"(60.96cm)	84	3/8"	.058"(1,5mm)	CL35884TL			R3582484-4009TL	H3582484-4009TL
24"(60.96cm)	84	3/8"	.063"(1,6mm)	CL36384TL			R3632484-4009TL	H3632484-4009TL
28"(71.12cm)	92	3/8"	.058"(1,5mm)	CL35892TL			R3582892-4009TL	H3582892-4009TL
28"(71.12cm)	92	3/8"	.063"(1,6mm)	CL36392TL			R3632892-4009TL	H3632892-4009TL
28"(71.12cm)	93	3/8"	.063"(1,6mm)	CL36393TL				H3632893-4009TL
36"(91.44cm)	115	3/8"	.058"(1,5mm)	CL358115TL			R35836115-4009TL	
36"(91.44cm)	115	3/8"	.063"(1,6mm)	CL363115TL				H35836115-4009TL

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

MAKITA (CONT.)

MODELS:DCS 9000,DCS 9010FL

20"(50.80cm)	65	3/8"LP	.063"(1,6mm)	CL46365TL				H4632065-4009TL

MARUYAMA

MODELS:POLE SAWS:MC-PL10,MC-PS10

10"(25.40cm)	40	3/8"LP	.050"(1,3mm)	CL15040TL	M1501040-1218TL			

McCULLOCH

MODELS:12A,12S,EM12

12"(30.48cm)	44	3/8"LP	.050"(1,3mm)	CL15044TL	M1501244-1318TL			

MODELS:14A,14S,EM16

14"(35.56cm)	49	3/8"LP	.050"(1,3mm)	CL15049TL	M1501449-1318TL			
16"(40.64cm)	54	3/8"LP	.050"(1,3mm)	CL15054TL	M1501654-1318TL			
18"(45.72cm)	60	3/8"LP	.050"(1,3mm)	CL15060TL	M1501860-1318TL			

MODELS:MS1015,MS1015P,MCP1510 POLE SAW

10"(25.40cm)	39	3/8"LP	.050"(1,3mm)	CL15039TL	M1501039-1318TL			

MODELS:MS1630NT,MS1640NT

16"(40.64cm)	54	3/8"LP	.050"(1,3mm)	CL15054TL	M1501654-1318TL			
16"(40.64cm)	55	3/8"LP	.050"(1,3mm)	CL15055TL	M1501655-1318TL			

MODELS:EM 300S

14"(35.56cm)	50	3/8"LP	.050"(1,3mm)	CL15050TL	M1501450-1318TL			
16"(40.64cm)	55	3/8"LP	.050"(1,3mm)	CL15055TL	M1501655-1318TL			

MODELS: 2138,3215,3216,3514,3518,3816,3818AV,EAGER BEAVER,2010,2014,2016,2116,2318,EB 2.3,EB 6A,MACCAT 16,18,MC Series 110,115,120, 130,140,155,160S,165,175,310,320,340,355,365,375,430,435,440,445,510,515,MCC1514,MINI MAC,MS1415,MS1420,MS1430,MS1432,MS1435, MS1455,MS1625M,MS1625AV,MS1635NAV,MS1635NAVXX,MS1645,MS1838,MS1838AVCC,MS1838AV,MS1842AVC,MS1846AVCC,PM380,PM400, POWER MAC Series 6,145-14,225-16,PROMAC Series 3200,3205,3205-14,3210,3212,3214,3216,3219,3505,3800,3805,3818,3850, SILVER EAGLE Series 2010,2012,2012S,2014,2014S,2016,2018S,2316,SP-40,SUPER 16,SUPER 18,TITAN SERIES 35,36,37,38,39,40,WILDCAT

12"(30.48cm)	44	3/8"LP	.050"(1,3mm)	CL15044TL	M1501244-1318TL			
14"(35.56cm)	49	3/8"LP	.050"(1,3mm)	CL15049TL	M1501449-1318TL			
14"(35.56cm)	50	3/8"LP	.050"(1,3mm)	CL15050TL	M1501450-1318TL			
16"(40.64cm)	54	3/8"LP	.050"(1,3mm)	CL15054TL	M1501654-1318TL			
16"(40.64cm)	55	3/8"LP	.050"(1,3mm)	CL15055TL	M1501655-1318TL			
18"(45.72cm)	60	3/8"LP	.050"(1,3mm)	CL15060TL	M1501860-1318TL			

McCULLOCH continued on page 85

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

McCULLOCH (CONT.)

MODELS:25EV,28,28V,30,30V,35,35EV,40V,200CS,230CS,CS36,CS36LE,CS40,CS40V,J3816

10"(25.40cm)	39	3/8"LP	.050"(1,3mm)	CL15039TL	M1501039-1318TL			
12"(30.48cm)	44	3/8"LP	.050"(1,3mm)	CL15044TL	M1501244-1318TL			
14"(35.56cm)	49	3/8"LP	.050"(1,3mm)	CL15049TL	M1501449-1318TL			
14"(35.56cm)	50	3/8"LP	.050"(1,3mm)	CL15050TL	M1501450-1318TL			
16"(40.64cm)	54	3/8"LP	.050"(1,3mm)	CL15054TL	M1501654-1318TL			
16"(40.64cm)	55	3/8"LP	.050"(1,3mm)	CL15055TL	M1501655-1318TL			
18"(45.72cm)	60	3/8"LP	.050"(1,3mm)	CL15060TL	M1501860-1318TL			

MODELS:PM380,PM400

16"(40.64cm)	54	3/8"LP	.050"(1,3mm)	CL15054TL	M1501654-1318TL			
16"(40.64cm)	55	3/8"LP	.050"(1,3mm)	CL15055TL	M1501655-1318TL			
18"(45.72cm)	60	3/8"LP	.050"(1,3mm)	CL15060TL	M1501860-1318TL			

MODELS:EB428,MS1434,MS1436,MS1636,MS1639NAVCC,MS1839,MS1842AVCC

14"(35.56cm)	49	3/8"LP	.050"(1,3mm)	CL15049TL	M1501449-1095TL			
16"(40.64cm)	54	3/8"LP	.050"(1,3mm)	CL15054TL	M1501654-1095TL			
18"(45.72cm)	60	3/8"LP	.050"(1,3mm)	CL15060TL	M1501860-1095TL			

MODELS:EB356A,EB358,MAC CAT 438,MC3516,MC4218AV,MC1435A,MC1635A,MCC1840B,MP406,MS354A,MXC1840D,MXC1840DK,MS4016P,MS4018P

16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL			
18"(45.72cm)	62	3/8"LP	.050"(1,3mm)	CL15062TL	M1501862-1041TL			

MODELS:5012B,5014NB,5016NB,DCS 330S,DCS 330TH,DCS 34,DCS340,DCS 341,DCS 390,DCS 390S,DCS 400,DCS 401,DCS 3416,UC3030A,UC3500,UC 40000,UC4030A

16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL		L2581666-11095TL	R258166-11095TL	H258166-11095TL
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL		L2581872-11095TL	R2581872-11095TL	
20"(50.80cm)	78	.325"	.058"(1,5mm)	CL25878TL			R2582078-11095TL	H2582078-11095TL

MODELS: 1-10,2-10,3-10,4-10,5-10,6-10,7-10,10-10,10-10A,55,PROMAC 55,60,555,560,570,605,610,620,650,655,700,800,805,850,1000,CP70,CP70L, DOUBLE EAGLE 50,DOUBLE EAGLE 80,EAGER BEAVER 3.7,PM605,PROMAC 5700,PROMAC 8200,SP60,SP70,SP80,SP81,SILVER EAGLE 3420,SILVER EAGLE 3720,TIMBER BEAR,TITAN 50,TITAN 57,TITAN 70

16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4176TL		
18"(45.72cm)	64	3/8"	.050"(1,3mm)	CL35064TL		L3501660-4176TL		
20"(50.80cm)	70	3/8"	.050"(1,3mm)	CL35070TL		L3502070-4176TL		

McCULLOCH continued on page 86

NOTE: Low kickback requirements in the ANSI standard apply to saw models less than 3.8 cubic inches(62cc).
Low kickback performance requirements in tha ANSI standard do not apply to saws larger than 3.8 cubic inches.

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

McCULLOCH (CONT.)

MODELS:7-10,560,610,620,650,655,700,800,805,850,1000,CP70,CP70L,DOUBLE EAGLE 80,PROMAC 8200,SP70,SP80,SP81,TITAN 70

16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4176TL		
18"(45.72cm)	64	3/8"	.050"(1,3mm)	CL35064TL		L3581864-4176TL		
18"(45.72cm)	66	3/8"	.050"(1,3mm)	CL35066TL		L3501866-4176TL		
20"(50.80cm)	70	3/8"	.050"(1,3mm)	CL35070TL		L3502070-4176TL		

OLYMPYK / OLEO-MAC

MODELS:EM 300S

14"(35.56cm)	50	3/8"LP	.050"(1,3mm)	CL15050TL	M1501450-1318TL			
16"(40.64cm)	55	3/8"LP	.050"(1,3mm)	CL15055TL	M1501655-1318TL			

MODELS:1325,MT3500,MT3600,MT3700,MT3750,MT4000,MT4100

16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL		L2581666-11095TL	R2581666-11095TL	H2581666-11095TL
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL250NK72TL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL		L2581872-11095TL	R2581872-11095TL	
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L2582078-11095TL		
20"(50.80cm)	78	.325"	.058"(1,5mm)	CL25878TL		L2582078-11095TL	R2582078-11095TL	H2582078-11095TL

MODELS:250,250A,251,252,254,260,261,264,355,460A,SUPER,272,280,284,461,480A SUPER,481,970,980,SUPER 482

10"(25.40cm)	40	3/8"LP	.050"(1,3mm)	CL35059TL		L3501659-4196TL		

MODELS:999

21"(53.34cm)	68	.404"	.063"(1,6mm)	CL46368TL			R4632168-5031TL	H4632168-5031TL
25"(63.50cm)	80	.404"	.063"(1,6mm)	CL46380TL			R4632580-5031TL	H4632580-5031TL

PARTNER

MODELS:365

14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL			

MODELS:410,510,540

13"(33.02cm)	56	.325" NK	.050"(1,3mm)	CL25056NKTL		L2501356-11095TL		
16"(38.10cm)	64	.325" NK	.050"(1,3mm)	CL25064NKTL		M2501564-11095TL		

PARTNER continued on page 87

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

PARTNER (CONT.)

MODELS:P-360,P-400,P-450,P-500,P-5000

13"(33.02cm)	56	.325" NK	.050"(1,3mm)	CL25056NKTL		L2501356-11095TL		
15"(38.10cm)	64	.325" NK	.050"(1,3mm)	CL25064NKTL		L2501564-11095TL		
15"(38.10cm)	64	.325"	.058"(1,5mm)	CL25864TL		L2581564-11095TL	R2581564-11095TL	H2581564-11095TL
16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL		L2581666-11095TL	R2581666-11095TL	H2581666-11095TL
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL		L2581872-11095TL	R2581872-11095TL	
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L2582078-11095TL		
20"(50.80cm)	78	.325"	.058"(1,5mm)	CL25878TL		L2582078-11095TL	R2582078-11095TL	H2582078-11095TL

MODELS:550,650,1655,2055,7000,P-55,P-65,P-70,P-85,R-11,R-12,R-14,R-16,R-17,R-18,R-19,R-20,R-21,R-22,R-23,R-30,R-35,R-40,R-416,R-420,R-421, S-50,S-55,S-65

13"(33.02cm)	52	3/8"	.058"(1,5mm)	CL35852TL			R3581352-4009TL	H3581352-4009TL
15"(38.10cm)	56	3/8"	.058"(1,5mm)	CL35856TL		L3581556-4009TL	R3581556-4009TL	H3581556-4009TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4009TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-4009TL	R3581660-4009TL	H3581660-4009TL
18"(45.72cm)	68	3/8"	.050"(1,3mm)	CL35068TL		L3501868-4009TL		
18"(45.72cm)	68	3/8"	.058"(1,5mm)	CL35868TL		L3581868-4009TL	R3581868-4009TL	H3581868-4009TL
20"(50.80cm)	72	3/8"	.050"(1,3mm)	CL35072TL		L3502072-4009TL		
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL		L3582072-4009TL	R3582072-4009TL	H3582072-4009TL
20"(50.80cm)	72	3/8"	.063"(1,6mm)	CL36372TL		L3632072-4009TL	R3632072-4009TL	H3632072-4009TL

PIONEER

MODELS:970,1072,1073,1074,P20,P21,P25,P26,P28,P28S

13"(33.02cm)	56	.325" NK	.050"(1,3mm)	CL25056NKTL		L2501356-11095TL		
15"(38.10cm)	64	.325" NK	.050"(1,3mm)	CL25064NKTL		L2501564-11095TL		
15"(38.10cm)	64	.325"	.058"(1,5mm)	CL25864TL		L2581564-11095TL	R2581564-11095TL	H2581564-11095TL
16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL		L2581666-11095TL	R2581666-11095TL	H2581666-11095TL
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL		L2581872-11095TL	R2581872-11095TL	
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L2502078-11095TL		
20"(50.80cm)	78	.325"	.058"(1,5mm)	CL25878TL		L2582078-11095TL	R2582078-11095TL	H2582078-11095TL

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

POULAN

MODELS:POLE SAWS:446T,PP445,PP258TPPP5000P

8"(20.32cm)	33	3/8"LP NK	.043"(1,1mm)	CL14333TL	M1430833-1041TL			
10"(25.40cm)	40	3/8"LP NK	.043"(1,1mm)	CL14340TL	M1431040-1041TL			

MODELS:ES 300 (ELECTRIC),ES 350

8"(20.32cm)	33	3/8"LP NK	.043"(1,1mm)	CL14333TL	M1430833-1041TL			
10"(25.40cm)	40	3/8"LP NK	.043"(1,1mm)	CL14340TL	M1431040-1041TL			
16"(40.64cm)	56	3/8"LP NK	.043"(1,1mm)	CL14356TL	M1431656-1041TL			

MODELS:38568,43177,43178,HCS513,HCS516,HCS520,HPS513,LIMBLOPPER

10"(25.40cm)	39	3/8"LP	.050"(1,3mm)	CL15039TL	M1501039-1318TL			
12"(30.48cm)	44	3/8"LP	.050"(1,3mm)	CL15044TL	M1501244-1318TL			
14"(35.56cm)	49	3/8"LP	.050"(1,3mm)	CL15049TL	M1501449-1318TL			
14"(35.56cm)	50	3/8"LP	.050"(1,3mm)	CL15050TL	M1501450-1318TL			
16"(40.64cm)	54	3/8"LP	.050"(1,3mm)	CL15054TL	M1501654-1318TL			
16"(40.64cm)	55	3/8"LP	.050"(1,3mm)	CL15055TL	M1501655-1318TL			
18"(45.72cm)	60	3/8"LP	.050"(1,3mm)	CL15060TL	M1501860-1318TL			

MODELS: 25A,180,190,200,205,210,220,221,222,225,230,235,236,240,250,255,260,262,400E,1220,1630,1634,1800,1838,1900,1900LE,1950,1950LE, 1975,1975LE,2000,2025,2055LE,2075,2075C,2150,2155,2160,2175,2250,2250LE,2300,2350,2375,2375LE,2450,2550,2550LE,2555,3314,3314WS, 3314WSA,3416,3516,3516PR,3516AVX,3816,3816AV,3818,4018,4018WT,4218,4218AV,4218AVX,E14E,E16E,ES350,ES400,MICRO 25,S23,S25,S25AV, S25CVA,S25D,S25DA,S35,ELECTRIC MODELS 1420,1425,1625,2100,2400,2500,2600,PRO 440E,PATRIOT 1900,PP3516AVX,WILDTHING,WOODSHARK

10"(25.40cm)	40	3/8"LP NK	.043" (1,1mm)	CL14340TL	M1431040-1041TL			
10"(25.40cm)	40	3/8"LP	.050" (1,3mm)	CL15040TL	M1501040-1041TL	L1501040-1041TL		
12"(30.48cm)	45	3/8"LP NK	.043" (1,1mm)	CL14345TL	M1431245-1041TL			
12"(30.48cm)	45	3/8"LP	.050" (1,3mm)	CL15045TL	M1501245-1041TL	L1501245-1041TL		
14"(35.56cm)	52	3/8"LP NK	.043" (1,1mm)	CL14352TL	M1431452-1041TL			
14"(35.56cm)	52	3/8"LP	.050" (1,3mm)	CL15052TL	M1501452-1041TL	L1501452-1041TL		
16"(40.64cm)	56	3/8"LP	.050" (1,3mm)	CL15056TL	M1501656-1041TL	L1501656-1041TL		
18"(45.72cm)	62	3/8"LP	.050" (1,3mm)	CL15062TL	M1501862-1041TL	L1501862-1041TL		

MODELS:255,285,295,305,306SA,310,335 PREDATOR,336,2700,2750,2775,2800,2900 FARM HAND,3000,3050,3100,3300,4600,4620,4620AV,4620AVX

13"(33.02cm)	56	.325" NK	.050"(1,3mm)	CL25056NKTL		L3501659-11095TL		
15"(38.10cm)	64	.325" NK	.050"(1,3mm)	CL25064NKTL				
16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L3501660-11095TL		
16"(40.64cm)	68	.325"	.050"(1,3mm)	CL25066TL		L3581660-11095TL		
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L3581864-11095TL		

POULAN continued on page 89

NOTE: Low kickback requirements in the ANSI standard apply to saw models less than 3.8 cubic inches(62cc).
Low kickback performance requirements in tha ANSI standard do not apply to saws larger than 3.8 cubic inches.

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

POULAN (CONT.)

MODELS:325

13"(33.02cm)	56	.325" NK	.050"(1,3mm)	CL25056NKTL		L2501356-11095TL		
15"(38.10cm)	64	.325" NK	.050"(1,3mm)	CL25064NKTL		L2501564-11095TL		
15"(38.10cm)	64	.325"	.058"(1,5mm)	CL25864TL		L2581564-11095TL	R2581564-11095TL	H2581564-11095TL
16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL		L2581666-11095TL	R2581666-11095TL	H2581666-11095TL
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL		L2581872-11095TL	R2581872-11095TL	
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L2502078-11095TL		
20"(50.80cm)	78	.325"	.058"(1,5mm)	CL25878TL		L2582078-11095TL	R2582078-11095TL	H2582078-11095TL

MODELS:203,245,306,306A,360,361,375,385,400,445,446,450,3400,3800,395,3900,4000,4200,4400,4900,5200,5400,5500,6700

16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4176TL		
18"(45.72cm)	66	3/8"	.050"(1,3mm)	CL35066TL		L3501866-4176TL		
20"(50.80cm)	70	3/8"	.050"(1,3mm)	CL35070TL		L3502070-4176TL		

MODELS:415,425,445,2083II,2094,2095

13"(33.02cm)	52	3/8"	.058"(1,5mm)	CL35852TL			R3581352-4009TL	H3581352-4009TL
15"(38.10cm)	56	3/8"	.058"(1,5mm)	CL35856TL		L3581556-4009TL	R3581556-4009TL	H3581556-4009TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4009TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-4009TL	R3581660-4009TL	H3581660-4009TL
18"(45.72cm)	68	3/8"	.050"(1,3mm)	CL35068TL		L3501868-4009TL		
18"(45.72cm)	68	3/8"	.058"(1,5mm)	CL35868TL		L3581868-4009TL	R3581868-4009TL	H3581868-4009TL
20"(50.80cm)	72	3/8"	.050"(1,3mm)	CL35072TL		L3502072-4009TL		
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL		L3582072-4009TL	R3582072-4009TL	H3582072-4009TL
20"(50.80cm)	72	3/8"	.063"(1,6mm)	CL36372TL		L3632072-4009TL	R3632072-4009TL	H3632072-4009TL
24"(60.96cm)	84	3/8"	.058"(1,5mm)	CL35884TL			R3582484-4009TL	H3582484-4009TL
24"(60.96cm)	84	3/8"	.063"(1,6mm)	CL36384TL			R3632484-4009TL	H3632484-4009TL
28"(71.12cm)	92	3/8"	.058"(1,5mm)	CL35892TL			R3582892-4009TL	H3582892-4009TL
28"(71.12cm)	92	3/8"	.063"(1,6mm)	CL36392TL			R3632892-4009TL	H3632892-4009TL
28"(71.12cm)	93	3/8"	.063"(1,6mm)	CL36393TL				H3632893-4009TL
36"(91.44cm)	115	3/8"	.058"(1,5mm)	CL358115TL			R35836115-4009TL	
36"(91.44cm)	115	3/8"	.063"(1,6mm)	CL363115TL				H35836115-4009TL

MODELS:POLE SAWS:MC-PL10,MC-PS10

20"(50.40cm)	40	3/8"LP	.050"(1,3mm)	CL35870TL			R3582070-4196TL	H3582070-4196TL

POULAN continued on page 90

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

POULAN (CONT.)

MODELS:415,425,475,505

15"(38.10cm)	56	3/8"	.058"(1,5mm)	CL35856TL		L3581556-4009TL	R3581556-4009TL	H3581556-4009TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4009TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-4009TL	R3581660-4009TL	H3581660-4009TL
18"(45.72cm)	68	3/8"	.050"(1,3mm)	CL35068TL		L3501868-4009TL		
18"(45.72cm)	68	3/8"	.058"(1,5mm)	CL35868TL		L3581868-4009TL	R3581868-4009TL	H3581868-4009TL
20"(50.80cm)	72	3/8"	.050"(1,3mm)	CL35072TL		L3502072-4009TL		
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL		L3582072-4009TL	R3582072-4009TL	H3582072-4009TL
20"(50.80cm)	72	3/8"	.063"(1,6mm)	CL36372TL		L3632072-4009TL	R3632072-4009TL	H3632072-4009TL
24"(60.96cm)	84	3/8"	.058"(1,5mm)	CL35884TL			R3582484-4009TL	H3582484-4009TL
24"(60.96cm)	84	3/8"	.063"(1,6mm)	CL36384TL			R3632484-4009TL	H3632484-4009TL
28"(71.12cm)	92	3/8"	.058"(1,5mm)	CL35892TL			R3582892-4009TL	H3582892-4009TL
28"(71.12cm)	92	3/8"	.063"(1,6mm)	CL36392TL			R3632892-4009TL	H3632892-4009TL
28"(71.12cm)	93	3/8"	.063"(1,6mm)	CL36393TL				H3632893-4009TL
36"(91.44cm)	115	3/8"	.058"(1,5mm)	CL358115TL			R35836115-4009TL	
36"(91.44cm)	115	3/8"	.063"(1,6mm)	CL363115TL				H35836115-4009TL

MODELS:POLE SAWS:MC-PL10,MC-PS10

20"(50.40cm)	70	3/8"	.050"(1,3mm)	CL35870TL			R3582070-4196TL	H3582070-4196TL

POWER PRUNER

MODELS:PPF-280,PPT-280,PPT-265,PPT-265H,PPT-265S

10"(25.40cm)	40	3/8"LP NK	.043"(1,1mm)	CL14340TL	M1431040-1041TL			
10"(25.40cm)	40	3/8"LP	.050"(1,3mm)	CL15040TL	M1501040-1041TL			
12"(30.48cm)	45	3/8"LP NK	.043"(1,1mm)	CL14345TL	M1431245-1041TL			
12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL			
14"(35.56cm)	52	3/8"LP NK	.043"(1,1mm)	CL14352TL	M1431452-1041TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL			

POWERHOUSE

MODELS:190500,190501,190555,190556

8"(20.32cm)	33	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL			
10"(25.40cm)	40	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL			

MODELS:190502,190503,190557,190559

18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL		L2581872-11095TL	R2581872-11095TL	
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L2502078-11095TL		
20"(50.80cm)	78	.325"	.058"(1,5mm)	CL25878TL			R2582078-11095TL	

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

REDMAX

MODELS:POLE SAWS:PRO GZ25N,PSZ 2500S

10"(25.40cm)	40	3/8"LP NK	.043"(1,1mm)	CL14340TL	M1431040-1218TL			

MODELS:G250,G300AVS,G300TS,G310TS,G2500,G2500TS,G3100TS,G3200EZ,G3300EZ,GZ3500TG,3800,G3800AVS,GZ400,GZ4000

10"(25.40cm)	40	3/8"LP	.050"(1,3mm)	CL15040TL	M1501040-1041TL	L1501040-1041TL		
12"(30.48cm)	45	3/8"LP NK	.043"(1,1mm)	CL14345TL	M1431245-1041TL			
12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL	L1501245-1041TL		
14"(35.56cm)	52	3/8"LP NK	.043"(1,1mm)	CL14352TL	M1431452-1041TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL	L1501452-1041TL		
16"(40.64cm)	56	3/8"LP NK	.043"(1,1mm)	CL14356TL	M1431656-1041TL			
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL	L1501656-1041TL		
18"(45.72cm)	62	3/8"LP	.050"(1,3mm)	CL15062TL	M1501862-1041TL	L1501862-1041TL		

MODELS:G390,G450AVS,G455AVS,G5000,G5000AVS,G5300

15"(38.10cm)	64	.325" NK	.050"(1,3mm)	CL25064NKTL		L2501564-11095TL		
15"(38.10cm)	64	.325"	.058"(1,5mm)	CL25864TL		L2581564-11095TL	R2581564-11095TL	H2581564-11095TL
16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL		L2581666-11095TL	R2581666-11095TL	H2581666-11095TL
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL		L2581872-11095TL	R2581872-11095TL	
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L2502078-11095TL		
20"(50.80cm)	78	.325"	.058"(1,5mm)	CL25878TL		L2582078-11095TL	R2582078-11095TL	H2582078-11095TL

MODELS:GZ4500

16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11041TL		

MODELS:G621AVS

16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4176TL		
18"(45.72cm)	66	3/8"	.050"(1,3mm)	CL35066TL		L3501866-4176TL		
20"(50.80cm)	70	3/8"	.050"(1,3mm)	CL35070TL		L3502070-4176TL		

MODELS:GZ7000

18"(45.72cm)	68	3/8"	.050"(1,3mm)	CL15052TL		L3501868-4009TL		
20"(50.80cm)	72	3/8"	.050"(1,3mm)	CL15056TL		L3502072-4009TL		

NOTE: Low kickback requirements in the ANSI standard apply to saw models less than 3.8 cubic inches(62cc).
Low kickback performance requirements in tha ANSI standard do not apply to saws larger than 3.8 cubic inches.

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

REMINGTON

MODELS:100,500,812,814,816,840AV,850AV,860AV,JOB MASTER,OUTDOORSMAN II,RANCHER,WEEKENDER,YARDMASTER

12"(30.48cm)	44	3/8"LP	.050"(1,3mm)	CL15044TL	M1501244-1318TL			
14"(35.56cm)	49	3/8"LP	.050"(1,3mm)	CL15049TL	M1501449-1318TL			
14"(35.56cm)	50	3/8"LP	.050"(1,3mm)	CL15050TL	M1501450-1318TL			
16"(40.64cm)	54	3/8"LP	.050"(1,3mm)	CL15054TL	M1501654-1318TL			
16"(40.64cm)	55	3/8"LP	.050"(1,3mm)	CL15055TL	M1501655-1318TL			

MODELS:RM5118

16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		

RYOBI

MODELS:PCN 3355,APR02

10"(25.40cm)	40	3/8"LP	.050"(1,3mm)	CL15040TL	M1501040-1041TL			
12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL			
16"(40.64cm)	57	3/8"LP	.050"(1,3mm)	CL15057TL	M1501657-1041TL			

MODELS:CSE5145,CSE5650

16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL25866TL		L2581666-11041TL		
18"(45.72cm)	66	3/8"	.058"(1,5mm)	CL25872TL		L2581872-11041TL	R2581872-11041TL	H2581872-11041TL
20"(50.80cm)	70	3/8"	.058"(1,5mm)	CL25878TL		L2582078-11041TL		

MODELS:PCN 4040

16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25866TL		L2581666-11041TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25872TL		L2581872-11041TL	R2581872-11041TL	H2581872-11041TL

SEARS (CRAFTSMAN)

MODELS:POLE SAWS:79245,79246,79240

8"(20.32cm)	33	3/8"LP NK	.043"(1,1mm)	CL14333TL	M1430833-1041TL			
10"(25.40cm)	40	3/8"LP NK	.043"(1,1mm)	CL14340TL	M1431040-1041TL			

MODELS:35265,35507PS

16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL			

SEARS continued on page 93

NOTE: Low kickback requirements in the ANSI standard apply to saw models less than 3.8 cubic inches(62cc).
Low kickback performance requirements in tha ANSI standard do not apply to saws larger than 3.8 cubic inches.

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

SEARS (CRAFTSMAN) (CONT.)

MODELS:3400,3401,3402,3407,3144,3412,3214,3415,3425,3445,3455,3460,3461,3476,34071,34094,34101,34102,34104,34106,34108,34109,34111,34114,34115,34116,34117,34118,34124,34150,34180,34181,35006,35008,35018,35023,35024,35026,35027,35028,35036,35037,35038,35044,35046,35048,35056,35058,35060,35066,35067,35080,35081,35082,35083,35087,35088,35091,35093,35095,35096,35099,35104,35106,35108,35114,35115,35116,35117,35118,35134,35136,35138,35144,35145,35146,35148,35156,35158,35160,35161,35170,35171,35180,35181,35182,35190,35191,35198,35202,35203,35205,35206,35207,35209,35211,35215,35216,35218,35219,35224,35231,35232,35235,35238,35263,35266,35267,35268,35269,35270,35273,35280,35281,35283,35363,35366,35367,35504,35505,35506,35508,35512,35514,35515,35516,35623,35624,35713,35714,35717,35718,35723,35736,35802,35824,35841,35886,36010,36012,36013,36015,36017,36018,36023,36028,36036,36038,36068,36069,36080,36082,36083,36085,36087,36088,36218

12"(30.48cm)	45	3/8"LP NK	.043"(1,1mm)	CL14345TL	M1431245-1041TL			
12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL	L1501245-1041TL		
14"(35.56cm)	52	3/8"LP NK	.043"(1,1mm)	CL14352TL	M1431452-1041TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL	L1501452-1041TL		
16"(40.64cm)	56	3/8"LP NK	.043"(1,1mm)	CL14356TL	M1431656-1041TL			
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL	L1501656-1041TL		
18"(45.72cm)	62	3/8"LP	.050"(1,3mm)	CL15062TL	M1501862-1041TL	L1501862-1041TL		

MODELS:35084,35085,41AY85AR799

18"(45.72cm)	62	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11095TL		

MODELS:35020,35021,35119,35120,35121,35492,35607,35624,35607,35628,35623

16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11041TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11041TL		
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L2502078-11041TL		

MODELS:35212,35483,35608,35609,35690,35721,35727,35728,35826,35829,35851,35881,35885,Electrics (1983 and later),35887,35889

16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4176TL		
18"(45.72cm)	64	3/8"	.050"(1,3mm)	CL35064TL		L3501864-4176TL		
18"(45.72cm)	66	3/8"	.050"(1,3mm)	CL35066TL		L3501866-4176TL		
20"(50.80cm)	70	3/8"	.050"(1,3mm)	CL35070TL		L3502070-4176TL		

SHINDAIWA

MODELS:90,100,110,120,140,150 ELECTRIC,285S,300,300S

12"(30.48cm)	45	3/8"LP NK	.043"(1,1mm)	CL14345TL	M1431245-1041TL			
12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL	L1501245-1041TL		
14"(35.56cm)	52	3/8"LP NK	.043"(1,1mm)	CL14352TL	M1431452-1041TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL	L1501452-1041TL		
16"(40.64cm)	56	3/8"LP NK	.043"(1,1mm)	CL14356TL	M1431656-1041TL			
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL	L1501656-1041TL		
18"(45.72cm)	62	3/8"LP	.050"(1,3mm)	CL15062TL	M1501862-1041TL	L1501862-1041TL		

SHINDAIWA continued on page 94

NOTE: Low kickback requirements in the ANSI standard apply to saw models less than 3.8 cubic inches(62cc).
Low kickback performance requirements in tha ANSI standard do not apply to saws larger than 3.8 cubic inches.

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

SHINDAIWA (CONT.)

MODELS:104P,180,345,350,352,352S,357,360,E350AV

14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL	L1501452-1041TL		
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL			
16"(40.64cm)	57	3/8"LP	.050"(1,3mm)	CL15057TL	M1501657-1041TL	L1501657-1041TL		
18"(45.72cm)	62	3/8"LP	.050"(1,3mm)	CL15062TL	M1501862-1041TL			

MODELS:360,366,377,400,415,416,446S,450,451,488,488S,490,500

15"(38.10cm)	64	.325" NK	.050"(1,3mm)	CL25064NKTL		L2501564-11041TL		
16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11041TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11041TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11041TL		
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L2502078-11041TL		

MODELS:550,575,577

13"(33.02cm)	45	3/8"	.058"(1,5mm)	CL35852TL			R3581352-4009TL	H3581352-4009TL
15"(38.10cm)	45	3/8"	.058"(1,5mm)	CL35856TL		L3581556-4009TL	R3581556-4009TL	H3581556-4009TL
16"(40.64cm)	52	3/8"	.058"(1,5mm)	CL35860TL		L3581660-4009TL	R3581660-4009TL	H3581660-4009TL
18"(45.72cm)	52	3/8"	.058"(1,5mm)	CL35868TL		L3581868-4009TL	R3581868-4009TL	H3581868-4009TL
20"(50.80cm)	56	3/8"	.058"(1,5mm)	CL35872TL		L3582072-4009TL	R3582072-4009TL	H3582072-4009TL
24"(60.96cm)	56	3/8"	.058"(1,5mm)	CL35884TL			R3582484-4009TL	H3582484-4009TL
28"(71.12cm)	62	3/8"	.058"(1,5mm)	CL35892TL			R3582892-4009TL	H3582892-4009TL

MODELS:670,670 WEST COAST,2083,2083II,2094,2095

13"(33.02cm)	52	3/8"	.058"(1,5mm)	CL35852TL			R3581352-4009TL	H3581552-4009TL
15"(38.10cm)	56	3/8"	.058"(1,5mm)	CL35856TL		L3581556-4009TL	R3581556-4009TL	H3581556-4009TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4009TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-4009TL	R3581660-4009TL	H3581660-4009TL
18"(45.72cm)	68	3/8"	.050"(1,3mm)	CL35068TL		L3501868-4009TL		
18"(45.72cm)	68	3/8"	.058"(1,5mm)	CL35868TL		L3581868-4009TL	R3581868-4009TL	H3581868-4009TL
20"(50.80cm)	72	3/8"	.063"(1,6mm)	CL46365TL			R4632065-4009TL	H4632065-4009TL
20"(50.80cm)	72	3/8"	.050"(1,3mm)	CL35072TL		L3502072-4009TL		
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL		L3582072-4009TL	R3582072-4009TL	H3582072-4009TL
20"(50.80cm)	84	3/8"	.063"(1,6mm)	CL36372TL		L3632072-4009TL	R3632072-4009TL	H3632072-4009TL
24"(60.96cm)	84	3/8"	.058"(1,5mm)	CL35884TL			R3582484-4009TL	H3582484-4009TL
24"(60.96cm)	92	3/8"	.063"(1,6mm)	CL36384TL			R3632484-4009TL	H3632484-4009TL
28"(71.12cm)	92	3/8"	.058"(1,5mm)	CL35892TL			R3582892-4009TL	H3582892-4009TL
28"(71.12cm)	93	3/8"	.063"(1,6mm)	CL36392TL			R3632892-4009TL	H3632892-4009TL
28"(71.12cm)	93	3/8"	.063"(1,6mm)	CL36393TL				H3632893-4009TL
36"(91.44cm)	115	3/8"	.058"(1,5mm)	CL358115TL				H35836115-4009TL
36"(91.44cm)	115	3/8"	.063"(1,6mm)	CL363115TL				H36336115-4009TL

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

SKIL

MODELS:1620,1622,1624,1631,TYPE 3,1634,1635,1636

10"(25.40cm)	39	3/8"LP NK	.043"(1,1mm)	CL14345TL	M1431245-1041TL			
12"(30.48cm)	44	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL	L1501245-1041TL		
14"(35.56cm)	49	3/8"LP NK	.043"(1,1mm)	CL14352TL	M1431452-1041TL			
14"(35.56cm)	50	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL	L1501452-1041TL		
16"(40.64cm)	54	3/8"LP NK	.043"(1,1mm)	CL14356TL	M1431656-1041TL			
16"(40.64cm)	55	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL	L1501656-1041TL		
18"(45.72cm)	60	3/8"LP	.050"(1,3mm)	CL15062TL	M1501862-1041TL			

MODELS:1641

16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4176TL		
18"(45.72cm)	64	3/8"	.050"(1,3mm)	CL35064TL		L3501864-4176TL		
18"(45.72cm)	66	3/8"	.050"(1,3mm)	CL35066TL		L3501866-4176TL		
20"(50.80cm)	70	3/8"	.050"(1,3mm)	CL35070TL		L3502070-4176TL		

SNAPPER

MODELS:S1634,S1838

10"(25.40cm)	40	3/8"LP NK	.043"(1,1mm)	CL14340TL	M1431040-1041TL			
10"(25.40cm)	40	3/8"LP	.050"(1,3mm)	CL15040TL	M1501040-1041TL	L1501040-1041TL		
12"(30.48cm)	45	3/8"LP NK	.043"(1,1mm)	CL14345TL	M1431245-1041TL			
12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL	L1501245-1041TL		
14"(35.56cm)	52	3/8"LP NK	.043"(1,1mm)	CL14352TL	M1431452-1041TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL	L1501452-1041TL		
16"(40.64cm)	56	3/8"LP NK	.043"(1,1mm)	CL14356TL	M1431656-1041TL			
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL	L1501656-1041TL		
18"(45.72cm)	62	3/8"LP	.050"(1,3mm)	CL15062TL	M1501862-1041TL	L1501862-1041TL		

SOLO

MODELS:630,633,635,636,637,643

12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1095TL			
14"(35.56cm)	52	3/8"LP NK	.043"(1,1mm)	CL14352TL	M1431452-1095TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1095TL			
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1095TL			
18"(45.72cm)	62	3/8"LP	.050"(1,3mm)	CL15062TL	M1501862-1095TL			

SOLO continued on page 96

NOTE: Low kickback requirements in the ANSI standard apply to saw models less than 3.8 cubic inches(62cc).
Low kickback performance requirements in tha ANSI standard do not apply to saws larger than 3.8 cubic inches.

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

SOLO (CONT.)

MODELS:603,662,655,667,670,675,680,681,690,694

13"(33.02cm)	52	3/8"	.058"(1,5mm)	CL35852TL			R3581352-4009TL	H3581552-4009TL
15"(38.10cm)	56	3/8"	.058"(1,5mm)	CL35856TL		L3581556-4009TL	R3581556-4009TL	H3581556-4009TL
16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4009TL		
16"(40.64cm)	60	3/8"	.058"(1,5mm)	CL35860TL		L3581660-4009TL	R3581660-4009TL	H3581660-4009TL
18"(45.72cm)	68	3/8"	.050"(1,3mm)	CL35068TL		L3501868-4009TL		
18"(45.72cm)	68	3/8"	.058"(1,5mm)	CL35868TL		L3581868-4009TL	R3581868-4009TL	H3581868-4009TL
20"(50.80cm)	72	3/8"	.063"(1,6mm)	CL46365TL			R4632065-4009TL	H4632065-4009TL
20"(50.80cm)	72	3/8"	.050"(1,3mm)	CL35072TL		L3502072-4009TL		
20"(50.80cm)	72	3/8"	.058"(1,5mm)	CL35872TL		L3582072-4009TL	R3582072-4009TL	H3582072-4009TL
20"(50.80cm)	84	3/8"	.063"(1,6mm)	CL36372TL		L3632072-4009TL	R3632072-4009TL	H3632072-4009TL
24"(60.96cm)	84	3/8"	.058"(1,5mm)	CL35884TL			R3582484-4009TL	H3582484-4009TL
24"(60.96cm)	92	3/8"	.063"(1,6mm)	CL36384TL			R3632484-4009TL	H3632484-4009TL
28"(71.12cm)	92	3/8"	.058"(1,5mm)	CL35892TL			R3582892-4009TL	H3582892-4009TL
28"(71.12cm)	93	3/8"	.063"(1,6mm)	CL36392TL			R3632892-4009TL	H3632892-4009TL
28"(71.12cm)	93	3/8"	.063"(1,6mm)	CL36393TL				H3632893-4009TL
36"(91.44cm)	115	3/8"	.058"(1,5mm)	CL358115TL				H35836115-4009TL
36"(91.44cm)	115	3/8"	.063"(1,6mm)	CL363115TL				H36336115-4009TL

MODELS:PPF-280,PPT-280,PPT-265,PPT-265H,PPT-265S

16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL		L2581666-11095TL	R2581666-11095TL	H2581666-11095TL
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL		L2581872-11095TL	R2581872-11095TL	H2581872-11095TL
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L2502078-11095TL		
20"(50.80cm)	78	.325"	.058"(1,5mm)	CL25878TL		L2582078-11095TL	R2582078-11095TL	H2582078-11095TL

STANLEY HYDRAULIC

MODELS:CS05,CS06

13"(33.02cm)	56	.325" NK	.050"(1,3mm)	CL25056NKTL		L2501356-11095TL		
15"(38.10cm)	64	.325" NK	.050"(1,3mm)	CL25064NKTL		L2501564-11095TL		
15"(38.10cm)	64	.325"	.058"(1,5mm)	CL25864TL		L2581564-11095TL	R2581564-11095TL	H2581564-11095TL
16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11095TL		
16"(40.64cm)	66	.325"	.058"(1,5mm)	CL25866TL		L2581666-11095TL	R2581666-11095TL	H2581666-11095TL
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.058"(1,5mm)	CL25872TL		L2581872-11095TL	R2581872-11095TL	
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L2502078-11095TL		
20"(50.80cm)	78	.325"	.058"(1,5mm)	CL25878TL		L2582078-11095TL	R2582078-11095TL	H2582078-11095TL

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

STIHL

MODELS:POLE PRUNERS:HT 70,HT 73,HT 75,HT 100,HT 101,HT 130,HT 131,HT 250

12"(30.48cm)	44	3/8"LP NK	.043"(1,1mm)	CL14344TL	M1431244-1074TL			
14"(35.56cm)	50	3/8"LP NK	.043"(1,1mm)	CL14350TL	M1431450-1074TL			

MODELS:009,009L,010,011,012,015,017,018,018C,019,019T,020,020 SUPER,020T,021,023,023C,023L,E 10,E 14,E 140,MS 170,MS 171,E 180,E 180C, MS 180 C,MS 180 C-B,MS 180 C-BE,MS 181,MS 181C-BE,MS 190T,MS 191T,MS 192C,MS 192 T,MS 192TC,MS 200,MS 200 T,MS 210 C,MS 201T,MS 210, MS 210 C,MS 210 C-BE,MS 211,MS 211C,MS 211 C-BE,MS 220,MS 220 Q,MS 230,MS 230 C,MS 230 C-BE,MS 250,MS 250 C,MS 250,C-BE,MS 140, MS 140 C,MS 140 C-BQ,MSE 180,MSE 180 C,MSE 180 C-BQ,MSE 200

12"(30.48cm)	45	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1095TL			
14"(35.56cm)	52	3/8"LP NK	.043"(1,1mm)	CL14352TL	M1431452-1095TL			
14"(35.56cm)	52	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1095TL			
16"(40.64cm)	56	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1095TL			
18"(45.72cm)	62	3/8"LP	.050"(1,3mm)	CL15062TL	M1501862-1095TL			

MODELS:020,021,025,025C,MS 230,MS 230C,MS 230C-BE,MS 250,MS 250C,MS 250C-BE

16"(40.64cm)	62	.325" NK	.050"(1,3mm)	CL25062NKTL		L2501662-1074TL		
16"(40.64cm)	62	.325"	.050"(1,3mm)	CL25062TL		L2501662-1074TL		
16"(40.64cm)	62	.325"	.058"(1,5mm)	CL25862TL		L2581662-1074TL		

MODELS:1-10,2-10,3-10,4-10,5-10,6-10,7-10,10-10,10-10A,55,PROMAC 55,60,555,560,570,605,610,620,650,655,700,800,805,850,1000,CP70,CP70L, DOUBLE EAGLE 50,DOUBLE EAGLE 80,EAGER BEAVER 3.7,PM605,PROMAC 5700,PROMAC 8200,SP60,SP70,SP80,SP81,SILVER EAGLE 3420,SILVER EAGLE 3720,TIMBER BEAR,TITAN 50,TITAN 57,TITAN 70

15"(38.10cm)	62	.325"	.063"(1,6mm)	CL36362TL		L2631562-4025TL		
16"(40.64cm)	67	.325"	.050"(1,3mm)	CL35067TL		L2501667-4025TL		
16"(40.64cm)	67	.325"	.063"(1,6mm)	CL36367TL		L2631667-4025TL	R2631667-4025TL	
18"(45.72cm)	74	.325"	.050"(1,3mm)	CL35074TL		L2501874-4025TL		
18"(45.72cm)	74	.325"	.063"(1,6mm)	CL36374TL		L2631874-4025TL	R2631874-4025TL	H2631874-4025TL
20"(50.80cm)	81	.325"	.050"(1,3mm)	CL35081TL		L2502081-4025TL		
20"(50.80cm)	81	.325"	.063"(1,6mm)	CL36381TL		L2632081-4025TL	R2632081-4025TL	H2632081-4025TL

MODELS:029,030,031,032,034,036,036P,036 PRO,036QS,040,MS 290,MS 291,MS 291C-BEQ,MS 310,MS 311,MS 360,MS 360 C,MS 360 PRO,MS 360 QS, MS 361,MS 361C-B,MS 361 C-Q,MS 362,MS 362 C-Q,MS 390,MS 391,034 SUPER,E 15,E 20,E 220 Q,MS 260,MS 260 PRO,MSE 220,MSE 220 Q

16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4025TL		
18"(45.72cm)	66	3/8"	.050"(1,3mm)	CL35066TL		L3501866-4025TL		
20"(50.80cm)	72	3/8"	.050"(1,3mm)	CL35072TL		L3502070-4025TL		

STIHL continued on page 98

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

STIHL (CONT.)

MODELS:038,038 SUPER MAGNUM,039,041,042,044,044M,045,046,046M,0448,056,056S,064,066,066 MAGNUM,MS 440,MS 440 MAGNUM,MS 441, MS441C,MS460,MS460 MAGNUM,MS 650,MS 660,MS 660M

16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4025TL		
16"(40.64cm)	60	3/8"	.063"(1,6mm)	CL36360TL		L3631660-4025TL	R3631660-4025TL	H3631660-4025TL
18"(45.72cm)	66	3/8"	.050"(1,3mm)	CL35066TL		L3501866-4025TL		
18"(45.72cm)	66	3/8"	.063"(1,6mm)	CL36366TL		L3631866-4025TL	R3631866-4025TL	H3631866-4025TL
20"(50.80cm)	72	3/8"	.050"(1,3mm)	CL35072TL		L3502072-4025TL		
20"(50.80cm)	72	3/8"	.063"(1,6mm)	CL36372TL		L3632072-4025TL	R3632072-4025TL	H3632072-4025TL
22"(55.88cm)	76	3/8"	.063"(1,6mm)	CL36376TL			R3632276-4025TL	H3632276-4025TL
24"(60.96cm)	84	3/8"	.063"(1,6mm)	CL36384TL			R3632484-4025TL	H3632484-4025TL
28"(71.12cm)	92	3/8"	.063"(1,6mm)	CL36392TL			R3632892-4025TL	H3632892-4025TL
30"(76.20cm)	98	3/8"	.063"(1,6mm)	CL36398TL			R3633098-4025TL	H3633098-4025TL
36"(91.44cm)	114	3/8"	.063"(1,6mm)	CL363114TL			R36336114-4025TL	H36336114-4025TL

MODELS:050,051,075,076,07S,084,088,088M,08SEQ,E 30,MS 880,MS 880 MAGNUM,S 10

21"(53.34cm)	68	.404"	.063"(1,6mm)	CL46368TL			R4632168-5031TL	H4632168-5031TL
25"(63.50cm)	80	.404"	.063"(1,6mm)	CL46380TL			R4632580-5031TL	H4632580-5031TL
30"(76.20cm)	92	.404"	.063"(1,6mm)	CL46392TL			R4633092-5031TL	H4633092-5031TL

TANAKA

MODELS:POLE PRUNERS:TPS-200,TPS210,TPS-250,TPS-250PF,TPS-270,TPS-270PF,TPS-2501,TPS-2510

10"(25.40cm)	40	3/8"LP NK	.043"(1,1mm)	CL14340TL	M1431040-1041TL			
12"(30.48cm)	44	3/8"LP NK	.043"(1,1mm)	CL14345TL	M1431245-1041TL			

MODELS:038,038 SUPER MAGNUM,039,041,042,044,044M,045,046,046M,0448,056,056S,064,066,066 MAGNUM,MS 440,MS 440 MAGNUM,MS 441, MS441C,MS460,MS460 MAGNUM,MS 650,MS 660,MS 660M

10"(25.40cm)	39	3/8"LP NK	.043"(1,1mm)	CL14345TL	M1431245-1041TL			
12"(30.48cm)	44	3/8"LP	.050"(1,3mm)	CL15045TL	M1501245-1041TL	L1501245-1041TL		
14"(35.56cm)	49	3/8"LP NK	.043"(1,1mm)	CL14352TL	M1431452-1041TL			
14"(35.56cm)	50	3/8"LP	.050"(1,3mm)	CL15052TL	M1501452-1041TL	L1501452-1041TL		
16"(40.64cm)	54	3/8"LP NK	.043"(1,1mm)	CL14356TL	M1431656-1041TL			
16"(40.64cm)	55	3/8"LP	.050"(1,3mm)	CL15056TL	M1501656-1041TL	L1501656-1041TL		
18"(45.72cm)	60	3/8"LP	.050"(1,3mm)	CL15062TL	M1501862-1041TL			

TANAKA continued on page 99

CUTTING LENGTH	DRIVE LINKS	PITCH	GAUGE	CHAIN PART NUMBER	MINI LAMINATE	LAMINATED SPROCKET NOSE	REPLACEABLE SPROCKET NOSE	HARD NOSE

TANAKA (CONT.)

MODELS:ECS-415,ECS-4000,ECS-4000B,ECV-4501,TCS40EA

15"(38.10cm)	64	.325" NK	.050"(1,3mm)	CL25064NKTL		L2501564-11041TL		
16"(40.64cm)	66	.325" NK	.043"(1,1mm)	CL25066NKTL		L2501666-11041TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501666-11041TL		
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11041TL		
20"(50.80cm)	78	.325"	.050"(1,3mm)	CL25078TL		L2502078-11041TL		

MODELS:ECV-5601

16"(40.64cm)	66	.325" NK	.050"(1,3mm)	CL25066NKTL		L2501660-11095TL		
16"(40.64cm)	66	.325"	.050"(1,3mm)	CL25066TL		L2501864-11095TL		
18"(45.72cm)	72	.325" NK	.050"(1,3mm)	CL25072NKTL		L2501872-11095TL		
18"(45.72cm)	72	.325"	.050"(1,3mm)	CL25072TL		L2501872-11095TL		

MODELS:ECS-505,ECS-506,ECS-650,ECS-655

16"(40.64cm)	60	3/8"	.050"(1,3mm)	CL35060TL		L3501660-4176TL		
18"(45.72cm)	64	3/8"	.050"(1,3mm)	CL35064TL		L3501864-4176TL		
18"(45.72cm)	66	3/8"	.050"(1,3mm)	CL35066TL		L3501866-4176TL		
20"(50.80cm)	70	3/8"	.050"(1,3mm)	CL35070TL		L3502070-4176TL		

Ajánlatkéréshez szíveskedjen elküldeni KIMPORT-os kapcsolattartója részére (vagy az arajanlat@kimport.hu-ra) kitöltve az ajánlatkérő excel fájlt.

[Ajánlatkérő excel]

Kimport Purchasing Kft.
1112 Budapest, Tippan utca 2.
HU23490495
Tel.: +36-1-249-46-22
arajanlat@kimport.hu