

KATALÓGUS

500+ válogatott kínai beszállító

MŰSZAKI CIKKEK - TECH SUPPLIES

2024.05.

v.1.0.

Milyen beszállítók termékeit tartalmazza a Kimport katalógus?

500+ válogatott kínai gyártó termékeiből összeállított termékkatalógus. **A beszállítók nem az aktív vagy korábbi ügyfeleink beszállítói**, hanem a következő nagyvállalatok (aktív vagy korábbi) beszállítói (kékre kattintva a forrás): [LIDL](#) (DE), [ALDI](#) (DE), [KMART](#) (AU), [JOHN LEWIS](#) (UK)

A forrásokon összesen közel 3000 kínai gyártó cégnevét találjuk. Ezen cégek hátterét leellenőriztük ([így](#)), és az 1000 általunk legjobbnak (legkisebb kockázat) ítélt vállalattal felvettük a kapcsolatot. Ezek közül 513 volt nyitott az együttműködésre. Ezen válogatott beszállítók termékeit tartalmazza ez és a többi Kimport katalógus.

Ár? MOQ? Gyártási idő? CE?

A termékek az esetek 99%-ában nincsenek készleten! A gyártási idő beszállítónként és termékcsopontonként változik! A rendelhető minimum mennyiségek beszállítónként és termékcsopontonként eltérőek, az árak pedig a gyártási kapacitás, alapanyag árak és árfolyam (USD/RMB) ingadozása miatt változnak, ezért minden esetben egyedi ajánlatot kell kérni! A termékek nagy részéhez van érvényes CE certifikát, de nem minden esetben, viszont megfelelnek a CE sztenderdeknek. Egyes esetekben elképzelhető, hogy külön kell CE-t csináltatni!

Szállítás?

Korlátlan mennyiségű beszállítótól (minden oldalon bal alul található az adott beszállító kódja) lehet rendelni és konszolidáljuk a rendelést úgy, hogy egy (vagy minél kevesebb) rendelésként lehessen kezelni az importfolyamat során. Segíti az ügymenetet, amennyiben egy beszállítótól minél több terméket választunk, és összesen minél kevesebb különböző beszállítótól vásárolunk. Shenzhen, Ningbo, Qingdao, Jinhua és Xi'an városokban is rendelkezünk olyan raktárral ahol az áruk konszolidációját és feladását, igény szerint további címkézési műveleteket végre tudunk hajtani.

Mennyibe kerül ez?

Dijunk az SKU-k száma, áruérték és a kiválasztott beszállítók mennyiségétől függ, jellemzően az áruérték 3-6%-a.

Vámkezelésben, betarifálásban, előzetes szállítási díj kalkulációban is állunk rendelkezésükre, tehát segítünk megállapítani az egy termékre eső megközelítő beszerzési árat (a szállítási díjak előzetesen nem határozhatóak meg 100% pontossággal).

Árajánlatkéréshez kérjük megadni a beszállító kódját és amennyiben van a termékkép mellett termékkód, úgy azt is megjelölni!



KIMPORT

Energy Meter Socket



HCG03M

Corner socket w. energy meter
3 way Schuko socket
Energy meter with LED panel
Stainless/Wooden/Stone surface



Power

From 0,1 to 3680W

Consumption & Cost

0,00 – 9,999 KWh
0,00 – 99,99 €

Date & Clock



HG03/2KM

Living room socket w. energy meter
3 way Schuko + 2 way Euro
Push switch
Energy meter with LCD panel
Stainless/Wooden/Stone surface



Stainless

Wooden

Stone

- **Three quality surface available**
- **Fine matte with textured appearance**
- **Soft blue LED light up the soft night**
- **Real-time monitoring of electricity consumption, charges are well known.**



HEK03/1UC

3 way Schuko + 1 way Euro
USB A x 1 + Type C x1
Total output: 5V 3.4A max.
Push switch

- *Smooth surface by Glossy PC material*
- *Each socket rotative 150 degrees*
- *Free brackets & adhesive tapes*
- *Easy installation and use*
- *No screws for the whole body*



Flexible Extension Socket

- *Fine matte with textured appearance*
- *Each individual socket can move freely*
- *Ultra-long wires make your office integration*

GE04

4 way Schuko
Total cable length 5m
(visible 4.5m)



- *Whole body no screws*

KIMPORT

Double Color Designed Socket



RAL
7035
Dark Grey

PANTONE
14-4501 TCX

- *Fine matte with textured appearance*
- *Soft blue LED light up the soft night*



GH04KUC

4 way Schuko
USB A x 1 + Type C x1
Total output: 5V 3.4A max.
Push switch

GH03KUC

3 way Schuko
USB A x 1 + Type C x1
Total output: 5V 3.4A max.
Push switch



GH06K

6 way Schuko
Black & white classic color matching
Push switch



- *Cable hidden in the bottom*

KIMPORT

S-shape Turning Socket



- Smooth surface by Glossy PC material
- Each socket can turn 90 degrees
- Soft blue LED light up the soft night



GS05KUCS

5 way Schuko
USB A x 1 + Type C x1
Total output: 5V 3.4A max.
Push switch
Surge Protection



GS05KUS

5 way Schuko
2 x USB = 5V 2.1A max.
Push switch
Surge Protection



- No-screw technology for the whole body

Magic Cube

- 4 way Schuko
- Push switch
- USB A x 2 + Type C x 1, PD20W
- Type C: 5V/3A, 9V/2.22A, 12V/1.67A
- Total output: 5V 3.4A max.
- Fine matte with textured appearance


GM04KUC



• Use on the desk



• Use under the table



• Two different color available in one product

GM04U

Magic Cube 4 way
16A 250V~ max.3680W
2xUSB=2.4A max. Or
1 x USB + 1 x Type C = 5V 2.4A max.
Free accessory kit with bracket

GM03UCQ

Magic Cube 3 way
Wireless charger 10W max.
USB A x1, QC 18W, USB C x 1, PD20W
Type A: 5V/3A, 9V/2A, 12V/1.5A
Type C: 5V/3A, 9V/2.22A, 12V/1.67A
Total out put: 5V 4A max.



KIMPORT Adaptor with USB & Type C



GZB03UC

USB A x1, QC 18W, USB C x 1, PD20W
 Type A: 3.6-6V/3A, 6-9V/2A, 9-12V/1.5A,
 QC3.0(18W)
 Type C: 5V/3A, 9V/2.22A, 12V/1.67A,
 PD3.0(20W)
 Total output: 5V 4A max.

- **USB-C both Quick Charge**
- **Fine matte textured appearance**
- **Glossy edges**
- **No-screw technology for the whole body**



- **For phone holder: 250g max.**



**GZB01U
GZB01UC**



**GZB01U-MH
GZB01UC-MH**

2xUSB=3.4A max.Or
 1 x USB + 1 x Type C = 5V 3.4A max



GZB02UC

USB A x1, USB C x 1
 Total output: 5V3.4A max.
 Glossy decorated colorful frame



GZB03UC-1

USB A x1, USB C x 1
 Total output: 5V3.4A max.
 Glossy edges



GZB03UC-2

Pop-up Socket

KIMPORT

- High level brand design
- One palm for comfortable pressing on large head
- Aluminium touch surface fine and smooth
- Black elastic surface soft and warm



MS04G-3VUCQ

Horizontal Pop-up 3 way
Fast Charge, wireless charge 10W
USB A x1, QC 18W, USB C x 1, PD20W
Type A: 5V3A, 9V2A, 12V1.5A,
Type C: 5V3A, 9V2.22A, 12V1.67A
Total output: 5V 4A max.




MS07G-3VUC

Side Pop-up 3 way
2 x USB = 5V 2.1A max. Or,
1 x USB + 1 x Type C = 5V 3.4A max.



MS008G-3VUC

Vertical Pop-up 3 way
2 x USB = 5V 2.1A max. Or,
1 x USB + 1 x Type C = 5V 3.4A max.

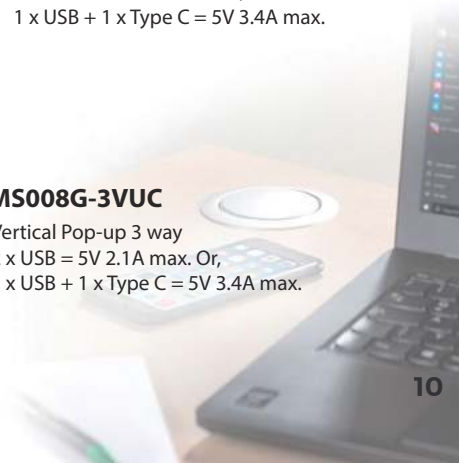

KIMPORT



- **The wide clip fix very stable**
- **Loose the knob to adjust the socket to comfortable angle**
- **Cable runs under the socket**
- **Fee accessory kit with clips**

FRMGK03U-DH

Semicircle Aliminium socket with desk holder
180 degrees Rotative
3 way with ON/OFF switch
2 x USB = 5V 2.1A max.
1 x USB + 1 x Type C = 5V 3.4A max.



FRAGK04U2-DH

Narrow Aliminium socket with desk holder
4 way with ON/OFF switch
2 x USB = 5V 2.1A max.
1 x USB + 1 x Type C = 5V 3.4A max.



FRWVGK04U2-DH

Wide Aliminium socket with desk holder
4 way with ON/OFF switch
2 x USB = 5V 2.1A max.
1 x USB + 1 x Type C = 5V 3.4A max.

KIMPORT Aluminium Profile Modular Socket



FRAGKS08

Slim aluminium profile
8 way with ON/OFF switch
Surge protection
250V~16A, 3680W
SPD Type3, IP20
Uc=255V~,Uoc=3KV,U_p=1.8KV (for L-N, L/N-PE)

- Two profile aluminium outlooking available (wide & slim)
- Can be hung horizontally and vertically
- End caps convenient for wire arrangement and storage



FRAGKS06

Slim aluminium profile
6 way with ON/OFF switch
Surge protection



FRAG04/01-ES

4 way with ON/OFF electronic foot switch
1 way permanent
Cable 1.5m H05VV-F, 3G1.5mm²
Switch part: 0.5m H03VVH2-F, 2x0.75mm²



FRWGKS04U2

Wide aluminium profile
4 way with ON/OFF switch
Surge protection
2 x USB = 5V 2.1A max. Or,
1 x USB + 1 x Type C = 5V 3.4A max.



FRA02WM

Washing machine & Dryer Socket
Circuit Breaker
16A, 250V~ max. 3680W, Stand-by: 0.8W
Master/slave change at 1200W

KIMPORT PVC Profile Modular Socket



FRPGKS08

Narrow PVC profile
8 way with ON/OFF switch
Surge protection

- Two PVC profile available (wide & slim)
- Can be hung horizontally and vertically
- End caps convenient for wire arrangement and storage



FRPGKS06

Narrow PVC profile
6 way with ON/OFF switch
Surge protection



FRGKS04

Wide PVC profile
4 way with ON/OFF switch
Surge protection



Wooden+Black color



FRPGKSM05/02

1 master + 5 slave + 2 permanent
ON/OFF switch
Surge protection 15,000A



Golden+Black color



FRPGKS06

ON/OFF switch
Surge protection 26,000A

KIMPORT Cord Management Socket



- Cable runs under the Bridge
- Cord management

FRGKS16U

6 x Schuko + 10 x Euro, ON/OFF switch, surge protection
2 x USB = 2.1A or 1 x USB + Type C = 5V 3.4A max.

G4093

9way schuko socket w. flat plug
1 x USB + Type C = 5V 3.4A max.

- Bridge type brand design
- Double color LED light up the bridge
- Cable runs under the bridge
- High energy surge protection available (900J, 1800J, 2700J, 3600J)



G4081

8 way with SPD, ON/OFF switch, 2xUSB=2.1A

G3080

8 way with SPD, ON/OFF switch.



G4041

4 way with SPD, ON/OFF switch, 2xUSB=2.1A

G3040

4 way with SPD, ON/OFF switch.



F5183

8 way with SPD 1800J, ON/OFF switch,
Coaxial protection IN/OUT,
Tel, Network connectors.



F5142

4 way with SPD 1800J, ON/OFF switch,
Coaxial protection IN/OUT.

KIMPORT

- Smooth surface by Glossy PC material
- Soft green LED light up the soft night
- Wall holes backside

GD04KU

PC 4way with ON/OFF switch
16A 250V~ max.3680W
2 x USB = 5V 2.4A max. Or
1 x USB + 1 x Type C = 5V 3.4A max.

Multiple Socket

- Cord management
- Safe blue LED light and blue switch
- Fine matte with textured appearance



GD03KU

3 way Schuko with ON/OFF switch
16A 250V~ max.3680W
2 x USB = 5V 2.1A max. Or
1 x USB + 1 x Type C = 5V 3.4A max.



GKS06

6 way with ON/OFF switch

GKS05U

5 way with ON/OFF switch
2xUSB=2.1A max. Or
1 x USB + 1 x Type C = 5V 3.4A max.
Surge protection



C03KU

3 way Schuko with ON/OFF switch
Two-den smart design for easy widening cable
2 x USB = 5V 2.1A max. Or
1 x USB + 1 x Type C = 5V 3.4A max.



- Rotary hook backside



GB05K

5 way with ON/OFF switch
Surge protection

Cable Reel



F4MR-25/50

Metal Cable reel 4way
25m & 50m cable max.



G4R-25/50

Cable reel 4way
25m & 50m cable max.



G43R-25/50

Garden reel w. extension cords
25m & 50m max.



G4R-15

Cable reel 4way
15m cable max.



GX03U

Cable reel 3way 5m cable max.

Over-heating protection.

Wall fixing holes and hanger for fixed use

Easy reeling and plug put on back for perfect storage

2 x USB = 5V2.4A max.or,

1 x USB + 1x Type C = 5V3.4A max.

Round LED power indicator

KIMPORT

Others



• **Mobile holder**



• **built-in buckle fold**

2391

Data line containing box
Hold 1.5m line max.
Adjust line length



1391

Extension cable water proof box
IP20 CE



G2-5C

Extension cords
w. injected coupling

• **4 plugs for choice**



GF-03L

Normal injected



GF-04L

Flat injected




GF-05L

Surge protected
rewireable



GF-06L

Standard flat
rewireable

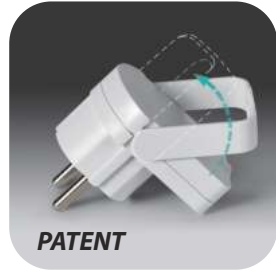

- **Tensile test in the direction of usage with a force of $60 N \pm 1 N$.**
- **In the direction of non-usage is $30 N \pm 1 N$, both duration $30 s \pm 0.5s$.**



HT020

Window Alarm
ON/OFF switch
2xAAA battery



DC809

Wireless Doorbell
90DB 433.9Hz
Receiver: 3xAA battery
Transmitter: 1x23A 12V(55mA)



HT018

Door Alarm
ON/OFF switch 120DB
High/Low sensitivity choice
9V Carbon or Alkaline battery

SCHUKO TYPE

ECO VERSION



KY-01



KY-03



KY-04



KIMPORT

KY-GE03



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)

KY-GE04



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)

KY-GE05



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)

KY-GE06



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)

KY-GE03S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)

KY-GE04S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)

KY-GE05S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)

KY-GE06S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)



KY-G102



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G102S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G103



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G103S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G02/02



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G02/02S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G04/04



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G04/04S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G104



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G104S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G105



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G105S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G203



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G203S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G204



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G204S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G106



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G106S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)



KY-G205



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G205S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G206



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

KY-G206S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V - Max 3680W
- With Children protectors(shutter)

Protect electricity safety

surge protection / Overload protection



Surge protection



Overload protection



KIMPORT

KY-G703S



surge protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)
- Surge protection
- Mounting hole

KY-G704S



surge protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)
- Surge protection
- Mounting hole

KY-G705S



surge protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)
- Surge protection
- Mounting hole

KY-G706S



surge protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)
- Surge protection
- Mounting hole

KY-G803S



Overload protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)
- Overload protection
- Mounting hole

KY-G804S



Overload protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)
- Overload protection
- Mounting hole

KY-G805S



Overload protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)
- Overload protection
- Mounting hole

KY-G806S



Overload protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)
- Overload protection
- Mounting hole

KY-G703Y



surge protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)
- Surge protection
- Mounting hole

KY-G704Y



surge protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)
- Surge protection
- Mounting hole

KY-G705Y



surge protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)
- Surge protection
- Mounting hole

KY-G706Y



surge protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)
- Surge protection
- Mounting hole

KY-G803Y



Overload protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)
- Overload protection
- Mounting hole

KY-G804Y



Overload protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)
- Overload protection
- Mounting hole

KY-G805Y



Overload protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)
- Overload protection
- Mounting hole

KY-G806Y



Overload protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)
- Overload protection
- Mounting hole



Table power strip fast charger

USB / Type-C

KY-G605Y



- H05VV-F 3G1.0mm²/ 1.5mm²
- 16A,250V~ Max 3680W
- With Children protectors(shutter)

KY-G604YU



- H05VV-F 3G1.0mm²/ 1.5mm²
- 16A,250V~ Max 3680W
- USB Charger DC 5V Max.2.4A/3.4A
- With Children protectors(shutter)

KY-G604YU



- H05VV-F 3G1.0mm²/ 1.5mm²
- 16A,250V~ Max 3680W
- USB Charger DC 5V Max.2.4A/3.4A
- With Children protectors(shutter)

LD-0120
LD-0120

KY-G1102U



Phone holder

- H05VV-F 3G1.0mm²/ 1.5mm²
- 16A,250V~ Max 3680W
- USB Charger DC 5V Max.2.4A/3.4A
- With Children protectors(shutter)

KY-G1102C



Phone holder

- H05VV-F 3G1.0mm²/ 1.5mm²
- 16A,250V~ Max 3680W
- USB Charger DC 5V Max.2.4A/3.4A
- With Children protectors(shutter)

KY-G1001U



Easy travel

- H05VV-F 3G1.0mm²/ 1.5mm²
- 16A,250V~ Max 3680W
- USB Charger DC 5V Max.2.4A/3.4A
- With Children protectors(shutter)

KY-G1001C



Easy travel

- H05VV-F 3G1.0mm²/ 1.5mm²
- 16A,250V~ Max 3680W
- USB Charger DC 5V Max.2.4A/3.4A
- With Children protectors(shutter)

KY-G1203Y



Slim design

- H05VV-F 3G1.0mm²/ 1.5mm²
- 16A,250V~ Max 3680W
- With Children protectors(shutter)

KY-G1204Y



- H05VV-F 3G1.0mm²/ 1.5mm²
- 16A,250V~ Max 3680W
- With Children protectors(shutter)

KY-G1205Y



- H05VV-F 3G1.0mm²/ 1.5mm²
- 16A,250V~ Max 3680W
- With Children protectors(shutter)

KY-G1206Y



- H05VV-F 3G1.0mm²/ 1.5mm²
- 16A,250V~ Max 3680W
- With Children protectors(shutter)


KY-G903Y



Power cube

- H05VV-F 3G1.0mm²/ 1.5mm²
- 16A,250V~ Max 3680W
- With Children protectors(shutter)
- PC plastic

KY-G903YU



- H05VV-F 3G1.0mm²/ 1.5mm²
- 16A,250V~ Max 3680W
- USB Charger DC 5V Max.2.4A/3.4A
- With Children protectors(shutter)
- PC plastic

KY-G903YC



- H05VV-F 3G1.0mm²/ 1.5mm²
- 16A,250V~ Max 3680W
- USB Charger DC 5V Max.2.4A/3.4A
- With Children protectors(shutter)
- PC plastic



Individual Switch

Save energy and more safe

USB charger 2.4A/3.4A



KIMPORT

KY-G1803SL



surge protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-G1804SL



surge protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-G1805SL



surge protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-G1806SL



surge protection

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-G1803SC



USB A+C2 4A/3 4A

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-G1804SC



USB A+C2 4A/3 4A

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-G1805SC



USB A+C2 4A/3 4A

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-G1806SC



USB A+C2 4A/3 4A

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

LD-0120

KY-GZ01-1



- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-GZ01-2



Travel adapter

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-GZ01-3



Travel adapter

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-GZ01-4



Travel adapter

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-GZ02-1



- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-GZ02-2



Travel adapter

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-GZ02-3



Travel adapter

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-GZ02-4



Travel adapter

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-GZ03-1



- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-GZ03-2



Travel adapter

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-GZ03-3



Travel adapter

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-GZ03-4



Travel adapter

- H05VV-F 3G1.0mm²/1.5mm²
- 16A,250V~Max 3680W
- With Children protectors(shutter)
- One pole independent switch

KY-SA03S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- PC Module, Aluminium Shell
- With Children protectors(shutter)

KY-SA04L



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- PC Module, Aluminium Shell
- With Children protectors(shutter)

KY-SA08SG



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- PC Module, Aluminium Shell
- With Children protectors(shutter)

KY-SA06S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- PC Module, Aluminium Shell
- With Children protectors(shutter)

KY-SA06LP



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- PC Module, Aluminium Shell
- With Children protectors(shutter)

KY-SA07S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- PC Module, Aluminium Shell
- With Children protectors(shutter)

KY-SA08S



- H05VV-F 3G1.0mm²/1.5mm²
- 16A, 250V~Max 3680W
- PC Module, Aluminium Shell
- With Children protectors(shutter)



Modular Design
more in one



KY-GX04-10



- H05VV-F 3G1.0mm² Max 12
- H05VV-F 3G1.5mm² Max 10
- 16A, 250V~Max 3680W
- Overload protection
- With Children protectors(shutter)

KY-GX04-50



- H05VV-F 3G1.0mm² Max 50
- H05VV-F 3G1.5mm² Max 50
- 16A, 250V~Max 3680W
- Overload protection
- With Children protectors(shutter)

KY-GC01



- H05VV-F 3G1.0mm²
- H05VV-F 3G1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)

KY-GX04-15



- H05VV-F 3G1.0mm² Max 15
- H05VV-F 3G1.5mm² Max 15
- 16A, 250V~Max 3680W
- Overload protection
- With Children protectors(shutter)

KY-GY01-30



- H05VV-F 3G1.0mm² Max 30
- H05VV-F 3G1.5mm² Max 30
- 16A, 250V~Max 3680W
- Overload protection
- With Children protectors(shutter)

KY-GC02



- H05VV-F 2G1.0mm²
- H05VV-F 2G1.5mm²
- 16A, 250V~Max 3680W
- With Children protectors(shutter)

KY-GX04-30



- H05VV-F 3G1.0mm² Max 30
- H05VV-F 3G1.5mm² Max 30
- 16A, 250V~Max 3680W
- Overload protection
- With Children protectors(shutter)

KY-GY01-50



- H05VV-F 3G1.0mm² Max 50
- H05VV-F 3G1.5mm² Max 50
- 16A, 250V~Max 3680W
- Overload protection
- With Children protectors(shutter)

KY-GC03



- With Children protectors(shutter)

Smart Plug

C-GZB-1A1

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	1 Socket
Energy Monitoring	Yes
Type of connection	Wifi + Bluetooth
Product Size	54×54×77.7mm
Working Temp.	-20℃-50℃
Working Humidity	≤80%
Wireless Type	Wifi:2.4G/802.11 b/g/n Bluetooth:4.2/IEEE 802.15.1



Bluetooth®



- Energy Consumption Monitoring
- Voice Control and APP Control
- Schedule and Timer
- Create Group and Share with Family
- Safe and Reliable

24-Hour Programme Plug In Timer

C-GZB-1D1

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	1 Socket
Switch	On-Auto
Operation	Cycle 24 Hours Cycle Timmer
Min.Setting Time	15 Mins
Max. Setting Time	24 Hours
Working Temp./Humidity	-20 C -50 C/≤80%
Product Size	129×69×78mm



- Electronic Plug-In Timer Switch
- Sturdy Construction
- Convenient Functioning

24-Hour Programme Plug In Timer

C-GZB-1D2

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	1 Socket
Switch	On-Auto
Operation	Cycle 24 Hours Cycle Timmer
Min.Setting Time	15 Mins
Max. Setting Time	24 Hours
Working Temp./Humidity	-20 C -50 C/≤80%
Product Size	80×80×78mm



- Electronic Plug-In Timer Switch
- Sturdy Construction
- Convenient Functioning

7 Days Programme Plug In Timer

C-GZB-1D3

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	1 Socket
Switch	7 Knobs
Operation	Cycle 7 Days Segmented Setting Time
Setting Time	7 Days 10 Pcs Program
Working Temp.	-20°C -50°C
Working Humidity	≤80%
Product Size	74×70×78mm



- Electronic Plug-In Timer Switch
- Sturdy Construction
- Convenient Functioning

Waterproof Programme Plug In Timer

C-GZB-1DW1

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	1 Socket
Operation	Cycle 24 Hours Cycle Timmer
Min.Setting Time	15 Mins
Max. Setting Time	24 Hours
Working Temp./Humidity	-20℃-50℃/≤80%
Product Size	152x76x88.7mm



- Electronic Plug-In Timer Switch
- Sturdy Construction
- Convenient Functioning
- IP44 Waterproof

USB Plug Charger With Nightlight

C-GZB-2LU1

Technical Specifications

Main Material	PP Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	2 Socket 2 USB-A:DC 5V 2.4A(Max.)
Night light Switch	On-Off
Night Light LED	2 Pcs 2835,0.5W
Night light CCT	3000k(+/-500K)
Working Temp.	-20℃ -50℃
Working Humidity	≤80%
Product Size	72×70×78.5mm



- Multi Plug Extension Socket
- With Nightlight
- Space Saving

USB Plug Charger With Nightlight

C-GZB-3LU1

Technical Specifications

Main Material	PP Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	3 Socket 3 USB-A:DC 5V 2.4A 1 Type C:DC 5V 3.0A
Night light Switch	On-Off
Night Light LED	2 Pcs 2835,0.5W
Night light CCT	3000k(+/-500K)
Working Temp.	-20°C -50°C
Working Humidity	≤80%
Product Size	90×70×78.5mm



- Multi Plug Extension Socket
- With Nightlight
- Space Saving

USB Plug Charger

C-GZB-1U1

Technical Specifications

Main Material	PP Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	1 Port 2×USB-A:2.4A 2×Type C:DC 5V 3.0A
Night light Switch	NA
Night Light LED	NA
Night light CCT	75×52×77.5mm
Working Temp.	-20°C -50°C
Working Humidity	≤80%



- Multi Plug Extension Socket
- USB C Charge, Better Configuration
- Space Saving

USB Plug Charger

C-GZB-2U1

Technical Specifications

Main Material	PP Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	2 Port 2×USB-A:2.4A 2× Type C:DC 5V3.0A
Energy Monitoring	NA
Type of connection	NA
Product Size	94×52×77.5mm
Working Temp.	-20℃-50℃
Working Humidity	≤80%



- Multi Plug Extension Socket
- USB C Charge, Better Configuration
- Space Saving

USB Plug Charger

C-GZB-3U1

Technical Specifications

Main Material	PP Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	3 Port 2×USB-A:2.4A 2×Type C:DC 5V 3.0A
Night light Switch	NA
Night Light LED	NA
Night light CCT	116×52×77.5mm
Working Temp.	-20°C -50°C
Working Humidity	≤80%



- Multi Plug Extension Socket
- USB C Charge, Better Configuration
- Space Saving

Motion Sensor USB Plug

C-GZB-1SLU1

Technical Specifications

Main Material	PP Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	1 Port Max.:3.4A 2×USB-A: 2.4A 2×Tapy C: DC5V3.0A
Night Light Switch	PIR Motion Sensor
Max.Motion Sensor distance	3-5m
Motion Detact Angle	110°
CCT& Luminous Flux	6000K,20lm
Product Size	109.5×80.5×83mm



- Multi Plug Extension Socket
- With PIR Mottion Sensor Nightlight
- Space Saving

LED Nightlight Plug

C-GZB-1L1

Technical Specifications

Main Material	PP Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	1 Socket
Night light Switch	On-Auto-Of
Night Light LED	3 Pcs 2835,0.5W
CCT&Luminous Flux	3000k(+/-500K),8lm(+/-10%)
Working Temp.	-20℃-50℃
Working Humidity	≤80%
Product Size	78×78×67.5mm



- Night Light Switches on Automatically at Dusk
- Wide Application
- Exceptionally Low Electricity Consumption

Circle USB Power Strip

C-USB-4KU1

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	4 Port USB-A+C:DC5V2.4A(Max)
Energy Monitoring	NA
Type of Connection	NA
Product Size	360x85x41mm
Working Temp.	-20°C -50°C
Working Humidity	≤80%



- Cool and Flexible Design
- Space Saving Helper
- Universal Power Strip

Power Strip

C-GSB-3K1/4K1/5K1/6K1 Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	3 Port/4 Port/5 Port/6 Port
Switch	On-Off
Wire Length	Customization
Working Temp.&Humidity	-20 C -50 C / ≤80%
Product Size	217×54×37mm(3 port)
	260×54×37mm(4 port)
	302×54×37mm(5 port)
	345×54×37mm(6 port)



- Power Strip With Switch
- Space Saving

Power Strip With Double Light

C-GSB-5KLU1

Technical Specifications

Main Material	PP Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Port	5 Port USB-A+C:DC5V2.0A(MAX)
Switch	5 pcs independent On- Off
Wire Length	Customization
Working Temp.&Humidity	-20℃-50℃≤80%
Product Size	576×134.5×60mm
CCT & Luminous Flux	6000K,600lm



- Multi Plug Extension Power Strip
- Individual ON OFF Switches for Each Outlet
- Space Saving
- With High lumen Light

Power Strip With Night Light

C-GSB-3LU1

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	3 Port Type A/C:DC 5V 3.0A;9V 2A;12V 1.5 Type A+C:DC 5V 3.0AA
Ninglight Switch	On-Off
CCT & Luminous Flux	6000K,10lm
Wire Length	Customization
Working Temp.&Humidity	-20℃-50℃/≤80%
Product Size	173×78×57mm



- Multi Plug Extension Power Strip
- Space Saving
- With USB & Nightlight

Power Strip With RGB Table Light

C-GSB-3KLU1

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Port	3 Port MAX:3.4A 2×USB-A: 2.4A+2×Tapy C:DC5V3.0A
Night Light Switch	Touch
LED	16pcs SMD 2835+8pcs RGB 5050
LED Mode Lumen	270lm(+/-10%)
Product Size	120x120x172mm
Wire length	1.5m(customlization)



- Multi Plug Extension Power Strip
- With RGB Table Light
- Space Saving
- Overload Protection

Multi-Function Power Strip

C-GSB-3KU1/U2

Technical Specifications

Main Material	PP Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	3 Ports/4 Ports Max.:3.4A 2xUSB-A:2.4A+2xType C:DC 5V 3.0A
Switch	On-Off
Wire length	1.5m(Customization)
Product Size	226×54×40mm (3 PortS) 269x54x40mm (4 Ports)
Pulg Type	EU/France



- Multi Plug Extension Power Strip
- Power Strip With Switch
- Space Saving

IP44

C-GSB-3KW1

Technical Specifications

Main Material	PP Flame Retardant
Work Voltage	130V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Ports	3 Ports
Switch	On-Off
Wire length	Customization
Working Temp	-20℃-35℃
Working & Humidity	≤80%
Product Size	296x96x54mm
WaterProof Level	IP44



- Multi Plug Extension Power Strip
- Space Saving
- IP44

With Work Light

C-USB-5KLU1

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Port	5 Port USB-A+USB-C:DC5.0V 3.4A(max) USB-C: DC5.0V/3A, 9.0V/2.2A, 12.0V/1.6A USB-A:DC5.0V 3A,9.0V/2.0A, 12.0V/1.5A
Switch	On-Off
Wire length	Customization
CCT & Luminous Flux	3W 6500K(±500K)300lm
Working Temp	-20 C -35 C
Working Humidity	≤80%
Product Size	362x98.5x141.5mm



- Multi Plug Extension Power Strip
- Space Saving
- With USB
- Movable light

Multi-Function Power Strip

C-GZB-1M1

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Display	(Current, voltage, power, frequency, power factor, electricity charge, electricity time)
Working Temp	-20 C-35 C
Working & Humidity	≤80%
Product Size	150x71x78mm



Multi-Function Power Strip

C-USB-4KU3

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Port	4 Port USB-A+USB-C:DC5.0V 2.1A(Max) USB-A/USB-C:DC5.0V 2.1AOn-Off
Wire length	Customization
Working Temp	-20℃-35℃
Working Humidity	≤80%
Product Size	149x149x43mm



- Space Saving Helper
- Universal Power Strip
- With USB

With Work Light

C-GSB-2LU1

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Port	2 Port USB-A+USB-C:DC5.0V 2.1A(Max) USB-A/USB-C:DC5.0V 2.0A
CCT&Luminous Flux	3W 6500K(±500K)300lm
Working Temp	-20℃-35℃
Working & Humidity	≤80%
Product Size	223x153x82mm



- Multi Plug Extension Power Strip
- Space Saving
- With High lumen Light

With Work Light

C-GSB-4LU1

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Port	4 Port USB-A+USB-C:DC5.0V 2.1A(Max) USB-A/USB-C:DC5.0V 2.1AO n-Off
Wire length	Customization
Working Temp	-20 °C -35 °C
Working Humidity	≤80%
Product Size	149x149x43mm



- Multi Plug Extension Power Strip
- Space Saving
- With High lumen Light

Multi-Function Power Strip

C-GSB-4U1

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Port	4 Port USB-A+USB-C:DC5.0V 2.4A(Max) USB-A/USB-C:DC5.0V 2.4A
Wire Length	Customization
Working Temp	-20℃-35℃
Working Humidity	≤80%
Product Size	80X80X85mm



- Multi Plug Extension Power
- Space Saving
- Overload Protection

Wall Socket

C-QCG-1

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Port	1 Port
Working Temp	-20°C-35°C
Working Humidity	≤80%
Product Size	80X80mm



Socket With USB

C-QCG-1U

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Port	1 Port USB-A+USB-C:DC5.0V 2.4A(Max) USB-A/USB-C:DC5.0V 2.1A
Working Temp	-20 C-35 C
Working Humidity	≤80%
Product Size	80X80mm



Control Switch

C-QCK-1

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	3680W
Max Load Current	16A
Switch	On-Off
Working Temp	-20°C -35°C
Working Humidity	≤80%
Product Size	80X80mm



LED Brightness Control

C-QT-1

Technical Specifications

Main Material	PC Flame Retardant
Work Voltage	230V
Work Frequency	50Hz
Max power	2000W
Max Load Current	10A
Dimming signal	≤50mA
Control voltage	1-10V
Dimming range	5%-100%
Working Temp	-20℃-35℃
Working Humidity	≤80%
Product Size	80X80mm



Power Strip With RGB Table Light

RSP2216M

Technical Specifications

Main Material	PP Flame Retardant
Work Voltage	125V
Work Frequency	50~60Hz
Max power	1875W
Max Load Current	15A
Port	3 Port MAX:3.4A 2×USB-A: 2.4A+2×Type C:DC5V3.0A
Night Light Switch	Touch
LED	16pcs SMD 2835+8pcs RGB 5050
LED Mode Lumen	270lm(+/-10%)
Product Size	120x120x172mm
Wire length	1.5m(Customlization)

New Coming Soon



- Multi Plug Extension Power Strip
- With RGB Table Light
- Space Saving
- Overload Protection


Multi-Function Power Strip

RSP2220M

Technical Specifications

Main Material	ABS Flame Retardant
Work Voltage	125V
Work Frequency	50~60Hz
Max power	1875W
Max Load Current	15A
Port	4 Ports / Sport 1×USB-A: 5V 2.4A+1×Tapy C:DC5V2.4A
Wire length	1.5m(customlization)
Working Temp.	-20 C -50 C
Working &Humidity	≤80%
Product Size	226x42x30mm(4 Ports) 283x42x30mm(5 Ports)

New Coming Soon

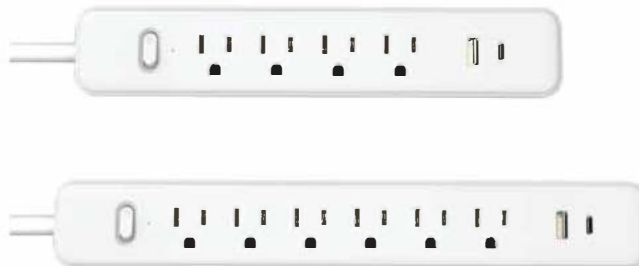

- Multi Plug Extension Power Strip
- Space Saving
- Overload Protection

Multi-Function Power Strip

RSP2221M

Technical Specifications

Main Material	ABS Flame Retardant
Work Voltage	125V
Work Frequency	60Hz
Max power	1875W
Max Load Current	15A
Ports	4 Ports 1xType C DC 5V 2.4A+1×USB-A:5V 2.4A
Wire length	Customized
Working Temp.	-20℃-50℃
Working & Humidity	≤80%
Product Size	Φ110×70mm

New Coming Soon



- Multi Plug Extension Power Strip
- Space Saving
- Overload Protection

Power Strip With Double Light

RSP2214M

Technical Specifications

Main Material	PP Flame Retardant
Work Voltage	125V
Work Frequency	60Hz
Max power	1875W
Max Load Current	15A
Port	5 Port USB-A+C:DC5V2.0A(MAX)
Switch	5 Pcs Independent On-Off Switch
Wire length	Customization
Working Temp.&Humidity	-20℃-50℃≤80%
Product Size	578x134.5x60mm
CCT & Luminous Flux	6000K,600lm



- Multi Plug Extension Power Strip
- Individual ON OFF Switches for Each Outlet
- Space Saving
- With High lumen Light

24-Hour Programme Plug In Timer

C-UZ-1D1

Technical Specifications

Main Material	PP Flame Retardant
Work Voltage	125V
Work Frequency	60Hz
Max power	1875W
Max Load Current	15A
Port	1 Port
Switch	On-Auto
Operation	Cycle 24 Hours Cycle Timmer
Min.Setting Time	15 Mins
Max.Setting Tim	24 Hours
Working Temp	-20℃-50℃
Working Humidity	≤80%
Product Size	129x69x78mm



- Electronic Plug-In Timer Switch
- Sturdy Construction
- Convenient Functioning

24-Hour Programme Plug In Timer

C-UZ-1D2

Technical Specifications

Main Material	PP Flame Retardant
Work Voltage	125V
Work Frequency	60Hz
Max power	1875W
Max Load Current	15A
Port	1 Port
Switch	On-Auto
Operation	Cycle 24 ours Cycle Timmer
Min.Setting Time	15 Mins
Max.Setting Tim	24 Hours
Working Temp	-20°C-50°C
Working Humidity	≤80%
Product Size	80x80x78mm



- Electronic Plug-In Timer Switch
- Sturdy Construction
- Convenient Functioning

7 Days Programme Plug In Timer

C-UZ-1D3

Technical Specifications

Main Material	PP Flame Retardant
Work Voltage	125V
Work Frequency	60Hz
Max power	1875W
Max Load Current	15A
Port	1 Port
Switch	7 Knobs
Operation	Cycle 7 Days Segmented Setting Time
Setting Time	7Days 10pcs Program
Working Temp	-20°C-50°C
Working Humidity	≤80%
Product Size	74x70x78mm



- Electronic Plug-In Timer Switch
- Sturdy Construction
- Convenient Functioning

USB Plug Charger With Nightlight

C-UZ-4ULP1

Technical Specifications

Main Material	ABS Flame Retardant
Work Voltage	125V
Work Frequency	60Hz
Max power	1875W
Max Load Current	15A
Port	4 Port USB-A+USB-C:DC5.0V 2.4A(Max) USB-A/USB-C:DC5.0V 2.0A5 pcs
Light Switch	On-Auto-Off
CCT & Luminous Flux	0.5W 3000K(±500K)
Working Temp	-20℃ -50℃
Working Humidity	≤80%
Product Size	125X92X52.3mm



- Multi Plug Extension Socket
- With Nightlight
- Space Saving

USB Plug Charger With Nightlight

C-UZ-6ULP1

Technical Specifications

Main Material	ABS Flame Retardant
Work Voltage	125V
Work Frequency	60Hz
Max power	1875W
Max Load Current	15A
Port	6 Port USB-A+USB-C:DC5.0V 2.4A(Max) USB-A/USB-C:DC5.0V 2.0A
Light Switch	On-Auto-Off
CCT & Luminous Flux	0.5W 3000K(±500K)
Working Temp	-20 °C -50 °C
Working Humidity	≤80%
Product Size	140X92X52.3mm



- Multi Plug Extension Socket
- With Nightlight
- Space Saving

C-US-4KU3

Technical Specifications

Main Material	ABS Flame Retardant
Work Voltage	125V
Work Frequency	60Hz
Max power	1875W
Max Load Current	15A
Port	4 Port USB-A+USB-C:DC5.0V 2.4A(Max) USB-A/USB-C:DC5.0V 2.4A
Light Switch	On-Off
Working Temp	-20 °C -50 °C
Working Humidity	≤80%
Product Size	215x210x42mm



- Cool and Flexible Design
- Space Saving Helper
- Universal Power Strip

Multi-Function Power Strip

C-US-4KU4

Technical Specifications

Main Material	ABS Flame Retardant
Work Voltage	125V
Work Frequency	60Hz
Max power	1875W
Max Load Current	15A
Port	4 Port USB-A+USB-C:DC5.0V 2.4A(Max) USB-A/USB-C:DC5.0V 2.4A
Working Temp	-20℃-50℃
Working Humidity	≤80%
Product Size	60X60X70mm



- Multi Plug Extension Power
- Space Saving
- Overload Protection



GES-296 GES-297 Intertek GS CE

- Power: Max.3680W 16A/250V~
- Cable: H05VV-F 3G1.0mm²(Max.2M)
- H05VV-F 3G1.5mm²
- Function: 1.Clip onto the verge of the desk
- 2.2xUSB TYPE A charging(DC 5.0V 2.4A total 12.0W)
- 3.With Switch
- 4.Shell in Stainless steel

GES-296 with surge protection,
GES-297 not with surge protection



NFS-258 NFS-259 NA CE

- Power: Max.3680W 16A/250V~
- Cable: H05VV-F 3G1.0mm²(Max.2M)
- H05VV-F 3G1.5mm²
- Function: 1.Clip onto the verge of the desk
- 2.2xUSB TYPE A charging (DC 5.0V 2.4A total 12.0W)
- 3.With Switch
- 4.Shell in Stainless steel

NFS-258 not with surge protection,
NFS-259 with surge protection



GES-298 — GES-302 GES-308 Intertek GS CE

- Power: Max.3680W 16A/250V~
- Cable: H05VV-F 3G1.0mm²(Max.2M) H05VV-F 3G1.5mm²
- Function: 1.2xUSB TYPE A charging (DC 5.0V 2.4A total 12.0W)
- 2.With button switch
- 3.Cable storage
- 4.Mounting holes for cable ties
- GES-308:4 way, Stainless steel panel

Model	GES-					
	298	299	300	301	302	308
Outlets quantity	3	4	5	6	6x1.6A + 2x2.5A	4
USB	√	√	√	√	√	√





GES-303 — GES-307



Power: Max.3680W 16A/250V~

Cable: H05VV-F 3G1.0mm²(Max,2M) H05VV-F 3G1.5mm²

Function: 1.With button switch

2.Cable storage

3.Mounting holes for cable ties

Model	GES-				
	303	304	305	306	307
Outlets quantity	3	4	5	6	6x1.6A + 2x2.5A



GES-298A — GES-302A GES-308A



Power: Max.3680W 16A/250V~

Cable: H05VV-F 3G1.0mm²(Max,2M) H05VV-F 3G1.5mm²

Function: 1.With button switch

2.Cable storage

3.Mounting holes for cable ties

4.USB TYPE A+USB TYPE C (DC 5.0V 3.4A total 17.0W)

USB TYPE A/C: 5.0V DC 3.0A 15.0W

9.0V DC 2.0A 18.0W

12.0V DC 1.5A 18.0W

GES-308A:4 way, Stainless steel panel

Model	GES-					
	298A	299A	300A	301A	302A	308A
Outlets quantity	3	4	5	6	6x1.6A + 2x2.5A	4
USB	√	√	√	√	√	√



NFS-165 — NFS-169 NFS-175

Power: Max.3680W 16A/250V~

Cable: H05VV-F 3G1.0mm²(Max,2M) H05VV-F 3G1.5mm²

Function: 1.2xUSB TYPE A charging (DC 5.0V 2.4A total 12.0W)

2.With button switch

3.Cable storage

4.Mounting holes for cable ties

NFS-175: 4 way, Stainless steel panel

Model	NFS-					
	165	166	167	168	169	175
Outlets quantity	3	4	5	6	6x1.6A + 2x2.5A	4
USB	√	√	√	√	√	√





NFS-170 — NFS-174

Power: Max.3680W 16A/250V~
 Cable: H05VV-F 3G1.0mm²(Max.2M) H05VV-F 3G1.5mm²
 Function: 1.With button switch
 2.Cable storage
 3.Mounting holes for cable ties

Model	NFS-					
	170	171	172	173	174	
Outlets quantity	3	4	5	6	6x1.6A + 2x2.5A	



NFS-165A — NFS-169A NFS-175A



Power: Max.3680W 16A/250V~
 Cable: H05VV-F 3G1.0mm²(Max.2M) H05VV-F 3G1.5mm²
 Function: 1.With button switch
 2.Cable storage
 3.Mounting holes for cable ties
 4.USB TYPE A+USB TYPE C (DC 5.0V 3.4A total 17.0W)
 USB TYPE A/C: 5.0V DC 3.0A 15.0W
 9.0V DC 2.0A 18.0W
 12.0V DC 1.5A 18.0W
 GES-308A:4 way, Stainless steel panel

Model	NFS-					
	165A	166A	167A	168A	169A	175A
Outlets quantity	3	4	5	6	6x1.6A + 2x2.5A	4
USB	√	√	√	√	√	√



GES-311



Power: Max.3680W 16A/250V~
 Cable: H05VV-F 3G1.5mm²
 Function: 1.With button switch
 2.Cable mangement



NFS-261



Power: Max.3680W 16A/250V~
 Cable: H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²
 Function: 1.With button switch
 2.Cable mangement



GES-313 

Power: Max.3680W/230V~ 16A/250V~
 Cable: H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²
 Function: Schuko type 2 way socket with dust cover,
 Suitable for desk, sofa and other furniture field



GES-314A 

Power: Max.3680W/230V~ 16A/250V~
 Cable: H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²
 Function: Schuko type 2 way socket with dust cover,
 Suitable for desk, sofa and other furniture field
 2xUSB TYPE A charging (5,0V DC 2,4A total 12,0W)



GES-314B 

Power: Max.3680W/230V~ 16A/250V~
 Cable: H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²
 Function: Schuko type 2 way socket with dust cover,
 Suitable for desk, sofa and other furniture field
 USB TYPE A+TYPE C(5,0V DC 3,4A total 17,0W)
 USB TYPE A:
 5,0V DC 3,0A total 15,0W
 9,0V DC 2,0A total 18,0W
 12,0V DC 1,5A total 18,0W
 USB TYPE C:
 5,0V DC 3,0A total 15,0W
 9,0V DC 2,22A total 20,0W
 12,0V DC 1,66A total 20,0W



NFS-263 

Power: Max.3680W/230V~ 16A/250V~
 Cable: H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²
 Function: French type 2 way socket with dust cover,
 Suitable for desk, sofa and other furniture field



NFS-264A 

Power: Max.3680W/230V~ 16A/250V~
 Cable: H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²
 Function: French type 2 way socket with dust cover,
 Suitable for desk, sofa and other furniture field
 2xUSB TYPE A charging (5,0V DC 2,4A total 12,0W)



NFS-264B 

Power: Max.3680W/230V~ 16A/250V~
 Cable: H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²
 Function: French type 2 way socket with dust cover,
 Suitable for desk, sofa and other furniture field
 USB TYPE A+TYPE C(5,0V DC 3,4A total 17,0W)
 USB TYPE A:
 5,0V DC 3,0A total 15,0W
 9,0V DC 2,0A total 18,0W
 12,0V DC 1,5A total 18,0W
 USB TYPE C:
 5,0V DC 3,0A total 15,0W
 9,0V DC 2,22A total 20,0W
 12,0V DC 1,66A total 20,0W



GES-315A



Power: Max.1150W/230V 5A/250V~
 Cable: H03VVH₂-F 2X0.75mm²
 Function: 1,Schuko type smart socket
 2,Touch switch on/off For LED
 3,3xUSB Type A charging(5.0V DC 4.0A total 20.0W)
 USB single output Max.: 5.0V DC 2.4A total 12.0W
 Wireless charge: 9.0V DC 1.11A total 10.0W
 7.5V DC 1.0A total 7.5W
 5.0V DC 1.0A total 5.0W
 Remark: When the mobile phone is charging, the indicator light up.
 When wireless charging ends, the indicator light will be off after 5S delay.



GES-315B



Power: Max.1150W/230V 5A/250V~
 Cable: H03VVH₂-F 2X0.75mm²
 Function: 1,Schuko type smart socket
 2,Touch switch on/off For LED
 3,2xUSB Type A+USB Type C charging(5.0V DC 4.0A total 20.0W)
 USB each TPYE A: 5.0V DC 2.4A total 12.0W
 USB TPYE C: 5.0V DC 3.0A total 15.0W
 9.0V DC 2.22A total 20.0W
 12.0V DC 1.67A total 20.0W
 2xUSB TPYE A: 5.0V DC 3.0A total 15.0W
 Wireless charge: 9.0V DC 1.11A total 10.0W
 7.5V DC 1.0A total 7.5W
 5.0V DC 1.0A total 5.0W
 Remark: When the mobile phone is charging, the indicator light up.
 When wireless charging ends, the indicator light will be off after 5S delay.



GES-319A—D

Power: Max.3680W 16A/250V~
 Cable: H05VV-F 3G1.0mm²(Max.2M) H05VV-F 3G1.5mm²
 GES-319A,GES-319C: 3xUSB TYPE A charging
 (5.0V DC 3.4A total 17.0W)
 GES-319B,GES-319D: 2xUSB TYPE A+TYPE C
 (5.0V DC 3.4A total 17.0W)
 USB TYPE A: 5.0V DC 2.4A 12.0W
 USB TYPE C: 5.0V DC 3.0A 15.0W
 9.0V DC 2.22A 20.0W
 12.0V DC 1.5A 18.0W



GES-319A



GES-319C

	GES-			
	319A	319B	319C	319D
Outlets quantity	2	2	2	2
Touch switch	√	√	√	√
Clock/Light	√	√		
Wireless charging (10.0W total)			√	√

NFS-265A—D

Power: Max.3680W 16A/250V~
 Cable: H05VV-F 3G1.0mm²(Max.2M) H05VV-F 3G1.5mm²
 NFS-265A,NFS-265C: 3xUSB TYPE A charging
 (5.0V DC 3.4A total 17.0W)
 NFS-265B,NFS-265D: 2xUSB TYPE A+TYPE C
 (5.0V DC 3.4A total 17.0W)
 USB TYPE A: 5.0V DC 2.4A 12.0W
 USB TYPE C: 5.0V DC 3.0A 15.0W
 9.0V DC 2.22A 20.0W
 12.0V DC 1.5A 18.0W

	NFS-			
	265A	265B	265C	265D
Outlets quantity	2	2	2	2
Touch switch	√	√	√	√
Clock/Light	√	√		
Wireless charging (10.0W total)			√	√



NFS-266A

Power: Max.2300W/230V~ 10A/250V~
 Cable: H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²
 Function: 1.French type smart socket
 2.Touch switch on/off
 3,3xUSB TYPE A charging (5,0V DC 4,0A total 20,0W)
 USB single output Max.: 5,0V DC 2,4A total 12,0W
 Wireless charge: 9,0V DC 1,11A total 10,0W
 7,5V DC 1,0A total 7,5W
 5,0V DC 1,0A total 5,0W
 Remark: When the mobile phone is charging, the indicator light up. When wireless charging ends, the indicator light will be off after 5S delay.



NFS-266B

Power: Max.2300W/230V~ 10A/250V~
 Cable: H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²
 Function:1.French type smart socket
 2.Touch switch on/off
 3,2xUSB TYPE A + USB TYPE C charging(5,0V DC 3,4A total 17,0W)
 USB Type A: 5,0V DC 2,4A total 12,0W
 USB Type C: 5,0V DC 3,0A total 15,0W
 9,0V DC 2,22A total 20,0W
 12,0V DC 1,66A total 20,0W
 Wireless charge: 9,0V DC 1,11A total 10,0W
 7,5V DC 1,0A total 7,5W
 5,0V DC 1,0A total 5,0W
 Remark: When the mobile phone is charging, the indicator light up. When wireless charging ends, the indicator light will be off after 5S delay.



GES-320A

Power: Max.2300W/230V~ 10A/250V~
 Cable: H05VV-F 3G1.5mm²
 Function: 1.Schuko type smart socket
 2.Touch switch on/off
 3,3xUSB TYPE A charging (5,0V DC 4,0A total 20,0W)
 USB single output Max.: 5,0V DC 2,4A total 12,0W
 Wireless charge: 9,0V DC 1,11A total 10,0W
 7,5V DC 1,0A total 7,5W
 5,0V DC 1,0A total 5,0W
 Remark: When the mobile phone is charging, the indicator light up. When wireless charging ends, the indicator light will be off after 5S delay.



GES-320B

Power: Max.2300W/230V~ 10A/250V~
 Cable: H05VV-F 3G1.5mm²
 Function:1.Schuko type smart socket
 2.Touch switch on/off
 3,2xUSB type A + USB type C charging(5,0V DC 3,4A total 17,0W)
 USB Type A: 5,0V DC 2,4A total 12,0W
 USB Type C: 5,0V DC 3,0A total 15,0W
 9,0V DC 2,22A total 20,0W
 12,0V DC 1,66A total 20,0W
 Wireless charge: 9,0V DC 1,11A total 10,0W
 7,5V DC 1,0A total 7,5W
 5,0V DC 1,0A total 5,0W
 Remark: When the mobile phone is charging, the indicator light up. When wireless charging ends, the indicator light will be off after 5S delay.



GES-321A GES-321B



Power: Max.3680W 16A/250V~
 Cable: H05VV-F 3G1.0mm²(Max.2M) H05VV-F 3G1.5mm²
 Function: 1.3 way retractable socket
 2.With switch
 3.Fixing hole Dia. 6mm
 GES-321A: 2xUSB TYPE A charging (5.0V DC 2.4A total 12.0W)
 GES-321B: USB TYPE A+TYPE C (5.0V DC 3.4A total 17.0W)
 USB TYPE A: 5.0V DC 3.0A 15.0W
 9.0V DC 2.0A 18.0W
 12.0V DC 1.5A 18.0W
 USB TYPE C: 5.0V DC 3.0A 15.0W
 9.0V DC 2.22A 20.0W
 12.0V DC 1.5A 18.0W

NFS-267A NFS-267B



Power: Max.3680W 16A/250V~
 Cable: H05VV-F 3G1.0mm²(Max.2M) H05VV-F 3G1.5mm²
 Function: 1.3 way retractable socket
 2.With switch
 3.Fixing hole Dia. 6mm
 NFS-267A: 2xUSB TYPE A charging (5.0V DC 2.4A total 12.0W)
 NFS-267B: USB TYPE A+TYPE C (5.0V DC 3.4A total 17.0W)
 USB TYPE A: 5.0V DC 3.0A 15.0W
 9.0V DC 2.0A 18.0W
 12.0V DC 1.5A 18.0W
 USB TYPE C: 5.0V DC 3.0A 15.0W
 9.0V DC 2.22A 20.0W
 12.0V DC 1.5A 18.0W



GES-322A GES-322B




Power: Max.3680W/230V~ 16A/250V~
 Function: 1.Schuko type 3 way kitchen socket
 2.With touch switch ON/OFF
 GES-322A: Cable: H05VV-F 3G1.5mm²
 2xUSB TYPE A charging
 (5.0V DC 2.4A total 12.0W)
 GES-322B: Cable: H05VV-F 3G1.0mm² 3G1.5mm²
 USB TYPE A+TYPE C (5.0V DC 3.4A total 17.0W)

NFS-268A NFS-268B




Power: Max.3680W/230V~ 16A/250V~
 Cable: H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²
 Function: 1.French type 3 way kitchen socket
 2.With touch switch ON/OFF
 NFS-268A: 2xUSB TYPE A charging
 (5.0V DC 2.4A total 12.0W)
 NFS-268B: USB TYPE A+TYPE C (5.0V DC 3.4A total 17.0W)

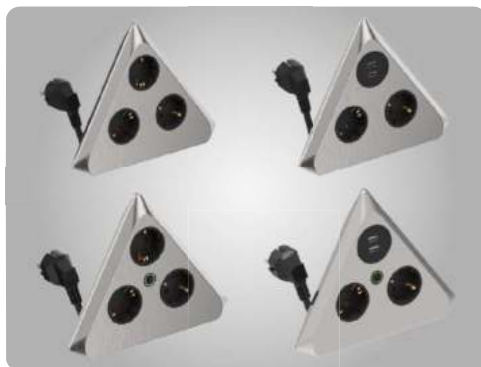

GES-323A—D

Kitchen socket
 Power: Max.3680W/230V~ 16A/250V~
 Cable: H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²
 GES-323B,GES-323D: 2xUSB TYPE A charging
 (5.0V DC 2.4A total 12.0W)

Model	GES-			
	323A	323B	323C	323D
Outlets quantity	3	2	3	2
Touch Switch			√	√
USB		2		2

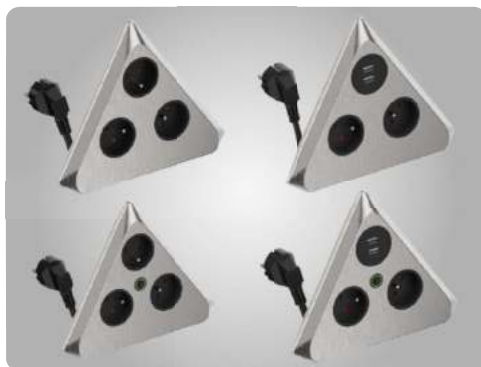

NFS-269A—D

Kitchen socket
 Power: Max.3680W/230V~ 16A/250V~
 Cable: H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²
 NFS-269B,NFS-269D: 2xUSB TYPE A charging
 (5.0V DC 2.4A total 12.0W)

Model	GES-			
	323A	323B	323C	323D
Outlets quantity	3	2	3	2
Touch Switch			√	√
USB		2		2



GES-326A GES-326B GES-326C

Power: Max.3680W/230V~ 16A/250V~
 GES-326A: 1.Cable: H05VV-F 3G1.5mm²
 2.Touch switch for LED light (5.0W total)
 GES-326B: 1.Cable: H05VV-F 3G1.0mm²
 H05VV-F 3G1.5mm²
 2.2xUSB TYPE A charging
 (5.0V DC 3.4A total 17.0W)
 USB TYPE A: 5.0V DC 3.0A 15.0W
 9.0V DC 2.0A 18.0W
 12.0V DC 1.5A 18.0W
 GES-326C: 1.Cable: H05VV-F 3G1.0mm²
 H05VV-F 3G1.5mm²
 2.USB TYPE A+TYPE C
 (5.0V DC 3.4A total 17.0W)
 USB TYPE A: 5.0V DC 3.0A 15.0W
 9.0V DC 2.0A 18.0W
 12.0V DC 1.5A 18.0W
 USB TYPE C: 5.0V DC 3.0A 15.0W
 9.0V DC 2.22A 20.0W
 12.0V DC 1.67A 20.0W
 TYPE C supports PD

Model	GES-		
	326A	326B	326C
Outlets quantity	4	4	4
Switch	√	√	√
USB		√	√
Light	√		



NFS-272A NFS-272B NFS-272C

Power: Max.3680W/230V~ 16A/250V~
 NFS-272A: 1.Cable: H05VV-F 3G1.5mm²
 2.Touch switch for LED light (5.0W total)
 NFS-272B: 1.Cable: H05VV-F 3G1.0mm²
 H05VV-F 3G1.5mm²
 2.2xUSB TYPE A charging
 (5.0V DC 3.4A total 17.0W)
 USB TYPE A: 5.0V DC 3.0A 15.0W
 9.0V DC 2.0A 18.0W
 12.0V DC 1.5A 18.0W
 NFS-272C: 1.Cable: H05VV-F 3G1.0mm²
 H05VV-F 3G1.5mm²
 2.USB TYPE A+TYPE C
 (5.0V DC 3.4A total 17.0W)
 USB TYPE A: 5.0V DC 3.0A 15.0W
 9.0V DC 2.0A 18.0W
 12.0V DC 1.5A 18.0W
 USB TYPE C: 5.0V DC 3.0A 15.0W
 9.0V DC 2.22A 20.0W
 12.0V DC 1.67A 20.0W
 TYPE C supports PD

Model	NFS-		
	272A	272B	272C
Outlets quantity	4	4	4
Switch	√	√	√
USB		√	√
Light	√		



GES-327   **IP44**

Power: Max.3680W/230V~ 16A/250V~
 Cable: H07RN-F 3G1.5mm²
 Function: 1.4 way outdoor portable socket
 2.Touch switch for LED light (5.0W total)



NFS-273   **IP44**

Power: Max.3680W/230V~ 16A/250V~
 Cable: H07RN-F 3G1.5mm²
 Function: 1.4 way outdoor portable socket
 2.Touch switch for LED light (5.0W total)



GES-328  

Power: Max.3680W/230V~ 16A/250V~
 Cable: H05VV-F 3G1.5mm²
 Function: 1.2 way portable socket
 2.With LED light (3.0W total)
 3.With cable management
 4.With steel stand
 5.2xUSB TYPE A charging
 (5.0V DC 2.4A total 12.0W)



NFS-274  

Power: Max.3680W/230V~ 16A/250V~
 Cable: H05VV-F 3G1.5mm²
 Function: 1.2 way portable socket
 2.With LED light (3.0W total)
 3.With cable management
 4.With steel stand
 5.2xUSB TYPE A charging
 (5.0V DC 2.4A total 12.0W)

KIMPORT



GES-329

Power: 16A/250V~
 Fit for H05RN-F H05RR-F 3G1.0mm²
 H07RN-F H05RR-F 3G1.5mm²
 Function: 1.2 way garden socket
 2.Rewirable



NFS-275

Power: 16A/250V~
 Fit for H05RN-F H05RR-F 3G1.0mm²
 H07RN-F H05RR-F 3G1.5mm²
 Function: 1.2 way garden socket
 2.Rewirable



GEH-049

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M

Product Features

- 1.Cable reel with 3 way socket
- 2.2xUSB TYPE A (5.0V DC 2.4A total 12.0W)
- 3.With dust lid, IP20



GEH-050 GEH-052



Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M

Product Features

1. Cable reel with 3 way socket
2. 2xUSB TYPE A (5.0V DC 2.4A total 12.0W)
3. With dust lid, IP20



GEH-053

GEH-054

Wire	Specifications	Length	Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max15M+2M	H05VV-F	3G1.0mm ²	Max25M+2M
H05VV-F	3G1.5mm ²	Max15M+2M	H05VV-F	3G1.5mm ²	Max25M+2M

Product Features

- Automatic cable reel with indoor extension cord



NFH-104 NFH-105



Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M

Product Features

1. Cable reel with 3 way socket
2. 2xUSB TYPE A (5.0V DC 2.4A total 12.0W)
3. With dust lid, IP20



NFH-106

NFH-107

Wire	Specifications	Length	Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max15M+2M	H05VV-F	3G1.0mm ²	Max25M+2M
H05VV-F	3G1.5mm ²	Max15M+2M	H05VV-F	3G1.5mm ²	Max25M+2M

Product Features

- Automatic cable reel with indoor extension cord



GEH-055 IP55

Wire	Specifications	Length
H05RR-F H05RN-F	3G1.0mm ²	Max20M
H05RR-F	3G1.5mm ²	Max15M
H07RN-F	3G1.5mm ²	Max10M

Product Features

With thermal cut-out, IP55



GEH-056 IP55

Wire	Specifications	Length
H05RR-F H05RN-F	3G1.0mm ²	Max40M
H05RR-F	3G1.5mm ²	Max25M
H07RN-F	3G1.5mm ²	Max20M
H07RN-F	3G2.5mm ²	Max15M

Product Features

With thermal cut-out, IP55



GEH-059

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max30M
H05VV-F	3G1.5mm ²	Max25M

Product Features

With thermal cut-out



GEH-060

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M

Product Features

With thermal cut-out



GEH-057 IP55

Wire	Specifications	Length
H05RR-F H05RN-F	3G1.0mm ²	Max40M
H05RR-F H07RN-F	3G1.5mm ²	Max40M
H07RN-F	3G2.5mm ²	Max25M

Product Features

With thermal cut-out, IP55



NFH-109

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max30M
H05VV-F	3G1.5mm ²	Max25M

Product Features

With thermal cut-out



GEH-058 IP55

Wire	Specifications	Length
H05RR-F H07RN-F	3G1.5mm ²	Max50M
H07RN-F	3G2.5mm ²	Max30M

Product Features

With thermal cut-out, IP55



NFH-110

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M

Product Features

With thermal cut-out



GEH-061 IP44

Wire	Specifications	Length
H05RR-F H05RN-F	3G1.0mm ²	Max40M
H05RR-F	3G1.5mm ²	Max25M
H07RN-F	3G1.5mm ²	Max20M
H07RN-F	3G2.5mm ²	Max15M

Product Features

With thermal cut-out



GEH-062 IP44

Wire	Specifications	Length
H05RR-F H05RN-F	3G1.0mm ²	Max20M
H05RR-F	3G1.5mm ²	Max15M
H07RN-F	3G1.5mm ²	Max10M

Product Features

With thermal cut-out



NFH-111 IP44

Wire	Specifications	Length
H05RR-F H05RN-F	3G1.0mm ²	Max40M
H05RR-F	3G1.5mm ²	Max25M
H07RN-F	3G1.5mm ²	Max20M
H07RN-F	3G2.5mm ²	Max15M

Product Features

With thermal cut-out



NFH-112 IP44

Wire	Specifications	Length
H05RR-F H05RN-F	3G1.0mm ²	Max20M
H05RR-F	3G1.5mm ²	Max15M
H07RN-F	3G1.5mm ²	Max10M

Product Features

With thermal cut-out



GEH-063 IP44

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max7.5M
H05VV-F	3G1.5mm ²	Max5M

Product Features

With thermal cut-out, Structural patents
2xUSB TYPE A (5.0V DC 2.4A total 12.0W)



NFH-113 IP44

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max7.5M
H05VV-F	3G1.5mm ²	Max5M

Product Features

With thermal cut-out, Structural patents
2xUSB TYPE A (5.0V DC 2.4A total 12.0W)



GEH-064 Intertek GS CE

Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max10M
H05VV-F	3G1,5mm ²	Max7,5M

Product Features

With thermal cut-out, Structural patents
2xUSB TYPE A (5.0V DC 2.4A total 12.0W)



NFH-114 NA CE

Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max10M
H05VV-F	3G1,5mm ²	Max7,5M

Product Features

With thermal cut-out, Structural patents
2xUSB TYPE A (5.0V DC 2.4A total 12.0W)



GEH-065 Intertek GS CE

Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max20M
H05VV-F	3G1,5mm ²	Max15M

Product Features

With thermal cut-out, Structural patents
2xUSB TYPE A (5.0V DC 2.4A total 12.0W)



NFH-115 NA CE

Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max20M
H05VV-F	3G1,5mm ²	Max15M

Product Features

With thermal cut-out, Structural patents
2xUSB TYPE A (5.0V DC 2.4A total 12.0W)



GEH-066

Reel Frame



GEH-067 GS CE IP44

Wire	Specifications	Length
H05RN-F H05RR-F	3G1,0mm ²	Max22M+2M
H07RN-F H05RR-F	3G1,5mm ²	Max22M+2M

Product Features

Prolonable electric wire disc fit for GEL-008A
attached plug GEP-003



NFH-116 NA CE IP44

Wire	Specifications	Length
H05RN-F H05RR-F	3G1,0mm ²	Max22M+2M
H07RN-F H05RR-F	3G1,5mm ²	Max22M+2M

Product Features

Prolonable electric wire disc fit for NFL-004A
attached plug GEP-003





GES-309



Power: 16A/250V~
 Function: 1.1 way adaptor
 2.3xUSB TYPE A (5.0V DC 3.4A total 17.0W)



GES-318



Power: 16A/250V~
 Function: 1.2 way socket
 2.2xUSB TYPE A (5.0V DC 2.1A total 10.0W)



GES-312



Power: 10A/250V~
 Function: 1.WI-FI control on/off
 2.Voice control
 3.Support Alexa and google home
 4.Nomal switch on/off
 5.Timer setting
 6.Tuya system



NFS-260

Power: 16A/250V~
 Function: 1.2 way socket
 2.2xUSB TYPE A (5.0V DC 2.1A total 10.0W)



NFS-262



Power: 10A/250V~
 Function: 1.WI-FI control on/off
 2.Voice control
 3.Support Alexa and google home
 4.Nomal switch on/off
 5.Timer setting
 6.Tuya system





GES-186



- 1. 4way socket, 16A/250V~, Max. 3680W
- 2. Cables: H05VVF-3G1.0mm²(Max.2M), H05VVF-3G1.5mm²
- 3. USBX1 TYPE A (DC 5V 2.1A)
- 4. USBX1 TYPE C (DC 5V 3A)
- 5. Each socket with a separate Wi-Fi control on/off
- 6. A main Wi-Fi control on/off for all sockets.
- 7. Support Alexa and google home
- 8. Normal switch on/off
- Total USB output: 24W
- Remark: Free distribution of current; When used at the same time.



NFS-155



- 1. 4way socket, 16A/250V~, Max. 3680W
- 2. Cables: H05VVF-3G1.0mm²(Max.2M), H05VVF-3G1.5mm²
- 3. USBX1 TYPE A (DC 5V 2.1A)
- 4. USBX1 TYPE C (DC 5V 3A)
- 5. Each socket with a separate Wi-Fi control on/off
- 6. A main Wi-Fi control on/off for all sockets.
- 7. Support Alexa and google home
- 8. Normal switch on/off
- Total USB output: 24W
- Remark: Free distribution of current; When used at the same time.



GEL-027



- H07RN-F H05RR-F 3G1.5mm²
- 16A/250V~
- Detachable earth spike
- Wi-Fi control on/off
- Normal Switch on/off



GES-203 Intertek Wi-Fi CE GES-204 CE NFS-145 NAS CE

- 1. 1 way socket, 16A/250V~
- 2. Wi-Fi control on/off
- 3. Support Alexa and google home
- 4. Normal Switch on/off



GES-205 CE

- 1. 1 way socket-outlet, 16A/250V~
- 2. Cables: H05WF-3G1.0mm²(Max.2M), H05WF-3G1.5mm²
- 3. USBX4(TYPE A+TYPE C)
- 4. USBX1 TYPE A quick charge(blue port) (12V/1.5A 9V/2A 5V/3A)
- 5. USBX2 TYPE A (DC 5V 2.1A)
- 6. USBX1 TYPE C (DC 5V 3A)
- Total USB output:24W
- Remark: Free distribution of current: When used at the same time,



NFS-146 NAS CE

- 1. 1 way socket-outlet, 16A/250V~
- 2. USBX4(TYPE A+TYPE C)
- 3. USBX1 TYPE A quick charge(blue port) (12V/1.5A 9V/2A 5V/3A)
- 4. USBX2 TYPE A (DC 5V 2.1A)
- 5. USBX1 TYPE C (DC 5V 3A)
- Total USB output:24W
- Remark: Free distribution of current
When used at the same time.



GES-200

- 1. 1 way socket-outlet, 16A/250V~
- 2. Cables: H05VVF-3G1.0mm² (Max. 2M), H05VVF-3G1.5mm²
- 3. USBX4 (TYPE A + TYPE C)
- 4. USBX1 TYPE A quick charge (blue port) (12V/1.5A 9V/2A 5V/3A)
- 5. USBX2 TYPE A (DC 5V 2.1A)
- 6. USBX1 TYPE C (DC 5V 3A)
- Total USB output: 24W
- Remark: Free distribution of current; When used at the same time.



NFS-141

- 1. 1 way socket-outlet, 16A/250V~
- 2. USBX4 (TYPE A + TYPE C)
- 3. USBX1 TYPE A quick charge (blue port) (12V/1.5A 9V/2A 5V/3A)
- 4. USBX2 TYPE A (DC 5V 2.1A)
- 5. USBX1 TYPE C (DC 5V 3A)
- Total USB output: 24W
- Remark: Free distribution of current
When used at the same time.



GES-211

- Power: Max. 3680W 16A/250V~
- Cables: H05VVF-3G1.5mm²
- Function: USB charging, 5V DC 2.4A



NFS-156

- Power: Max. 3680W 16A/250V~
- Cables: H05VVF-3G1.0mm² (Max. 2M) H05VVF-3G1.5mm²
- Function: USB charging, 5V DC 2.4A



GES-202

- 1. 2way socket-outlet, 16A/250V~
- 2. USBX4(TYPE A+TYPE C)
- 3. USBX1 TYPE A quick charge(blue port) (12V/1.5A 9V/2A 5V/3A)
- 4. USBX2 TYPE A (DC 5V 2.1A)
- 5. USBX1 TYPE C (DC 5V 3A)
- Total USB output:24W
- Remark: Free distribution of current
When used at the same time.



GES-202A

- 1. 2way socket-outlet, 16A/250V~
- 2. USBX4(TYPE A+TYPE C)
- 3. USBX1 TYPE A quick charge(blue port) (12V/1.5A 9V/2A 5V/3A)
- 4. USBX2 TYPE A (DC 5V 2.1A)
- 5. USBX1 TYPE C (DC 5V 3A)
- Total USB output:24W
- Remark: Free distribution of current
When used at the same time.



GES-201

- 1. 1 way socket-outlet, 16A/250V~
- 2. Cables: H05VVF-3G1.0mm²(Max.2M), H05VVF-3G1.5mm²
- 3. USBX4(TYPE A+TYPE C)
- 4. USBX1 TYPE A quick charge(blue port) (12V/1.5A 9V/2A 5V/3A)
- 5. USBX2 TYPE A (DC 5V 2.1A)
- 6. USBX1 TYPE C (DC 5V 3A)
- Total USB output:24W
- Remark: Free distribution of current
When used at the same time.



NFS-143

- 1. 1 way socket-outlet, 16A/250V~
- 2. USBX4(TYPE A+TYPE C)
- 3. USBX1 TYPE A quick charge(blue port) (12V/1.5A 9V/2A 5V/3A)
- 4. USBX2 TYPE A (DC 5V 2.1A)
- 5. USBX1 TYPE C (DC 5V 3A)
- Total USB output:24W
- Remark: Free distribution of current
When used at the same time.



GES-201A

- 1. 1 way socket-outlet, 16A/250V~
- 2. Cables: H05VVF-3G1.0mm²(Max.2M), H05VVF-3G1.5mm²
- 3. USBX4(TYPE A+TYPE C)
- 4. USBX1 TYPE A quick charge(blue port) (12V/1.5A 9V/2A 5V/3A)
- 5. USBX2 TYPE A (DC 5V 2.1A)
- 6. USBX1 TYPE C (DC 5V 3A)
- Total USB output:24W
- Remark: Free distribution of current
When used at the same time.



NFS-143A

- 1. 1 way socket-outlet, 16A/250V~
- 2. USBX4(TYPE A+TYPE C)
- 3. USBX1 TYPE A quick charge(blue port) (12V/1.5A 9V/2A 5V/3A)
- 4. USBX2 TYPE A (DC 5V 2.1A)
- 5. USBX1 TYPE C (DC 5V 3A)
- Total USB output:24W
- Remark: Free distribution of current
When used at the same time.



NFS-144

- 1. 2way socket-outlet, 16A/250V~
- 2. USBX4(TYPE A+TYPE C)
- 3. USBX1 TYPE A quick charge(blue port) (12V/1.5A 9V/2A 5V/3A)
- 4. USBX2 TYPE A (DC 5V 2.1A)
- 5. USBX1 TYPE C (DC 5V 3A)
- Total USB output:24W
- Remark: Free distribution of current
When used at the same time.



NFS-144A

- 1. 2way socket-outlet, 16A/250V~
- 2. USBX4(TYPE A+TYPE C)
- 3. USBX1 TYPE A quick charge(blue port) (12V/1.5A 9V/2A 5V/3A)
- 4. USBX2 TYPE A (DC 5V 2.1A)
- 5. USBX1 TYPE C (DC 5V 3A)
- Total USB output:24W
- Remark: Free distribution of current
When used at the same time.



GES-188—GES-210

Power: Max.3680W 16A/250V~
 Cable: H05W-F 3G1.5mm²
 Function: 1.USB charging,5V DC 2100mA)
 2.Light-switch
 3.With surge protection plug

	Model GES-							
	188	189	190	206	207	208	209	210
Outlets quantity	5	4	5	3	2	3	6	4
Switch		√	√		√	√		
USB	√	√		√	√			
With surge protection plug	√			√				



NFS-140——NFS-151 NA CE

Power: Max.3680W 16A/250V~
 Cable: H05VV-F 3G1.5mm²(Max.2M) H05VV-F 3G1.5mm²
 Function: 1.USB charging,5V DC 2100mA
 2.Light-switch

Model	NFS-					
	140	147	148	149	150	151
Outlets quantity	4	2	5	3	6	4
Switch	√	√	√	√		
USB	√	√				



SWS-013——SWS-020 CE

Power: Max.3680W 16A/250V~
 Cable: H05VV-F 3G1.0mm²(Max.2M) H05VV-F 3G1.5mm²
 Function: 1.USB charging,5V DC 2100mA
 2.Light-switch
 3.With surge protection plug

Model	SWS-								
	013	014	015	016	017	018	019	020	
Outlets quantity	5	4	5	3	2	3	6	4	
Switch		√	√		√	√			
USB	√	√		√	√				
With surge protection plug	√			√			√	√	



GEO-013+GEO-014 CE

USB charge with a plug
 USBX1 TYPE A quick charge(green port)
 DC 5V 3A/DC 9V 2A/DC 12V 1.5A
 USBX3 TYPE A: DC 5V 2.4A
 The single output: DC 5V 2.4A
 USBX1 TYPE C: DC 5V 3A
 Total USB output: 35W
 Remark: Free distribution of current; When used at the same time.



GEO-013+GEO-015 CE

USB charge with a plug
 USBX1 TYPE A quick charge(green port)
 DC 5V 3A/DC 9V 2A/DC 12V 1.5A
 USBX3 TYPE A: DC 5V 2.4A
 The single output: DC 5V 2.4A
 USBX1 TYPE C: DC 5V 3A
 Total USB output: 35W
 Remark: Free distribution of current; When used at the same time.



ULO-001+GEO-016 CE


USB charge with a plug
 USBX1 TYPE A quick charge(green port)
 DC 5V 3A/DC 9V 2A/DC 12V 1.5A
 USBX3 TYPE A: DC 5V 2.4A
 The single output: DC 5V 2.4A
 USBX1 TYPE C: DC 5V 3A
 Total USB output: 35W
 Remark: Free distribution of current; When used at the same time.

KIMPORT



GES-180

GES-180A

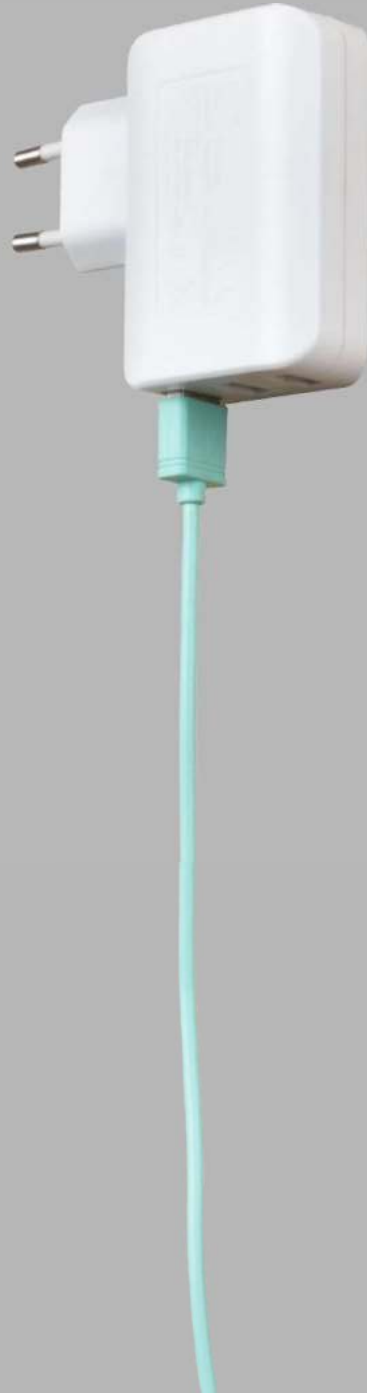

GES-180



USB charging adaptor, with 3 ways USB-outlet,
5V DC total 3,4A, with Identification chip,
Max. 2.4A per USB-outlet

GES-180A



Fast charging function
USBX2,DC 5V total 2,1A, with Identification chip,
Output:fast charging (blue),
- DC 5V 3A
- DC 5V 2A
- DC 12V 1.5A
(subjected to IT device Itself)

LD-0820

GERMAN TYPE





GES-168 GES-169 GES-170 GES-171 GES-172

1.Schuko type(Panel color optional)(Appearance of the patent),with winding and hook(The patent for utility model)	Model	GES-				
2.Switch with indicator		168	169	170	171	172
3.Power: Max.3680W 16A/250V~	Outlets quantity	3	4	5	6	8
	Switch	√	√	√	√	√



GES-160/160A/160B/161/161A/161B/162/162A/162B

- Schuko type(Panel color optional)(Appearance of the patent),with winding and hook(The patent for utility model)
- Switch with indicator
- Surge protection
- USB charger: USBX2 DC 5V 2.1A(intelligent chip optional)
- Power: Max.3680W 16A/250V~



Model	GES-								
	160	160A	160B	161	161A	161B	162	162A	162B
Outlets quantity	4	4	4	6	6	6	8	8	8
Switch	√	√	√	√	√	√	√	√	√
Surge	√	√		√	√		√	√	



GES-163—GES-167

Power: Max.3680W 16A/250V~
 Cables:H05VV-F 3G1.0mm²(Max.2M),H05VV-F 3G1.5mm²
 Function: With Rocker Switch
 Cable Stored Inside Casing

Model	GES-				
	163	164	165	166	167
Outlets quantity	3	4	5	6	8
Switch	√	√	√	√	√



GES-163A—GES-167A

Power: Max.3680W 16A/250V~
 Cables:H05VV-F 3G1.0mm²(Max.2M),H05VV-F 3G1.5mm²
 Function: Button Switch
 Cable Stored Inside Casing

Model	GES-				
	163A	164A	165A	166A	167A
Outlets quantity	3	4	5	6	8
Switch	√	√	√	√	√

GES-054 



Power: Max.3680W 16A/250V~
 Cables:H05VV-F 3G1.0mm²(Max.2M),H05VV-F 3G1.5mm²
 Function
 1.Button Switch
 2,Overload protection
 3,Surge protection
 Uoc: 6KV(L-N,L/N-PE)
 Up: 2KV
 4,USB charger: USBX2 DC 5V 1000mA
 5.Cable twist



GES-055 



Power: Max.3680W 16A/250V~
 Cables:H05VV-F 3G1.0mm²(Max.2M),H05VV-F 3G1.5mm²
 Function
 1.Button Switch
 2.Surge protection
 Uoc: 6KV(L-N,L/N-PE)
 Up: 2KV
 3,USB charger, 5V DC 1000mA
 4,RJ11 jack, RJ45 jack
 5,Fixable on wall



GES-330 GES-331 GES-332 GES-333 

1.Power: Max.3680W/230V~ 16A/250V~
 2.Cable: H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²
 3.2xUSB TYPE A charging (5.0V DC 2.1A total 10.5W)

Model	GES-			
	330	331	332	333
Outlets quantity	3	4	5	6
Switch	√	√	√	√



GES-334 GES-335 GES-336 GES-337 

1.Power: Max.3680W/230V~ 16A/250V~
 2.Cable: H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²
 3.USB TYPE A+USB TYPE C charging (5.0V DC 3.4A total 17W)
 USB TYPE A: 5.0V DC 2.4A total 12W
 USB TYPE C: 5.0V DC 3.0A total 15W

Model	GES-			
	334	335	336	337
Outlets quantity	3	4	5	6
Switch	√	√	√	√

KIMPORT



Material of shell		Outlets quantity	Switch	Surge Protection	Overload protection	USB(2.4A)	Specs
Plastic	Aluminium						
GES-254		3					
GES-255		4					
GES-256		5					
GES-257		6					
GES-258		8					
GES-259		10					
GES-260	GES-218	3	√				H05V-F
GES-261	GES-219	4	√				3G1.0mm ²
GES-262	GES-220	5	√				(Max.2M)
GES-263	GES-221	6	√				H05V-F
GES-264	GES-222	8	√				3G1.5mm ²
GES-265	GES-223	10	√				Max.3680W
GES-266	GES-224	3	√	√ (1200A)	√		16A/250V~
GES-267	GES-225	4	√	√ (1200A)	√		
GES-268	GES-226	5	√	√ (1200A)	√		
GES-269	GES-227	6	√	√ (1200A)	√		
GES-270	GES-228	8	√	√ (1200A)	√		
GES-271	GES-229	10	√	√ (1200A)	√		
GES-272	GES-230	3	√	√ (1200A)	√		
GES-273	GES-231	4	√	√ (1200A)	√		
GES-274	GES-232	5	√	√ (1200A)	√		
GES-275	GES-233	6	√	√ (1200A)	√		
GES-276	GES-234	8	√	√ (1200A)	√		
GES-277	GES-235	10	√	√ (1200A)	√		
GES-278	GES-236	3	√	√ (1200A)			
GES-279	GES-237	4	√	√ (1200A)			
GES-280	GES-238	5	√	√ (1200A)			
GES-281	GES-239	6	√	√ (1200A)			
GES-282	GES-240	8	√	√ (1200A)			
GES-283	GES-241	10	√	√ (1200A)			
GES-284	GES-242	3	√	√ (1200A)		√	
GES-285	GES-243	4	√	√ (1200A)		√	
GES-286	GES-244	5	√	√ (1200A)		√	
GES-287	GES-245	6	√	√ (1200A)		√	
GES-288	GES-246	8	√	√ (1200A)		√	
GES-289	GES-247	10	√	√ (1200A)		√	
GES-290	GES-248	3	√			√	
GES-291	GES-249	4	√			√	
GES-292	GES-250	5	√			√	
GES-293	GES-251	6	√			√	
GES-294	GES-252	8	√			√	
GES-295	GES-253	10	√			√	
	GES-216	3	√	√ (19500A)		√	
	GES-217	6	√	√ (60000A+Filter)		√	



HX-3D——HX-6D

Model	HX-			
	3D	4D	5D	6D
Outlets quantity	3	4	5	6

Cables:H05W-F 3G1.0mm²(Max.2M),H05VV-F 3G1.5mm²



HKX-3D——HKX-6D

Model	HKX-			
	3D	4D	5D	6D
Outlets quantity	3	4	5	6
Switch	√	√	√	√

Cables:H05W-F 3G1.0mm²(Max.2M),H05VV-F 3G1.5mm²



ODL-C-04

Model	ODL-C
	04
Outlets quantity	4
Switch	√

Cables:H05W-F 3G1.0mm²(Max.2M),H05VV-F 3G1.5mm²



GES-002

Model	GES-
	002
Outlets quantity	3x16A 4x2.5A
Switch	√
Surge	√

Cables:H05W-F 3G1.0mm²(Max.2M),H05VV-F 3G1.5mm²



ODL-CKX-3/6

Model	ODL-CKX-
	3/6
Outlets quantity	3x16A 6x2.5A
Shutter	√
Switch	√



GES-035—GES-038



Model	GES-				Rewirable
	035	036	037	038	
Outlets quantity	3	4	5	6	
Switch	✓	✓	✓	✓	
Surge	✓	✓	✓	✓	



ODL-BKXZ-4—ODL-BKXZ-4/4



Model	ODL-BKXZ-			
	4	5A	6	4/4
Outlets quantity	4	5	6	3x1.6A + 4x2.5A
Shutter	✓	✓	✓	✓

Cables: H05VV-F 3G1.0mm²(Max.2M), H05VV-F 3G1.5mm² Max.3680W 16A/250V~



GES-041—GES-043



Model	GES-			Power: Master Max,900W, slave Max,2300W, 16A/250V~
	041	042	043	
Outlets quantity	5	6	4x1.6A + 4x2.5A	
Shutter	✓	✓	✓	
Switch	✓	✓	✓	
Surge	✓	✓	✓	

Cables: H05VV-F 3G1.0mm²(Max.2M), H05VV-F 3G1.5mm² Max.3680W 16A/250V~



GES-116 GES-117



90° Corner use
 Rating: Max.3680W, non-rewirable, IP20
 Cable: H05VV-F 3G1.0mm² (Max.2m) H05VV-F 3G1.5mm²

Model	GES-	
	116	117
Outlets quantity	3x1.6A + 3x2.5A	5x1.6A + 3x2.5A



GES-053



Model	GES-		Cable: H05VV-F 3G1.0mm ² (Max.2M) 3G1.5mm ² Max.3680W 16A/250V~ Transparentshell Patent Design
	053		
Outlets quantity	4		



GES-125—GES-128

Power: Max.3680W 16A/250V~	Model	GES-			
Cables: H05VV-F 3G1.0mm ² (Max.2M)		125	126	127	128
H05VV-F 3G1.5mm ²	Outlets quantity	3	4	5	6
Function: 1.Light-switch	Button/Switch	✓	✓	✓	✓
2.360° free rotating					
Patent Design					



GES-151—GES-152



Model	GES-		Cable: H05VV-F 3G1.0mm ² (Max.2M) 3G1.5mm ² Max.3680W 16A/250V~
	151	152	
Outlets quantity	3	6	
Shutter	✓	✓	

Main switch and separate control switches
 Overload protection



GES-187



Cables: H05VV-F 3G1.0mm²(Max.2M) 3G1.5mm²
 Max.3680W 16A/250V~
 USB charging, 5V DC 2100mA
 Main switch and separate control switches
 Surge protection



ODL-PY-2E
ODL-PY-6E

ODL-PY-2E—ODL-PY-6E    IP44

Model	ODL-PY-				
	2E	3E	4E	5E	6E
Outlets quantity	2	3	4	5	6
Shutter					
Switch					

Utility Model patent Design patent
H07RN-F H05RR-F 3G1.5mm² Max.3680W 16A/250V~



ODL-PY-K-2E
ODL-PY-K-6E

ODL-PY-K-2E—ODL-PY-K-6E    IP44

Model	ODL-PY-K-				
	2E	3E	4E	5E	6E
Outlets quantity	2	3	4	5	6
Shutter					
Switch	√	√	√	√	√

Utility Model patent Design patent
H07RN-F H05RR-F 3G1.5mm² Max.3680W 16A/250V~



GES-029    IP44

Model	GES-029	
Outlets quantity	4	
Shutter	H07RN-F H05RR-F 3G1.5mm ²	
Switch	Max.3680W 16A/250V~	



GES-052    IP44

Model	GES-052	
Outlets quantity	4	
Shutter	Max.3680W 16A/250V~	
Switch	Rewirable	



HJR-4BAT    CE

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max30M
H05VV-F	3G1.5mm ²	Max25M

Product Features

Central part fixed With thermal cut-out	Metal reel
--	------------



GEH-044 Intertek GS TUV SÜD CE		
Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max7,5M
H05VV-F	3G1,5mm ²	Max5M
Product Features		
With thermal cut-out Structural patents		



HJR-5 Intertek GS TUV SÜD CE IP20		
Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max30M
H05VV-F	3G1,5mm ²	Max25M
Product Features		
With thermal cut-out		



GEH-045 Intertek GS TUV SÜD CE		
Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max10M
H05VV-F	3G1,5mm ²	Max7,5M
Product Features		
With thermal cut-out Structural patents		



GEH-027A Intertek GS TUV SÜD CE		
Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max20M
H05VV-F	3G1,5mm ²	Max15M
Product Features		
With thermal cut-out		



GEH-046 Intertek GS TUV SÜD CE		
Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max20M
H05VV-F	3G1,5mm ²	Max15M
Product Features		
With thermal cut-out Structural patents		



GEH-028A Intertek GS TUV SÜD CE		
Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max40M
H05VV-F	3G1,5mm ²	Max30M
Product Features		
With thermal cut-out		



HJR-3 Intertek GS TUV SÜD CE		
Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max30M
H05VV-F	3G1,5mm ²	Max25M
Product Features		
With thermal cut-out		



GEH-029A Intertek GS TUV SÜD CE		
Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max40M
H05VV-F	3G1,5mm ²	Max50M
Product Features		
With thermal cut-out		



HJR-3C Intertek GS TUV SÜD CE		
Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max35M
H05VV-F	3G1,5mm ²	Max30M
Product Features		
With thermal cut-out		



GEH-030A Intertek GS TUV SÜD CE		
Wire	Specifications	Length
H05VV-F	3G1,5mm ²	Max60M
Product Features		
With thermal cut-out		



GEH-031A Intertek GS IP44

Wire	Specifications	Length
H05RR-F H05RN-F	3G1.0mm ²	Max20M
H05RR-F	3G1.5mm ²	Max15M
H07RN-F	3G1.5mm ²	Max10M

Product Features
With thermal cut-out



GEH-032A Intertek GS IP44

Wire	Specifications	Length
H05RR-F H05RN-F	3G1.0mm ²	Max40M
H05RR-F	3G1.5mm ²	Max25M
H07RN-F	3G1.5mm ²	Max20M
H07RN-F	3G2.5mm ²	Max15M

Product Features
With thermal cut-out



GEH-033A Intertek GS IP44

Wire	Specifications	Length
H05RR-F H05RN-F	3G1.0mm ²	Max40M
H05RR-F H07RN-F	3G1.5mm ²	Max40M
H07RN-F	3G2.5mm ²	Max25M

Product Features
With thermal cut-out



GEH-034A Intertek GS IP44

Wire	Specifications	Length
H05RR-F H07RN-F	3G1.5mm ²	Max50M
H07RN-F	3G2.5mm ²	Max30M

Product Features
With thermal cut-out



GEH-041A Intertek GS IP44

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M

Product Features
Germany type cable reel with 3way socket
Thermic cut out, USBX2 DC5V 2.1A with identification chip



GEH-042A Intertek GS IP44

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max40M
H05VV-F	3G1.5mm ²	Max30M

Product Features
Germany type cable reel with 3way socket
Thermic cut out, USBX2 DC5V 2.1A with identification chip



GEH-037 Intertek GS IP44

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	37M+3M
H05VV-F	3G1.5mm ²	27M+3M

Product Features
Prolonable electric wire disc fit for YC-DAX-2
With thermal cut-out



GEH-038 Intertek GS IP44

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	37M+3M
H05VV-F	3G1.5mm ²	47M+3M

Product Features
Prolonable electric wire disc fit for YC-DAX-2
With thermal cut-out



GEH-039 Intertek GS IP44

Wire	Specifications	Length
H05RN-F H05RR-F	3G1.0mm ²	37M+3M
H07RN-F H07RR-F	3G1.5mm ²	27M+3M

Product Features
Prolonable electric wire disc fit for GEL-008 hard cover
With thermal cut-out



GEH-040 Intertek GS IP44

Wire	Specifications	Length
H05RN-F H05RR-F	3G1.0mm ²	37M+3M
H07RN-F H07RR-F	3G1.5mm ²	47M+3M

Product Features
Prolonable electric wire disc fit for GEL-008 hard cover
With thermal cut-out



GEH-043 Intertek CE			
Wire	Specifications	Length	
H05RN-F H05RR-F	3G1.0mm ²	27M+3M	
H07RN-F H07RR-F	3G1.5mm ²	22M+3M	
Product Features			
Prolongable electric wire disc fit for GEL-020 hard cover With thermal cut-out			



HJR-6BA Intertek CE IP44			
Wire	Specifications	Length	
H05RN-F H05RR-F	3G1.0mm ²	Max30M	
H07RN-F H05RR-F	3G1.5mm ²	Max25M	
Product Features			
With thermal cut-out Central part fixed			



HJR-4B Intertek CE			
Wire	Specifications	Length	
H05VV-F	3G1.0mm ²	Max40M	
H05VV-F	3G1.5mm ²	Max50M	
Product Features			
With thermal cut-out Central part fixed			



HJR-6BT Intertek CE IP44			
Wire	Specifications	Length	
H05RN-F H05RR-F	3G1.0mm ²	Max40M	
H07RN-F H05RR-F	3G1.5mm ²	Max50M	
Product Features			
Central part fixed Metal reel With thermal cut-out			



HJR-4BA Intertek CE			
Wire	Specifications	Length	
H05VV-F	3G1.0mm ²	Max30M	
H05VV-F	3G1.5mm ²	Max25M	
Product Features			
With thermal cut-out Central part fixed			



HJR-6BAT Intertek CE IP44			
Wire	Specifications	Length	
H05RN-F H05RR-F	3G1.0mm ²	Max30M	
H07RN-F H05RR-F	3G1.5mm ²	Max25M	
Product Features			
Central part fixed Metal reel With thermal cut-out			



HJR-4BT Intertek CE			
Wire	Specifications	Length	
H05VV-F	3G1.0mm ²	Max40M	
H05VV-F	3G1.5mm ²	Max50M	
Product Features			
Central part fixed Metal reel With thermal cut-out			



HJR-5BAZ Intertek CE IP44			
Wire	Specifications	Length	
H05RN-F H05RR-F	3G1.0mm ²	Max15M	
H07RN-F H05RR-F	3G1.5mm ²	Max10M	
Product Features			
With thermal cut-out			



HJR-6B Intertek CE IP44			
Wire	Specifications	Length	
H05RN-F H05RR-F	3G1.0mm ²	Max40M	
H07RN-F H05RR-F	3G1.5mm ²	Max50M	
Product Features			
With thermal cut-out Central part fixed			



HJR-9P Intertek CE IP44			
Wire	Specifications	Length	
H05RN-F H05RR-F	3G1.0mm ²	Max30M	
H07RN-F H05RR-F	3G1.5mm ²	Max20M	
Product Features			
With thermal cut-out			



HJR-9C Intertek GS CE IP44			
Wire	Specifications	Length	
H05RN-F H05RR-F	3G1,0mm ²	Max35M	
H07RN-F H05RR-F	3G1,5mm ²	Max25M	

Product Features
With thermal cut-out



HJR-80 CE		
Wire	Specifications	Length
H07RN-F	3G1,5mm ²	Max15M

Product Features
Prolonable electric wire disc fit for YC-DA-16 attached plug YC-DA-16Z with thermal cut-out



HJR-56 Intertek GS CE IP44		
Wire	Specifications	Length
H07RN-F	3G1,5mm ²	Max50M

Product Features
Metal reel with thermal cut-out



GEH-002 Intertek GS CE		
Wire	Specifications	Length
H05V-F	3G1,0mm ²	Max18M
H05V-F	3G1,5mm ²	Max15M

Product Features
Prolonable electric wire disc fit for YC-DAX-3 attached plug HY005-F



HJR-57 Intertek GS CE IP44		
Wire	Specifications	Length
H07RN-F	3G2,5mm ²	Max40M

Product Features
Metal reel with thermal cut-out



ODL-186 Intertek GS CE		
Wire	Specifications	Length
H05V-F	3G1,0mm ²	Max18M
H05V-F	3G1,5mm ²	Max15M

Product Features
Prolonable electric wire disc fit for YC-DAX-2A attached plug HY005-F



HJR-61 CE IP44		
Wire	Specifications	Length
H07RN-F	5G2,5mm ²	Max50M

Product Features
Attached plug YC-DA-101Z with thermal cut-out



GEH-048 GS CE		
Wire	Specifications	Length
H05V-F	3G1,0mm ²	Max10M+2M
H05V-F	3G1,5mm ²	Max10M+2M

Product Features
Prolonable electric wire disc fit for YC-DAX-2A attached plug HY005-F



HJR-62 Intertek GS CE IP44		
Wire	Specifications	Length
H07RN-F	3G2,5mm ²	Max40M



Product Features
With thermal cut-out





GEH-022 GS CE		
Wire	Specifications	Length
H05V-F	3G1,0mm ²	Max40M
H05V-F	3G1,5mm ²	Max50M

Product Features
Prolonable electric wire disc fit for YC-DAX-2A
With thermal cut-out Central part fixed





HJR-102A   IP44		
Wire	Specifications	Length
H05RR-F H07RN-F	5G2.5mm ²	Max25M
Product Features		
Attached plug YC-DA-101Z with thermal cut-out		




HJR-103A   IP44		
Wire	Specifications	Length
H05RR-F H07RN-F	3G2.5mm ²	Max30M
Product Features		
Attached plug YC-DA-101Z with thermal cut-out		




HJR-104A   IP44		
Wire	Specifications	Length
H05RR-F H07RN-F	3G2.5mm ²	Max30M
Product Features		
Attached plug YC-DA-16Z with thermal cut-out		




GEH-026 		
Wire	Specifications	Length
H05RN-F H05RR-F	3G1.0mm ²	Max40M
H07RN-F H05RR-F	3G1.5mm ²	Max50M
Product Features		
Central part fixed Metal reel With thermal cut-out		




GEH-035 		
Wire	Specifications	Length
H05VV-F	3G1.5mm ²	Max20M
Product Features		
With thermal cut-out		



GEH-036 		
Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M
Product Features		
With thermal cut-out		



GEH-051 		
Wire	Specifications	Length
H07RN-F	3G2.5mm ²	30M
Product Features		
Central part fixed Metal reel With thermal cut-out		

KIMPORT



GEL-019 GEL-019A

H05V-F 3G1.0mm²-3G1.5mm²
Rotating switch With light

GES-182

GES-183



GES-184

GEP-012

GES-182 GES-183 GES-184 GEP-012

Plug for assembled type socket
Fit for H05RN-F H05RR-F 3G1.0mm²
H07RN-F H05RR-F 3G1.5mm²
16A/250V~



GEL-001A  

H05VV-F 3G1,0mm²-3G1,5mm²



GEL-003     **IP44**

Plug for assembled type socket
 Fit for H05RN-F H05RR-F 3G1,0mm²
 H07RN-F H05RR-F 3G1,5mm²
 16A/250V~
 Rewirable



GEL-003A     **IP44**

Plug for assembled type socket
 Fit for H05RN-F H05RR-F 3G1,0mm²
 H07RN-F H05RR-F 3G1,5mm²
 16A/250V~
 Rewirable



GEL-004  

H03VH₂-F 2X0,75mm²
 H05VH₂-F 2X0,75mm²-2X1,0mm²



GEL-008A   **IP44**

H05RN-F H05RR-F 3G1,0mm²
 H07RN-F H05RR-F 3G1,5mm²
 H07RN-F 3G2,5mm²
 16A/250V~



GEL-009  

H03VH₂-F 2X0,75mm²
 H05VH₂-F 2X0,75mm²-2X1,0mm²



GEL-010   

H05VV-F 2X0,75mm²-2X1,0mm²



GEL-011A   

H05VV-F 2X1,0mm²-2X1,5mm²
 H05RR-F 2X1,0mm²-2X1,5mm²
 H05RN-F 2X1,0mm²
 16A/250V~



GEL-012   

H07RN-F H05RR-F 3G1,5mm²
 16A/250V~



ODL-132A   

H05VV-F 2X1,0mm²-2X1,5mm²



YC-DAX-2A Intertek GS CE

H05W-F 3G1.0mm²-3G1.5mm²



YC-DAX-3 Intertek GS

H05W-F 3G1.0mm²-3G1.5mm²
Rewirable



YC-DAT-12A Intertek GS CE IP44

H07RN-F H05RR-F 3G1.5mm²
16A/250V~
Detachable earth spike With timer



YC-DA-12D Intertek GS CE IP44

H07RN-F H05RR-F 3G1.5mm²
16A/250V~
Detachable earth spike



YC-DA-12E Intertek GS CE IP44

H07RN-F H05RR-F 3G1.5mm²
16A/250V~
Detachable earth spike



YC-DA-12F Intertek GS CE IP44

H07RN-F H05RR-F 3G1.5mm²
16A/250V~
Detachable earth spike



GEL-015 Intertek GS CE

H07RN-F H05RR-F 3G1.5mm²
16A/250V~
Detachable earth spike
Remote Control
Not for Germany



GEL-028 Intertek GS CE

H07RN-F H05RR-F 3G1.5mm²
16A/250V~
Detachable earth spike



GEL-029 Intertek GS CE

H07RN-F H05RR-F 3G1.5mm²
16A/250V~
Detachable earth spike With timer



GEL-020A Intertek GS CE

H05RN-F H05RR-F 3G1.0mm²
H07RN-F H05RR-F 3G1.5mm²
16A/250V~



GEL-021  

H03WH₂-F 2X0.75mm²
 H05WH₂-F 2X0.75mm²-2X1.0mm²
 2.5A/250V~



GEL-022  

H05W-F 3G1.0mm²-3G1.5mm²
 16A/250V~



GEL-023  

H05W-F 3G1.5mm²
 16A/250V~
 With switch, 2-pole



GEL-024  

H05RN-F H05RR-F 3G1.0mm²
 H07RN-F H05RR-F 3G1.5mm²
 16A/250V~



GEL-025 

H05RN-F H05RR-F 3G1.0mm²
 H07RN-F H05RR-F 3G1.5mm²
 16A/250V~



GES-153

Adaptor Zigbee control
 1 Way German socket
 Rating:16/250~,2P+E,
 Max.3680W,IP20



GES-154  

Adaptor with sensor switch
 1 Way German socket
 Rating:3/250~,2P+E,
 Max.690W,IP20



GES-155  

Adaptor with dimmer switch
 1 Way German socket
 Rating:250~,2P+E,
 Max.280W,IP20



GES-156/GES-156A  

Adaptor with USB POWER(2.1A)
 1 Way German socket
 Rating:16/250~,2P+E,Max.3680W,IP20
 GES-156 not with identification function
 GES-156A with identification function



YC-DA-4 YC-DA-4Z  

Plug for assembled type socket
 Fit for H05W-F 3G1.0mm²-3G1.5mm²
 16A/250V~

KIMPORT



YC-B-9 YC-B-9Z

Plug for assembled type socket
 Fit for H05V-F 2X1.0mm²
 H03WH₂-F 2X0.75mm²-2X1.0mm²
 10A/250V~



YC-DA-30Z

16A/250V~



YC-B-10Z

16A/250V~



YC-DA-31Z

16A/250V~



YC-DA-14 YC-DA-14Z IP44

Plug for assembled type socket
 Fit for H05RN-F H05RR-F 3G1.0mm²
 H07RN-F H05RR-F 3G1.5mm²
 16A/250V~



YC-DA-32 YC-DA-32Z IP44

Plug for assembled type socket
 Fit for H05RN-F H05RR-F 3G1.0mm²
 H07RN-F H05RR-F 3G1.5mm²
 16A/250V~



YC-DA-16 YC-DA-16Z CE IP44

Plug for assembled type socket
 Fit for H07RN-F 3G1.5mm²-3G2.5mm²
 16A/250V~



GEL-005 IP44

Plug for assembled type socket
 16A/250V~
 Rewirable



YC-DA-17 IP44

Plug for assembled type socket
 Fit for H05RN-F H05RR-F 3G1.0mm²
 H07RN-F H05RR-F 3G1.5mm²
 16A/250V~



GEL-006 IP44

Plug for assembled type socket
 16A/250V~
 Rewirable



GEL-007 N S IP44

Plug for assembled type socket
16A/250V~
Rewirable



GEL-013 S IP44

Plug for assembled type socket
Rewirable



GEL-017 IP44

Plug for assembled type socket
16A/250V~
Rewirable



YC-DA-106 IP44

16A/250V~



YC-DA-107 IP44

16A/250V~



GES-003 IP44

Plug:16A/250V~
Socket:2.5A/250V~ 3 ways



GES-004 IP44

Plug:16A/250V~
Socket:2.5A/250V~ 4 ways



GES-005 IP44

Plug:16A/250V~ 2P+E
Socket:16A/250V~ 1 way 2.5A/250V~ 2 ways



ODL-152 IP44


Plug:16A/250V~ 2P+E
Socket:16A/250V~ 2 ways
Utility model patent Design patent



ODL-153 IP44

Plug:16A/250V~ 2P+E
Socket:16A/250V~ 3 ways
Utility model patent Design patent



ODL-154 

Plug: 16A/250V~
 Socket: 2.5A/250V~ 2 ways
 Utility model patent Patent Design



GES-058 


With switch
 Plug: 16A/250V~ 2P+E
 Socket: 16A/250V~ 1 way



ODL-157 

Plug: 16A/250V~ 2P+E
 Socket: 16A/250V~ 1 way 2.5A/250V~ 2 ways
 Utility model patent Patent Design



GES-060 


With surge protection
 Plug: 16A/250V~ 2P+E
 Socket: 16A/250V~ 1 way



ODL-158A 

Plug: 16A/250V~ 2P+E
 Socket: 16A/250V~ 2 ways
 Utility model patent Patent Design



GES-010 

Plug: 16A/250V~
 Socket: 2.5A/250V~ 3 ways



ODL-EBX-7A 

Max. 3500W 16A/250V~



GES-011 

Plug: 16A/250V~
 Socket: 2.5A/250V~ 4 ways



ODL-EBX-8A 

Max. 3500W 16A/250V~



GES-012 

Plug: 16A/250V~ 2P+E
 Socket: 16A/250V~ 1 way
 2.5A/250V~ 2 ways



GES-073

Plug: 16A/250V~ 2P+E
 Socket: 16A/250V~ 1 way
 2.5A/250V~ 2 ways



GES-098

With switch
 Plug: 16A/250V~
 Socket: 16A/250V~ 1 way
 2.5A/250V~ 2 ways



GES-109

1-way German Sockets with shutter and Switch
 Rating: 16A/250V~, 2P+E, Max. 3680W, IP20



GES-123 IP44

Plug: 16A/250V~ 2P+E
 Socket: 16A/250V~ 2 ways



GES-123A IP44

Plug: 16A/250V~ 2P+E
 Socket: 16A/250V~ 2 ways



GES-159


16A/250V~
 With switch



GES-134

2.5A/250V~

DENMARK TYPE

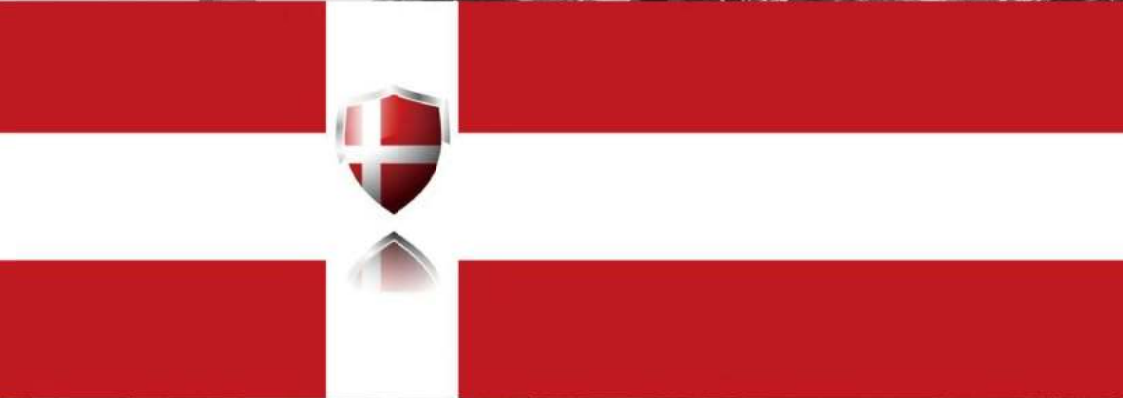

LD-0820



ODL-DX-3
ODL-DX-6

ODL-DX-3——ODL-DX-6 

Model	ODL-DX			
Outlets quantity	3	4	5	6
Shutter	√	√	√	√

H05VV-F 2X1.0mm² H05VV-F 2X1.5mm²



ODL-DKX-3
ODL-DKX-5

ODL-DKX-3——ODL-DKX-6 

Model	ODL-DKX			
Outlets quantity	3	4	5	6
Shutter	√	√	√	√
Switch	√	√	√	√



ODL-DX-7
ODL-DX-8

ODL-DX-7——ODL-DX-8 

Model	ODL-DX	
Outlets quantity	7	8
Shutter	√	√

H05VVH₂-F 2X1.0mm²(Max.2M)



DKS-001

Model	DKS-001
Outlets quantity	2
Shutter	

H05VV-F 2X1.0mm² H05VV-F 2X1.5mm²



DKS-006 

Model	DKS-006
Outlets quantity	4
Shutter	√

H05RN-F H05RR-F 3G1.0mm²
H07RN-F H05RR-F 3G1.5mm²



DKS-007

Model	DKS-007	
Outlets quantity	5	
Shutter	✓	
Switch	✓	H05RN-F H05RR-F 3G1.0mm ² H07RN-F H05RR-F 3G1.5mm ²



DKS-008

Model	DKS-008	
Outlets quantity	8	
Shutter	✓	
Switch	✓	H05VV-F 3G1.0mm ² H07VV-F 3G1.5mm ²



DKS-011

Model	DKS-011	
Outlets quantity	6	
Switch	✓	
		H05VV-F 3G1.0mm ² -3G1.5mm ²



DKL-001 IP44

H05RN-F H05RR-F 3G1.0mm²
H07RN-F H05RR-F 3G1.5mm²
Max.3680W/230V~



YC-BX-5

H05VV-F 2X1.0mm²-2X1.5mm²



DKH-006

Wire	Specifications	Length
H05VV-F	2X1.0mm ²	Max20M
H05VV-F	2X1.5mm ²	Max15M

Product Features
With thermal cut-out



DKH-007

Wire	Specifications	Length
H05VV-F	2X1.0mm ²	Max40M
H05VV-F	2X1.5mm ²	Max30M

Product Features
With thermal cut-out



DKH-008

Wire	Specifications	Length
H05VV-F	2X1.0mm ²	Max40M
H05VV-F	2X1.5mm ²	Max50M

Product Features
With thermal cut-out



DKH-009

Wire	Specifications	Length
H05VV-F	2X1.5mm ²	Max60M

Product Features
With thermal cut-out



DKH-010

Wire	Specifications	Length
H05VV-F	2X1.0mm ²	Max20M
H05VV-F	2X1.5mm ²	Max15M

Product Features
Cable reel with 3way socket
Thermic cut out USBX2 DC5V 2.1A with identification chip



DKH-011		
Wire	Specifications	Length
H05VV-F	2X1.0mm ²	Max40M
H05VV-F	2X1.5mm ²	Max30M
Product Features		
Germany type cable reel with 3way socket Thermic cut out; USBX2 DC5V 2.1A with identification chip		



DKH-012		
Wire	Specifications	Length
H05VV-F	2X1.0mm ²	Max40M
H05VV-F	2X1.5mm ²	Max50M
Product Features		
Cable reel with 3way socket Thermic cut out USBX2 DC5V 2.1A with identification chip		



DKH-013		
Wire	Specifications	Length
H05VV-F	2X1.5mm ²	Max60M
Product Features		
Cable reel with 3way socket Thermic cut out USBX2 DC5V 2.1A with identification chip		



HJR-36D		
Wire	Specifications	Length
H05RN-F H05RR-F	3G1.0mm ²	Max40M
H07RN-F H05RR-F	3G1.5mm ²	Max50M
Product Features		
With thermal cut-out		

FRENCH TYPE






NFS-117 NFS-118 NFS-119 NFS-120 NFS-121 NA CE

1. French type (Panel color optional) (Appearance of the patent), with winding and hook (The patent for utility model)	Model	NFS-								
2. Switch with Indicator	Outlets quantity	131	131A	131B	132	132A	132B	133	133A	133B
3. Surge protection	Switch	√	√	√	√	√	√	√	√	√
Uoc: 4KV (L-N, L/N-PE)	Surge	√	√		√	√		√	√	
Up: 2.2KV (L-N, L/N-PE)										
4. USB charger: USBX2 DC 5V 2.1A (Intelligent chip optional)										
NFS-131/NFS-132/NFS-133 not with identification function										
NFS-131A/NFS-132A/NFS-133A with identification function										
5. Power: Max. 3680W 16A/250V~										




NFS-117 NFS-118 NFS-119 NFS-120 NFS-121 NA CE

H05VV-F 3G1.0mm ² (Max. 2M) H05VV-F 3G1.5mm ²	Model	NFS-				
Power: Max. 3680W 16A/250V~	Outlets quantity	117	118	119	120	121
Function: 1. With Button Switch	Button/Switch	√	√	√	√	√
2. Cable stored inside casing						

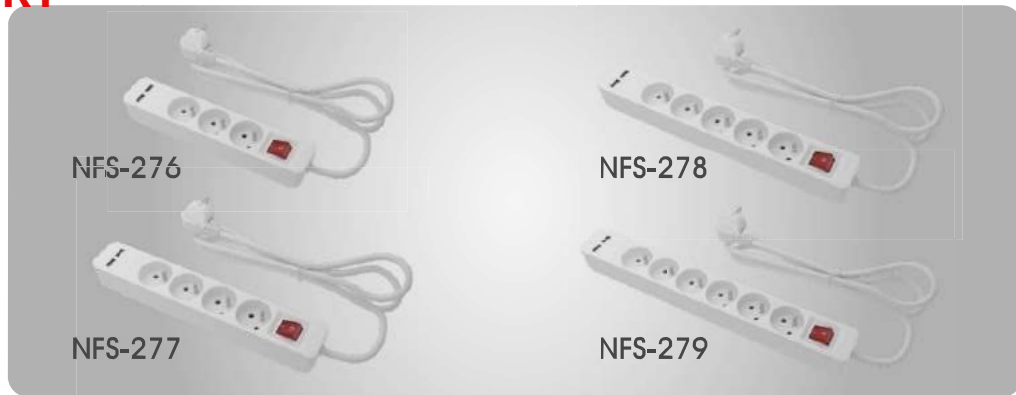

NFS-276 NFS-277 NFS-278 NFS-279 NA CE

1. Power: Max. 3680W/230V~ 16A/250V~	Model	NFS-			
2. Cable: H05VV-F 3G1.0mm ² H05VV-F 3G1.5mm ²	Outlets quantity	276	277	278	279
3. 2xUSB TYPE A charging (5.0V DC 2.1A total 10.5W)	Switch	√	√	√	√

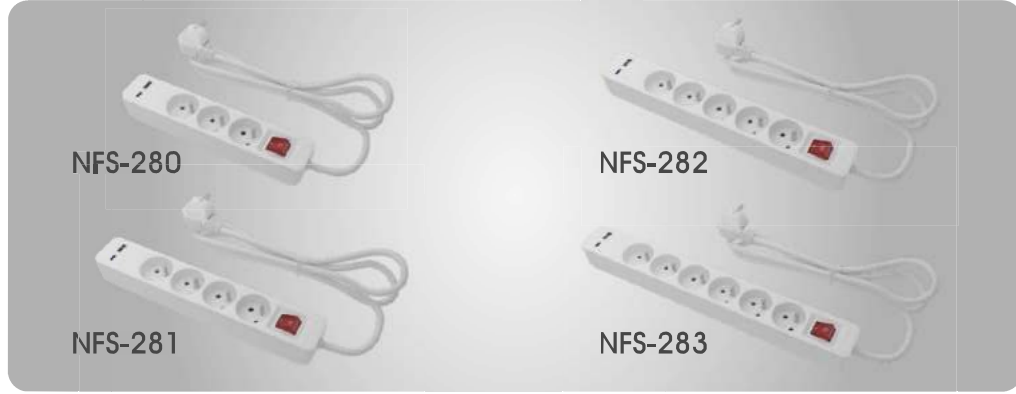

NFS-280 NFS-281 NFS-282 NFS-283 NA CE

1. Power: Max. 3680W/230V~ 16A/250V~	Model	NFS-			
2. Cable: H05VV-F 3G1.0mm ² H05VV-F 3G1.5mm ²	Outlets quantity	280	281	282	283
3. USB TYPE A+USB TYPE C charging (5.0V DC 3.4A total 17W)	Switch	√	√	√	√
USB TYPE A: 5.0V DC 2.4A total 12W					
USB TYPE C: 5.0V DC 3.0A total 15W					



GES-090

- Power: Max,3680W 16A/250V~
- Cables:H05VV-F 3G1.0mm²(Max.2M),H05VV-F 3G1.5mm²
- Function: 1.Button Switch
- 2.Surge protection
- 3,USB charging, 5V DC 1000mA
- 4,RJ11 jack, RJ45 jack
- 5.Fixable on wall



	Material of shell Plastic Aluminium	Outlets quantity	Switch	Surge Protection	Overload protection	USB(2.4A)	Specs
NFS-215		3					
NFS-216		4					
NFS-217		5					
NFS-218		6					
NFS-219		8					
NFS-221	NFS-179	3	✓				
NFS-222	NFS-180	4	✓				
NFS-223	NFS-181	5	✓				
NFS-224	NFS-182	6	✓				
NFS-225	NFS-183	8	✓				
NFS-227	NFS-185	3	✓	√ (1200A)	✓		
NFS-228	NFS-186	4	✓	√ (1200A)	✓		
NFS-229	NFS-187	5	✓	√ (1200A)	✓		
NFS-230	NFS-188	6	✓	√ (1200A)	✓		
NFS-231	NFS-189	8	✓	√ (1200A)	✓		
NFS-233	NFS-191	3	✓	√ (1200A)	✓	✓	
NFS-234	NFS-192	4	✓	√ (1200A)	✓	✓	
NFS-235	NFS-193	5	✓	√ (1200A)	✓	✓	
NFS-236	NFS-194	6	✓	√ (1200A)	✓	✓	H05VV-F
NFS-237	NFS-195	8	✓	√ (1200A)	✓	✓	3G1.0mm ²
NFS-239	NFS-197	3	✓	√ (1200A)			(Max.2M)
NFS-240	NFS-198	4	✓	√ (1200A)			H05VV-F
NFS-241	NFS-199	5	✓	√ (1200A)			3G1.5mm ²
NFS-242	NFS-200	6	✓	√ (1200A)			Max.3680W
NFS-243	NFS-201	8	✓	√ (1200A)			16A/250V~
NFS-245	NFS-203	3	✓	√ (1200A)		✓	
NFS-246	NFS-204	4	✓	√ (1200A)		✓	
NFS-247	NFS-205	5	✓	√ (1200A)		✓	
NFS-248	NFS-206	6	✓	√ (1200A)		✓	
NFS-249	NFS-207	8	✓	√ (1200A)		✓	
NFS-251	NFS-209	3	✓			✓	
NFS-252	NFS-210	4	✓			✓	
NFS-253	NFS-211	5	✓			✓	
NFS-254	NFS-212	6	✓			✓	
NFS-255	NFS-213	8	✓			✓	
NFS-257		10	✓	√ (1200A)	✓		Only for Belgium



FX-3D
FX-6D

FX-3D — FX-6D (NA) CE

Model	FX-			
	3D	4D	5D	6D
Outlets quantity	3	4	5	6
Shutter	✓	✓	✓	✓

H05VV-F 3G1,0mm²(Max,2M) H05VV-F 3G1,5mm² Max,3680W 16A/230V~



FKX-3D
FKX-6D

FKX-3D — FKX-6D (NA) CE

Model	FKX-				
	3D	4D	5D	6D	
Outlets quantity	3	4	5	6	
Shutter	✓	✓	✓	✓	H05VV-F 3G1,0mm ² (Max,2M)
Switch	✓	✓	✓	✓	H05VV-F 3G1,5mm ² Max,3680W 16A/230V~



FX-7
FX-8

FX-7 FX-8 (NA) CE

Model	FX-		
	7	8	
Outlets quantity	4x6A	6x6A	H05VVH ₂ -F 2X1,0mm ² (Max,2M) Max,1380W/230V~



NFS-002 (NA) CE

Model	NFS-	
	002	
Outlets quantity	3x1,6A + 4x6A	
Shutter	✓	H05VV-F 3G1,0mm ² (Max,2M) H05VV-F 3G1,5mm ²
Switch	✓	Max,3680W 16A/230V~



NFS-017
NFS-020

NFS-017 — NFS-020 (NA) CE

Model	NFS-			
	017	018	019	020
Outlets quantity	4	5	6	4x1,6A + 4x6A
Shutter	✓	✓	✓	✓
Switch	✓	✓	✓	✓

Overload protection
Surge protection

H05VV-F 3G1,0mm²(Max,2M) H05VV-F 3G1,5mm² Max,3680W 16A/230V~



NFS-080
NFS-083

NFS-080 — NFS-083 (NA) CE

Model	NFS-			
	080	081	082	083
Outlets quantity	4	5	6	4x1,6A + 4x6A
Shutter	✓	✓	✓	✓
Switch	✓	✓	✓	✓

Overload protection

H05VV-F 3G1,0mm²(Max,2M) H05VV-F 3G1,5mm² Max,3680W 16A/230V~



FPYX-4N
FPYX-6N

FPYX-3N — FPYX-6N (NA) CE IP44

Model	FPYX-				
	3N	4N	5N	6N	
Outlets quantity	3	4	5	6	H05RN-F H05RR-F 3G1,0mm ² (Max,2M) H07RN-F H05RR-F 3G1,5mm ² Max,3680W/230V~
Shutter	✓	✓	✓	✓	



FPYX-K-4N
FPYX-K-6N

FPYX-K-3N — FPYX-K-6N (NA) CE IP44

Model	FPYX-K-				
	3N	4N	5N	6N	
Outlets quantity	3	4	5	6	H05RN-F H05RR-F 3G1,0mm ² (Max,2M) H07RN-F H05RR-F 3G1,5mm ² Max,3680W/230V~
Shutter	✓	✓	✓	✓	
Switch	✓	✓	✓	✓	



NFS-030 (NA) IP44

Model	NFS-	
	030	
Outlets quantity	4	Rewirable
Shutter	✓	Max,3680W/230V~
Switch		



NFS-042 (NA) CE IP44

Model	NFS-	
	042	
Outlets quantity	4	H05RN-F H05RR-F 3G1,0mm ² (Max,2M) H07RN-F H05RR-F 3G1,5mm ² Max,3680W/230V~ Utility Model patent Patent Design
Shutter	✓	
Switch		



NFS-044		NA CE
Model	NFS-044	H05VV-F 3G1.0mm ² (Max.2M) H05VV-F 3G1.5mm ²
Outlets quantity	4	Max.3680W 16A/230V~
Shutter	✓	Transparent shell Patent Design



NFS-104		CE
Model	NFS-104	H05VV-F 3G1.0mm ² (Max.2M) H05VV-F 3G1.5mm ²
Outlets quantity	5	Max.3680W 16A/230V~
Shutter	✓	Individual switch
Switch	✓	



NFS-152		NA CE
Cable:	H05VV-F 3G1.0mm ² (Max.2M) 3G1.5mm ²	
Max. Power:	3680W 16A/250V~	
USB charging:	5V DC 2100mA	
Features:	Main switch and separate control switches Surge protection	



NFS-153 NFS-154		NA CE
Model	NFS-153 NFS-154	Cable: H05VV-F 3G1.0mm ² (Max.2M) 3G1.5mm ²
Outlets quantity	3 6	Max.3680W 16A/250V~
Switch	✓ ✓	
Features:	Main switch and separate control switches Overload protection	



NFS-091 NFS-092		NA CE
90° Corner use		
Rating:	Max.3680W, non-rewirable, IP20	
Cable:	H05VV-F 3G1.0mm ² (Max.2M) H05VV-F 3G1.5mm ²	
Model	NFS-091 NFS-092	
Outlets quantity	3x16A + 3x6A 6x16A + 3x6A	



NFS-094—NFS-097		CE
Power:	Max.3680W 16A/250V~	
Cable:	H05VV-F 3G1.0mm ² (Max.2M) H05VV-F 3G1.5mm ²	
Function:	1. Light-switch 2. 360° free rotating Patent Design	
Model	NFS-094 NFS-095 NFS-096 NFS-097	
Outlets quantity	3 4 5 6	
Button Switch	✓ ✓ ✓ ✓	



NFH-100 NA CE		
Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max7.5M
H05VV-F	3G1.5mm ²	Max5M
Product Features		
With thermal cut-out Structural patents		



NFH-062A NA CE		
Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max40M
H05VV-F	3G1.5mm ²	Max30M
Product Features		
With thermal cut-out		



NFH-101 NA CE		
Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max10M
H05VV-F	3G1.5mm ²	Max7.5M
Product Features		
With thermal cut-out Structural patents		



NFH-063A NA CE		
Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max40M
H05VV-F	3G1.5mm ²	Max50M
Product Features		
With thermal cut-out		



NFH-102 NA CE		
Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M
Product Features		
With thermal cut-out Structural patents		



NFH-064A NA CE		
Wire	Specifications	Length
H05VV-F	3G1.5mm ²	Max60M
Product Features		
With thermal cut-out		



NFH-005 NA CE		
Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max30M
H05VV-F	3G1.5mm ²	Max25M
Product Features		
With thermal cut-out		



NFH-065A NA CE IP44		
Wire	Specifications	Length
H05RR-F H05RN-F	3G1.0mm ²	Max20M
H05RR-F	3G1.5mm ²	Max15M
H07RN-F	3G1.5mm ²	Max10M
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M
Product Features		
With thermal cut-out		



NFH-061A NA CE		
Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M
Product Features		
With thermal cut-out		



NFH-066A NA CE IP44		
Wire	Specifications	Length
H05RR-F H05RN-F	3G1.0mm ²	Max40M
H05RR-F	3G1.5mm ²	Max25M
H07RN-F	3G1.5mm ²	Max20M
H07RN-F	3G2.5mm ²	Max15M
H05VV-F	3G1.0mm ²	Max40M
H05VV-F	3G1.5mm ²	Max30M
Product Features		
With thermal cut-out		



NFH-067A NS CE IP44		
Wire	Specifications	Length
H05RR-F H05RN-F	3G1.0mm ²	Max40M
H05RR-F H07RN-F	3G1.5mm ²	Max40M
H07RN-F	3G2.5mm ²	Max25M
H05VV-F	3G1.0mm ²	Max40M
H05VV-F	3G1.5mm ²	Max50M

Product Features
With thermal cut-out



NFH-078 CE		
Wire	Specifications	Length
H05VV-F	3G1.0mm ²	37M+3M
H05VV-F	3G1.5mm ²	47M+3M

Product Features
Prolongable electric wire disc fit for NFL-001
With thermal cut-out



NFH-068A NS CE IP44		
Wire	Specifications	Length
H05RR-F H07RN-F	3G1.5mm ²	Max50M
H07RN-F	3G2.5mm ²	Max30M
H05VV-F	3G1.5mm ²	Max60M

Product Features
With thermal cut-out



NFH-079 NS CE		
Wire	Specifications	Length
H05VV-F	3G1.0mm ²	37M+3M
H05VV-F	3G1.5mm ²	37M+3M
H05RR-F	3G1.0mm ²	37M+3M
H05RN-F	3G1.5mm ²	37M+3M
H05RN-F	3G1.0mm ²	37M+3M
H07RN-F	3G1.5mm ²	37M+3M



NFH-082A		
Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M

Product Features
French type cable reel with 3way socket
Thermic cut out, USBX2 DC5V 2.1A with identification chip



NFH-080 NS CE		
Wire	Specifications	Length
H05VV-F	3G1.5mm ²	57M+3M
H05RR-F	3G1.5mm ²	47M+3M
H07RN-F	3G1.5mm ²	47M+3M



NFH-083A		
Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max40M
H05VV-F	3G1.5mm ²	Max30M

Product Features
French type cable reel with 3way socket
Thermic cut out, USBX2 DC5V 2.1A with identification chip



NFH-086 NS CE		
Wire	Specifications	Length
H05RN-F H05RR-F	3G1.0mm ²	27M+3M
H07RN-F H05RR-F	3G1.5mm ²	22M+3M



NFH-077 CE		
Wire	Specifications	Length
H05VV-F	3G1.0mm ²	37M+3M
H05VV-F	3G1.5mm ²	27M+3M



Product Features
Prolongable electric wire disc fit for NFL-001
With thermal cut-out





NFH-017 NS CE IP44		
Wire	Specifications	Length
H05RN-F H05RR-F	3G1.0mm ²	Max15M
H05RR-F	3G1.5mm ²	Max10M
H07RN-F	3G1.5mm ²	Max8M

Product Features
With thermal cut-out





NFH-018   IP44			
Wire	Specifications	Length	
H05RN-F H05RR-F	3G1.0mm ²	Max25M	
H05RR-F	3G1.5mm ²	Max20M	
H07RN-F	3G1.5mm ²	Max12M	
Product Features			
With thermal cut-out			





NFH-026   IP44			
Wire	Specifications	Length	
H07RN-F	3G2.5mm ²	Max50M	
Product Features			
Attached plug YC-DA-16Z		With thermal cut-out	





NFH-019   IP44			
Wire	Specifications	Length	
H05RN-F H05RR-F	3G1.0mm ²	Max30M	
H05RR-F	3G1.5mm ²	Max20M	
H07RN-F	3G1.5mm ²	Max15M	
Product Features			
With thermal cut-out			





NFH-027   IP44			
Wire	Specifications	Length	
H07RN-F	5G2.5mm ²	Max25M	
Product Features			
Attached plug YC-DA-101Z		With thermal cut-out	





NFH-023   IP44			
Wire	Specifications	Length	
H07RN-F	3G1.5mm ²	Max35M	
H05RR-F	3G1.5mm ²	Max40M	
H07RN-F	3G2.5mm ²	Max30M	
Product Features			
Metal reel	With thermal cut-out		





NFH-028   IP44			
Wire	Specifications	Length	
H07RN-F	5G2.5mm ²	Max50M	
Product Features			
Attached plug YC-DA-101Z		With thermal cut-out	





NFH-024   IP44			
Wire	Specifications	Length	
H07RN-F	3G1.5mm ²	Max45M	
H05RR-F	3G1.5mm ²	Max55M	
H07RN-F	3G2.5mm ²	Max40M	
Product Features			
Metal reel	With thermal cut-out		





NFH-029  			
Wire	Specifications	Length	
H05VV-F	3G1.0mm ²	Max40M	
H05VV-F	3G1.5mm ²	Max50M	
Product Features			
Central part fixed Metal reel,with thermal cut-out			



NFH-025   IP44			
Wire	Specifications	Length	
H07RN-F	3G1.5mm ²	Max45M	
H05RR-F	3G1.5mm ²	Max55M	
H07RN-F	3G2.5mm ²	Max40M	
Product Features			
With thermal cut-out			



NFH-030  			
Wire	Specifications	Length	
H05VV-F	3G1.0mm ²	Max30M	
H05VV-F	3G1.5mm ²	Max25M	
Product Features			
Central part fixed Metal reel,with thermal cut-out			



NFH-031 NS CE IP44

Wire	Specifications	Length
H05RN-F H05RR-F	3G1.0mm ²	Max40M
H07RN-F H05RR-F	3G1.5mm ²	Max50M
H05VV-F	3G1.0mm ²	Max40M
H05VV-F	3G1.5mm ²	Max50M

Product Features

Central part fixed
Metal reel, with thermal cut-out



NFH-032 NS CE IP44

Wire	Specifications	Length
H05RN-F H05RR-F	3G1.0mm ²	Max30M
H07RN-F H05RR-F	3G1.5mm ²	Max25M
H05VV-F	3G1.0mm ²	Max30M
H05VV-F	3G1.5mm ²	Max25M

Product Features

Central part fixed
Metal reel, with thermal cut-out



NFH-043 NS CE

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max40M
H05VV-F	3G1.5mm ²	Max50M

Product Features

Central part fixed
With thermal cut-out



NFH-044 NS CE

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max30M
H05VV-F	3G1.5mm ²	Max25M

Product Features

Central part fixed
With thermal cut-out



NFH-056 CE IP44

Wire	Specifications	Length
H07RN-F	3G1.5mm ²	Max30M
H05RR-F	3G1.5mm ²	Max55M
H07RN-F	3G2.5mm ²	Max40M

Product Features

With thermal cut-out



NFH-076 NS CE

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max25M
H05VV-F	3G1.5mm ²	Max20M



NFH-085 NS CE

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M

Product Features

With thermal cut-out





NFH-103 NS CE

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max10M+2M
H05VV-F	3G1.5mm ²	Max10M+2M

Product Features

Prolongable electric wire disc fit for
NFL-001A attached plug HY005-F



NFL-012   IP44

H05RN-F H05RR-F 3G1.5mm²

H07RN-F H05RR-F 3G1.5mm²

230V Max.3680W/230V~

Detachable earth spike

Remote Control



NFL-013 NFL-013A  

H05V-F 3G1.0mm²-3G1.5mm²

Max.1680W/230V~

Rotating switch With light



NFS-137

NFS-136

GEP-012

NFS-138

NFS-136 NFS-137 NFS-138 GEP-012  

Plug for assembled type socket
 Fit for H05RN-F H05RR-F 3G1.0mm²
 H07RN-F H05RR-F 3G1.5mm²
 16A/250V~



YC-FAX-4 YC-FA-4Z 

Plug for assembled type socket
 Fit for H05VV-F 3G1.0mm²-3G1.5mm²
 Max.3680W/230V~



YC-FAX-6 YC-DA-14Z **IP44**

Plug for assembled type socket
 Max.3680W/230V~



YC-FAX-7  

H03VH₂-F 2X0.75mm²
 Max.1680W/230V~



YC-FAX-12  **IP44**

16A/230V~
 Max.3680W/230V~



NFL-001A  

H05V-F 3G1.0mm²-3G1.5mm²
 Max.3680W/230V~



NFL-004A   IP44

HD5V-F 3G1.0mm²-3G1.5mm²
 H05RN-F H05RR-F 3G1.0mm²
 HD7RN-F H05RR-F 3G1.5mm²
 Max.3680W/230V~
 H07RN-F,3G2.5mm²



NFL-005   IP44

HD5V-F 3G1.0mm²-3G1.5mm²
 HD5RN-F H05RR-F 3G1.0mm²
 HD7RN-F H05RR-F 3G1.5mm²
 Max.3680W/230V~



NFL-006   IP44

HD5RN-F H05RR-F 3G1.0mm²
 HD7RN-F H05RR-F 3G1.5mm²
 Max.3680W/230V~
 Detachable earth spike



NFL-007   IP44

HD5RN-F H05RR-F 3G1.0mm²
 HD7RN-F H05RR-F 3G1.5mm²
 Max.3680W/230V~
 Detachable earth spike



NFL-008   IP44

HD5RN-F H05RR-F 3G1.0mm²
 HD7RN-F H05RR-F 3G1.5mm²
 Max.3680W/230V~
 Detachable earth spike



NFL-009  IP44

Plug for assembled type socket
 Fit for H05RN-F H05RR-F 3G1.0mm²
 H07RN-F H05RR-F 3G1.5mm²
 Max.3680W/230V~
 Rewirable



NFL-010   IP44

H05RN-F H05RR-F 3G1.0mm²
 H07RN-F H05RR-F 3G1.5mm²
 Max.3680W/230V~
 Detachable earth spike



NFL-011A  

H05V-F 2X1.0mm²-2X1.5mm²



NFL-014A   IP44

H05V-F 3G1.0mm²-3G1.5mm²
 H05RN-F H05RR-F 3G1.0mm²
 H07RN-F H05RR-F 3G1.5mm²
 Max.3680W/230V~



NFL-015  

H05V-F 2X1.0mm²-2X1.5mm²
 H05RR-F 2X1.0mm²-2X1.5mm²
 H05RN-F 2X1.0mm²
 Max.3680W/230V~



NFL-016 (NA) CE

H03VH₂-F 2X0.75mm²
 H05VH₂-F 2X0.75mm²-2X1.0mm²
 6A/250V~



NFL-020 (NA) CE IP44

H07RN-F H05RR-F 3G1.5mm²
 16A/250V~
 Detachable earth spike



NFL-021 (NA) CE IP44

H07RN-F H05RR-F 3G1.5mm²
 16A/250V~
 Detachable earth spike With timer



NFL-003 (NA) IP44

Max.3680W/230V~
 Rewirable



NFS-031 NFP-002 IP65

Plug for assembled type socket
 Fit for H05RN-F H05RR-F 3G1.0mm²
 H07RN-F H05RR-F 3G1.5mm²
 16A/250V~



NFS-134 (NA) CE

Adaptor with sensor switch
 1 Way French socket
 Rating:3/250~,2P+E,Max.690W,IP20



NFS-135 (NA) CE

Adaptor with sensor switch
 1 Way French socket
 Rating:3/250~,2P+E,Max.690W,IP20



NFS-130/NFS-130A (NA) CE

Adaptor with USB POWER(2.1A)
 1 Way French socket
 Rating:16/250~,2P+E,Max.3680W,IP20
 NFS-130 not with identification function
 NFS-130A with identification function



NFS-034 (NA)

With switch
 Plug:16A/230V~ 2P+E
 Socket:16A/250V~ 1 way



NFS-035 (NA)

With surge protection
 Plug:16A/230V~ 2P+E
 Socket:16A/230V~ 1 way

KIMPORT



NFS-045

Plug: 16A/230V~ 2P+E
 Socket: 16A/230V~ 2 ways 2.5A/230V~ 1 way
 Max. 3680W/230V~
 Not for France



ODL-137 (NA)

Plug: 16A/230V~ 2P+E
 Socket: 16A/230V~ 2 ways 6A/230V~ 1 way
 Max. 3680W/230V~
 Utility model patent Patent Design



ODL-138 (NA)

Plug: 16A/230V~ 2P+E
 Socket: 16A/230V~ 2 ways
 Max. 3680W/230V~
 Utility model patent Patent Design



ODL-139 (NA)

Plug: 16A/230V~
 Socket: 6A/230V~ 4 ways
 Max. 1380W/230V~
 Utility model patent Patent Design



ODL-140 (NA)

Plug: 16A/230V~ 2P+E
 Socket: 16A/230V~ 1 way 6A/230V~ 2 ways
 Max. 3680W/230V~
 Utility model patent Patent Design



ODL-141 (NA)

Plug: 16A/230V~
 Socket: 6A/230V~ 2 ways
 Max. 1380W/230V~
 Utility model patent Patent Design



ODL-142 (NA)

Plug: 16A/230V~
 Socket: 6A/230V~ 3 ways
 Max. 1380W/230V~
 Utility model patent Patent Design



ODL-143 (NA)

Plug: 16A/230V~
 Socket: 6A/230V~ 3 ways
 Max. 1380W/230V~
 Utility model patent Patent Design



EFX-14 (NA)

Plug: 16A/230V~ 2P+E
 Socket: 16A/230V~ 3 ways
 Max. 3680W/230V~
 Utility model patent Patent Design



NFS-056 (NA)

With switch
 Plug: 16A/250V~ 2P+E
 Socket: 16A/250V~ 1 way 2.5A/250V~ 2 ways
 Max. 3680W/230V~



NFS-057 

Function: 3-way
Rating: 16A/250V~ 2P+E, Max.3680W, IP20




NFS-058 

Function: 1-way with switch
Rating: 16A/250V~ 2P+E, Max.3680W, IP20



NFS-103 

With switch
Plug: 16A/250V~ 2P+E
Socket: 16A/250V~ 2 ways
Max.3680W/230V~

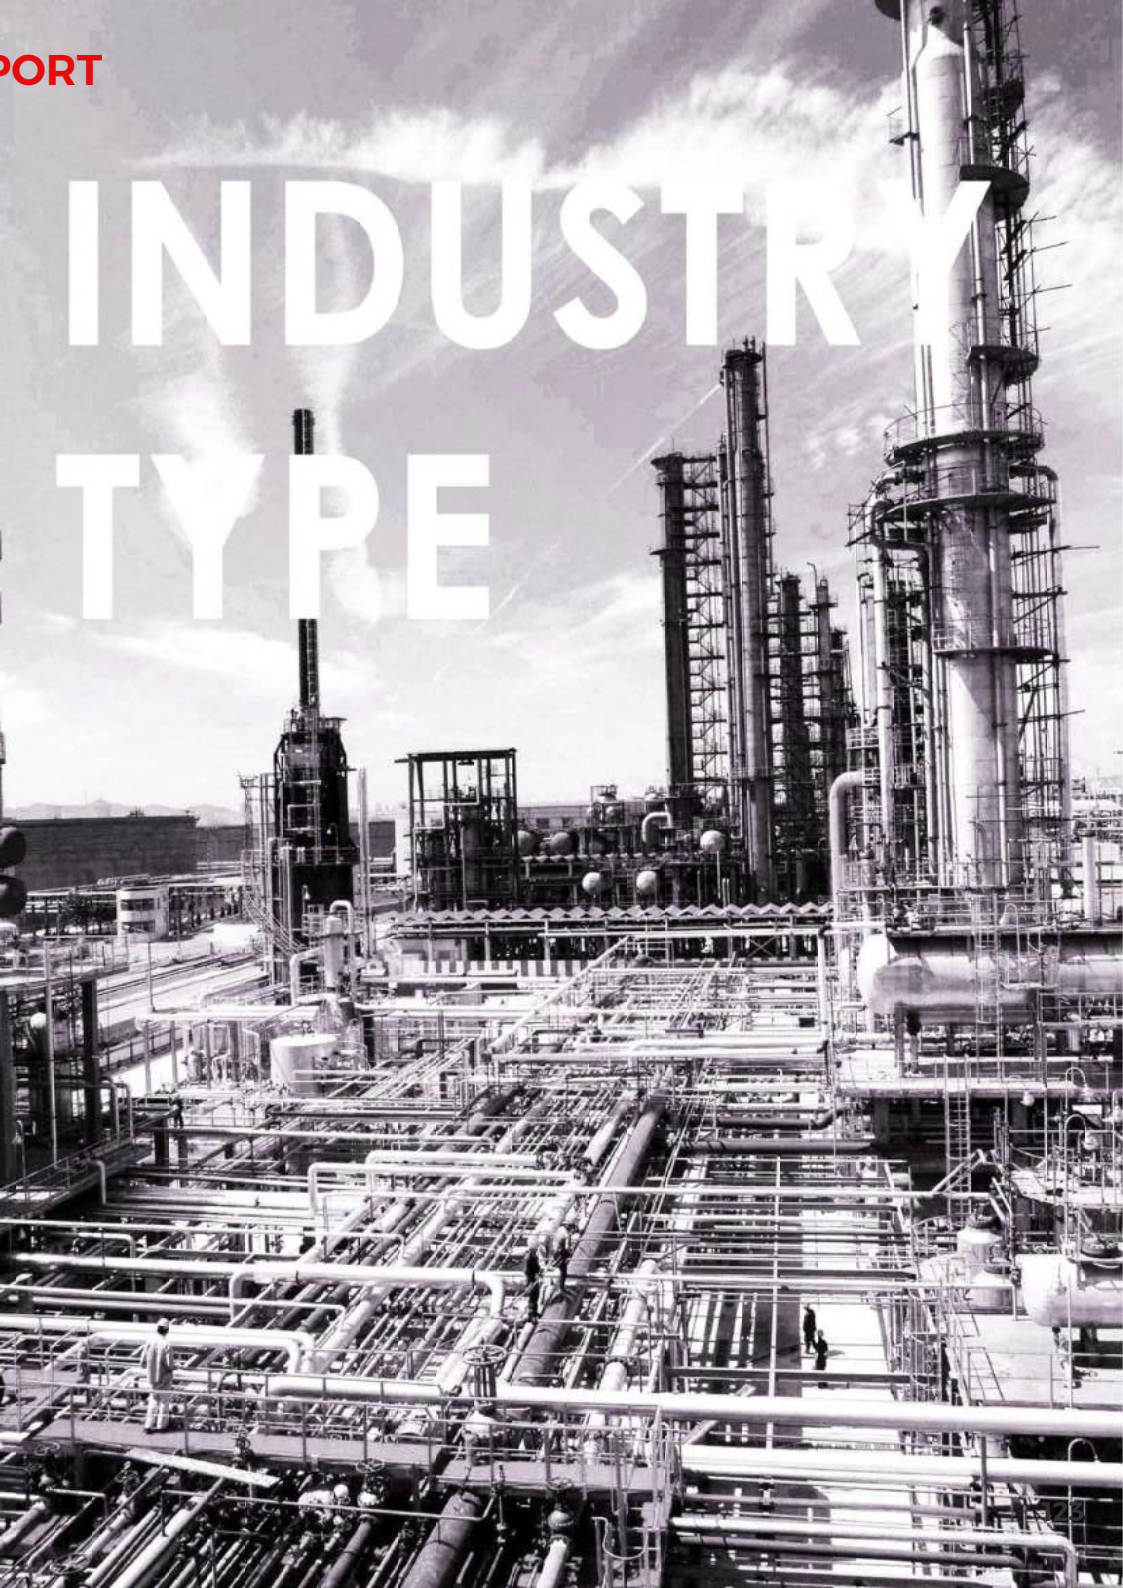



IIP-015 IP44

3pins rewire able plug for industry using.Screwless.
2P+E, 16A-6h
Socket:200-250V~ 50/60HZ
Blue/Grey



IIP-020 IP44

5pins fixed plug for industry using.Screwless.
3P+N+E, 16A-6h
Socket:220/346V~ 240/415V~
Red/Grey



IIP-016 IP44

5pins rewire able plug for industry using.Screwless.
3P+N+E, 16A-6h
Socket:220/346V~ 240/415V~ 50/60HZ
Red/Grey



IIP-021 IP44

5pins fixed plug for industry using.Screwless.
3P+N+E, 32A-6h
Socket:220/346V~ 240/415V~
Red/Grey



IIP-017 IP44

5pins rewire able plug for industry using.Screwless.
3P+N+E, 32A-6h
Socket:220/346V~ 240/415V~ 50/60HZ
Red/Grey



IIS-016 IP44

3pins rewire able socket for industry using.Screwless.
2P+E, 16A-6h
Socket:200-250V~ 50/60HZ
Blue/Grey



IIP-018 IP66/67

5pins rewire able plug for industry using.Screwless.
3P+N+E, 32A-6h
Socket:220/346V~ 240/415V~ 50/60HZ
Red/Grey



IIS-017 IP44

5pins rewire able socket for industry using.Screwless.
3P+N+E, 16A-6h
Socket:220/346V~ 240/415V~ 50/60HZ
Red/Grey



IIP-019 IP44

3pins fixed plug for industry using.Screwless.
2P+E, 16A-6h
Socket:200-250V~ 50/60HZ
Blue/Grey



IIS-018 IP44

5pins rewire able socket for industry using.Screwless.
3P+N+E, 32A-6h
Socket:220/346V~ 240/415V~ 50/60HZ
Red/Grey


IIS-019  **IP67**

5pins rewire able socket for industry using,Screwless.
 3P+N+E, 32A-6h
 Socket:220/346V~ 240/415V~ 50/60HZ
 Red/Grey


IIS-020  **IP44**

5pins fixed socket for industry using,Screwless.
 3P+N+E, 16A-6h
 Socket:220/380V~ 240/415V~
 Red/Grey


IIS-021  **IP44**

5pins fixed socket for industry using,Screwless.
 3P+N+E, 32A-6h
 Socket:220/346V~ 240/415V~
 Red/Grey


IIS-022  **IP44**

5pins fixed socket for industry using,Screwless.
 3P+N+E, 16A-6h
 Socket:220/346V~ 240/415V~ 2P+E,16/250~, Schuko type
 Red/Blue/Grey

CZECH TYPE





NFS-021 — NFS-024

Model	NFS-			
	021	022	023	024
Outlets quantity	3	4	5	6

Rewirable
Not for France
Max.3680W 16A/230V~



NFS-025 — NFS-028

Model	NFS-			
	025	026	027	028
Outlets quantity	3	4	5	6
Switch	√	√	√	√

Rewirable
Not for France
Max.3680W 16A/230V~



NFS-032 — NFS-033 KEMA EUR CE

Model	NFS-		
	032	033	
Outlets quantity	3x16A 4x2,5A	3x16A 4x2,5A	H05VV-F 3G1.0mm ² (Max.2M) H05VV-F 3G1.5mm ² Max.3680W 16A/230V~ Rewirable Not for France
Shutter	√	√	
Switch		√	



NFH-070A CE

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M

Product Features
With thermal cut-out



NFH-071A CE

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max40M
H05VV-F	3G1.5mm ²	Max30M

Product Features
With thermal cut-out



NFH-072A CE

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max40M
H05VV-F	3G1.5mm ²	Max50M

Product Features
With thermal cut-out



NFH-088A CE

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M

Product Features
With thermal cut-out



NFH-089A CE

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max40M
H05VV-F	3G1.5mm ²	Max30M

Product Features
With thermal cut-out



NFH-090A CE		
Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max40M
H05VV-F	3G1,5mm ²	Max50M

Product Features
With thermal cut-out



NFH-095A CE IP44		
Wire	Specifications	Length
H05RR-F H07RN-F	3G1,5mm ²	Max50M
H07RN-F	3G2,5mm ²	Max30M
H05VV-F	3G1,5mm ²	Max60M

Product Features
With thermal cut-out



NFH-091A CE		
Wire	Specifications	Length
H05VV-F	3G1,5mm ²	Max60M

Product Features
With thermal cut-out



NFH-096A CE IP44		
Wire	Specifications	Length
H05RR-F H05RN-F	3G1,0mm ²	Max20M
H05RR-F	3G1,5mm ²	Max15M
H07RN-F	3G1,5mm ²	Max10M
H05VV-F	3G1,0mm ²	Max20M
H05VV-F	3G1,5mm ²	Max15M

Product Features
With thermal cut-out



NFH-092A CE IP44		
Wire	Specifications	Length
H05RR-F H05RN-F	3G1,0mm ²	Max20M
H05RR-F	3G1,5mm ²	Max15M
H07RN-F	3G1,5mm ²	Max10M
H05VV-F	3G1,0mm ²	Max20M
H05VV-F	3G1,5mm ²	Max15M

Product Features
With thermal cut-out



NFH-097A CE IP44		
Wire	Specifications	Length
H05RR-F H05RN-F	3G1,0mm ²	Max40M
H05RR-F	3G1,5mm ²	Max25M
H07RN-F	3G1,5mm ²	Max20M
H07RN-F	3G2,5mm ²	Max15M
H05VV-F	3G1,0mm ²	Max40M
H05VV-F	3G1,5mm ²	Max30M

Product Features
With thermal cut-out



NFH-093A CE IP44		
Wire	Specifications	Length
H05RR-F H05RN-F	3G1,0mm ²	Max40M
H05RR-F	3G1,5mm ²	Max25M
H07RN-F	3G1,5mm ²	Max20M
H07RN-F	3G2,5mm ²	Max15M
H05VV-F	3G1,0mm ²	Max40M
H05VV-F	3G1,5mm ²	Max30M

Product Features
With thermal cut-out



NFH-098A CE IP44		
Wire	Specifications	Length
H05RR-F H05RN-F	3G1,0mm ²	Max40M
H05RR-F H07RN-F	3G1,5mm ²	Max40M
H07RN-F	3G2,5mm ²	Max25M
H05VV-F	3G1,0mm ²	Max40M
H05VV-F	3G1,5mm ²	Max50M

Product Features
With thermal cut-out



NFH-094A CE IP44		
Wire	Specifications	Length
H05RR-F H05RN-F	3G1,0mm ²	Max40M
H05RR-F H07RN-F	3G1,5mm ²	Max40M
H07RN-F	3G2,5mm ²	Max25M
H05VV-F	3G1,0mm ²	Max40M
H05VV-F	3G1,5mm ²	Max50M

Product Features
With thermal cut-out



NFH-099A CE IP44		
Wire	Specifications	Length
H05RR-F H07RN-F	3G1,5mm ²	Max50M
H07RN-F	3G2,5mm ²	Max30M
H05VV-F	3G1,5mm ²	Max60M

Product Features
With thermal cut-out

SWISS TYPE



Model	SWS-				
	001	002	006	007	008
Outlets quantity	3	6	4	5	8
Shutter	✓	✓	✓	✓	✓
Switch	✓	✓	✓	✓	✓

H05VV-F 3G1.0mm²
 H05VV-F 3G1.5mm²
 Max.2300W 10A/230V~

SWS-003

 Plug: 10A/230V~ 2P+E
 Socket: 10A/230V~ 3-ways



SWH-005		
Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max30M
H05VV-F	3G1.5mm ²	Max25M
H05RR-F H05RN-F	3G1.0mm ²	Max25M
H05RR-F	3G1.5mm ²	Max20M
H07RN-F	3G1.5mm ²	Max15M
Product Features		
With thermal cut-out		



SWH-007		
Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max30M
H05VV-F	3G1.5mm ²	Max25M
Product Features		
With thermal cut-out		



SWH-012		
Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M
Product Features		
With thermal cut-out		





SWH-013		
Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max40M
H05VV-F	3G1,5mm ²	Max30M
Product Features		
With thermal cut-out		



SWH-018		
Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max40M
H05VV-F	3G1,5mm ²	Max50M
Product Features		
Cable reel with 3way socket Thermic cut out USBX2 DC5V 2,1A with identification chip		



SWH-014		
Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max40M
H05VV-F	3G1,5mm ²	Max50M
Product Features		
With thermal cut-out		



SWH-019		
Wire	Specifications	Length
H05VV-F	3G1,5mm ²	Max60M
Product Features		
Cable reel with 3way socket Thermic cut out USBX2 DC5V 2,1A with identification chip		



SWH-015		
Wire	Specifications	Length
H05VV-F	3G1,5mm ²	Max60M
Product Features		
With thermal cut-out		



SWL-001	
H05VV-F 3G1,0mm ² -3G1,5mm ²	16A/250V~



SWH-016		
Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max20M
H05VV-F	3G1,5mm ²	Max15M
Product Features		
Cable reel with 3way socket Thermic cut out USBX2 DC5V 2,1A with identification chip		



SWL-002	
H05VV-F 2X1,0mm ² -2X1,5mm ²	10A/250V~



SWH-017		
Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max40M
H05VV-F	3G1,5mm ²	Max30M
Product Features		
Cable reel with 3way socket Thermic cut out USBX2 DC5V 2,1A with identification chip		



SWL-003	
H05RN-F H05RR-F 3G1,0mm ²	10A/250V~
H07RN-F H05RR-F 3G1,5mm ²	

ITALY TYPE



ITS-001
ITS-002
ITS-008

ITS-001 ITS-002 ITS-008

ITS-001 3-way 2P+E P30 & 3-way 2P+E P17/11
 ITS-002 3-way 2P+E P17/11
 ITS-008 6-way 2P+E P17/11, with switch
 H05VV-F 3G1.0mm² H05VV-F 3G1.5mm² 16A/250V~



ITS-003

Plug: 16A/250V~ 2P+E
 Socket: 2-way 2P+E P17/11 & 1-way 2P+E P30



ITS-004

Plug: 10A/250V~ 2P+E
 Socket: 3-way 2P+E P11



ITS-005

Plug: 16A/250V~ 2P+E
 Socket: 3-way 2P+E P17/11



ITS-006

Plug: 10A/250V~ 2P+E
 Socket: 1-way 2P+E P30





ITS-007

Plug: 16A/250V~ 2P+E
Socket: 1-way 2P+E P30



ITS-009 ITS-010

ITS-009 3-way P40
ITS-010 5-way with switch P40
H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²



ITS-011B
ITS-011D

ITS-011B(D)

ITS-011B With USB DC5V 2.1A P40
ITS-011D With USB DC5V 1A+2A P40
3-way with switch
H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²



ITS-012B
ITS-012D

ITS-012B(D)

ITS-012B With USB DC5V 2.1A P40
ITS-012D With USB DC5V 1A+2A P40
5-way with switch
H05VV-F 3G1.0mm² H05VV-F 3G1.5mm²



ITL-001

H05VV-F 3G1.0mm²-3G1.5mm²
16A/250V~ 2P+E P17/11



ITH-005

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max25M
H05VV-F	3G1.5mm ²	Max20M



ITH-009

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max7.5M
H05VV-F	3G1.5mm ²	Max5M

Product Features
With thermal cut-out



ITH-010

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M

Product Features
With thermal cut-out



ITH-011

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max20M
H05VV-F	3G1.5mm ²	Max15M

Product Features
With thermal cut-out



ITH-012 CE

Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max40M
H05VV-F	3G1,5mm ²	Max30M

Product Features
With thermal cut-out



ITH-016 CE

Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max40M
H05VV-F	3G1,5mm ²	Max30M

Product Features
Cable reel with 3way socket;
Thermic cut out; USBX2 DC5V 2.1A with identification chip



ITH-013 CE

Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max40M
H05VV-F	3G1,5mm ²	Max50M

Product Features
With thermal cut-out



ITH-017 CE

Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max40M
H05VV-F	3G1,5mm ²	Max50M

Product Features
Cable reel with 3way socket;
Thermic cut out; USBX2 DC5V 2.1A with identification chip



ITH-014 CE

Wire	Specifications	Length
H05VV-F	3G1,5mm ²	Max60M

Product Features
With thermal cut-out



ITH-018 CE

Wire	Specifications	Length
H05VV-F	3G1,5mm ²	Max60M

Product Features
Cable reel with 3way socket;
Thermic cut out; USBX2 DC5V 2.1A with identification chip



ITH-015 CE

Wire	Specifications	Length
H05VV-F	3G1,0mm ²	Max20M
H05VV-F	3G1,5mm ²	Max15M

Product Features
Cable reel with 3way socket;
Thermic cut out; USBX2 DC5V 2.1A with identification chip

America Type



LD-0820



ULS-001

Power: 15A/125V~
 Power strip with 6 outlets
 With overload switch
 SJT 14AWG X 3C,VW-1,300V,60°C/105°C



ULS-002A

Power: 15A/125V~
 SJT 14AWG X 3C,VW-1,300V,60°C/105°C
 Function: 1.With overload switch
 2.USB Charging, 5V DC 1000mA



ULS-002B

Power: 15A/125V~
 SJT 14AWG X 3C,VW-1,300V,60°C/105°C
 Function: 1.With overload switch
 2.With surge protection



ULS-002C

Power: 15A/125V~
 SJT 14AWG X 3C,VW-1,300V,60°C/105°C
 Function: 1.With overload switch
 2.With RJ45X2+RJ11X2



ULS-002D

Power: 15A/125V~
 SJT 14AWG X 3C,VW-1,300V,60°C/105°C
 Function: 1.With overload switch
 2.With power indicator show



ULS-002E

Power: 15A/125V~
 SJT 14AWG X 3C,VW-1,300V,60 C/105 C
 Function: 1.With overload switch
 2.With grounding light show



ULL-001

Power	Specifications
Wire Length ≤ 50ft	15A/125V~ SJT 14AWG X 3C,VW-1,300V,60 C/105 C (With HY048-F Plug)
50ft ≤ Wire Length ≤ 100ft	13A/125V~ SJT 14AWG X 3C,VW-1,600V,60 C/105 C (With HY048-F Plug) STW 14AWG X 3C,VW-1,300V,60 C/105 C (With ULP-003 Plug)
Wire Length ≤ 50ft	15A/125V~ STW 12AWG X 3C,VW-1,300V,60 C/105 C (With ULP-003 Plug) SJT 12AWG X 3C,VW-1,300V,60 C/105 C (With ULP-003 Plug)
50ft < Wire Length ≤ 100ft	13A/125V~ STW 14AWG X 3C,VW-1,300V,60 C/105 C (With ULP-003 Plug)

-Fan-shaped design with three outlets



ULL-002

Power	Specifications
Wire Length ≤ 50ft	SJT SJTW 16AWG/3C 60 C/105 C
13A/125V~	SJT SJTW 14AWG/3C 60 C/105 C
Wire Length > 50ft	SJT SJTW 16AWG/3C 60 C/105 C
10A/125V~	SJT SJTW 14AWG/3C 60 C/105 C



ULL-003

Power	Specifications
Wire Length ≤ 50ft	13A/125V~ 2P SJT 16AWG/2C 60 C (With ULP-002 Plug)
13A/125V~ 2P	SPT-2 16AWG/2C 105 C (With ULP-001 Plug)



ULL-004

Power	Specifications
Wire Length ≤ 50ft	13A/125V~ 2P
50ft < Wire Length ≤ 100ft	10A/125V~ 2P SPT 16AWG / 2C 60 C/105 C



ULL-005

Power	Specifications
Wire Length ≤ 50ft(15.2M)	13A/125V~ SJT / SJTW 16AWG X 3C
Wire Length > 50ft(15.2M)	10A/125V~ SJT / SJTW 14AWG X 3C
Wire Length ≤ 50ft(15.2M)	15A/125V~ SJT / SJTW 14AWG X 3C
Wire Length > 50ft(15.2M)	13A/125V~



ULH-001

Wire	Specifications	Length
SJT / SJTW	14AWG X 3C	Max10M



ULH-006(A)

Wire	Specifications	Length
SJT / SJTW	16AWG X 3C	Max5M
ULH-006: USBX2 DC 5V 2.1A		
ULH-006A: USBX2 DC 5V 3.1A		



ULH-002

Wire	Specifications	Length
SJT / SJTW	14AWG X 3C	Max15M



ULH-007(A)

Wire	Specifications	Length
SJT / SJTW	16AWG X 3C	Max7.5M
ULH-007: USBX2 DC 5V 2.1A		
ULH-007A: USBX2 DC 5V 3.1A		



ULH-003

Wire	Specifications	Length
SJT / SJTW	16AWG X 3C	Max5M



ULH-008(A)

Wire	Specifications	Length
SJT / SJTW	16AWG X 3C	Max15M
ULH-008: USBX2 DC 5V 2.1A		
ULH-008A: USBX2 DC 5V 3.1A		



ULH-004

Wire	Specifications	Length
SJT / SJTW	16AWG X 3C	Max7.5M



ULH-009

Wire	Specifications	Length
SJT / SJTW	16AWG X 3C	Max25M
SJT / SJTW	14AWG X 3C	Max18M
SJT / SJTW	12AWG X 3C	Max16M



ULH-005

Wire	Specifications	Length
SJT / SJTW	16AWG X 3C	Max15M



ULH-010

Wire	Specifications	Length
SJT / SJTW	16AWG X 3C	Max30M
SJT / SJTW	14AWG X 3C	Max25M
SJT / SJTW	12AWG X 3C	Max20M



ULH-011 

Wire	Specifications	Length
SJT / SJTW	16AWG X 3C	Max30M
SJT / SJTW	14AWG X 3C	Max30M
SJT / SJTW	12AWG X 3C	Max30M

ULH-012 

Wire	Specifications	Length
SJT / SJTW	16AWG X 3C	Max25M+3M
SJT / SJTW	14AWG X 3C	Max18M+3M
SJT / SJTW	12AWG X 3C	Max16M+2M

ULH-013 

Wire	Specifications	Length
SJT / SJTW	16AWG X 3C	Max27M+3M
SJT / SJTW	14AWG X 3C	Max25M+3M
SJT / SJTW	12AWG X 3C	Max20M+2M

ULH-014 


Wire	Specifications	Length
SJT / SJTW	16AWG X 3C	Max27M+3M
SJT / SJTW	14AWG X 3C	Max27M+3M
SJT / SJTW	12AWG X 3C	Max28M+2M

ULH-015 

Wire	Specifications	Length
SJT / SJTW	14AWG X 3C	Max8M+2M

LD-0820

Australia Type

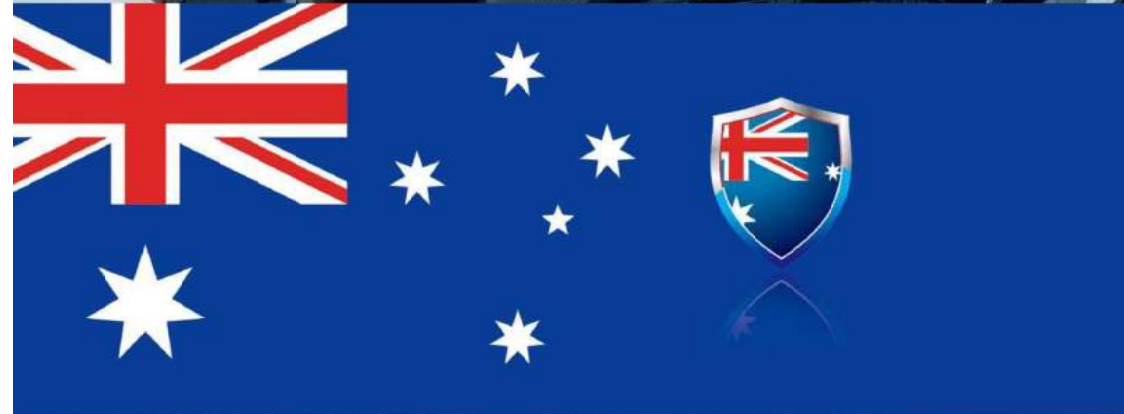



ASS-001 ASS-002

10A/250V~ H05VV-F 3G1.0mm²~1.5mm² Max 1.8M
With switch



ASS-001A ASS-002A

10A/250V~ H05VV-F 3G1.0mm²~1.5mm² Max 1.8M



ASH-001A

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max15M

Product Features
With thermal cut-out
Power:10A/250V~,2P+E



ASH-002A

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max25M

Product Features
With thermal cut-out
Power:10A/250V~,2P+E



ASH-003A

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max45M

Product Features
With thermal cut-out
Power:10A/250V~,2P+E



ASH-004A

Wire	Specifications	Length
H05VV-F	3G1.0mm ²	Max60M

Product Features
With thermal cut-out
Power:10A/250V~,2P+E



ASL-001

Power	Specification
10A/250V~	H05VV-F 3G0.75mm ² ~1.0mm ²



ASL-001A

Power	Specification
10A/250V~	H05VV-F 3G0.75mm ² ~1.0mm ²

With light



ASL-002

Power	Specification
10A/250V~	H05VV-F 3G1,5mm ² 4V-75 H07VV-F 0,6/1KV 3G1,5mm ²




ASL-002A

Power	Specification
10A/250V~	H05VV-F 3G1,5mm ² 4V-75 H07VV-F 0,6/1KV 3G1,5mm ²
With light	



ASL-003 ASL-003A

Power	Specification
10A/250V~	H05VV-F 3G1,5mm ² 4V-75 H07VV-F 0,6/1KV 3G1,5mm ²
With light(ASL-003A)	

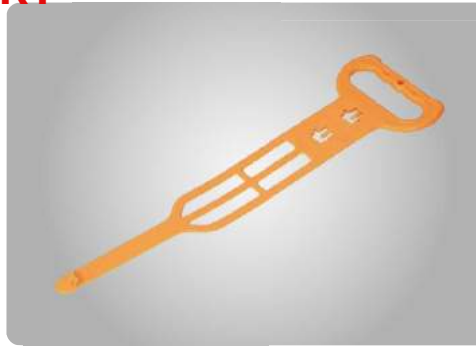

GEO-003



GEO-005

Distance 25~30M



KP2-2

4A/250V





BRS-001

- 1.Power: 10A/125V~
- 2.Specification:60227IEC53 2X0.75mm²~1.0mm²



BRL-001

- 1.Power: 10A/125V~
- 2.Specification:60227IEC53 2X0.75mm²~1.0mm²



BRL-002

- 1.Power: 10A/125V~
- 2.Specification:60227IEC53 2X0.75mm²~1.0mm²



HY005-F

Wire	Specifications
H03VV-F	3G0.75mm ²
H05VV-F	3G0.75mm ² -3G1.5mm ²
H05RN-F	3G0.75mm ² -3G1.0mm ²
H05RR-F	3G0.75mm ² -3G1.0mm ²

Product Features
Power: 16A/250V~,2P+E



HY006-F

Wire	Specifications
H03VV-F	3G0.75mm ²
H05VV-F	3G0.75mm ² -3G1.5mm ²
H05RN-F	3G0.75mm ² -3G1.0mm ²
H05RR-F	3G0.75mm ² -3G1.0mm ²

Product Features
Power: 16A/250V~,2P+E



HY009-F

Wire	Specifications
H05RN-F	3G0.75mm ² -3G1.0mm ²
H05RR-F	3G0.75mm ² -3G1.0mm ²
H05VV-F	3G0.75mm ² -3G1.5mm ²

Product Features
Power: 16A/250V~,2P+E



HY020-F

Wire	Specifications
H03VVH ₂ -F	2X0.5mm ² -2X0.75mm ²
H05VVH ₂ -F	2X0.75mm ² -2X1.5mm ²

Product Features
Power: 2.5A/250V~,2P



HY051-F

Wire	Specifications
H03VVH ₂ -F	2X0.75mm ²
H05VVH ₂ -F	2X0.75mm ² -2X1.0mm ²

Product Features
Power: 6A/250V~,2P



HY052-F	
Wire	Specifications
H05VV-F	3G1,5mm ² -3G2,5mm ²
Product Features	
Power: 16A/250V~,2P+E	



GEP-009	
Wire	Specifications
H03VV-F	3G0,75mm ²
H05VV-F	3G0,75mm ² -3G1,5mm ²
Product Features	
Power: 16A/250V~,2P+E	



GEP-001	
Wire	Specifications
H05VV-F	3G0,75mm ² -3G1,5mm ²
H05RN-F	3G0,75mm ² -3G1,0mm ²
H05RR-F	3G0,75mm ² -3G1,5mm ²
Product Features	
Power: 16A/250V~,2P+E	



GEP-010	
Wire	Specifications
H03VV ₂ -F	2X0,5mm ² -2X0,75mm ²
H05VV ₂ -F	2X0,75mm ² -2X1,5mm ²
Product Features	
Power: 2,5A/250V~,2P	



GEP-002	
Wire	Specifications
H05RN-F	3G0,75mm ² -3G1,0mm ²
H05RR-F	3G0,75mm ² -3G1,5mm ²
H05VV-F	3G0,75mm ² -3G1,5mm ²
Product Features	
Power: 16A/250V~,2P+E	



GEP-011	
Wire	Specifications
H03VV-F	3G0,75mm ²
H05VV-F	3G0,75mm ² -3G1,5mm ²
Product Features	
Power: 16A/250V~,2P+E	



GEP-003	
Wire	Specifications
H05VV-F	3G1,0mm ² -3G2,5mm ²
H05RR-F	3G0,75mm ² -3G1,5mm ²
H05RN-F	3G0,75mm ² -3G1,0mm ²
H07RN-F	3G1,5mm ² -3G2,5mm ²
Product Features	
Power: 16A/250V~,2P+E	



GEP-013	
Wire	Specifications
H05VV-F	3G0,75mm ² -3G1,5mm ²
Product Features	
Power: 16A/250V~,2P+E	



GEP-004	
Wire	Specifications
H05RN-F	2X1,0mm ²
H05RR-F	2X1,0mm ² -2X1,5mm ²
H05VV-F	2X1,0mm ² -2X1,5mm ²
Product Features	
Power: 10A/250V~,2P	



GEP-014	
Wire	Specifications
H05VV-F	3G0,75mm ² -3G1,5mm ²
Product Features	
Power: 16A/250V~,2P+E	



GEP-015	
Wire	Specifications
H05VV-F	3G0.75mm ² -3G1.5mm ²
Product Features	
Power: 16A/250V~,2P+E	



TWP-001	
Wire	Specifications
HVCTFK	2X0.75mm ²
Product Features	
Power: 7A/250V~,2P	



YC-B-2ZA	
Wire	Specifications
H05VVH ₂ -F	2X0.75mm ² -2X1.0mm ²
Product Features	
Power: 16A/250V~,2P	



YC-B-2Z	
Wire	Specifications
H05VV-F	2X0.75mm ² -2X1.5mm ²
H03VVH ₂ -F	2X0.75mm ²
H05VVH ₂ -F	2X0.75mm ²
Product Features	
Power: 16A/250V~,2P	



SWP-001	
Wire	Specifications
H05VV-F	3G0.75mm ²
H05RR-F	3G1.0mm ² -3G1.5mm ²
H05RN-F	3G1.0mm ²
H07RN-F	3G1.5mm ²
Product Features	
Power: 16A/250V~,2P+E	



SWP-002	
Wire	Specifications
H05VV-F	2X0.75mm ² -2X1.5mm ²
H03VVH ₂ -F	2X0.75mm ²
Product Features	
Power: 10A/250V~,2P	



SWP-003	
Wire	Specifications
H05VV-F	3G0.75mm ² -3G1.5mm ²
Product Features	
Power: 16A/250V~,2P+E	



HY-2	
Wire	Specifications
H05VVH ₂ -F	2X0.75mm ² -2X1.0mm ²
Product Features	
Power: 16A/250V~,2P	



BSP-001	
Wire	Specifications
H05VV-F	2X0.75mm ² -2X1.5mm ²
H03VVH ₂ -F	2X0.75mm ²
H05VVH ₂ -F	2X0.75mm ²
Product Features	
Power: 16A/250V~,2P	



ISP-001	
Wire	Specifications
H05VV-F	3G1.0/1.5mm ²
Product Features	
Power: 10A/250V~,2P+E	



ITP-001	
Wire	Specifications
H05VV-F	3G1.0mm ² -3G1.5mm ²
Product Features	
Power: 16A/250V~,2P+E	



GBP-002	
Wire	Specifications
60227 IEC	53(RVV)300/500V 3X0.75
60227 IEC	53(RVV)300/500V 3X1.0
Product Features	
Power: 10A/250V~,2P+E	




ITP-002	
Wire	Specifications
H05VV-F	3G1.0mm ²
Product Features	
Power: 10A/250V~,2P+E	



GBP-003	
Wire	Specifications
60227 IEC	52(RVV)300/300V 2X0.5
Product Features	
Power: 6A/250V~,2P	



ITP-003	
Wire	Specifications
H05VV-F	2X0.75mm ² -2X1.5mm ²
Product Features	
Power: 10A/250V~,2P	

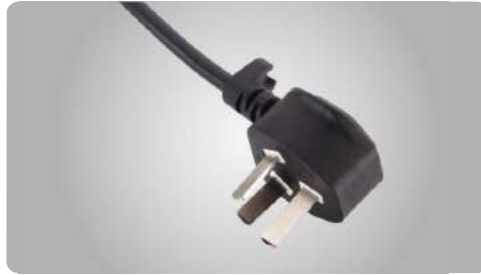

GBP-004(B/G/W)	
Wire	Specifications
60227 IEC	53(RVV)300/500V 3X0.75
60227 IEC	53(RVV)300/500V 3X1.0
Product Features	
Power: 10A/250V~,2P+E	



HY007-F	
Wire	Specifications
H05VV-F	3G0.75mm ² -3G1.5mm ²
H05RR-F	3G1.0mm ²
H05RN-F	3G1.0mm ²
H07RN-F	3G1.5mm ²
Product Features	
Power: 13A/250V~,2P+E	



GBP-005(B/G/W)	
Wire	Specifications
60227 IEC	53(RVV)300/500V 3X0.75
60227 IEC	53(RVV)300/500V 3X1.0
Product Features	
Power: 10A/250V~,2P+E	



GBP-001	
Wire	Specifications
60227 IEC	53(RVV)300/500V 3X0.75
60227 IEC	53(RVV)300/500V 3X1.0
Product Features	
Power: 10A/250V~,2P+E	



ASP-003	
Wire	Specifications
H05VV-F	3G0.75/1.0
Product Features	
Power: 10A/250V~,2P+E	



JPP-001	
Wire	Specifications
HVCTFK	2X0.75mm ²
Product Features	
Power: 7A/250V~,2P	



JPP-002			
Wire	002A	002B	002C
VFF/HVFF	2X0.75	2X1.25	2X2.0
HFFF/NNFF	2X0.75	2X1.25	2X2.0
CVTFK/HVCTFK	2X0.75	2X1.25	2X2.0
Product Features			
002A, 7A/125V~,2P		002B, 12A/125V~,2P	
002C, 15A/125V~,2P			



JPP-003			
Wire	003A	003B	003C
VCTF/HVCTF	3X0.75	3X1.25	3X2.0
Product Features			
003A, 7A/125V~,2P+E			
003B, 12A/125V~,2P+E			
003C, 15A/125V~,2P+E			



ASP-001		
Wire	001A	001B
H03VVH ₂ -F	2X0.5/0.75	2X0.75
H05VVH ₂ -F	2X0.75	2X0.75/1.0
H05VV-F	2X0.75	2X0.75/1.0
Product Features		
001A, 7.5A/250V~,2P		
001B, 10A/250V~,2P		



ASP-002			
Wire	002A	002B	002C
H05VV-F	3G0.75	3G0.75/1.0	3G1.5
Heavy Duty PVC		3G1.0	3G1.5
Product Features			
002A, 7.5A/250V~,2P+E			
002B, 10A/250V~,2P+E			
002C, 15A/250V~,2P+E			



HY048-F		
Wire	Specifications	Temperature
SJT	16AWG X 3C	60°C/105°C
SJTW	16AWG X 3C	60°C/105°C
SJT	18AWG X 3C	60°C/105°C
SJTW	18AWG X 3C	60°C/105°C
SJT	14AWG X 3C	60°C/105°C
Product Features		
Power: 16A/250V~,2P+E		



KRP-001	
Wire	Specifications
H03VV-F	2X0.75
H05VV-F	2X0.75/1.0/1.5
H05RR-F	2X0.75/1.0/1.5
H05RN-F	2X0.75/1.0
H03VVH ₂ -F	2X0.75
H05VVH ₂ -F	2X0.75/1.0
Product Features	
Power: 16A/250V~,2P	



KRP-002	
Wire	Specifications
H05VV-F	3G0.75/1.0/1.5
H05RR-F	3G0.75/1.0/1.5
H05RN-F	3G0.75/1.0
Product Features	
Power: 16A/250V~,2P+E	



KRP-003	
Wire	Specifications
H03VV-F	2X0.75
H05VV-F	2X0.75
H05RR-F	2X0.75
H05RN-F	2X0.75
H03VVH ₂ -F	2X0.75
H05VVH ₂ -F	2X0.75
Product Features	
Power: 2.5A/250V~,2P	



SAP-001	
Wire	Specifications
H05VV-F	3G0.75/1.0
Product Features	
Power: 6A/250V~,2P+E	



SAP-002		
Wire	Specifications	
H05VV-F	2X0,75/1,0	
Product Features		
Power: 6A/250V~,2P		



ULP-003		
Wire	Specifications	Temperature
STW	14AWG/3C	60 C/105 C
STW	12AWG/3C	60 C/105 C
Product Features		
Power: 15A/125V~,2P+E		



SAP-003		
Wire	Specifications	
H05VV-F	3G1,5	
Product Features		
Power: 16A/250V~,2P+E		



BRP-001		
Wire	Specifications	
H05VVH ₂ -F	2X0,75mm ²	
H05VVH ₂ -F	2X1,0mm ²	
Product Features		
Power: 10A/250V~,2P		



SAP-004		
Wire	Specifications	
H05VV-F	2X1,5mm ²	
Product Features		
Power: 16A/250V~,2P		



BRP-002		
Wire	Specifications	
H05VVH ₂ -F	2X1,0mm ²	
Product Features		
Power: 12A/250V~,2P		



ULP-001		
Wire	Specifications	Temperature
SPT-2	18AWG/2C	60 C/105 C
SPT-2	16AWG/2C	60 C/105 C
Product Features		
Power: 10A/125V~,2P		



BRP-003		
Wire	Specifications	
H05VV-F	3G0,75mm ²	
H05VV-F	3G1,0mm ²	
Product Features		
Power: 10A/250V~,2P+E		



ULP-002		
Wire	Specifications	Temperature
SJT	16AWG/2C	60 C/105 C
SJTW	16AWG/2C	60 C/105 C
SJT	18AWG/2C	60 C/105 C
SJTW	18AWG/2C	60 C/105 C
Product Features		
Power: 15A/125V~,2P		



BRP-004		
Wire	Specifications	
H05VV-F	3G1,0mm ²	
H05VV-F	3G1,5mm ²	
Product Features		
Power: 12A or 16A/250V~,2P+E		



ICO-001	
Wire	Specifications
H03VVH ₂ -F	2X0.5mm ² (Max:2M)-2X0.75mm ²
H03VVH ₂ -F	2X0.75mm ²
H03VVH ₂ -F	2X0.5mm ²
Product Features	
Power: 2.5A/250V~,2P	



GES-529	
Distance 25-30	
M4x2.5A Slim Socket	
H03VVH ₂ -F 2X0.75mm ²	
H05VVH ₂ -F 2X0.75mm ² -2X1.0mm ²	
Patent is owned by Cixi Hongyi's customer.	
Not fully open sales,please consult.	



ICO-002	
Wire	Specifications
H05VV-F	3G0.75mm ² (Max:2M)-3G1.0mm ²
H05VV-F	3G1.0mm ²
H05VV-F	3G0.75mm ²
Product Features	
Power: 10A/250V~,2P+E	



GEP-504	
H05VF-F 3G0.75mm ² -3G1.5mm ²	
H03VF-F 3G0.75mm ²	
Patented Product.	



ICO-003	
Wire	Specifications
H05VV-F	3G0.75mm ² (Max:2M)-3G1.0mm ²
H05VV-F	3G1.0mm ²
H05VV-F	3G0.75mm ²
Product Features	
Power: 10A/250V~,2P+E	



GEP-505	
H03VVH ₂ -F 2X0.75mm ²	
H05VVH ₂ -F 2X0.75mm ² -2X1.0mm ²	
Patented Product.	



ICO-004	
Wire	Specifications
H05VV-F	3G0.75mm ²
Product Features	
Power: 2.5A/250V~,2P+E	



GES-552 GES-553	
Patented Features	
Power: 2.5A/250V~	

GB WIRE






KIMPORT

AUSTRALIA / UL WIRE

IMAGE	MODEL	STANDARD	NOMINAL CROSS SECTION	NOMINAL OD
Rubber 60245 IEC 66 (YCW) 450/750V SERIES FLEXIBLE CABLE				
	60245 IEC 66 (YCW)	GB/T5013.4/ IEC 60245-4	1X1.5	6.3
			1X2.5	6.9
	60245 IEC 66 (YCW)	GB/T5013.4/ IEC 60245-4	2X1.0	8.8
			2X1.5	9.5
	60245 IEC 66 (YCW)	GB/T5013.4/ IEC 60245-4	2X2.5	11.3
			3G1.0	9.4
	60245 IEC 66 (YCW)	GB/T5013.4/ IEC 60245-4	3G1.5	10.2
			3G2.5	12.2
	60245 IEC 66 (YCW)	GB/T5013.4/ IEC 60245-4	4G1.0	10.4
			4G1.5	11.3
	60245 IEC 66 (YCW)	GB/T5013.4/ IEC 60245-4	4G2.5	13.4
			5G1.0	11.5
	60245 IEC 66 (YCW)	GB/T5013.4/ IEC 60245-4	5G1.5	12.4
			5G2.5	14.9
Rubber 60245 IEC 53 (YZ) 60245 IEC 57(YZW) 300/500V SERIES FLEXIBLE CABLE				
	60245 IEC 53 (YZ) 60245 IEC 57(YZW)	GB/T5013.4/ IEC 60245-4	2X0.75	6.4
			2X1.0	6.9
	60245 IEC 53 (YZ) 60245 IEC 57(YZW)	GB/T5013.4/ IEC 60245-4	2X1.5	8.3
			2X2.5	9.9
	60245 IEC 53 (YZ) 60245 IEC 57(YZW)	GB/T5013.4/ IEC 60245-4	3G0.75	6.9
			3G1.0	7.3
	60245 IEC 53 (YZ) 60245 IEC 57(YZW)	GB/T5013.4/ IEC 60245-4	3G1.5	8.8
			3G2.5	10.4
	60245 IEC 53 (YZ) 60245 IEC 57(YZW)	GB/T5013.4/ IEC 60245-4	4G0.75	7.4
			4G1.0	8.1
	60245 IEC 53 (YZ) 60245 IEC 57(YZW)	GB/T5013.4/ IEC 60245-4	4G1.5	9.8
			4G2.5	11.7
	60245 IEC 53 (YZ) 60245 IEC 57(YZW)	GB/T5013.4/ IEC 60245-4	5G0.75	8.6
			5G1.0	8.8
	60245 IEC 53 (YZ) 60245 IEC 57(YZW)	GB/T5013.4/ IEC 60245-4	5G1.5	10.7
			5G2.5	13
PVC 60227 IEC 52 (RVV) 300/300V SERIES FLEXIBLE CABLE				
	60227 IEC 52 (RVV)	GB/T5023.5/ IEC 60227-5	2X0.5	3.25X5.20
			2X0.75	3.5X5.5
	60227 IEC 52 (RVV)	GB/T5023.5/ IEC 60227-5	2X0.5	5.2
			2X0.75	5.6
	60227 IEC 52 (RVV)	GB/T5023.5/ IEC 60227-5	3G0.5	5.4
			3G0.75	5.9
PVC 60227 IEC 53 (RVV) 300/500V SERIES FLEXIBLE CABLE				
	60227 IEC 53 (RVV)	GB/T5023.5/ IEC 60227-5	2X0.75	4.0X6.4
			2X0.75	6.3
	60227 IEC 53 (RVV)	GB/T5023.5/ IEC 60227-5	2X1.0	6.7
			2X1.5	7.7
	60227 IEC 53 (RVV)	GB/T5023.5/ IEC 60227-5	2X2.5	9.2
			3G0.75	6.7
	60227 IEC 53 (RVV)	GB/T5023.5/ IEC 60227-5	3G1.0	7
			3G1.5	8.2
	60227 IEC 53 (RVV)	GB/T5023.5/ IEC 60227-5	3G2.5	9.9
			4G0.75	7.3
	60227 IEC 53 (RVV)	GB/T5023.5/ IEC 60227-5	4G1.0	8
			4G1.5	9.4
	60227 IEC 53 (RVV)	GB/T5023.5/ IEC 60227-5	4G2.5	11.1
			5G0.75	8.2
	60227 IEC 53 (RVV)	GB/T5023.5/ IEC 60227-5	5G1.0	8.8
			5G1.5	10.4
	60227 IEC 53 (RVV)	GB/T5023.5/ IEC 60227-5	5G2.5	12.4

IMAGE	MODEL	STANDARD	NOMINAL CROSS SECTION	NOMINAL OD
AUSTRALIA WIRE				
	4V-75 H03VH2-F	AS/NZS 3191	2X0.5	3.2X5.2
			2X0.75	3.4X5.5
	4V-75 H03VV-F	AS/NZS 3191	2X0.5	5.2
			2X0.75	5.6
	4V-75 H03VV-F	AS/NZS 3191	3G0.5	5.5
			3G0.75	5.9
	4V-75 H05VV-F	AS/NZS 3191	2X0.75	6.3
			2X1.0	6.7
	4V-75 H05VV-F	AS/NZS 3191	2X1.5	7.7
			3G0.75	6.7
	4V-75 H05VV-F	AS/NZS 3191	3G1.0	7
			3G1.5	8.2
	4V-75 H07VV-F	AS/NZS 3191	2X0.75	8.4
			2X1.0	8.8
	4V-75 H07VV-F	AS/NZS 3191	2X1.5	9.5
			3G1.0	9.4
	4V-75 H07VV-F	AS/NZS 3191	3G1.5	10.2
			UL WIRE	
	SVT 60,75,90,105°C	UL 62	18AWG/2C	6
			17AWG/2C	6.3
	SPT-1 60,75,90,105°C	UL 62	16AWG/2C	6.6
			20AWG/2C	2.62X4.8
	SPT-2 60,75,90,105°C	UL 62	18AWG/2C	2.65X6.1
			16AWG/2C	3.5X6.95
	SPT-3 60,75,90,105°C	UL-62	16AWG/2C	3.75X7.75
			18AWG/2C	4.2X8.4
	SJT/SJTW 60,75,90,105°C	UL-62	16AWG/2C	4.5X9.0
			14AWG/2C	5.8X12
	SJT/SJTW 60,75,90,105°C	UL-62	16AWG/2C	7.3
			16AWG/2C	7.9
	SJT/SJTW 60,75,90,105°C	UL-62	14AWG/2C	8.7
			16AWG/3C	7.8
	STW 60,75,90,105°C	UL-62	16AWG/3C	8.4
			14AWG/3C	9.3
	STW 60,75,90,105°C	UL-62	12AWG/3C	11
			18AWG/2C	8.8
	STW 60,75,90,105°C	UL-62	16AWG/2C	9.4
			18AWG/3C	9.3
	NISPT-1 60,75,90,105°C	UL-62	16AWG/3C	9.9
			18AWG/2C	3.25X6.0
	NISPT-2 60,75,90,105°C	UL-62	16AWG/2C	3.60X6.70
			18AWG/2C	4.05X7.5
	NISPT-2 60,75,90,105°C	UL-62	16AWG/2C	4.35X8.2
			UL STANDARD SINGLE-CORE CABLE	
	AWM 1015 60,75,80,90,105°C	UL758	28AWG	2
			26AWG	2.1
			24AWG	2.2
			22AWG	2.35
			20AWG	2.55
			18AWG	2.8
			16AWG	3.1
			14AWG	3.45
			12AWG	3.95
			10AWG	4.3

EUROPEAN PVC WIRE PARAMETERS

IMAGE	MODEL	STANDARD	NOMINAL CROSS SECTION	NOMINAL OD
PVC 300/300V SERIES FLEXIBLE CABLE				
	H03VVH2-F	EN 50525-2-11	2X0.5	3.45X5.5
			2X0.75	3.55X5.65
	H03VV-F	EN 50525-2-11	2X0.5	5.3
			2X0.75	5.6
	H03VV-F	EN 50525-2-11	3G0.5	5.4
			3G0.75	6
PVC 300/500V SERIES FLEXIBLE CABLE				
	H05VVH2-F	EN 50525-2-11	2X0.75	4.05X6.4
			2X1.0	4.3X6.9
			2X0.75	6.3
	H05VV-F	EN 50525-2-11	2X1.0	6.7
			2X1.25	7.3
			2X1.5	7.7
			2X2.5	9.2
			3G0.75	6.7
	H05VV-F	EN 50525-2-11	3G1.0	7
			3G1.25	8.1
			3G1.5	8.2
			3G2.5	9.9

EUROPEAN RUBBER WIRE PARAMETERS

IMAGE	MODEL	STANDARD	NOMINAL CROSS SECTION	NOMINAL OD
Rubber 300/300V SERIES FLEXIBLE CABLE				
	H05RN-F	EN 50525-2-21	2X0.75	6.4
			2X1.0	6.9
	H05RN-F	EN 50525-2-21	3G0.75	6.9
			3G1.0	7.3
			2X0.75	6.4
	H05RR-F	EN 50525-2-21	2X1.0	6.9
			2X1.5	8.3
			2X2.5	9.9
	H05RR-F	EN 50525-2-21	3G0.75	6.9
			3G1.0	7.3
			3G1.5	8.8
			3G2.5	10.4
	H05RR-F	EN 50525-2-21	4G0.75	7.4
			4G1.0	8.1
			4G1.5	9.8
			4G2.5	11.7
	H05RR-F	EN 50525-2-21	5G0.75	8.6
			5G1.0	8.8
			5G1.5	10.7
			5G2.5	13
Rubber 450/750V SERIES FLEXIBLE CABLE				
	H05RR-F	EN 50525-2-21	2X1.0	8.8
			2X1.5	9.5
			2X2.5	11.3
	H05RR-F	EN 50525-2-21	3G1.0	9.4
			3G1.5	10.2
			3G2.5	12.2
	H05RR-F	EN 50525-2-21	4G1.0	10.4
			4G1.5	11.3
			4G2.5	13.4
	H05RR-F	EN 50525-2-21	5G1.0	11.5
			5G1.5	12.4
			5G2.5	14.9

POWER LINE

- The power cord is being made under excellent matching materials method and advanced process, and which is based on meeting the standard of cable, and achieving the lower power waste by itself, so our power cord can help to improve the effect of your product, and implementing your ideas of saving energy.
- We can match many types terminals according to your requirements

The insulation of cores

- The insulation of cores had been carried out high voltage 6000 V sparking test by 100% rate, avoiding the sheath had been damaged and lead into causing disaster.
- The power cord are using RoHS materials, and the tensile strength of Rubber and PVC cable are approaching 5N/mm² and 10N/mm²

The sheath of power cord

- PVC cable can keep good condition under -15°C
- We can change the color of the sheath, it's up to your ideas.

Copper wire

- Using the Oxygen-free copper wire, which can keep smoothly road when the current pass, and don't produce more heat to let power cord becoming warm, and ensure the product is safety.
- Adopting the anneal process under 560°C and without oxygen condition, and let wire becoming softness, after this process, the power cord can meet all kind of curve test requirement.
- Adopting multi-core stranded conductor, can ensure the power cord can safely using under harsh and curly conditions.

The sheath of rubber power cord

- Rubber cable can keep good condition under -35°C
- We can change the color of the sheath, it's up to your ideas.

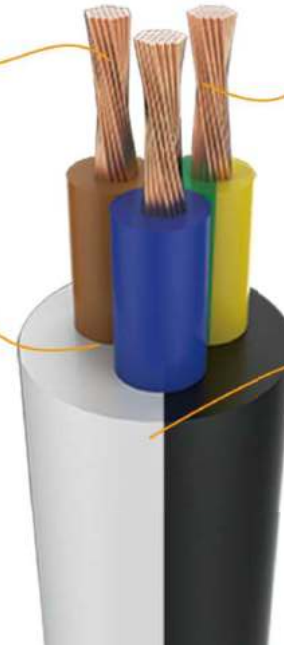












IMAGE	MODEL	STANDARD	NOMINAL CROSS SECTION	NOMINAL OD
PVC 300/300V SERIES FLEXIBLE CABLE				
	227 IEC 53 (H05VH2-F)	K60227-1, K60227-2, K60227-5	2X0.75	4.05X6.4
			2X1.0	4.3X6.9
	227 IEC 53 (H05VV-F)	K60227-1, K60227-2, K60227-5	2X0.75	6.3
			2X1.0	6.7
			2X1.5	7.7
	227 IEC 53 (H05VV-F)	K60227-1, K60227-2, K60227-5	3G0.75	6.7
			3G1.0	7
			3G1.5	8.2
			3G2.5	9.9
	60245 IEC 57 (H05RN-F)	K60245-1, K60245-2, K60245-4	2X0.75	6.4
			2X1.0	6.9
	60245 IEC 57 (H05RN-F)	K60245-1, K60245-2, K60245-4	3G0.75	6.9
			3G1.0	7.3
			3G1.5	8.2
	60245 IEC 53 (H05RR-F)	K60245-1, K60245-2, K60245-4	2X0.75	6.4
			2X1.0	6.9
			2X1.5	8.3
	60245 IEC 53 (H05RR-F)	K60245-1, K60245-2, K60245-4	3G0.75	6.9
			3G1.0	7.3
			3G1.5	8.8
	60227 IEC 52 (H03VH2-F)	K60227-1, K60227-2, K60227-5	2X0.5	3.45X5.5
			2X0.75	3.55X5.65
	60227 IEC 52 (H03VV-F)	K60227-1, K60227-2, K60227-5	2X0.5	5.3
			2X0.75	5.6
	60227 IEC 52 (H03VV-F)	K60227-1, K60227-2, K60227-5	3G0.5	5.4
			3G0.75	6

UL CABLE ABBREVIATION	
DESCRIPTION	
Parallel Tinsel Cords	TPT
Jacketed Tinsel Cords	TST
Integral Thermoset Paralled Cords,30 mils insulation	SP-1
Integral Thermoset Paralled Cords,45 mils Insulation	SP-2
Integral Thermoset Paralled Cords,60 mils Insulation	SP-3
Integral TPE Paralled Cords,30 mils Insulation	SPE-1
Integral TPE Paralled Cords,45 mils Insulation	SPE-2
Integral TPE Paralled Cords,60 mils Insulation	SPE-3
Non-integral Thermoset Paralled Cords,15 mils Insulation, 15 mils Jacket	NISP-1
Non-integral Thermoset Paralled Cords,30 mils Insulation, 15 mils Jacket	NISP-2
Non-integral TPE Paralled Cords,15 mils Insulation, 15 mils Jacket	NISPE-1
Non-integral TPE Paralled Cords,30 mils Insulation, 15 mils Jacket	NISPE-2
Integral Thermoplastic Paralled Cords,30 mils Insulation	SPT-1
Outdoor Integral Thermoplastic Paralled Cords,30 mils Insulation	SPT-1W
Integral Thermoplastic Paralled Cords,45 mils Insulation	SPT-2
Outdoor Integral Thermoplastic Paralled Cords,45 mils Insulation	SPT-2W
Integral Thermoplastic Paralled Cords,60 mils Insulation	SPT-3
Non-integral Thermoplastic Paralled Cords,15 mils Insulation, 15 mils Jacket	NISPT-1
Non-integral Thermoplastic Paralled Cords,30 mils Insulation, 15 mils Jacket	NISPT-2
Non-oil-resistance Vacuum-cleaner Cords	SV
Oil-resistant Vacuum-cleaner Cords	SVO
Vacuum-cleaner Cords with Oil-Resistant Insulation and Jacket	SVOO
Non-oil-resistance Vacuum-cleaner Thermoplastic Cords	SVT
Non-oil-resistance Vacuum-cleaner TPE Cords	SVE
Oil-resistant Vacuum-cleaner TPE Cords	SVEO
Non-oil-resistance Hard-service Cords	SJ
Oil-resistant Hard-service Cords	SJO
Outdoor Oil-resistant Hard-service Cords	SJOW
Hard-service Cords with Oil-Resistant Insulation and Jacket	SJOO
Hard-service Thermoplastic Cords	SJT
Outdoor Hard-service Thermoplastic Cords	SJTW
Hard-service TPE Cords	SJE
Non-oil-resistance Extra-hard-service Cords	S
Oil-resistant Extra-hard-service Cords	SO
Outdoor Oil-resistant Extra-hard-service Cords	SOW
Extra-hard-service Cords with Oil-Resistant Insulation and Jacket	SOO
Extra-hard-service Thermoplastic Cords	ST
Outdoor Extra-hard-service Thermoplastic Cords	STW
Oil-resistant Extra-hard-service Thermoplastic Cords	STO
Extra-hard-service TPE Cords	SE
Parallel Heater Cord	HPN
Hard-service Heater Cords	HSJ
Oil-Resistant Hard-service Heater Cords	HSJO
Appliance Wiring Material	AWM

JAPANESE CODING SYSTEM

KIMPORT

HARMONIZED WIRE CODING SYSTEM

JAPANESE CODING SYSTEM							
SPECIFICATION AND INFO							
	H	—	V	—	CTF	—	K
Heat Resistant Insulation	○		○		○		○
PVC -----V	○		○				
Neoprene -----NN			○				
Hypalon -----HH			○				
Flat Flexible Cord -----FF					○		
Cable Cord -----CTF					○		
Oval -----K							○

HARMONIZED WIRE CODING SYSTEM											
SPECIFICATION AND VOLTAGE											
	H	05	V2	V2	H2	—	F	2	X	0.75	
Types	○		○	○	○						
Harmonized determination-----H	○										
Approved national Type-----A	○										
Nominal voltage Uo/U											
300,300V-----03											
300,500V-----05		○									
450,750V-----07			○								
Insulation material											
PVC standard up to +70°C-----V											
PVC heat resistant up to +90°C---V2			○								
PVC crosslinked-----V4											
Rubber up to +60°C-----R			○								
Rubber up to +90°C-----B											
Halogen free crosslinked compound----Z											
Halogen free thermoplastic compound---Z1											
Sheath material											
PVC standard up to +70°C-----V											
PVC heat resistant up to +90°C---V2											
PVC crosslinked-----V4											
Polyurethane-----Q											
Rubber up to +60°C-----R			○								
Polychloroprene Rubber up to +60°C---N											
Textile Braided-----T											
Special qualities in construction											
Flat dividable wire-----H											
Flat,non-dividable wire-----H2					○						
Dual-layer extruded wire for lighting chains--H7											
Coil-suitable wire-----H8											
Type of construction											
Single-core-----U											
Multi-core-----R											
Flexible,for fixed laying-----K											
Flexible-----F							○				
Extra-flexible-----H											
Number of cores											
Earth-wire											
Without earth-wire-----X									○		
With earth-wire green-yellow----G											
Nominal cross-section of conductor in mm											
										○	

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



PG SERIES

PG260-CU 2 OUT LETS+ 3 USB PORTS + 1 Type C



PG260-CU


PG260-U

PG250-U

PG250-CU

SPECIFICATIONS

AC Rating	125V/15A/1875W
Cable	1.5M 3G 16AWG
Surge Protection	MOV Surge Protection
Power Plug	US Plug
Product Size	80x80x35mm
USB Charge	USB Quick Charger 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	5V 3.4A, Max 17W, Type C 20W
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

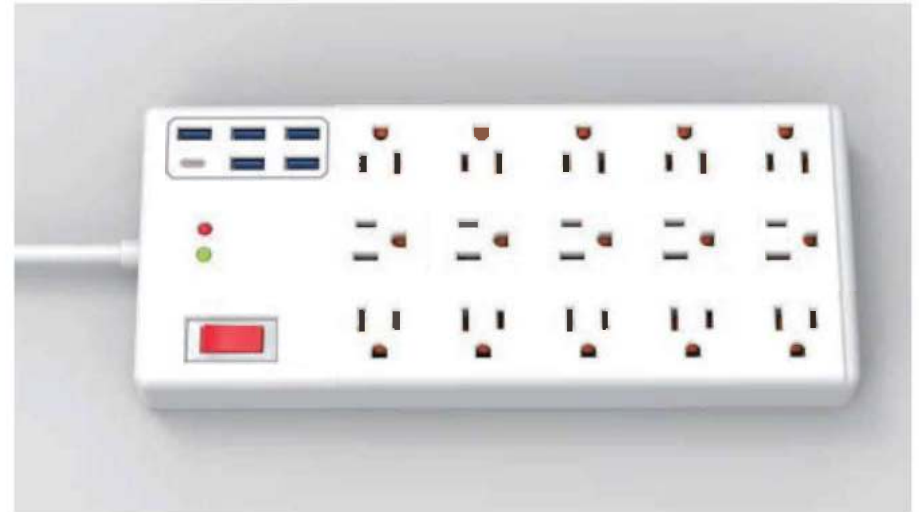

PU SERIES

PU1560-CU 15 OUTLETS+ 6 USB PORTS



PU1560-6U

PU1560-CU

PU1560-4U

PU1560-CU

SPECIFICATIONS

AC Rating	125V/15A/1875W
Cable	1.5M 3G 16AWG
Surge Protection	MOV Surge Protection
Power Plug	US Plug
Product Size	265x113x26mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	5V 3.4A, Max 17W, Type C 20W
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



PB SERIES

PB660-J 6 OUT LETS + 4 USB PORTS



PB660-U White

PB660-CU White

PB660-U Black


SPECIFICATIONS

AC Rating	125V/15A/1875W
Surge Protection	MOV Surge Protection
Power Plug	US Plug
Product Size	305x37x26mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



PA SERIES

PA1260 -U 12 OUT LETS + 4 USB PORTS

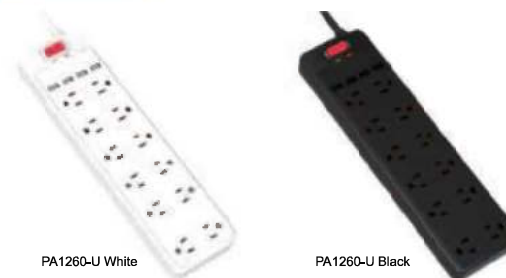

PA1260-U White

PA1260-U Black

SPECIFICATIONS

AC Rating	125V/15A/1875W
Surge Protection	MOV Surge Protection
Power Plug	US Plug
Product Size	301x84x25.5mm
USB Charge	USB Quick Charger 18W 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



FH SERIES FH560-4U 5 OUT LETS + 4 USB PORTS



FH560-4U White

FH560-4U Black

FH560-CU Black
(With Type C)

SPECIFICATIONS

AC Rating	125V/15A/1875W
Surge Protection	MOV Surge Protection
Power Plug	US Plug
Product Size	271x52x30mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iphone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



FL SERIES FL560-4U 5 OUT LETS + 4 USB PORTS



FL560-4U White

FL560-4U Black

SPECIFICATIONS

AC Rating	125V/15A/1875W
Surge Protection	MOV Surge Protection
Power Plug	US Plug
Product Size	292x52x34mm
USB Charge	USB Quick Charger 18W 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iphone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



FJ SERIES

FJ460-4U 4 OUT LETS + 4 USB PORTS



FJ460-4U White



FJ460-4U Black



FJ460-CU White
(With Type C)

SPECIFICATIONS

AC Rating	125V/15A/1875W
Surge Protection	MOV Surge Protection
Power Plug	US Plug
Product Size	148x112x32mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



PS SERIES

PS260-CU PD GaN Chargers Power Strip



PS260-CU Black



PS260-CU White

SPECIFICATIONS

AC Rating	125V/15A/1875W
Surge Protection	MOV Surge Protection
Power Plug	US Plug
Product Size	270x55x40mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



SJ SERIES SJ860-U 8 OUT LETS + 3 USB PORTS



SPECIFICATIONS


AC Rating	100-125V/15A/1875W
Cable	1.5M 3G 16AWG
Surge Protection	MOV Surge Protection
Power Plug	US Plug
Product Size	235x102x27mm
USB Charge	USB Quick Charger 12W 3-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iphone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Max 5V 3.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



SPECIFICATIONS

AC Rating	100-125V/15A/1875W
Cable	1.5M 3G 16AWG
Surge Protection	MOV Surge Protection
Power Plug	US Plug
Product Size	330x52x33mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iphone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Max 5V 3.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER

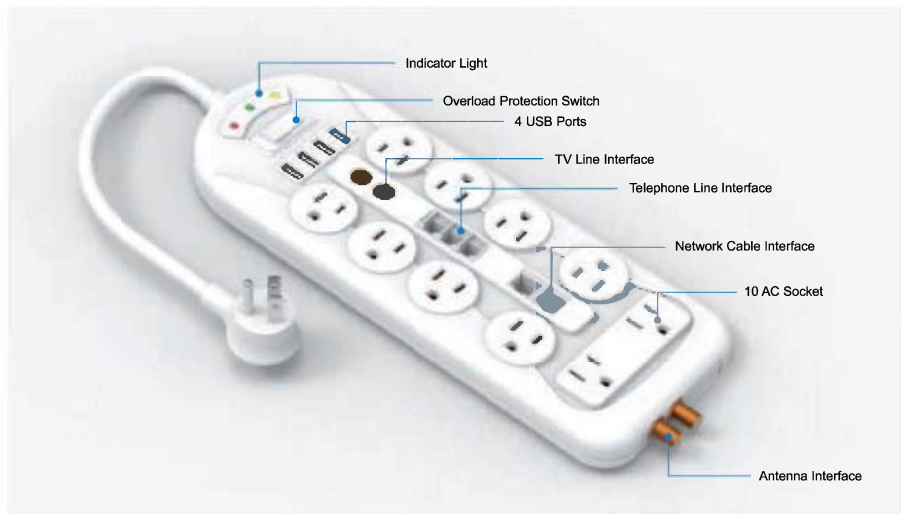

SE SERIES

SE1060-U 10 OUTLETS+ 4 USB PORTS



SE1060-TELFU Black

SE1060-TELF Black


SE1060-TELF White

SE1060-U Black

SE1060-U White

SPECIFICATIONS

AC Rating	100-125V/15A/1875W
Cable	1.5M 3G 16AWG
Surge Protection	MOV Surge Protection
Power Plug	US Plug
Product Size	309x111x28mm
USB Charge	USB Quick Charger 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	5V 2.4A, Max 18W
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

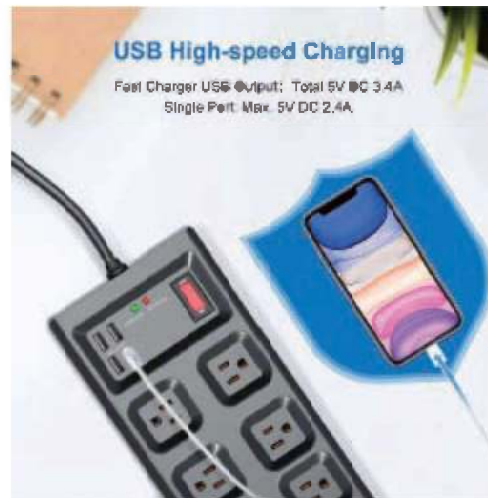

SQ SERIES

SQ1060-U 10 OUTLETS + 4 USB PORTS



SQ1060-U Black

SQ1060-CU White

CV-RQ1060-U White

CV-RZ860-U White

External IR Remote Control Connector and Overload Resettable

SPECIFICATIONS

AC Rating	100-125V/15A/1875W
Cable	1.5M 3G 16AWG
Surge Protection	MOV Surge Protection
Power Plug	US Plug
Product Size	349x160x30mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Max 5V 3.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



SL SERIES

SL360-U 3 OUTLETS+ 4 USB PORTS



SL320-CU White
(With Type C)

SL320-U White

SL330-U White

SL350-U White

SL380-U White

SPECIFICATIONS

AC Rating	100-250V/10-16A
Surge Protection	MOV Surge Protection
Power Plug	US,EU,UK,Plug
Product Size	85x85x75mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iphone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



SH SERIES

SH860 -U 8 OUTLETS + 4 USB PORTS



SH860-U White

SH880-U White

SH850-U Black

Touch Sensor Switch

- The first touch of the switch is yellow light.
- The second is white.
- The third is mixed yellow and white light.
- The fourth is to turn off the lights.

SPECIFICATIONS

AC Rating	100-250V/10-16A
Surge Protection	MOV Surge Protection
Power Plug	US,AU Plug
Product Size	170x170x230mm(large) 135x135x232mm(small)
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iphone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



SW SERIES

SW660-U 6 OUT LETS + 4 USB PORTS



SPECIFICATIONS

AC Rating	100-125V/15A/1875W
Surge Protection	MOV Surge Protection
Power Plug	US Plug
Product Size	125x90x38mm
With Shelf Size	180x90mm
Quick Charge 3.0 USB Output	5V 2.5A, 9V 2A, 12V 1.5A; Max 18W
3 USB Output Port Total Power	5V 4.4A; Max 22W
1 USB Output Port	5V 2.4A; Max 12W
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



SX SERIES (TRAVEL ADAPTER)

SX160-U 1 OUT LETS+ 3 USB PORTS



SPECIFICATIONS


AC Rating	100-250V/10-16A
Surge Protection	MOV Surge Protection
Power Plug	EU, AU, UK, US Plug
Product Size	100x65x35mm
USB Charge	USB Quick Charger 18W 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



SA SERIES

SA660-U 6 OUTLETS+ 2 USB PORTS

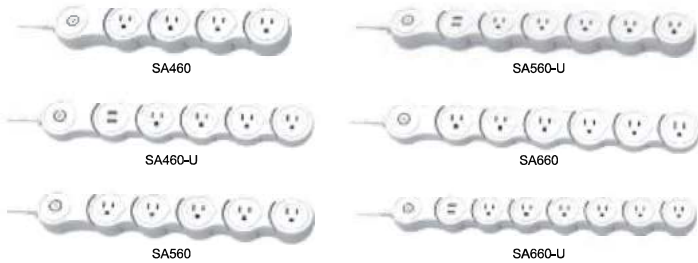

SPECIFICATIONS

AC Rating	100-125V/15A/1875W
Cable	1.5M 3G 16AWG
Surge Protection	MOV Surge Protection
Power Plug	US Plug
Product Size	440x55x35mm
USB Charge	USB Quick Charger 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	5V 2.4A, Max 18W
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



SA SERIES

SA650-U 6 OUTLETS + 2 USB PORTS



SPECIFICATIONS

AC Rating	240V/10A/2400W
Cable	1.8M 3G 1.0mm ²
Surge Protection	MOV Surge Protection
Power Plug	AU Plug
Product Size	506x59x34mm
USB Charge	USB Quick Charger 12W 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



FA SERIES

FA420-3U 4 OUT LETS + 3 USB PORTS



FA420-3U

FA420-3U

FA420-CU
(With Type C)

FA620-4U

FA620-4U

FA620-CU
(With Type C)

SPECIFICATIONS

AC Rating	250V/16A/3680W
Surge Protection	MOV Surge Protection
Power Plug	EU Plug
FD420-3U Product Size	151x107x39mm
FA620-4U Product Size	238x107x39mm
Quick Charge 3.0 USB Output	5V 2.5A, 9V 2A, 12V 1.5A; Max 18W
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



FC SERIES

FC620-4U 6 OUT LETS + 4 USB PORTS



FC620-4U

FC620-4U

FC620-CU
(With Type C)

FC820-4U

FC820-4U

FC820-4U
(With Type C)

SPECIFICATIONS

AC Rating	250V/16A/3680W
Surge Protection	MOV Surge Protection
Power Plug	EU Plug
Product Size	206x111x39mm/260x111x39mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iphone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



FN SERIES

FN420-4U 4 OUTLETS + 4 USB PORTS



FN420-4U



FN420-4U



FN520-4U



FN520-4U

SPECIFICATIONS

AC Rating	250V/16A/3680W
Surge Protection	MOV Surge Protection
Power Plug	EU Plug
FN420-4U Product Size	195x195x38mm
FN520-4U Product Size	165x165x38mm
Quick Charge 3.0 USB Output	5V 2.5A, 9V 2A, 12V 1.5A; Max 18W
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



PO SERIES

PO220-3U 2 OUTLETS + 3 USB PORTS



PO220-3U



PO220-3U



PO220-CU
(With Type C)

SPECIFICATIONS

AC Rating	250V/16A/3680W
Surge Protection	MOV Surge Protection
Power Plug	EU Plug
Product Size	115x102x40mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



FM SERIES FM420-4U 4 OUT LETS +4 US B PORTS



FM420-4U



FM420-4U

SPECIFICATIONS

AC Rating	250V/16A/3680W
Surge Protection	MOV Surge Protection
Power Plug	EU Plug
Product Size	367x64x42mm
Quick Charge 3.0 USB Output	5V 2.5A, 9V 2A, 12V 1.5A; Max 18W
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



PI SERIES PI420-3U 4 OUTLETS + 3 USB PORTS



PI420-3U



PI420-3U

SPECIFICATIONS

AC Rating	250V/16A/3680W
Surge Protection	MOV Surge Protection
Power Plug	EU Plug
Product Size	290x55x40mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iphone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



QR SERIES

QR220-U 2 OUTLETS + 3 USB PORTS(WITH WIRELESS CHARGING)



SPECIFICATIONS

AC Rating	100-250V/10-16A
Cable	1.5M 3G 16AWG/1.5mm ²
Surge Protection	MOV Surge Protection
Power Plug	EU Plug
Product Size	108x102x31.6mm
Fast Charger USB Output	Max 5V 3.1A, USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Type-C Output	5-20V, Max 60W
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

ST SERIES

ST420-U 4 OUTLETS + 2 USB PORTS(WITH CLICK OUT)



SPECIFICATIONS

AC Rating	250V/16A
Cable	1.5M 3G 1.5mm ²
Surge Protection	MOV Surge Protection
Power Plug	EU Plug
Product Size	265x111x89.5mm
Fast Charger USB Output	Max 5V 3.1A, USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



SU-U SERIES

SU420-3U 4 OUTLETS + 3 USB PORTS



SU420-3U

SU520-3U

SU620-3U

SU430-3U

SU530-3U


SU630-3U

SPECIFICATIONS

AC Rating	100-250V/10-16A
Cable	1.5M 3G 1.5mm ²
Surge Protection	MOV Surge Protection
Power Plug	EU Plug
Product Size	442x70x43mm
Fast Charger USB Output	Max 5V 3.1A, USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Type-C Output	5-20V, Max 60W
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

PD SERIES

PD120-U 1 OUTLETS + 2 USB PORTS

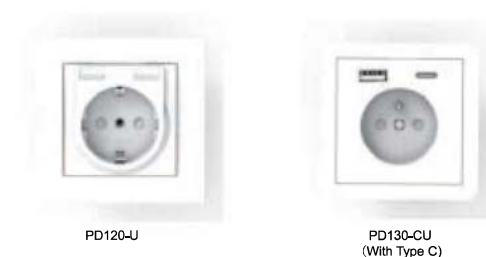

PD120-U

PD130-CU
(With Type C)

SPECIFICATIONS


AC Rating	250V/16A
Surge Protection	MOV Surge Protection
Power Plug	EU, US, AU Plug
Product Size	81x81x76mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER




SD SERIES

SD820-U 8 OUTLETS + 4 USB PORTS

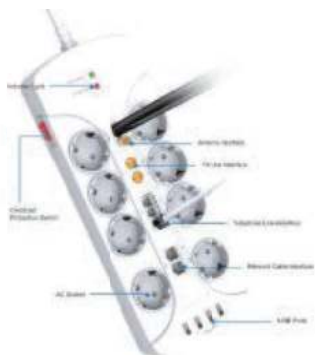

SD SERIES

SD830-U 8 OUTLETS + 4 USB PORTS

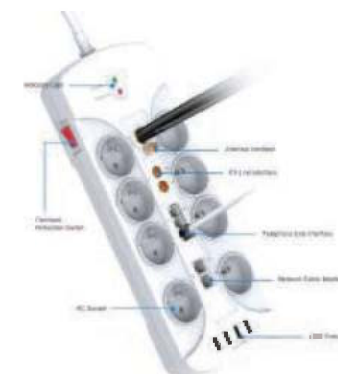

External IR Remote Control Contactor and Overload Resettable



External IR Remote Control Contactor and Overload Resettable

SPECIFICATIONS

AC Rating	230V/16A/3680W
Cable	1.5M 3G 1.0mm ²
Surge Protection	MOV Surge Protection
Power Plug	VDE Plug
Product Size	322x120x42mm
USB Charge	USB Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

SPECIFICATIONS

AC Rating	230V/16A/3680W
Cable	1.5M 3G 1.0mm ²
Surge Protection	MOV Surge Protection
Power Plug	VDE Plug
Product Size	322x120x42mm
USB Charge	USB Quick Charger 18W 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



SR SERIES

SR420-U 4 OUTLETS + 4 USB PORTS



SR420-4U



SR420



SR420-U



SR420-U Color



SR520



SR520-U

SR520-4U



SR620-3U

SPECIFICATIONS

AC Rating	230V/16A/3680W
Cable	1.5M 3G 1.0mm ²
Surge Protection	MOV Surge Protection
Power Plug	VDE Plug
Product Size	440x70x43mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



SR SERIES

SR430-U 4 OUTLETS + 2 USB PORTS



SR430



SR430-U



SR430-4U



SR530



SR530-4U



SR630



SR630-U

SPECIFICATIONS

AC Rating	230V/16A/3680W
Cable	1.5M 3G 1.0mm ²
Surge Protection	MOV Surge Protection
Power Plug	VDE Plug
Product Size	440x70x43mm
USB Charge	USB Quick Charger 12W 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



SU SERIES

SU520 5 OUTLETS WITH SWITCH




SPECIFICATIONS

AC Rating	230V/10A/2300W
Cable	1.5M 3G 1.0mm ²
Surge Protection	MOV Surge Protection
Power Plug	VDE Plug
Product Size	442x70x43mm
USB Charge	USB Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



SU SERIES

SU530-U 5 OUTLETS + 2 USB PORTS

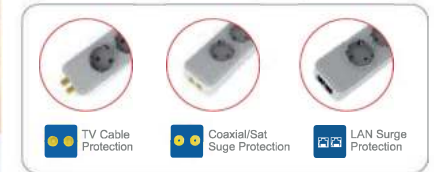

SPECIFICATIONS

AC Rating	230V/10A/2300W
Cable	1.5M 3G 1.0mm ²
Surge Protection	MOV Surge Protection
Power Plug	VDE Plug
Product Size	442x70x43mm
USB Charge	USB Quick Charger 18W 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



SG SERIES

SG520-U 5 OUTLETS + 3 USB PORTS



SG520-U



SG530-U



SG520-F



SG480-U

SPECIFICATIONS

AC Rating	100-250V/10-16A
Cable	1.5M 3G 1.0mm ²
Surge Protection	MOV Surge Protection
Power Plug	VDE Plug
Product Size	372x49x42mm
USB Charge	USB Quick Charger 12W 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



SK SERIES

SK530-U 5 OUTLETS + 2 USB PORTS



SK530 White



SK530 Black



SK530-U White

SPECIFICATIONS

AC Rating	230V/16A/3680W
Cable	1.5M 3G 1.0mm ²
Surge Protection	MOV Surge Protection
Power Plug	VDE Plug
Product Size	333x60x37mm
USB Charge	USB Quick Charger 12W 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



SD SERIES

SD880-U 8 OUTLETS + 4 USB PORTS



SD880-U Black



SD880-U White



SD880-CU White
(With Type C)

SPECIFICATIONS

AC Rating	250V/13A/3250W
Cable	1.5M 3G 1.5mm ²
Surge Protection	MOV Surge Protection
Power Plug	UK Plug
Product Size	322x120x42mm
USB Charge	USB Quick Charger 12W 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



SC SERIES

SC880-U 8 OUTLETS + 4 USB PORTS



SC880-U Black



SC880-U White




SC880-CU White
(With Type C)

SPECIFICATIONS

AC Rating	250V/13A/3250W
Cable	1.5M 3G 1.0mm ²
Surge Protection	MOV Surge Protection
Power Plug	UK Plug
Product Size	397x145x36.5mm
USB Charge	USB Quick Charger 18W 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER

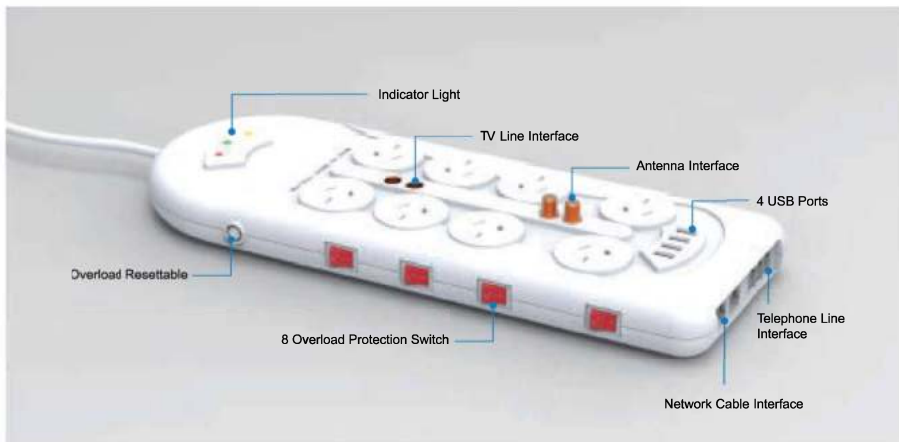

SC SERIES

SC850-LEFTU 8 OUTLETS + 2 USB PORTS



- LAN Surge Protection
- Coaxial/Sat Surge Protection
- USB Charger
- Coaxia Sat Surge Protection
- TV Cable Surge Protection
- LED-Light Indicator



External IR Remote Control Connector and Overload Resettable

SPECIFICATIONS

AC Rating	100-250V/10-16A
Cable	1.5M 3G 1.0mm ²
Surge Protection	MOV Surge Protection
Power Plug	AU, UK Plug
Product Size	397x145x36.5mm
4 USB Output	Total 5V 3.1A; Single Port: 5V 2.1A Max, 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



SV SERIES

SV680-U 6 OUTLETS + 2 USB PORTS



SPECIFICATIONS

AC Rating	250V/13A/3250W
Cable	1.5M 3G 1.0mm ²
Surge Protection	MOV Surge Protection
Power Plug	UK Plug
Product Size	470x64x27mm
USB Charge	USB Quick Charger 12W 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



SZ SERIES

SZ680-4U 6 OUTLETS + 4 USB PORTS



SZ680-U Black



SZ680-U White



SZ680-CU White
(With Type C)

SPECIFICATIONS

AC Rating	250V/13A/3250W
Cable	1.5M 3G 1.5mm ²
Surge Protection	MOV Surge Protection
Power Plug	UK Plug
Product Size	279x120x32mm
USB Charge	USB Quick Charger 12W 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



PQ SERIES

PQ320-U 3 OUTLETS WITH SWITCH



PQ320-U Black



PQ320 Black



PQ330 White



PQ330 Black

SPECIFICATIONS

AC Rating	250V/10A/2500W
Cable	1.5M 3G 1.0mm ²
Surge Protection	MOV Surge Protection
Power Plug	VDE Plug
Product Size	200x52x42mm
USB Charge	USB Quick Charger 18W 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



PT SERIES

PT1020-U 12 OUTLETS + 6 USB PORTS



JA SERIES

JA620 6 OUTLETS (WITH WALL HOLE)



SPECIFICATIONS

AC Rating	250V/16A/3680W
Surge Protection	MOV Surge Protection
Power Plug	EU Plug
PT1020-U Product Size	309x110x39.5mm
PT880-U Product Size	270x110x29.5mm
Quick Charge 3.0 USB Output	5V 2.5A, 9V 2A, 12V 1.5A; Max 18W
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

SPECIFICATIONS

AC Rating	100-250V/10-16A
Cable	1.5M 3G 1.5mm2
Surge Protection	MOV Surge Protection
Power Plug	EU Plug
Product Size	265x111x89.5mm
Fast Charger USB Output	Max 5V 3.1A, USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



PL SERIES

PL420-U 4 OUTLETS + 4 USB PORTS




SPECIFICATIONS

AC Rating	100-250V/10-16A
Surge Protection	MOV Surge Protection
Power Plug	EU, US,AU Plug
Product Size	81x81x76mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iphone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



PK SERIES

PK450-3U 4 OUTLETS + 3 USB PORTS

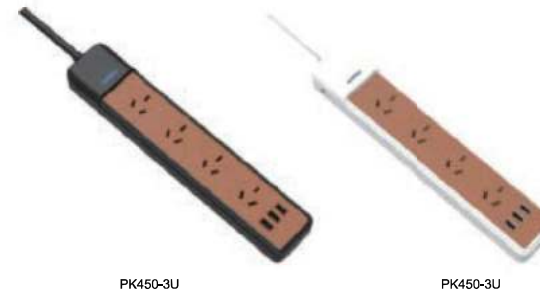

SPECIFICATIONS

AC Rating	240V/10A/2400W
Surge Protection	MOV Surge Protection
Power Plug	AU Plug
Product Size	290x55x40mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iphone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



PJ SERIES

PJ250-CU 2 OUT LETS +3 USB PORTS



PJ250-CU
(With Type C)



PJ250-CU
(With Type C)

SPECIFICATIONS

AC Rating	240V/10A/2400W
Surge Protection	MOV Surge Protection
Power Plug	AU Plug
Product Size	372x49x42mm
Quick Charge 3.0 USB Output	5V 2.5A, 9V 2A, 12V 1.5A; Max 18W
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



PS SERIES

PS250-CU PD GaN Chargers Power Strip



PS250-CU
(With Type C)



PS250-CU
(With Type C)

SPECIFICATIONS

AC Rating	240V/10A/2400W
Surge Protection	MOV Surge Protection
Power Plug	AU Plug
Product Size	270x55x40mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



FD SERIES FD1050-U 10 OUTLETS + 4 USB PORTS



FD1050-U Black



FD1050-U White

SPECIFICATIONS

AC Rating	240V/10A/2400W
Cable	1.5M 3G 1.0mm ²
Surge Protection	MOV Surge Protection
Power Plug	AU Plug
Product Size	420x130x40mm
4 USB Output	Total 5V 3.1A; Single Port: 5V 2.1A Max, 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



PE SERIES PE850-CU 8 OUTLETS + 3 USB PORTS



PE850-U Black



PE850-U White

SPECIFICATIONS

AC Rating	240V/10A/2400W
Surge Protection	MOV Surge Protection
Power Plug	AU Plug
Product Size	440x70x43mm
USB Charge	USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



FG SERIES FG250-U 2 OUTLETS + 4 USB PORTS



FG250-U Black



FG250-U White

SPECIFICATIONS

AC Rating	240V/10A/2400W
Surge Protection	MOV Surge Protection
Power Plug	AU Plug
PT880-U Product Size	170x170x35mm
Quick Charge 3.0 USB Output	5V 2.5A, 9V 2A, 12V 1.5A; Max 18W
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



PF SERIES PF650-4U 6 OUTLETS + 4 USB PORTS



PF650-4U



PF650-4U



PF650-CU
(With Type C)

SPECIFICATIONS

AC Rating	240V/10A/2400W
Surge Protection	MOV Surge Protection
Power Plug	AU Plug
Product Size	367x64x42mm
Quick Charge 3.0 USB Output	5V 2.5A, 9V 2A, 12V 1.5A; Max 18W
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



SPECIFICATIONS

AC Rating	100-250V/10-16A
Cable	1.5M 3G 16AWG
Surge Protection	MOV Surge Protection
Power Plug	US,EU,AU Plug
Product Size	108x102x31.6mm
Fast Charger USB Output	Max 5V 3.1A,USB Quick Charger 12W 4-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iphone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Type-C Output	5-20V,Max 60W
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

QG220-U

VED Plug AC Rating: 250V/10A/2500W



QG220-CU White
(With Type C)



QG220-CU Black
(With Type C)



QG220-U White



QG220-U Black

QG230-U

VDE Plug AC Rating: 250V/10A/2500W



QG230-CU White
(With Type C)



QG230-CU Black
(With Type C)



QG230-U White



QG230-U Black

QG250-U

AU Plug AC Rating: 240V/10A/2400W



QG250-CU White
(With Type C)



QG250-CU Black
(With Type C)



QG250-U White



QG250-U Black

QG260-U

US Plug AC Rating: 125V/15A/1875W



QG260-CU White
(With Type C)



QG260-CU Black
(With Type C)




QG260-U White



QG260-U Black

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER

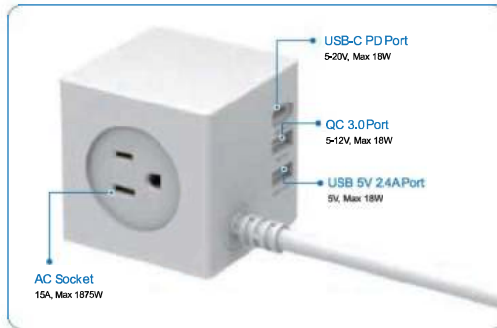

SPECIFICATIONS

AC Rating	100-125V/15A/1875W
Cable	1.5M 3G 16AWG
Surge Protection	MOV Surge Protection
Power Plug	US Plug
Product Size	61x61x61mm
USB Charge	USB Quick Charger 45W 3-Port Fast Charger Desktop Charger Charging Station with Quick Charge 3.0 for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Quick Charge 3.0 USB Output	5V 2.5A;9V 2A;12V 1.5A;Max 18W
Fast Charger USB Output	5V 2.4A
PD Type-C Output	5V 3A;9V 2A;12V 1.5A;Max 18W
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

QC120-U

VED Plug AC Rating: 230V/10A/2500W



QC120-U White(with switch)

QC120-U Black(with switch)

QC120-U White(no switch)

QC120-U Black(no switch)

QC130-U

VDE Plug AC Rating: 250V/10A/2500W



QC130-U White(with switch)

QC130-U Black(with switch)

QC130-U White(no switch)

QC130-U Black(no switch)

QC150-U

AU Plug AC Rating: 240V/10A/2400W



QC150-U White(with switch)

QC150-U Black(with switch)

QC150-U White(no switch)

QC150-U Black(no switch)

QC160-U

US Plug AC Rating: 125V/15A/1875W



QC160-U White(with switch)

QC160-U Black(with switch)

QC160-U White(no switch)

QC160-U Black(no switch)

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



QT SERIES

QT160-U1 OUT LETS+ 3 USB PORTS



SPECIFICATIONS

AC Rating	100-250V/10-16A
Surge Protection	MOV Surge Protection
Power Plug	US,EU,AU Plug
Product Size	138x70x39mm
Fast Wireless Charging	5V 1A; 6.8V 1.1A;9V 1.1A; Max watts 10W
PD USB-C CHARGE	5V 3A; 9V 3A; 12V 3A; 15V 3A; 20V 2.25A; Max watts 45W
Quick Charge 3.0 USB Output	5V 3A; 9V 2A; 12V 1.5A; Max watts 18W
Fast Charger USB Output	5V 2.4A; Max watts 12W
Laptop Charger	19V 3A;Max watts 60W
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

QT120-U

VED Plug AC Rating: 230V/10A/2500W



QT130-U

VDE Plug AC Rating: 230V/10A/2500W



QT150-U

AU Plug AC Rating: 240V/10A/2400W



QT160-U

US Plug AC Rating: 125V/15A/1875W



MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



AB SERIES

AB260 -CU
2 OUT LETS + 2 USB PORTS + 1 TYPE C



SPECIFICATIONS

AC Rating	100-125V/15A/1875W
Cable	1.5M 3G 16AWG
Surge Protection	MOV Surge Protection
Power Plug	US Plug
Product Size	160X60X31mm
Fast Charger USB Output	Max 5V 3.1A, USB Quick Charger 12W 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Type-C Output	5-20V, Max 45W
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized



SM SERIES

SM120-U 1 OUTLETS + 2 USB PORTS



SPECIFICATIONS

AC Rating	230V/16A/3680W
Surge Protection	MOV Surge Protection
Power Plug	VDE Plug
Product Size	70x55x40mm
USB Charge	USB Quick Charger 18W 2-Port Fast Charger Desktop Charger Charging Station for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER



TRAVEL CHARGER

Wireless Charging Station with USB Charger



QS100-CU

SPECIFICATIONS


AC Rating	100-250V/10-16A
Cable	1.5M 3G 1.0mm ²
Surge Protection	MOV Surge Protection
Power Plug	VDE Plug
Product Size	220x147x87mm
USB Charge	USB Quick Charger 45W 3-Port Fast Charger Desktop Charger Charging Station with Quick Charge 3.0 for Galaxy S8/ S7/S/Edge, Note 5 and iSmart for iPhone XS/ XS MAX X 8/7/Plus, iPad, LG, Nexus 6, HTC & More.
Quick Charge 3.0 USB Output	5V 2.5A; 9V 2A; 12V 1.5A; Max 18W
Fast Charger USB Output	5V 3.1A, Total 8A
PD Type-C Output	5V 3A; 9V 2A; 12V 1.5A; Max 15W
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

TRAVEL CHARGER

Surge Protector with USB Charge



AB110-U



SPECIFICATIONS

AC Rating	100-250V/10-16A
Frequency Range	50-60Hz
Surge Protection	MOV Surge Protection
Power Plug	EU, AU, UK, US Plug
Product Size	110x65x35mm
Usage	For All Travel / Home electrical appliances such as Mobile Phone chargers, Notebook Computers, Digital Cameras, Hairdryers, Shavers, and other electronic products.
Universal Country	Hong Kong Ireland, Malaysia, Uk, Singapore, Brunei, Europe, France, Germany, Greece, Korea, Russia, Switzerland, U.A.E, Thailand, Indonesia, Australia, Argentina, China, Fiji, New Zealand, Papua New Guinea, USA, China, Canada Caribbean, Japan, North and South America, Philippines Taiwan, Thailand
Fast Charger USB Output	Total 5V DC 3.1A Single Port: Max. 5V DC 2.1A
Housing Material	PC+ABS
Color	White, Black, Teal, Yellow and Red, can Also be Customized

MULTI SOCKET SURGE PROTECTOR WITH USB CHARGER

ITALY

Surge Protector with USB Charger



PQ340

SU540

SU540-L

SU640-L



TD840-LEFT

RD840-LEFTU

SA540

OTHER

Surge Protector with USB Charger



PV210-U

PV310

PV310-U

PV410



PV410-U

PV510

SF410

CV-SF410



SF410-U

SF510

CV-SF510

SF510-U



SF610

CV-SF610

SF610-U

SF610-U

OTHER

Surge Protector with USB Charger



SP410

SP410-U

SP610

SP610-U



TC610-LEFTU

SC810-LEFTU

TC810-LEF

TC810-LEFTU



QT110-U White

QT110-U Black

SA511-U

SA610 White

	LAN Surge Protection		LED-Light Indicator
	Coaxial/Sat Surge Protection		TV Cable Surge Protection
	Coaxial/Sat Surge Protection		USB Charger



External IR Remote Control Contactor and Overload Resettable

GaN 20W



ZDC-1U20T

GaN 20W A+C



ZDC-2U20T

GaN 30W



ZDC-1U30T

GaN 30W A+C



ZDC-2U30T

GaN 35W



ZDC-1U35T

GaN 35W A+C



ZDC-2U35T

GaN 45W



ZDC-1U45T

GaN 45W A+C



ZDC-2U45T

GaN 45W



ZDC-1U46T

GaN 45W A+C



ZDC-2U46T

GaN 65W



ZDC-1U65T

GaN 65W



ZDC-1U66T

GaN 65W C+A



ZDC-2U65T

GaN 65W 2C+A



ZDC-3U65T

GaN 65W 2C+A



ZDC-3U66T

GaN 100W 3C+A



ZDC-4U100T

PD 20W



ZDC-1U20Q

PD 20W C+A



ZDC-2U20Q

PD 25W



ZDC-1U25Q

PD 25W C+A



ZDC-2U25Q

PD 30W



ZDC-1U30Q

PD 30W C+A



ZDC-2U30Q

PD 45W 2C



ZDC-2U45Q

PD 50W 2C



ZDC-2U50Q

GaN 20W C+A



GaN 30W C+A



ZDC-2U20T

USB Port	2 Port
Input	100-240V~50/60Hz 0.5A Max
Output(USB-C)	5V/3A or 9V/2.22A or 12V/1.67A(20W)
(USB-A)	5V/3A or 9V/2A or 12V/1.5A(18W)
(USB-C+USB-A)	5V/3.6A(18W)
Power	20W Max
Size	32*33*40mm
Colour	White/Black

ZDC-2U30T

Port	2 Port
Input	100-240V~50/60Hz 1A Max
Output(USB-A)	5V/3A,9V/2A, 12V/1.5A(18W)
(USB-C)	5V3A,9V/3A,12V/2.5A, 15V/2A,20V/1.5A(30W)
PPS	3.3-11V/3A
(USB-A+USB-C)	5V/3.6A
Size	32*33*40mm
Colour	White/Black

GaN 35W C+A



ZDC-2U35T

Port	2 Port
Input	100-240V~50/60Hz 1AMax
Output(USB-A)	5V/3A,9V/2A, 12V/1.5A(18W)
(USB-C)	5V3A,9V/3A, 12V/2.91A, 15V/2.33A,20V/1.75A(35W)
PPS	3.3-11V/3A
(USB-A+USB-C)	5V/3.6A
Size	32*33*40mm
Colour	White/Black

LD-1417

GaN 45W C+A



ZDC-2U45T

USB Port	2 Ports
Input	100-240V~50/60Hz 1.2A
Output(USB-C)	5V/3A,9V/3A, 12V/3A, 15V/3A,20V/2.25A(45W)
PPS	3.3-11V/4.05A
(USB-A)	5V/3A,9V/2A, 12V/1.5A(18W)
(USB-C+USB-A)	5V/3A+5V/2A(15W+10W)
(USB-C+USB-A)	9V/3A, 12V/2.5A15V/2A,20V/1.5A+5V/2A,9V/1.67A(30W+15W Max)
Size	38*32*46mm
Colour	White/Black

185


GaN 65W 2C+A



ZDC-3U65T

Port	3 Ports
Input	AC~100-240V 50-60Hz 1.5AMax
USB-C1	5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A
PPS	3.3-11V/5A
USB-C2	5V/3A,9V/2.22A,12V/1.67A
USB-A	5V/3A 9V/2A,12V/1.5A
USB-C1+C2	45W+15W
USB-C1+A	45W+15W
USB-C2+A	5V/3A
USB-C1+C2+A	45W+15W
Size	38mm*32mm*66mm
Colour	White/Black

GaN 100W 3C+A

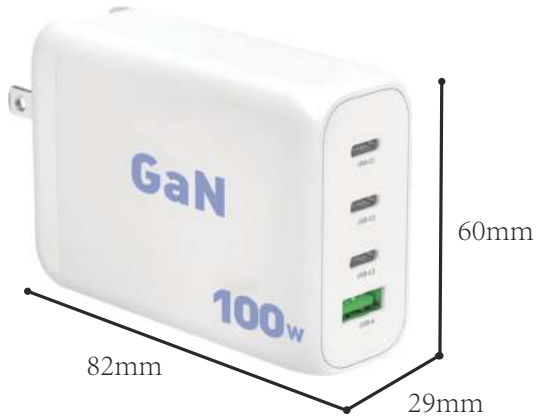

ZDC-4U100T

Input	Input :100 -240V
Output	AC 100-240V,50/60Hz,1.8A Max USB-C1 : 5V/3A, 9V/3A, 12V/3A, 15V/3A,20V/5A USB-C2 : 5V/3A, 9V/3A,12V/3A, 15V/3A, 20V/5A USB-C3 : 5V/3A,9V/2.56A,12V1.92A USB-A : 5V/3A, 9V2A, 12V/1.5A
Plug	US
Colour	Black / White
Product dimension	82x60x29mm
Product weight	220g

GaN 140W 3C+A

**ZDC-4U140T**

Input	100-240V~ 50/60Hz 2A Max
Output	USB-C1: 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A,28V/5A (PD140W) USB-C2: 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A (PD100W) USB-C3: 5V/3A,9V/2.22A,12V/1.67A (PD20W) USB-A: 5V/3A, 9V/2A,12V/1.5A (18W) Total output: 140W MAX
Size	74.2*30.9*75mm

PD 35W 2C



ZDC-2U35Q

USB Port	2 Ports
Input	100-240V~50-60Hz1A Max
Power	35W Max
USB-C1/USB-C2	5V/3A,9V/3A,12V/2.9A,15V12.33A20V/1.75A(35W)
PPS	3.3-11V/3A(33W Max)
C1+C2	35W Max (Intelligent output distribution)
Size	46.36*46.41*28.34mm
Colour	WhiteBlack

PD 50W 2C



ZDC-2U50Q

USB Port	2 Ports
Input	100-240V~50/60Hz 1.5A Max
Power	50W Max
USB-C1	5V/3A,9V/3A,12V12.5A,15V12A,20V/1.5A(30W)
PPS	3.3-11V/3A or 3.3-16V/2A
USB-C2	5V/3A,9V/2.0A,12V/1.67A(20W)
C1+C2	30W+20W(50W Max)
Size	52.28X27.69X55.23mm
Colour	WhiteBlack

B0L22 (45W)









Input : 100 -240V	Output : 20V 2.25A
Plug : US / EU/ UK, AC cable: 1.5m	Product dimension: 96.5x40x28mm
AC socket: 3 Prong-C6, DC cable: 1.8m	Product weight: 260g

B0L15 (45W)









Input : 100 -240V	Output : 20V 2.25A
Plug : US / EU/ UK, DC Cable: 1.2m	DC interface: 4.0x1.7mm
Product Dimension: 63x63x28mm	Product Weight: 163g

B0L10 (45W)









Input : 100 -240V	Output : 20V 2.25A
Plug : US / EU/ UK, AC cable: 1.5m	DC interface: Square Tip
AC socket: 3 Prong-C6, DC cable: 1.2m	Product weight: 190g
Product dimension: 105x48x30mm	

B0L17 (45W)









Input : 100 -240V	Output : 20V 2.25A
Plug : US / EU/ UK, DC Cable: 1.2m	DC interface: 4.0x1.7mm
AC Socket: 3 Prong-C6, AC Cable: 1.5m	Product Weight: 190g
Product Dimension: 105x48x30mm	

B0L14 (65W)









Input : 100 -240V	Output : 20V 3.25A
Plug : US / EU/ UK	DC interface: 4.0x1.7mm
Product dimension: 75x75x28mm	Length of DC cable: 1.5m
Product weight: 210g	

B0L16 (65W)









Input : 100 -240V	Output : 20V 3.25A
Plug : US / EU/ UK, AC Cable: 1.5m	DC interface: 4.0x1.7mm
AC Socket: 3 Prong-C6, DC Cable: 1.2m	Product Weight: 250g
Product Dimension: 110x45x30mm	

B0L01 (65W)









Input : 100 -240V	Output : 20V 3.25A
Plug : US / EU/ UK, AC cable: 1.5m	DC interface: 5.5x2.5mm
AC socket: 3 Prong-C6, DC cable: 1.2m	Product weight: 300g
Product dimension: 110x45x30mm	

B0L06 (65W)









Input : 100 -240V	Output : 20V 3.25A
Plug : US / EU/ UK, AC Cable: 1.5m	DC interface: 7.9x5.5mm
AC Socket: 3 Prong-C6, DC Cable: 1.2m	Product Weight: 250g
Product Dimension: 110x45x30mm	

B0L03 (90W)



Replacement for Lenovo laptop chargers

Input : 100 -240V	Output : 20V 4.5A
Plug : US / EU/ UK, AC Cable: 1.5m	DC interface: Square Tip
AC Socket: 3 Prong-C6, DC Cable: 1.5m	Product Weight: 335g
Product Dimension: 130x58x28mm	

B0L02 (90W)



Input : 100 -240V	Output : 20V 4.5A
Plug : US / EU/ UK, AC cable: 1.5m	DC interface: 7.9x5.5mm
AC socket: 3 Prong-C6, DC cable: 1.2m	Product weight: 335g
Product dimension: 130x58x28mm	

B0L20 (65W)



Input : 100 -240V	Output : 20V 3.25A
Plug : US / EU/ UK, AC Cable: 1.5m	Product Dimension: 115x50x30mm
AC Socket: 3 Prong-C6, DC Cable: 1.8m	Product Weight: 310g

B0L21 (90W)



Compatible with 90W Type-C models

Input : 100 -240V	Output : 20V 4.5A
Plug : US / EU/ UK, AC Cable: 1.5m	Product Dimension: 128x53x30mm
AC Socket: 3 Prong-C6, DC Cable: 1.8m	Product Weight: 380g

B0L31 (95W)



Input : 100 -240V	Output : 20V 4.75A
Plug : US / EU/ UK, AC cable: 1.5m	Product dimension: 122x55x28mm
AC socket: 3 Prong-C6, DC cable: 1.8m	Product weight: 255g

B0L29 (100W)



Input : 100 -240V	Output : 20V 5A
Plug : US / EU/ UK, AC cable: 1.5m	Product dimension: 128x53x30mm
AC socket: 3 Prong-C6, DC cable: 1.8m	Product weight: 385g

B0H18/B0H16 (45W)



Input : 100 -240V	Output : 20V 2.25A / 19V 2.31A
Plug : US / EU/ UK, AC Cable: 1.5m	Product Weight: 250g
AC Socket: 3 Prong-C6, DC Cable: 1.8m	Product Dimension: 95x41x27mm

B0H22 (65W)



Input : 100 -240V	Output : 20V 3.25A
Plug : US / EU/ UK, AC Cable: 1.5m	Product Weight: 300g
AC Socket: 3 Prong-C6, DC Cable: 1.8m	Product Dimension: 90x50x28mm



B0H01/B0H15/B0H03 / B0H04 / B0H08 (65W)

Input : 100 -240V	Output(B0H01) : 18.5V 3.34A Output(B0H15) : 18.5V 3.5A
Plug : US / EU/ UK, AC Cable: 1.5m	DC interface: 7.4x5.0mm(B0H01) / 4.8x1.7mm(B0H15)
AC Socket: 3 Prong-C6, DC Cable: 1.2m	Product Weight: 296g
Product Dimension: 110x45x30mm	

B0H33 (90W)




Input : 100 -240V	Output : 20V 4.5A
Plug : US / EU/ UK, AC Cable: 1.5m	Product Weight: 340g
AC Socket: 3 Prong-C6, DC Cable: 1.8m	Product Dimension: 135x65x23mm

B0H32 (65W)



Input : 100 -240V	Output : 20V 3.25A
Plug : US / EU/ UK, AC cable: 1.5m	Product weight: 255g
AC socket: 3 Prong-C6, DC cable: 1.8m	Product dimension: 97x53x22mm



B0H05 / B0H06 / B0H07 (90W)



Input : 100 -240V	Output: 19V 4.74A
Plug : US / EU/ UK, AC cable: 1.5m	DC interface: 7.4x5.0mm(B0H05) / 4.5x3.0mm(B0H06)
AC socket: 3 Prong-C6, DC cable: 1.2m	Product weight: 295g



4.0x1.35mm



5.5x2.5mm



3.0x1.1mm

B0U06 / B0U18 (33W)



Input : 100 -240V	Output : 19V 1.75A
Plug : US / EU/ UK	DC interface: B0U06 : 3.0x1.1mm B0U18 : 5.5X2.5mm / 4.0X1.35mm
Product Dimension: 53x53x30mm	Length Of DC Cable: 1.8
Product Weight: 150g	



B0U11 Black / B0U14 White (45W)



Input : 100 -240V-50-60Hz 1.8A	Output : 20V 2.25A
Plug : US / EU/ UK	Product weight: 210g
DC cable: 1.8m	Product dimension: 65x65x32mm



4.0x1.35mm



4.0x1.2mm



3.0x1.1mm

B0U16 (45W)



Input : 100 -240V	Output : 19V 2.35A
Plug : US / EU/ UK, AC cable: 1.5m	DC interface: 3.0x1.1mm
AC socket: 3 Prong-C6, DC cable: 1.5m	Product weight: 190g
Product dimension: 105x48x30mm	

B0U07 / B0U08 / B0U17 (45W)



Input : 100 -240V	Output : 19V 2.37A
Plug : US / EU/ UK	DC interface: B0U07 : 3.0x1.1mm B0U08 : 4.0x1.35mm B0U17 : 4.0x1.2mm
Product Dimension: 63x63x30mm	
Length Of DC Cable: 1.8m	
Product Weight: 160g	



B0U04 / B0U05 / B0U01 (65W)



Input : 100 -240V	Output : 19V 3.42A
Plug : US / EU/ UK	DC interface: B0U04 : 4.0x1.35mm
Product dimension: 78x78x30mm	B0U05 : 4.5x3.0mm
Product weight: 220g	B0U01 : 5.5x2.5mm
Length of DC cable: 1.8m	



B0U15Black / B0U12White (65W)



Input : 100 -240V-50-60Hz 1.8A	Output : 20V 3.25A
Plug : US / EU/ UK	Product weight: 200g
DC cable: 1.8m	Product dimension: 65x65x32mm



B0U02 / B0U03 (90W)



Input : 100 -240V	Output : 19V 4.7A
Plug : US / EU/ UK, AC cable : 1.5m	DC interface: B0U02 : 5.5x2.5mm / B0U03 : 4.5x3.0mm
AC socket : 3 Prong-C6, DC Cable: 1.8m	Product Weight: 440g
Product Dimension: 90x90x30mm	



B0U13 (87W)



Input : 100 -240V	Output : 20V 3.25A
Plug : US / EU/ UK	Product weight: 230g
DC interface: Type-C, DC cable: 1.8m	Product dimension: 75x75x30mm



B0D15 (30W)

UL UK CE FC RŮHS

Input : 100 -240V	Output : 20V 1.5A
Plug : US / EU/ UK, AC Cable: 1.5m	Product Weight: 136g
AC Socket: 3 Prong-C6, DC Cable: 1.8m	Product Dimension: 67x55x22mm



B0D16 (45W)

UL UK CE FC RŮHS

Input : 100 -240V	Output : 20V 2.25A
Plug : US / EU/ UK, AC cable: 1.5m	DC interface: Type-C
AC socket: 3 Prong-C6, DC cable: 1.8m	Product weight: 250g
Product dimension: 95x55x23mm	



B0D04 (45W)

UL UK CE FC RŮHS

Input : 100 -240V	Output : 19.5V 2.31A
Plug : US / EU/ UK, AC Cable: 1.5m	DC interface: 4.5x3.0mm
AC Socket: 2 prong-C8, DC Cable: 1.2m	Product Weight: 260g
Product Dimension: 108x48x30mm	



B0D14 / B0D12 (45W)

UL UK CE FC RŮHS

Input : 100 -240V	Output : 19.5V 2.31A
Plug : US / EU/ UK, AC Cable: 1.5m	DC interface: 4.5x3.0mm / 7.4x5.0mm
AC Socket: 3 Prong-C6, DC Cable: 1.5m	Product Weight: 310g
Product Dimension: 95x55x23mm	



B0D08 (45W)

UL UK CE FC RŮHS

Input : 100 -240V	Output : 19V 2.31A
Plug : US / EU/ UK, AC cable: 1.5m	DC interface: 4.5x3.0mm
AC socket: 3 Prong-C6, DC cable: 1.2m	Product weight: 250g
Product dimension: 95x40x25mm	



B0D09 (65W)

UL UK CE FC RŮHS

Input : 100 -240V	Output : 19V 3.34A
Plug : US / EU/ UK, AC Cable: 1.5m	DC interface: 4.5x3.0mm
AC Socket: 3 Prong-C6, DC Cable: 1.2m	Product Weight: 300g
Product Dimension: 110x48x30mm	

Laptop Charger for Dell

KIMPORT



B0D10 / B0D17 (65W)

ETL UK CE FC RoHS

Input : 100 -240V	Output : 19.5V 3.34A
Plug : US / EU/ UK, AC cable: 1.5m	DC interface: 4.5x3.0mm / 7.4x5.0mm
AC socket: 3 Prong-C6, DC cable: 1.5m	Product weight: 310g
Product dimension: 105x65x23mm	



B0D22 (90W)

ETL UK CE FC RoHS

Input : 100 -240V	Output : 19V 4.62A
Plug : US / EU/ UK, AC Cable: 1.5m	DC interface: 4.5x3.0mm
AC Socket: 3 Prong-C6, DC Cable: 1.2m	Product Weight: 275g
Product Dimension: 126x48x30mm	



B0D13 (65W)

ETL UK CE FC RoHS

Input : 100 -240V	Output : 20V 3.25A
Plug : US / EU/ UK, AC cable 1.5m	Product weight: 210g
AC socket :3 Prong-C6, DC cable: 1.8m	Product dimension: 65x65x32mm



B0D20 (90W)

ETL UK CE FC RoHS

Input : 100 -240V	Output : 20V 4.5A
Plug : US / EU/ UK, AC Cable: 1.5m	DC interface: Type-C
AC Socket: 3 Prong-C6, DC Cable: 1.8m	Product Weight: 350g
Product Dimension: 135x65x23mm	

Laptop Charger for Apple

KIMPORT



B0A15 (30W)



Input : 100 -240V	Output : 20V 1.5A
Plug : US / EU/ UK /AU	DC interface: Type-C
Product Dimension: 65x65x28mm	Length Of DC Cable: 2.0m
Product Weight: 160g	



B0A12 (61W)
EU/UK/AU

B0A12-01 (65W)
US

B0A12 (61W) / B0A12-01 (65W)

Input : 100 -240V	Output Voltage/Current:20.3V 3A
Plug : 61W: US / EU/ UK / AU 65W: US	Product Weight: 209g
DC Cable: 1.8m	Product Dimension: 160x108x30mm



B0A14 (87W)



Input : 100 -240V	Output : 20.2V 4.3A
Plug : US / EU/ UK /AU	DC interface: Type-C
Product Dimension: 80x80x28mm	Length Of DC Cable: 2.0m
Product Weight: 230g	



B0A18 (100W)



Input : 100 -240V	Output : 20V 5A
Plug : US / EU/ UK /AU	DC interface: Type-C
Product Dimension: 80x80x28mm	Length Of DC Cable: 2.0m
Product Weight: 245g	

Universal Laptop Charger + Interchangeable mutple tips

KIMPORT



B0D08-16 (45W)

ETL UK CA CE FC RoHS

Input : 100 -240V~50-60Hz 1.8A	Output : 19.5V 2.31A
Plug : US / EU/ UK, AC Cable: 1.5m	Product Weight: 165g
AC Socket: 3 Prong-C6, DC Cable: 1.2m	Product Dimension: 93x40x26mm

B0D09-16 (65W)/B0H07 (90W)

ETL UK CA CE FC RoHS

Input : 100 -240V~50-60Hz 1.8A	Output : 19.5V 3.34A/19.5 V 4.62A
Plug : US / EU/ UK, AC cable: 1.5m	Product weight: 230g
AC socket: 3 Prong-C6, DC cable: 1.2m	Product dimension: 118x50x31mm



B0U05-5 (45W)

ETL UK CA CE FC RoHS

Input : 100 -240V~50-60Hz 1.8A	Output : 19 V 2.37 A
Plug : US / EU/ UK	Length Of DC Cable: 1.8m
Product dimension: 63x63x28mm	Product Weight: 150g

BHU07-4 (65W)

ETL UK CA CE FC RoHS

Input : 100 -240V~50-60Hz 1.8A	Output : 19 V 3.42 A
Plug : US / EU/ UK, DC Cable: 1.8m	Product Weight: 250g
Product dimension: 75x75x28mm	

Interchangeable mutiple tips



M1

15V 6.3*3.0mm
for Toshiba



M4

18.5V 4.8*1.7mm
for HP



M5

19V 5.5*2.5mm
for ASUS/Toshiba



M6

19V 5.0*3.0mm
for Samsung



M8

19.5V 6.5*4.4mm
for SONY



M9

19.5V 7.4*5.0mm
for Dell



M10

20V 11.0*5.0mm
for Lenovo



M11

20V 7.9*5.4mm
for Lenovo



M12

18.5V 7.4*5.0mm
for HP



M13

19V 4.0*1.7mm
for Toshiba/Lenovo



M18

19V 3.0*1.1mm
for ASUS/Acer



M19

19V 4.0*1.35mm
for ASUS



M20

19V 5.5*1.7mm
for Acer



M21

19.5V 4.5*3.0mm
for HP



M22

19.5V 4.5*3.0mm
for Dell



M28

19.5V 4.8*1.7mm
for HP

AC Cable



Data Cable



Power



- Portable Power Station
- Charger
- Wireless Charger
- Power Bank
- Car Charger
- AC Power
- Gaming Power

► SR03KWL-SG1-EU 3000W Portable Power Station



Highlights

- True-Bidirectional technology, support fast charging, only needs 1.6 hours
- Metal square lithium iron phosphate battery, differ from traditional columnar battery technology.
- Uninterrupted power supply (UPS), switch to back-up power within 14ms; UL1778 certification standard.
- Intelligent internal air cooling system
- More intelligent APP control platform, which can be connected via Wi-Fi/bluetooth Bottom wheel design, easier to move
- Aluminum alloy bracket, stronger structural design
- Automatic detection of input frequency 50Hz or 60Hz, AC output frequency follow.

Product Parameters

Battery Type	Square aluminum case LiFePO ₄ power battery
Energy Capacity	2560Wh
Cycle Life	> 3600 Cycles
Depth of Discharge (DOD)	95%
USB-A Output	5V/2.4A, 12W Max*2
USB-A Output (quick charge)	5V/3A, 9V/2A, 12V/1.5A, 18W Max*2
Type-C Output	5/9/12/15V 3A, 20V/5A, 100W Max* 2
DC5521 Output	12.6V, 3A* 2
Car port output	12.6V/10A, 126W Max
AC Output	Pure sine-wave,total 3000w(peak 5000w),220-240V(50Hz/60Hz), 16* 3
AC Input	2300W Max, 220-240V (50Hz/60Hz), 10A
Car port input	12V/24V, DC 8A (default)
PV Panel input	800W Max, 13-45V, 12A
Weight	34kg
Dimensions (W*H*D)	303*343*536mm
Discharge Temperature Range	-20-45 C (±3 C)
Charge Temperature Range	0-45 C (±3 C)
Certification	IEC/EN 62368-1, IEC/EN 62619, IEC/EN 62040.1, EMC, CA 65, TSCA, RoHS, Reach, WEEE, POPS, UN38.3, MSDS

► SR03KWL-SG1-US 3000W Portable Power Station

Highlights

- True-Bidirectional technology, support fast charging, only needs 1.6 hours
- Metal square lithium iron phosphate battery, differ from traditional columnar battery technology.
- Uninterrupted power supply (UPS), switch to back-up power within 14mS; UL1778 certification standard.
- Intelligent internal air cooling system
- More intelligent APP control platform, which can be connected via Wi-Fi/bluetooth Bottom wheel design, easier to move
- Aluminum alloy bracket, stronger structural design
- Automatic detection of input frequency 50Hz or 60Hz, AC output frequency follow.



Product Parameters

Battery Type	Square aluminum case LiFePO ₄ power battery
Energy Capacity	2560Wh
Cycle Life	> 3600 Cycles
Depth of Discharge (DOD)	95%
USB-A Output	5V/2.4A, 12W Max*2
USB-A Output (quick charge)	5V/2.4A, 9V/2A, 12V/1.5A, 18W Max*2
Type-C Output	5/9/12/15V 3A, 20V/5A, 100W Max* 2
DC5521 Output	12.6V, 3A* 2
Car port output	12.6V/10A, 126W Max
AC Output	100-120V(60Hz),20A,2400w* 3 ; 100-120V(60Hz),25A,3000w* 1;100-120V(60Hz),20A,1800W(by pass mode)
AC Input	1800W Max, 100-120V (60Hz), 15A
Car port input	12V/24V, DC 8A (default)
PV Panel input	800W Max, 13-45V, 12A
Weight	34kg
Dimensions (W*H*D)	303*343*536mm
Discharge Temperature Range	-20-45 C (±3 C)
Charge Temperature Range	0-45 C (±3 C)
Certification	ANSI/CAN/UL 1012+UL 1778+UL01741+UL1973,FCC part15B,ICES,EMC,CA65,TSCA,RoHS,Reach, WEEE,POPS,UN38.3,MSDS

Highlights



01 Metal square lithium iron phosphate battery, differ from traditional columnar battery technology

05 Support USB flash disk software upgrade function.

02 Uninterrupted power supply (UPS), switch to back-up power within 14mS; UL1778 certification standard

06 Support PV+AC charging

03 True-Bidirectional technology, support fast charging, only needs 1.6 hours

07 Aluminum alloy bracket, stronger structural design

04 Bottom wheel design, easier to move

08 Support battery expansion technology for larger battery capacity, supporting 6 extra batteries to reach a total capacity of 17.5kWh

09 AC load frequency smart following off-grid, and APP choose:50/60Hz

► SR1KW8L-SG1-EU 1800W Portable Power Station



Highlights

- True-Bidirectional technology, support fast charging, only need 1.6 hours
- Aluminum alloy bracket, stronger structural design
- Uninterrupted power supply (UPS), switch to back-up power within 14mS
- Intelligent internal air cooling system
- More intelligent APP control platform, which can be connected via Wi-Fi/bluetooth
- Automatic detection of input frequency 50Hz or 60Hz, AC output frequency follow

Product Parameters

Battery Type	Lithium iron phosphate battery (LiFePo ₄)
Energy Capacity	1229Wh
Cycle Life	> 2000 Cycles
Depth of Discharge (DOD)	95%
USB-A Output	5V/2.4A, 12W Max*2
USB-A Output (quick charge)	5V/3A, 9V/2A, 12V/1.5A, 18W Max*2
Type-C Output	5/9/12/15V 3A, 20V/5A, 100W Max* 2
DC5521 Output	12.6V, 3A* 2
Car port output	12.6V/10A, 126W Max
AC Output	Pure sine-wave,total 1800w(peak 3000W),220-240V(50Hz/60Hz)*3
AC Input	1800W Max, 220-240V (50Hz/60Hz), 10A Max
Car port input	12V/24V, DC 8A (default)
PV Panel input	400W max, 13-45V, 12A
Weight	22kg
Dimensions (W*H*D)	270*300*432mm
Discharge Temperature Range	-20-45 C (±3 C)
Charge Temperature Range	0-45 C (±3 C)
Certification	IEC/EN 62368-1, IEC/EN 62133, IEC/EN 62040.1, EMC, CA 65, TSCA, RoHS, Reach, WEEE, POPS, UN38.3, MSDS

► SR1KW8L-SG1-US 1800W Portable Power Station

Highlights

- True-Bidirectional technology, support fast charging, only need 1.6 hours
- Aluminum alloy bracket, stronger structural design
- Uninterrupted power supply (UPS), switch to back-up power within 14ms
- Intelligent internal air cooling system
- More intelligent APP control platform, which can be connected via Wi-Fi/bluetooth
- Automatic detection of input frequency 50Hz or 60Hz, AC output frequency follow



Product Parameters

Battery Type	Lithium iron phosphate battery (LiFePo ₄)
Energy Capacity	1229Wh
Cycle Life	> 2000 Cycles
Depth of Discharge (DOD)	95%
USB-A Output	5V/2.4A, 12W Max*2
USB-A Output (quick charge)	5V/3A, 9V/2A, 12V/1.5A, 18W Max*2
Type-C Output	5/9/12/15V 3A, 20V/5A, 100W Max* 2
DC5521 Output	12.6V, 3A* 2
Car port output	12.6V/10A, 126W Max
AC Output	Pure sine-wave,total 1800W(peak 3000W),120V(50Hz/60Hz)*4
AC Input	1200W Max, 100-120V (50Hz/60Hz), 15A Max
Car port input	12V/24V, DC 8A (default)
PV Panel input	400W max, 13-45V, 12A
Weight	22kg
Dimensions (W*H*D)	270*300*432mm
Discharge Temperature Range	-20-45 C (±3 C)
Charge Temperature Range	0-45 C (±3 C)
Certification	ANSI/CAN/UL 2743,(considered part of UL 1778+UL1741), FCC part15B, ICES, EMC, CA 65, TSCA, RoHS, Reach, WEEE, POPS, UN38.3, MSDS

▶ SR0KW6L-SG1-EU 600W Portable Power Station

Highlights

- True-Bidirectional technology, support fast charging, only need 1.2 hours
- Aluminum alloy bracket, stronger structural design
- Uninterrupted power supply (UPS), switch to back-up power within 14mS
- Intelligent internal air cooling system
- More intelligent APP control platform, which can be connected via Wi-Fi/bluetooth
- Automatic detection of input frequency 50Hz or 60Hz, AC output frequency follow
- Light weight and easy to carry



Product Parameters

Battery Type	Lithium iron phosphate battery (LiFePo ₄)
Energy Capacity	512Wh
Cycle Life	> 2000 Cycles
Depth of Discharge (DOD)	95%
USB Output	5V/2.4A, 12W Max*2
Type-C Output	5/9/12/15V 3A, 20V/5A, 100W Max* 2
DC5521 Output	12V, 3A* 2
Car port output	12V/10A, 120W Max
AC Output	Pure sine-wave, total 600w(peak 1000W),220-240V(50Hz/60Hz),3A
AC Input	600W Max, 220-240V (50Hz/60Hz), 3A
Car port input	12V, DC 8A (default)
PV Panel input	200W Max, 12-20V/10A, DC10A Max
Weight	7kg
Dimensions (W*H*D)	301*193*227mm
Discharge Temperature Range	-20-45 C (±3 C)
Charge Temperature Range	0-45 C (±3 C)
Certification	IEC/EN 62368-1, IEC/EN 62133, IEC/EN 62040.1, EMC, CA 65, TSCA, RoHS, Reach, WEEE, POPS, UN38.3, MSDS

► **SR0KW6L-SG1-US**
600W Portable Power Station



Highlights

- True-Bidirectional technology, support fast charging, only need 1.2 hours
- Aluminum alloy bracket, stronger structural design
- Uninterrupted power supply (UPS), switch to back-up power within 14mS
- Intelligent internal air cooling system
- More intelligent APP control platform, which can be connected via Wi-Fi/bluetooth
- Automatic detection of input frequency 50Hz or 60Hz, AC output frequency follow
- Light weight and easy to carry

Product Parameters

Battery Type	Lithium iron phosphate battery (LiFePo ₄)
Energy Capacity	512Wh
Cycle Life	> 2000 Cycles
Depth of Discharge (DOD)	95%
USB Output	5V/2.4A, 12W Max*2
Type-C Output	5/9/12/15V 3A, 20V/5A, 100W Max* 2
DC5521 Output	12V, 3A* 2
Car port output	12V/10A, 120W Max
AC Output	Pure sine-wave, total 600W(peak 1000W),100-120V(50Hz/60Hz),3A
AC Input	600W Max, 100-120V (50Hz/60Hz), 6A
Car port input	12V, DC 8A (default)
PV Panel input	200W Max, 12-20V/10A, DC10A Max
Weight	7kg
Dimensions (W*H*D)	301*193*227mm
Discharge Temperature Range	-20-45℃ (±3℃)
Charge Temperature Range	0-45℃ (±3℃)
Certification	ANSI/CAN/UL 2743,(considered part of UL 1778+UL1741), FCC part15B, ICES, EMC, CA65, TSCA, RoHS, Reach, WEEE, POPS, UN38.3, MSDS

▶ SR0KW3L-SG1-EU 300W Portable Power Station

Highlights



- SR0KW3L-SG1-EU is a small-power portable station. It supports outdoor camping, outdoor office, home emergency, entertainment, medical equipment, fish tank, aerial photography and other application scenarios.
- 204Wh battery capacity, rated power up to 300W, peak power up to 500W, cycle life up to 2000 times (DOD 95%)
- Output: 1*AC Output, 2*USB-A, 1*Type-C, 1*Car port.
- Input: AC Input, Car port, 100W PV Input.

Product Parameters

Battery Type	Lithium iron phosphate battery (LiFePo ₄)
Energy Capacity	204Wh
Cycle Life	> 2000 Cycles
Depth of Discharge (DOD)	95%
USB-A Output	6W Max, 5V/ 1.2A*2
USB-C Output single port	5/9/12/15 3A,20V,3.25A(constant voltage),65W Max
USB-C Output dual port	5/9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A(constant voltage), 30W Max
AC Output	Pure sine-wave, total 300W(peak600W), 220-240V(50Hz/60Hz)
AC Input	220-240V(50Hz-60Hz), 4A, 300W Max; 600W Max(bypass mode)
Car port input	12V, DC 8A (default)
Car port output	96W Max, 12V, DC 8A
PV Panel input	100W, 12-20V/6A, DC 10A (Max)
Weight	4kg
Dimensions (W*H*D)	248*152*158
Discharge Temperature Range	-20-45(±3 °C)
Charge Temperature Range	0-45 °C (±3 °C)
Certification	ANSI/CAN/UL 2743, UL 1778, UL1741, EMC, CA 65, TSCA, UN38.3, MSDS

▶ SA2KW5L-BG1-UV 2.5kWh Extra Battery



Battery Parallel Technology



※ 3000W Models support battery parallel technology.

Battery Expansion Pack Parameters

Battery voltage	51.2V
Continuous charge/discharge current	50/70A
Operating ambient temperature range	Charge: 0~45°C/Discharge: -20~45°C
Storage ambient temperature range	-20~45°C
Operating ambient humidity range	10~85%
Single over-voltage protection	3650mV
Single under-voltage protection	2500mV
Charge/Discharge current protection	80/100A
Charge/Discharge high temperature protection	55/55°C (±3°C)
Charge/Discharge low temperature protection	0/-20°C (±3°C)
Test standard basis	IEC 62619, IEC 60730-1 appendix H, UL 1973, IEC 60730-1 appendix H, CE-EMC, RoHS, Reach, WEEE, POPS, UN38.3+MSDS
Excessive differential pressure alarm	500mV
SOC Too low alarm	5%
Equalization current	120mA

Charger

Name: PD 140W GaN Travel Charger
 Model: PD140U-1TGA/PD140E-1TGA/PD140B-1TGA

Specifications:

- ◆ AC: Input: 100-240V~50/60HZ 2A
- ◆ USB-C PD3.0 output:
 A: W/O PPS: 5V/3A,9V/3A,15V/3A,20V/5A 28V/5A
- ◆ Size:75×76×31.5mm
- ◆ Volume:177.9cm³
- ◆ Power Density: 0.77w/cm³
- ◆ Certification :UL、 CE、 FCC、 DOE、 CEC 、 PD3.1



Name: PD 100W GaN Power Station
 Model: PD100U-4UTGA

Specifications:

- ◆ Input: 100-240V AC 50~60Hz 1.6A Max
- ◆ Output: USB-C1: 5V/3A,9V/3A,15V/3A ,20V/5A
 USB-C2: 5V/3A,9V/2A
 USB-A1-A2: 5V/2.4A,Total:5V/3.4A
- ◆ Total: 100W
- ◆ Protocol: PD3.0
- ◆ Certification: UL、CB、FCC、IC、DOE、CEC、NRCAN、NOM、PSE
- ◆ Size: 80.5x80x29.5mm
- ◆ Shell Material: PC+ABS



Name: PD 68W GaN Travel Charger (Smart Edition)
 Model: PD68U-2UTGA

Specifications:

- ◆ AC: Input: 100-240V AC 50~60Hz 1.5A Max
- ◆ Output Single Port:
 USB-C output :5V/3A,9V/3A,15V/3A,20V/3A
 USB-A output :5-6V/3A,6-9V/2A,9-12V/1.5A
- ◆ Output Dual Port:
 USB-C1+C2 :(50W+18W)
- ◆ Size: 66×63×29.5mm
- ◆ Volume:122cm³
- ◆ Power Density: 0.56w/cm³
- ◆ Certification :UL、FCC、IC、DOE、CEC、SAA



Name: PD 68W GaN Travel Charger

Model: PD68U-2TGC

Specifications:

- ◆ Input: 100-240V AC 50~60Hz 1.5A Max
- ◆ Output: USB-C1: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A
 USB-C2: 5V/3A, 9V/2A
 USB-C1+C2: 50W+18W
- ◆ Total: 68W
- ◆ Protocol: PD3.0
- ◆ Certification: UL, FCC
- ◆ Size: 66×29.5×63mm



Name: PD 65W GaN Travel Charger

Model: PD65U-1TGA

Specifications:

- ◆ AC: Input: 100-240V AC 50-60Hz 1.7A Max
- ◆ USB-C output : 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A
- ◆ Protocol : PD3.0
- ◆ Size: 56.2×50×28.7mm
- ◆ Volume: 81cm³
- ◆ Power Density: 0.8w/cm³
- ◆ Certification :UL, CB, FCC, IC, DOE, CEC, NRCAN, NOM, PSE, PD3.0
- ◆ TID:3697(US/EU/UK)




Name: PD 65W GaN Travel Charger

Model: PD65-2TGA

Specifications:

- ◆ Input: 100-240V AC 50-60Hz 1.5A Max
- ◆ Output: USB-C1: 5V/3A, 9V/2.22A
 USB-C2: 5V/3A, 9V/3A, 15V/3A, 20V/3A
 USB-C1+C2: 20W+45W
- ◆ Total: 65W
- ◆ Certification: CE, FCC, IC, DOE, CEC
- ◆ Detachable plug travel charger, freely split, free combination
- ◆ Size: 73.5×33×73.5mm

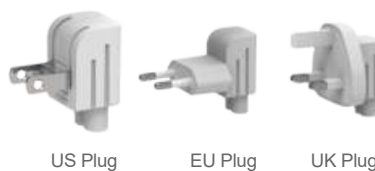

Charger

Name: PD 32W GaN Travel Charger (Smart Edition)
Model: PD32U-3UTGA/PD32E-3UTGA/PD32B-3UTGA

Specifications:

- ◆ AC: Input: 100-240V AC 50-60Hz
- ◆ USB-C PD3.0 output:
 A: W/O PPS: 5V/3A,9V/3A,12V/2.5A,15V/2A
- ◆ USB-A1/A2 output:
 A: W/O PPS: 5V/2.4A
- ◆ USB-C+USB-A1+USB-A2 output:
 C1: 20W(5V/3A,9V/2.22A)
 A1+A2: 12W(5V2.4A)(Share)
- ◆ Size:40.5×38×39mm
- ◆ Certification :FCC、DOE、CEC、CE



Name: PPS 37W Travel Charger
Model: PD37U-2UTNA

Specifications:

- ◆ AC: Input: 100-240V AC 50~60Hz 1.2A Max
- ◆ USB-C output: 5V/3A,9V/2.77A
 PPS: 3.3~5.9V/3A,3.3V~11V/2.25A
- ◆ USB-A output : 5V/2.4A
- ◆ Protocol: PD3.0
- ◆ Size: 56.4×59.5×27.7mm
- ◆ Certification :FCC、IC、DOE、CEC、CE



Name: PD 30W GaN Travel Charger
Model: PD30U-1TGG

Specifications:

- ◆ Input: 100-240V AC 50-60Hz 1.5A Max
- ◆ Output: 5V/3A,9V/3A,15V/2A,20V/1.5A
- ◆ Total: 30W
- ◆ Power Density: 1.11w/cm³
- ◆ Certification: FCC、IC、DOE、CEC
- ◆ Size: 29.4×30.5×30.24mm



Name: PPS 45W GaN Travel Charger
Model: PD45U-2TGA

Specifications:

- ◆ Input: 100-240V AC 50~60Hz 1.5A Max
- ◆ Output: USB-C1: 5V/3A,9V/3A,12V3A,15V/3A,20V/2.25A
 USB-C2: 5V/3A,9V/3A,12V3A,15V/3A,20V/2.25A
 USB-C1+C2: 5V/3A,9V/2.22A(20W)+5V/3A,9V/2.22A(20W)
- ◆ PPS: USB-C1: 3.3~11V/4.05A,3.3~21V/2.1A
 USB-C2: 3.3~11V/4.05A,3.3~21V/2.1A
- ◆ Total: 45W
- ◆ Certification: UL、FCC、CE、IC、DOE、CEC、UKCA
- ◆ Size: 40.5×38×52mm



Name: USB PD 3.1 4C 145W Port Power Station
Model: PD145-4TGA

Specifications:

- ◆ AC: Input: 100-240VAC 50-60Hz
- ◆ USB-C1 /C2 Output: 5V/3A,9V/3A,15V/3A,20V/5A,28V5A,140W Max
- ◆ USB-C3 /C4 Output: 5V/3A,9V/3A,15V/3A,20V/2.25A,45W Max



Name: USB PD 3.1 140W 3C+1A Port Power Station
Model: PD145-4UTGA

Specifications:

- ◆ AC: Input: 100-240VAC 50-60Hz
- ◆ USB-C1 /C2 Output: 5V/3A,9V/3A,15V/3A,20V/5A,28V5A,140W Max
- ◆ USB-C3 Output: 5V/3A,9V/3A,15V/3A,20V/2.25A,45W Max
- ◆ USB-A Output: 5V3A,9V2A,18W Max



Name: PD 132W GaN Power Station
Model: PD 132W-4UTGA

Specifications:

- ◆ Input: 100-240V AC
- ◆ Output: USB-C1: 5V/3A,9V/3A,15V/3A ,20V/2.25A
USB-C2: 5V/3A,9V/3A,15V/3A ,20V/2.25A
USB-C3: 5V/3A,9V/2.22A
USB-A1: 5V/2.4A
USB-C1+USB-C2+USB-C3+USB-A1: 50W+50W+20W+12W
- ◆ Power: 132W
- ◆ Certification:FCC、IC、DOE
- ◆ Size:120x31x31mm



Name: PD 107W GaN Power Station
Model: PD107X-4UTGA

Specifications:

- ◆ AC: Input: 100-240V AC 50~60Hz 1.6A Max
- ◆ Output :
USB-C1 output: 5V/3A,9V/3A,15V/3A,20V/3.25A
USB-C2 output: 5V/3A,9V/3A,15V/2A,20V/1.5A
USB-A1+A2 output: 5V/2.4.4A
- ◆ Total:107W
- ◆ Size: 98.5x80x30.5mm
- ◆ Certification :UL、FCC、CE



Charger

Name: USB PD 3.1 240W 4C Port Power Station

Model: PD240-4TGA

Specifications:

- ◆ AC: Input: 100-240V AC 50-60Hz
- ◆ USB-C1 /C2 Output: 5V/3A,9V/3A,15V/3A,20V/5A,28V5A,140W Max
- ◆ USB-C3/C4 Output: 5V/3A,9V/3A,15V/3A,20V/5A,100W Max



Name: PD 72W Power Station

Model: PDS75-4UT04

Specifications:

- ◆ AC: Input: 100-240V AC
- ◆ USB C output : 5V/3A,9V/3A,15V/3A ,20V/3A
- ◆ USB A1-A3 Output: 5V/2.4A,Total:5V/2.4A
- ◆ Total:72W
- ◆ Protocol : PD3.0, BC1.2
- ◆ Size: 91x75x27.5 mm
- ◆ Certification : UL CE FCC



Name: PD 75W Power Station

Model: PD75X-4UTNA

Specifications:

- ◆ AC: Input: 100-240V AC
- ◆ USB C1 output : 5V/3A,9V/3A,15V/3A ,20V/2.25A
- ◆ USB C2 output : 5V/3A,9V/2A
- ◆ USB A1-A2 Output: 5V/2.4A,Total:5V2.4A
- ◆ Total:75W
- ◆ Protocol : PD3.0, BC1.2
- ◆ Size: 91x75x27.5 mm
- ◆ Certification : UL CE FCC



Name: PD 60W Power Station (Smart Edition)

Model: PD60-8UTNA

Specifications:

- ◆ AC: Input: 100-240V AC 50~60Hz
- ◆ Output Single Port :
 - USB-C1 output: 5V/3A,9V/3A,12V/2.5A,15V/2A
 - USB-C2 output: 5V/3A
 - USB-A1-A6 output: 5V/2.4A
- ◆ Output Eight Port:
 - USB-C1 output: 5V/3A,9V/3A,12V/2.5A,15V/2A
 - USB-C2+A1-A6 output: 5V/6A
- ◆ Total:60W
- ◆ Size: 108.5x108.5x32.5mm



Name: PD 60W Power Station (Smart Edition)

Model: PD60-6UTNA

Specifications:

- ◆ AC: Input: 100-240V AC 50-60Hz
- ◆ USB-C1 output:
 - A: W/O PPS: 5V/3A,9V/3A,12V/2.5A,15V/2A
- ◆ USB-C2 output:
 - A: W/O PPS: 5V/3A
- ◆ USB-A1/A2/A3/A4 output:
 - A: W/O PPS: 5V2.4A
- ◆ Output Six Port:
 - USBC1:5V/3A,9V/3A,12V/2.5A,15V/2A
 - USBC2+USBA1+USBA2+USBA3+USBA4: 5V/6A
- ◆ Size:108.5×108.5×32.5mm
- ◆ Certification: Magsafe CE FCC



Name: PD 100W GaN Power Station

Model: PD100U-4UTGA

Specifications:

- ◆ AC: Input: 100-240V AC 50~60Hz 1.6A Max
- ◆ Output Single Port:
 - USB-C1 output: 5V/3A,9V/3A,15V/3A,20V/5A
 - USB-C2 output: 5V/3A,9V/2A
 - USB-A1+A2 output: 5V/3.4A
- ◆ Output Four Port:
 - USB-C1+C2+USB-A1+A2: C1(65W)+C2(18W)+A1+A2(17W)
- ◆ Total:100W
- ◆ Size:80.5×80×29.5 mm
- ◆ Certification :UL、CB、FCC、IC、DOE、CEC、NRCAN、NOM、PSE



Charger

Name: PD 3.1 142W GaN Power Station
Model: PD142-4UTGA

Specifications:

- ◆ AC: Input: 100-240V AC 50-60Hz 2.2A Max
- ◆ USB-C1 Output:
A: W/O PPS: 5V/3A,9V/3A,15V/3A,20V/5A,28V5A,140W Max
PPS: 5V-21V/5A,100W Max
- ◆ USB-C2/C3 Output:
A: W/O PPS: 5V/3A,9V/3A,15V/3A,20V/3.25A,65W Max
PPS: 5V-21V/3.25A,65W Max
- ◆ USB-A Output: 5V2.4A
- ◆ Output Double Port:
See the next page for details of specifications
- ◆ Output Multi-Port:
See the next page for details of specifications
- ◆ Size: 30.94x76.02x97.16MM



US Plug

EU Plug

UK Plug

Name: AC 120W Power Supply
Model: W210057-1LDGA

Specifications:

- ◆ AC: Input: 100-240V AC 50/60Hz 2A Max
- ◆ Output: 21V/5.7A,120W Max
- ◆ Protect: OVP,OCP,SCP
- ◆ Ripple and noise: 100mVp-p
- ◆ Small size and high efficiency
- ◆ Size: 105.2x50.4x31.6MM
- ◆ Power Density: 30w/in³
- ◆ Certification : UL CE FCC PSE NRCAN SAA



Name: AC 150W Power Supply
Model: W210071-1LDGA

Specifications:

- ◆ AC: Input: 100-240V AC 50-60Hz 2.5A Max
- ◆ Output: 21V/7.1A,150W Max
- ◆ Protect: OVP,OCP,SCP
- ◆ Ripple and noise: 100mVp-p
- ◆ Small size and high efficiency
- ◆ Size: 122.8x50.4x31.6MM
- ◆ Power Density: 28w/in³
- ◆ Certification : UL CE FCC PSE NRCAN SAA



Name: 3-in-1 Magnetic Wireless Charger for Mobile Phones and Earphones and Apple Watch
 Model: WPC20-3TCNA

Specifications:

- ◆ Input : USB C:15V2A
- ◆ Power:
 - 10W (Max) charging (phone)
 - 5W (Max) charging (Airpods)
 - 5W (Max) charging (DIY Apple watch)
- ◆ Compatible Model: iPhone 14 series and backward compatible and Airpods and Apple watch
- ◆ Size:198x89.7x128.8



Name: 3-in-1 Wireless Charging Pad for Phone and Watch and Earphone
 Model: WPC20-3XJNA

Specifications:

- ◆ Input : DC 3.5: 12V/2.5A
- ◆ Power: 7.5W /10W Qi Certified (iphone)
 - 5W (Max) charging (Airpods)
 - 5W (Max) charging (Apple watch)
- ◆ Pre Certification : Qi FCC CE MFI
- ◆ Size: 180x101x41.6 MM
- ◆ PPID: 261134-0028



Name: 3-in-1 Magsafe Wireless Charger for Mobile Phones and Earphones and Apple Watch
 Model: WPC25-3TCNA

Specifications:

- ◆ Input USB C: 15V/3A
- ◆ Output: 5W,7.5W,15W (Max) Fast Chargingcharging (iphone)
 - 5W (Max) charging (Airpods)
 - 5W (Max) charging (Apple Watch)
- ◆ Certification: MFI CE FCC
- ◆ Compatible Model: iPhone12Mini ,Iphone12 ,Iphone12 Pro , iPhone 12 Pro Max and Airpods
- ◆ Size: 198x89.7x128.8mm



Wireless Charger

Name: 15W Magsafe Folding Wireless Charging
Model: WPC15-1TXNA

Specifications:

- ◆ Input USB C: 5V/2A,9V/2.22A
- ◆ Output: 5W,7.5W,15W (Max) Fast Charging
- ◆ Certification: Magsafe CE FCC
- ◆ Compatible Model: iPhone12Mini ,Iphone12 ,Iphone12 Pro , Iphone 12 Pro Max
- ◆ PPID: 261134-255871
- ◆ Size: 90.7x89.9x24.1mm



Name: 2-in-1 Magsafe wireless charger for mobile phones and earphones
Model: WPC20-2TCNA

Specifications:

- ◆ Input USB C: 5V/3A,9V/3A
- ◆ Output:5W,7.5W,15W (Max) Fast Charging(iPhone), 5W (Max) Charging (Airpods)
- ◆ Certification: Magsafe CE FCC
- ◆ Compatible Model: iPhone 14 series and backward compatibe and Airpods
- ◆ PPID: 261134-476644
- ◆ Size: 126x90x136.5mm



Name: 15W Magsafe Stationary Car Mount wireless charger
Model: WPC15-1TXNB

Specifications:

- ◆ Input : USB C: 5V3A,9V2.22A
- ◆ Power: 15W (Max) fast charging
- ◆ Compatible Model: iPhone 14 series and backward compatibe
- ◆ Pre Certification :FCC,CE, MFI
- ◆ Size: 60.6x77.5x93.68mm
- ◆ PPID: 261134-702483



Name: 10W Wireless Charger with Magnetic
Model: WPC10-1TCNA

Specifications:

- ◆ Powe Bank Capacity : 4000mAh
- ◆ Wireless Output : 10W (Max)
- ◆ Input : USB C 5V3A,9V1.67A
- ◆ Output : 5V3A,9V2A
- ◆ Pre Certification : FCC,CE
- ◆ Size:110x69.7x14.7mm



Name: 3-in-1 Magsafe Wireless Charger for Mobile Phones and Earphones and Apple Watch
Model: WPC25-3TCNB

Specifications:

- ◆ Input : USB C:15V3A
- ◆ Power:
 - 15W (Max) charging (iphone)
 - 5W (Max) charging (Airpods)
 - 5W (Max) charging (DIY Apple watch)
- ◆ Compatible Model: iPhone 14 series and backward compatibe and Airpods and Apple watch
- ◆ Pre Certification: Magsafe CE FCC
- ◆ Size:198x89.7x128.8
- ◆ PPID: 261134-702901



Name: 2-in-1 Wireless Charger with Magnetic
Model: WPC20-2TCNC

Specifications:

- ◆ Input : USB C:5V3A,9V3A
- ◆ Power: 15W (Max) fast charging (iphone)
5W (Max) charging (Airpods)
- ◆ iPhone 14 series and backward compatible and Airpods
- ◆ Pre Certification :FCC, CE
- ◆ Size:126x90x136.5mm



Name: 15W Wireless Charger with Magnetic
Model: WPC15-1LCNA

Specifications:

- ◆ Input USB C: 5V/3A,9V/2.5A
- ◆ Output: 5W,7.5W,10W,15W (Max)
- ◆ Certification: CE FCC
- ◆ Compatible Model: iPhone 14 series and backward compatible
- ◆ USB C Cable: 1.5M
- ◆ Size: 59.7x7.5mm



Name: Watch Magnetic Charger to USB-C Cable
Model: WPC05-1MJNB

Specifications:

- ◆ Input USB C: 5V/2A
- ◆ Output: 5W
- ◆ Certification: CE FCC
- ◆ The built-in Magnetic Charging Module charges your Apple Watch module , Simply hold the connector near the back of the watch, where magnets cause it to snap into place automatically.
- ◆ USB-C end cable ,follow USB –C current mode ,1.2M long
- ◆ PPID: 261134-0027
- ◆ Size: 38x11.4mm



Name: Travel Charger with Apple Watch Charger
Model: PD30U-1TGA-WPC05

Specifications:

- ◆ Input: 100-240VAC
- ◆ USB C Output : 5V/3A,9V/3A,15V/2A,20V/1.5A
- ◆ Wireless Output: 5W
- ◆ Size: 42.5x38x42mm
- ◆ Certification : MFI
- ◆ PPID: 261134-730993



Name: Watch Magnetic Charging Dock
Model: WPC05-1MJNC

Specifications:

- ◆ Apple Watch Magnetic Charging Module
- The built-in Magnetic Charging Module charges your Apple Watch and supports Nightstand mode. By holding your Apple Watch at the optimal viewing angle
- ◆ with captive 1.2M USB-A cable Assembly
- ◆ PPID: 261134-0026



Name: Watch Magnetic Charger to USB -C
Model: WPC05-1TANA

Specifications:

- ◆ Input USB C: 5V/1A
- ◆ Output: 5W
- ◆ Certification: CE FCC
- ◆ The built-in Magnetic Charging Module charges your Apple Watch module , Simply hold the connector near the back of the watch, where magnets cause it to snap into place automatically
- ◆ PPID: 261134-501873
- ◆ Size: 60x39.28x14mm



Wireless Charger

Name: 4000mAh magnetic Charger Power Bank
Model: PC1P18PNC-WPC10

Specifications:

- ◆ Input USB C : 5V/3A,9V/1.67A
- ◆ USB C Output: 5V/3A,9V/2A
- ◆ Wireless Output: 5W,7.5W,10W
- ◆ Capacity: 4000mAh
- ◆ Certification: CE FCC
- ◆ Size: 110x69.7x14.7mm



Name: 15W Wireless Charger
Model: WPC15-1MWNA

Specifications:

- ◆ Input Micro USB: 5V/2A,9V/1.67A,12V/1.5A
- ◆ Output: 5V/1A,9V/1.1A,12V/1.25A Compatible7.5W
- ◆ Certification:QI CE FCC
- ◆ QC2.0&3.0 Power adapter to get power supply.
- ◆ Size:100.33x8mm



Name: 15W EPP single Charging PAD Wireless Charger
Model: WPC15-1TJNB

Specifications:

- ◆ Input USB C: 5V/2A,9V/2A,12V/2A(PD or QC)
- ◆ Output: 5V/1A,9V/1.1A,12V/1.25A Compatible7.5W
- ◆ Certification:QI(EPP) CE FCC
- ◆ Shell material: two color TPU injection molding
- ◆ PD&QC Power adapter to get power supply.
- ◆ Size:102x10mm



Name: 10W Wireless Charger with Magnetic
Model: WPC10-1TCNC

Specifications:

- ◆ Input : USB C:5V3A,9V2A
- ◆ Power: 5W,7.5W,10W (Magnetic)
- ◆ iPhone 14 series and backward compatible
- ◆ Pre Certification :FCC, CE
- ◆ Size:125.75x90.5x139.25mm



Name: 2-in-1 Magsafe Wireless Charger for Mobile Phones and AirPods
Model: WPC20-2TCNB

Specifications

- ◆ Input :USB C:5V3A,9V3A
- ◆ Power:
 15W (Max) charging (iPhone)
 5W (Max) charging (Airpods)
- ◆ Compatible Model: iPhone 14 series and backward compatibe and AirPods
- ◆ Pre Certification: Magsafe CE FCC
- ◆ Size:121x102.4x128.8mm
- ◆ PPID: 261134-398160



Name: Wireless Charging Stand for Phone and Watch
Model: WPC10-2CM

Specifications:

- ◆ 7.5W wireless 2-Coil Qi-Certified wireless charging pad EPP profiled Qi-certified : optimized to deliver 7.5W to iPhone XS, iPhone XS Max, and iPhone XR
- ◆ Apple Watch Nightstand mode
- ◆ The built-in Magnetic Charging Module charges your Apple Watch and supports Nightstand mode. By holding your Apple Watch at the optimal viewing angle,
- ◆ USBA : 12W ,5V.2.4A
- ◆ DC input : 3.5mm DC Power in equipped with one AC-DC adapter,12V/2.5A .
- ◆ PPID: 261134-890511



Power Bank

Name: PD Power Bank
Model: PC1P18PNB

Specifications:

- ◆ Input USB C: 5V/3A, 9V/2A, 12V/1.5A
- ◆ Output:
 - USB C: 5V/3A, 9V/2A, 12V/1.5A (PD3.0)
 - USB A: 5V/3A, 9V/2A, 12V/1.5A (QC3.0) USB C+A: 5V/3A
- ◆ Size: 105.5x72.5x23.5mm
- ◆ Shell Material: ABS + PC



Name: 10000mAh PD32W Power Bank for Phone
Model: PC2P32MF1

Specifications:


- ◆ Input Lightning: 5V/2.4A
- ◆ Output: 32W
 - Lightning: 5V/3A, 9V/2.22A
 - USB A: 5V/2.4A
- ◆ Certification: BC CE FCC MFI UN38.3
- ◆ PPIID: 261134-277468
- ◆ Size: 150.5x71.7x17.2mm



Name: PD Power Bank
Model: PC1P18M01

Specifications:

- ◆ Input USB C: 5V/3A, 9V/2A, 12V/1.5A
- ◆ Output:
 - USB C: 5V/3A, 9V/2A, 12V/1.5A (PD3.0)
 - USB A: 5V/3A, 9V/2A, 12V/1.5A (QC3.0)
 - USB C+A: 5V/3A
- ◆ Certification: CE, FCC, UN38.3
- ◆ Capacity: 10000mAh
- ◆ Protect: OCP, OTP, SCP
- ◆ Size: 145.5x69.5x14mm
- ◆ Shell Material: ABS + Aluminum Alloy

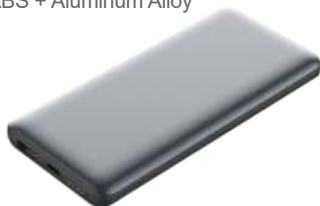

Name: PD3.0 Power Bank
Model: PC1P18P02

Specifications:

- ◆ Input: Micro B: 5V/2A
 - USB C: 5V/3A, 9V/2A, 12V/1.5A
- ◆ Output:
 - USB C: 5V/3A, 9V/2A, 12V/1.5A
 - USB A: 5V/3A, 9V/2A, 12V/1.5A
- ◆ Certification: CE, FCC, UN38.3
- ◆ Capacity: 10000mAh
- ◆ Protect: OCP, OTP, SCP
- ◆ Size: 162.4x80x15mm
- ◆ Shell Material: ABS+PC



Name: Smart Power Bank
Model: CPC5000-ACC01

Specifications:

- ◆ AC Input: 110-240V
- ◆ DC Input: USB C: 5V/3A
 - DC Output: USB C : 5V/3A (Max)
 - USB A: 5V/2.4A
 - Total: 5V/3A
- ◆ Capacity: 5000mAh (18.5Wh)
- ◆ Certification: CE, FCC, UN38.3
- ◆ Efficiency: 88%
- ◆ Size: 77.9x70x30.8mm
- ◆ Shell Material: PC+ABS
- ◆ While charges itself and other devices from any AC out let, it first charges your device then recharges it self, always ready to be taken on-the-go



Name: PD 24W Car Charger
Model: PDC24-1UTNA

Specifications:

- ◆ Input: 12-24V DC
- ◆ Output C: 5V/3A,9V/2.67A,12V/2A
- Output A: 5V/3A,9V/2.67A,12V/2A
- USB Total: 5V/3A
- ◆ Power: 24W
- ◆ Certification: CE, FCC
- ◆ Size: 55.85x30mm
- ◆ Shell Material: PC+ABS



Name: PD 3.0 Car Charger
Model: PDC30-2UTNB

Specifications:

- ◆ Input: 12-24V DC
- Output:
 - USB C: 5V/3A,9V/2A
 - USB A : 5V/2.4A
- ◆ Certification: CE, FCC
- ◆ Protect: OCP,OTP,SCP
- ◆ Size: 66x32x32mm
- ◆ Shell Material: ABS+PC



Name: PD Car Charger
Model: PDC36-3UTNA

Specifications:

- ◆ Input: 12-24V DC
- ◆ Output:
 - USB C: 5V/3A,9V/2A
 - USB A1-A2 QC3.0: 5V/3A,9V/2A,12V/1.5A
 - USB A1-A2 Total: 5V/3A
- ◆ Certification: CE, FCC
- ◆ Efficiency: 90%
- ◆ Protect: OCP,OTP,SCP
- ◆ Size: 66.78x36.3x30.7mm
- ◆ Shell Material: ABS+PC



Car Charger

Name: PD Car Charger

Model: PDC63-2UT01

Specifications:

- ◆ Input: 12-24V DC
- ◆ Output:
 - USB C: 5V, 9V, 12V, 15V/3A, 20V/2.25A (PD3.0)
 - USB A: 3.3-6.5V/3A, 6.5-9V/2A, 9-12V/1.5A (QC3.0)
- ◆ Certification: UL, CE, FCC
- ◆ Protect: OCP, OTP, SCP
- ◆ Size: 66.8x37x37mm




Name: PD 48W Car Charger

Model: PDC48-2TNA

Specifications:

- ◆ Input: 12-24V DC
- ◆ Output C1: 5V/3A, 9V/3A
- ◆ Output C2: 5V/3A, 9V/2A
- ◆ Power: 45W
- ◆ Certification: CE, FCC
- ◆ Size: 66x32mm
- ◆ Shell Material: PC+ABS



Name: USB PD 3.1 140W C+A Port Car Charger

Model: PDC140-2UTGA

Specifications:

- ◆ Input: 12-24V DC
- ◆ USB-C1 Output: 5V/3A, 9V/3A, 15V/3A, 20V/5A, 28V5A, 140W Max
- ◆ USB-A Output : 5V/3A, 9V/2A, 12V/1.5A, 18W Max
- ◆ Output Double Port:
- ◆ USB-C1+USB-A: 140W
- ◆ Size: 88.87x37.4mm



Name: USB PD 3.1 140W 2C Port Car Charger

Model: PDC140-2TGA

Specifications:

- ◆ Input: 12-24V DC
- ◆ USB-C1 Output: 5V/3A, 9V/3A, 15V/3A, 20V/5A, 28V5A, 140W Max
- ◆ USB-C2 Output : 5V/3A, 9V/3A, 15V/3A, 20V/5A, 28V5A, 140W Max
- ◆ Output Double Port:
- ◆ USB-C1+USB-C2: 140W
- ◆ Size: 88.87x37.4mm



Name: USB C PD 32W Power Strip
Model: P2-PD32U-3UTNB

Specifications:

- ◆ Input: 125V AC 60Hz
- ◆ AC Socket:125V/10A 1250W
- ◆ USB C Output : 5V/3A,9V/2.22A,
- ◆ USB A1-A2: 5V/2.4A, Total: 5V2.4A
- ◆ Total: 32W
- ◆ Size: 106x106x30mm
- ◆ Cable Length : 1.5M
- ◆ Certification : ETL CE FCC



Name: USB C PD 32W Power Strip
Model: P3-PD32U-3UTNB

Specifications:

- ◆ Input: 125V AC 60Hz
- ◆ AC Socket:125V/10A 1250W
- ◆ USB C Output : 5V/3A,9V/2.22A
- ◆ USB A1-A2: 5V/2.4A ,Total: 5V/2.4A
- ◆ Total: 32W
- ◆ With Overload Protection
- ◆ With LED indicator and a switch
- ◆ Size: 68x68x64mm
- ◆ Cable Length : 1.5M with braided mesh
- ◆ Certification : ETL FCC

Model:P3-PD32E-3UTNB



Name: USB C Power Strip
Model: P3-PD15B-3UTNA

Specifications:

- ◆ Input: 250V AC 50Hz
- ◆ AC Socket:250V/13A 3250W
- ◆ USB C Output : 5V/3A
- ◆ USB A1-A2: 5V/2.4A ,Total: 5V/2.4A
- ◆ USB C+USB A1+A2 Total: 15W
- ◆ Size: 78x78x81mm
- ◆ Cable Length : 1.5M with braided mesh
- ◆ Certification : CE

Name: AC+DC Power Strip
Model: P6-W0536U-4UTNA

Specifications:

- ◆ Input: 125V AC 60Hz
- ◆ AC Socket:125V/15A 1875W
- ◆ USB C Output : 5V/3A
- ◆ USB A1-A2: 5V/2.4A
- ◆ Total: 18W
- ◆ Overload Protection
- ◆ Size: 227.9x89.9x32.8mm
- ◆ Certification : ETL FCC



AC Power

Name: USB C PD 32W Surge Protector
Model: P3-PD32U-3UTNA

Specifications:

- ◆ Input: 125V AC 60Hz
 - ◆ AC Socket: 125V/15A 1875W
 - ◆ USB C Output : 5V/3A,9V/2.22A
 - ◆ USB A1-A2: 5V/2.4A ,Total: 5V/2.4A
 - ◆ Total: 32W
 - ◆ Surge protector, 450 Joules
- There are 3 lights (lightning protection, grounding, power supply indication), a switch, With Overload Protection,
- ◆ Size: 260.9x54.9x31.3mm
 - ◆ Cable Length : 1.5M with braided mesh
 - ◆ Certification : ETL FCC



Related Products

Model: P3-PD32E-3UTNA
*(Input: 250V/16A, Size:258x55x40.7mm
 Certification:CE LNP EMC LVD ERP)*

Model: P3-PD32B-3UTNA
*(Input: 250V/13A, Size:272.38x60.93x36mm
 Certification:CE UKCA LNP EMC ERP)*



Name: USB C PD 32W Surge Protector
Model: P6-PD32U-4UTNA

Specifications:

- ◆ Input: 125V AC 60Hz
 - ◆ AC Socket: 125V/15A 1875W
 - ◆ USB C Output : 5V/3A,9V/2.22A
 - ◆ USB A1-A3: 5V/2.4A ,Total: 5V/2.4A
 - ◆ Total: 32W
 - ◆ Surge protector, 900 Joules (US) 1050 Joules (EU)
- There are 3 lights (lightning protection, grounding, power supply indication), a switch, With Overload Protection,
- ◆ Size: 239.9x89.9x30.3mm
 - ◆ Cable Length : 1.5M with braided mesh
 - ◆ Certification : ETL FCC



Related Products

Model: P6-PD32E-4UTNA
*(AC Socket: 250V/16A 4000W
 Size: 270.4x102.4x45mm)*

Model: P6-PD32B-4UTNA
*(AC Socket: 250V/13A 3250W
 Size: 255.8x109x36mm)*



Name: USB C PD 32W Surge Protector
Model: P10-PD32U-4UTNA

Specifications:

- ◆ Input Voltage: 100-125V AC
- ◆ Power Rating: 125V/15A 1875W 50/60Hz
- ◆ Output USB C: 5V/3A,9V/2.22A
 USB A1-A3: 5V/2.4A (Smart)
- ◆ Power Total : 32W
- ◆ Certification: ETL(UL1363) FCC
- ◆ With Overload Protection, Surge protector
- ◆ Conductor is made of phosphor copper, which has better conductivity, heat dissipation , durable and plug unplug smoothly
- ◆ 45 Degree plug design to prevent Interference
- ◆ Appearance materials are all preferred PC 945U
- ◆ Cable Length : 1.5M (14AWG)
- ◆ Size: 311.6x89.9x30.3mm



Name: AC+DC Surge Protector
Model: P12-W0534U-4UTNA

Specifications:

- ◆ Input: 125V AC 60Hz
- ◆ AC Socket: 125V/15A 1875W
- ◆ USB C Output : 5V/3A
- ◆ USB A1-A3: 5V/2.4A
- ◆ Total: 17W
- ◆ Surge protector, 4000 Joules
 With Overload Protection,
- ◆ Size: 299.6x111.9x31.653mm
- ◆ Certification : ETL FCC



Name: USB C PD 70W Outlet Wall Plate
Model: P2-PD70U-2TNA

Specifications:

- ◆ Input Voltage: 125V AC
- ◆ Power Rating: 125V/10A 1250W 60Hz
- ◆ Output USB C1: 5V/3A, 9V/3A, 15V/3A, 20V/2.5A
 USB C2: 5V/3A, 9V/2.22A
- ◆ Power Total : 70W
- ◆ Certification: ETL(UL498A) FCC NRCAN DOE CEC
- ◆ Size: 116x71x49.5mm



Name: AC Expander
Model: P5-W0548U-4UTNB

Specifications:

- ◆ Input: 125V AC 60Hz
- ◆ AC Socket: 125V/15A 1875W
- ◆ USB C Output : 5V/3A,
- ◆ USB A1-A3: 5V/2.4A
- ◆ Total: 24W
- ◆ Surge protector, 1680 Joules
- ◆ Toggle able dust baffle design
- ◆ Size: 126.8x91.4x62.2mm
- ◆ Certification : ETL FCC




Name: AC Expander
Model: P6-W0548U-4UTNB

Specifications:

- ◆ Input: 125V AC 60Hz
- ◆ AC Socket: 125V/15A 1875W
- ◆ USB C Output : 5V/3A
- ◆ USB A1-A3: 5V/2.4A
- ◆ Total: 24W
- ◆ Surge protector, 1680Joules
- ◆ Toggle able dust baffle design
- ◆ Size: 156x87x30mm
- ◆ Certification : ETL FCC



Add new Connector : 12VHPWR

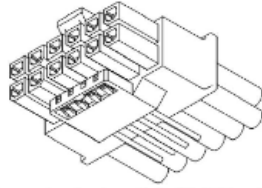

Name: ATX 3.0 1200W **Gaming Power**
Model: PCFP-1200H-FB




Highlight

- ◆ **Rated Power:** 1200W
- ◆ Meet the latest Inter Atx3.0 standards, and PCI Express 12VHPWR
- ◆ **Certification:** CB
- ◆ **Size:** 140x150x86mm
- ◆ **Fan:** Hydraulic



AC Input:	Voltage 100-240V~ Current 8-20A Frequency 50Hz-60Hz				
DC Output	+3.3V	+5V	+12V	-12V	+5VSB
Max Output	20A	20A	100A	0.3A	2.5A
Combined	100W		1200W	3.6W	12.5W

1200W Fan Speed Curve

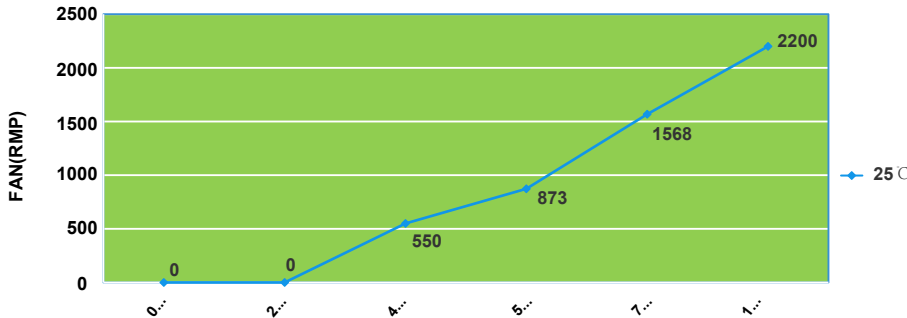

Ultra-Quiet Intelligent Temperature Control Design
The fan does not work in 20% load, 20%-50% fan works in low speed mode, the speed is not more than 800rpm, more than 50% fan works with intelligent temperature control, and the corresponding heat dissipation conditions are intelligently adjusted according to the working status.

Name: ATX 3.0 1050W **Gaming Power**
Model: PCFP-1050H-FB

Highlight

- ◆ **Rated Power:** 1050W
- ◆ Meet the latest Inter Atx3.0 standards, and PCI Express 12VHPWR
- ◆ **Certification:** CB
- ◆ **Size:** 140x150x86mm
- ◆ **Fan:** Hydraulic Pressure



AC Input:	Voltage 100-240V~ Current 6-15A Frequency 50Hz-60Hz				
DC Output	+3.3V	+5V	+12V	-12V	+5VSB
Max Output	20A	20A	87.5A	0.3A	2.5A
Combined	100W		1050W	3.6W	12.5W



80 Plus Gold

80 Plus Gold certification is close to platinum level conversion efficiency

Ultra-Quiet Intelligent Temperature Control Design

The fan does not work in 20% load, 20%-50% fan works in low speed mode, the speed is not more than 800rpm/M, more than 50% fan works with intelligent temperature control, and the corresponding heat dissipation conditions are intelligently adjusted according to the working status.



High Power Density

Using standard ATX shell size (L140mm*W150mm*H86mm) designed to output 1200W power, power density up to 664.5W/m³.

Multiple-Safe

protections, including: OVP, UVP, OCP, OP, SCP, OTP,



Name: ATX 3.0 650W/750W/850W **Gaming Power**

Model: PCFP-H-FD

650W/750W/850W



Highlight

- ◆ **Rated Power:** 650W
- ◆ Meet the latest Inter Atx3.0 standards, and PCI Express 12VHPWR
- ◆ **Certification:** CB
- ◆ **Size:** 140x150x86mm
- ◆ **Fan:** Hydraulic Pressure



AC Input:	Voltage 100-240V~ Current 6-15A Frequency 50Hz-60Hz/650/750/850W				
DC Output	+3.3V	+5V	+12V	-12V	+5VSB
Max Output	18A	18A	54.17A/62.5A/70.83A	0.3A	2.5A
Combined	100W		650W/750W/850W	3.6W	12.5W

Name: ATX 3.0 1050W/1200W **Gaming Power**

Model: PCFG-H-FB

1050W/1200W




Highlight

- ◆ **Rated Power:** 1050W/1200W
- ◆ Meet the latest Inter Atx3.0 standards, and PCI Express 12VHPWR
- ◆ **Certification:** CB
- ◆ **Size:** 140x150x86mm
- ◆ **Fan:** Hydraulic Pressur



AC Input:	Voltage 100-240V~ Current 6-15A Frequency 50Hz-60Hz				
DC Output	+3.3V	+5V	+12V	-12V	+5VSB
Max Output	20A	20A	87.5A/100A	0.3A	2.5A
Combined	100W		1050W/1200W	3.6W	12.5W

1200W Fan Speed Curve

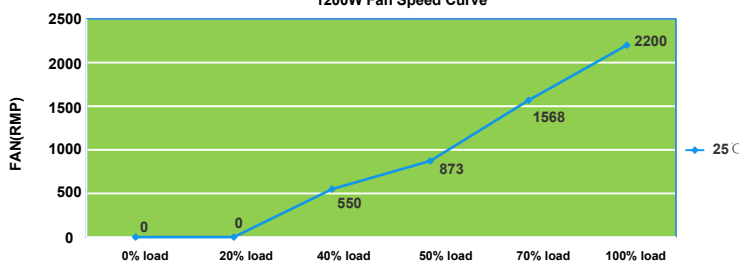

Ultra-Quiet Intelligent Temperature Control Design The fan does not work in 20% load, 20%-50% fan works in low speed mode, the speed is not more than 800rpm, more than 50% fan works with intelligent temperature control, and the corresponding heat dissipation conditions are intelligently adjusted according to the working status.

Gaming Power

Name: PCFP-H-FA 850W **Gaming Power**

Model: PCFP-0850H-FA



Highlight

- ◆ **Rated Power:** 850W
- ◆ **Certification:** CB
- ◆ **Size:** 140X150X86mm
- ◆ **Fan:** Hydraulic Pressure



AC Input:	Voltage 100-240V~ Current 6-15A Frequency 50Hz-60Hz				
DC Output	+3.3V	+5V	+12V	-12V	+5VSB
Max Output	18A	18A	70.83A	0.3A	2.5A
Combined	100W		850W	3.6W	12.5W

Name: PCFP-H-FA 1050W **Gaming Power**

Model: PCFP-1050H-FA



Highlight

- ◆ **Rated Power:** 1050W
- ◆ **Certification:** CB
- ◆ **Size:** 140X150X86mm
- ◆ **Fan:** Hydraulic Pressure



AC Input:	Voltage 100-240V~ Current 6-15A Frequency 50Hz-60Hz				
DC Output	+3.3V	+5V	+12V	-12V	+5VSB
Max Output	20A	20A	87.5A	0.3A	2.5A
Combined	100W		1050W	3.6W	12.5W

Name: PCFP-H-FA 1200W **Gaming Power**

Model: PCFP-1200H-FA




Highlight

- ◆ **Rated Power:** 1200W
- ◆ **Certification:** CB
- ◆ **Size:** 140X150X86mm
- ◆ **Fan:** Hydraulic Pressure



AC Input:	Voltage 100-240V~ Current 8-20A Frequency 50Hz-60Hz				
DC Output	+3.3V	+5V	+12V	-12V	+5VSB
Max Output	20A	20A	100A	0.3A	2.5A
Combined	100W		1200W	3.6W	12.5W

1200W Fan Speed Curve

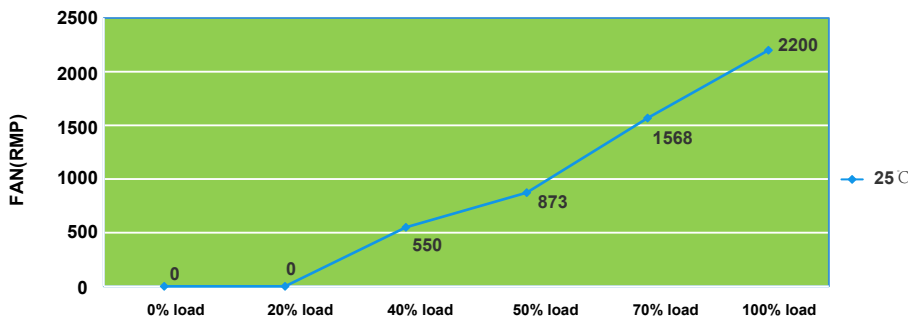

Ultra-Quiet Intelligent Temperature Control Design The fan does not work in 20% load, 20%-50% fan works in low speed mode, the speed is not more than 800rpm, more than 50% fan works with intelligent temperature control, and the corresponding heat dissipation conditions are intelligently adjusted according to the working status.

Name: PCFG-H-FA 850 **Gaming Power**
 Model: PCFG-850H-FA



Highlight

- ◆ Rated Power: 850W
- ◆ Certification: CB
- ◆ Size: 140X150X86mm
- ◆ Fan: Hydraulic Pressure



AC Input:	Voltage 100-240V~ Current 6-15A Frequency 50Hz-60Hz				
DC Output	+3.3V	+5V	+12V	-12V	+5VSB
Max Output	18A	18A	70.83A	0.3A	2.5A
Combined	100W		850W	3.6W	12.5W

Name: PCFG-H-FA 1050W **Gaming Power**
 Model: PCFG-1050H-FA



Highlight

- ◆ Rated Power: 1050W
- ◆ Certification: CB
- ◆ Size: 140X150X86mm
- ◆ Fan: Hydraulic Pressure



AC Input:	Voltage 100-240V~ Current 8-20A Frequency 50Hz-60Hz				
DC Output	+3.3V	+5V	+12V	-12V	+5VSB
Max Output	20A	20A	87.5A	0.3A	2.5A
Combined	100W		1050W	3.6W	12.5W

Name: PCFG-H-FA 1200W **Gaming Power**
 Model: PCFG-1200H-FA




Highlight

- ◆ Rated Power: 1200W
- ◆ Certification: CB
- ◆ Size: 140X150X86mm
- ◆ Fan: Hydraulic



AC Input:	Voltage 100-240V~ Current 8-20A Frequency 50Hz-60Hz				
DC Output	+3.3V	+5V	+12V	-12V	+5VSB
Max Output	20A	20A	100A	0.3A	2.5A
Combined	100W		1200W	3.6W	12.5W

1200W Fan Speed Curve

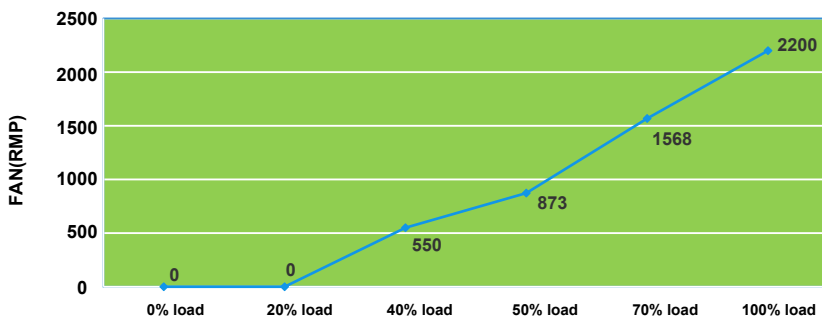

Ultra-Quiet Intelligent Temperature Control Design The fan does not work in 20% load, 20%-50% fan works in low speed mode, the speed is not more than 800rpm, more than 50% fan works with intelligent temperature control, and the corresponding heat dissipation conditions are intelligently adjusted according to the working status.

Indoor Camera



Name: Indoor Pan&Tilt Camera

Model: IPC-13PS

Specifications:

- ◆ 2K (2304*1296) Ultra HD Resolution;
- ◆ Built-in IR LEDs and Spotlights;
- ◆ Infrared night visibility ranges up to 32ft; the built-in spotlights turn the night into day;
- ◆ Support local TF card (Max 128G) storage or cloud storage;
- ◆ Support Human and Pet Detection;
- ◆ Support 24/7 constant video recording and event-triggered video recording;
- ◆ Full-Duplex Two-way audio;
- ◆ Smart integration with Alexa and Google Assistant;
- ◆ Remote access through mobile devices at any time;
- ◆ PTZ: Pan 350°/Tilt 90°;
- ◆ FOV(H): 90°; lens:3.2mm;



Name: Indoor Fixed Camera

Model: IPC-13CS

Specifications:

- ◆ 2K (2304*1296) Ultra HD Resolution ;
- ◆ Built-in IR LEDs and Spotlights;
- ◆ Infrared night visibility ranges up to 32ft; the built-in spotlights turn the night into day;
- ◆ Support local TF card (Max 128G) storage or cloud storage;
- ◆ Support Human and Pet Detection;
- ◆ Support 24/7 constant video recording and event-triggered video recording;
- ◆ Full-Duplex Two-way audio;
- ◆ Smart integration with Alexa and Google Assistant;
- ◆ Remote access through mobile devices at any time;
- ◆ PTZ: Fixed;
- ◆ FOV(H): 90°; lens:3.2mm;





Name: Battery Powered Wi-Fi Camera

Model: IPC-14NS

Specifications:

- ◆ 2.5K (2680*1520) Ultra HD Resolution;
- ◆ Triggered by PIR whose detection ranges up to 26ft;
- ◆ Support Human detection;
- ◆ Low Power consumption and RTOS system;
- ◆ Built-in 6700mAh rechargeable battery;
- ◆ Standby time ranges up to 8 months; working time ranges up to 3 months (Triggered 20 times in one day) ;
- ◆ Built-in IR LEDs and Spotlights; the built-in spotlights turn the night into day;
- ◆ Infrared night visibility ranges up to 32ft.
- ◆ Support local TF card(Max 128G) storage or cloud storage;
- ◆ Support event-triggered video recording;
- ◆ Full-Duplex Two-way Audio;
- ◆ Smart integration with Alexa and Google Assistant;
- ◆ Remote access through mobile devices at any time;
- ◆ FOV(H): 110°; lens:2.8mm;



Name: Solar Battery Camera

Model: IPC-14BU

Specifications:

- ◆ 2.5K (2680*1520) Ultra HD Resolution;
- ◆ Triggered by PIR whose detection ranges up to 26ft;
- ◆ Support Human detection;
- ◆ Low Power Consumption and RTOS system;
- ◆ Built-in Solar panel and 10400mAh rechargeable battery;
- ◆ No USB charging requirement with 4h sunshine every day;
- ◆ Built-in IR LEDs and Spotlights;
- ◆ Infrared night visibility ranges up to 32ft; the built-in spotlights turn the night into day;
- ◆ Support local TF card (Max 128G) storage or cloud storage;
- ◆ Support event-triggered video recording;
- ◆ Full-Duplex Two-way audio;
- ◆ Smart integration with Alexa and Google Assistant;
- ◆ Remote access through mobile devices at any time;
- ◆ FOV(H): 110°; lens:2.8mm;



Video Doorbell

Name: Video Doorbell Dual

Model: BELL-25SW

Model: BELL-25SC

Specifications:

- ◆ Dual Cam Technology: Dual Camera consists of the front camera and the packaged camera. The package camera of the Video doorbell is aimed at solving the blindspots on the doorstep;
- ◆ Delivery Guard: Get instantly notified when your package arrives with Delivery Guard. Plus, you'll receive pick-up reminders and alerts if someone approaches your package;
- ◆ Triggered by PIR whose detection ranges up to 16ft;
- ◆ Support Package Detection, Human Detection, and Facial Recognition;
- ◆ Low Power Consumption and RTOS system;
- ◆ The Battery powered doorbell's standby time ranges up to 6 months; Working time ranges up to 3 months (Triggered 20 times in one day) ;
- ◆ Built-in IR LEDs; Infrared night visibility ranges up to 16ft;
- ◆ No monthly fee;
- ◆ Motion-activated event recording, Max 128G TF card built-in chime;
- ◆ Full-Duplex Two-way audio;
- ◆ Smart integration with Alexa and Google Assistant;
- ◆ Remote access through mobile devices at any time.



Name: Video Doorbell

Model: BELL-15SW

Model: BELL-15SC

Specifications:

- ◆ Expanded Field of View: The increased 4:3 Aspect Ratio ensures you get a head-to-toe view of anyone who approaches and gives you the perfect viewing angle every time;
- ◆ 3K (2560*1920) Ultra HD Resolution;
- ◆ HDR mode makes Dynamic Range up to 100 dB;
- ◆ Triggered by PIR whose detection ranges up to 16ft;
- ◆ Support Human Detection;
- ◆ Low Power Consumption and RTOS system;
- ◆ The Battery powered doorbell's standby time ranges up to 6 months; working time ranges up to 3 months (Triggered 20 times in one day) ;
- ◆ Built-in IR LEDs; Infrared night visibility ranges up to 16ft;
- ◆ No monthly fee;
- ◆ Motion-activated event recording, Max 128G TF card built-in chime;
- ◆ Full-Duplex Two-way audio;
- ◆ Smart integration with Alexa and Google Assistant;
- ◆ Remote access through mobile devices at any time.



Pet Camera

Item	Description
Feature	A playing robot with pet and a guard as the home security IP camera
Structure	Tumbler design
Recharge	Automatically search the charging pile for recharge
Resolution	2K
AI	Auto-tracking pet or human detected
Battery	5200mAh rechargeable
Connectivity	Wi-Fi: 2.4Ghz or 5Ghz
Control Type	APP
Waterproof	IP54
Dimensions	113*113*107mm

Name: Pet Camera

Model: PR-V1.0

Specifications:

- ◆ Playing mode. In this mode, the Robot will scan the activity area and once a pet is detected it will start to tease the pet with six electronic skills of its own.
- ◆ Tumbler design. The robot can keep playing with the pet continuously and never be overturned because of the tumbler design.
- ◆ Auto cruise mode. Customers can schedule its timetable so it will start its auto cruise and make random movements at the set times.
- ◆ AI detection and auto-tracking feature. The built-in AI chip can distinguish people or pets and auto-track with that.
- ◆ Manual control mode. Customers can try the manual mode and remotely control the robot to play with their pets or patrol their room via the APP.
- ◆ Social attributes. The APP comes with multiple editing to help you share your moments with other media.
- ◆ Security & Surveillance Cameras. The robot can also guard your home like a security camera when you are away from home.



Hub & Docking



- Thunderbolt
- USB4
- USB and Type-C
- DisplayLink
- AV Distribution



THUNDERBOLT™

Design & Manufacturing Services (ODMs)

The table below lists Thunderbolt ODMs that offer design and manufacturing services. Contact information is available by clicking on the ODM name. Cable & Connector ODM contacts are listed on a separate page (this page is for Thunderbolt Licensees).

ODM	Storage (AC Power)	Storage (RAID)	Storage (Bus Power)	Adapter	Dock	Card Reader	PCIe Expansion	eGFX
CE-LINK					✓	✓		

Screenshot from Thunderbolt official website

6 products have been certified by Intel (more to be updated...)

The screenshot shows the Thunderbolt Technology website's certification page. It lists several products certified by Intel, including docks and portable hubs. Each product entry includes a link to the product, the ODM name (CE-LINK), certification status (Complete/Archived), and the date of certification. To the right of the text, there are images of the physical products: TB3-DOCK02-R, TB3-2DP1.4, TB4-DOCK03, TB4-DOCK05, TB4-HUB01, TB4-DOCK03, and TB4-DOCK03-D.

Product Name	ODM	Certification Status	Certification Date
TB3-DOCK02-R	CE-LINK	Complete/Archived	Mar 23, 2022, 4:34AM
TB4-DOCK05	CE-LINK	Complete/Archived	Jan 31, 2023, 4:39AM
TB4-DOCK03	CE-LINK	Complete/Archived	Jan 23, 2023, 7:27AM
TB4-DOCK03-D	CE-LINK	Complete/Archived	Oct 13, 2022, 7:16AM
TB3-2DP1.4	CE-LINK	Complete/Archived	Aug 16, 2022, 10:37AM
Thunderbolt 4 Portable Hub	CE-LINK	Complete/Archived	May 16, 2022, 7:06AM

Thunderbolt

Name: Thunderbolt 4 Portable Hub with Smart Power
 Model: TB4-HUB01/U4-HUB01

Introduction

This is a Thunderbolt certified Thunderbolt 4 portable Hub which provides the most advanced, efficient, and versatile I/O solution available with up to 40Gb/s for data and video. Allowing you to cascade Thunderbolt products up to 6 levels, to one 8K or two 4K 60Hz monitors. Besides, it supports smart power function which enables to distribute power according to the power consumption of the connected device, making full use of external power supply. It is designed for Thunderbolt 4 based PCs and Thunderbolt 3 based Macs utilizing MacOS 11 and later versions.



Highlights

Upstream:

- ◆ USB4/Thunderbolt 4*1
- ◆ Max 40Gbps, Goshen Ridge Solution

Universal Compatible

Downstream:

USB4/Thunderbolt4*3

- ◆ Share max 40Gbps bandwidth, downward compatible with Thunderbolt 3, DP Alt mode, USB
- ◆ Support daisy chain
- ◆ Each port support 15W downstream charging

- ◆ Support max 8K or dual 4K/60Hz


USB3.2 Type-A Gen2 *2

- ◆ Max 10Gbps
- ◆ Max 900mA downstream charging

DC Power Jack*1

- ◆ 100W power supply, max 60W for host charging
- ◆ Support smart charging, dynamically allocate power to host and connected devices

Connection Diagram

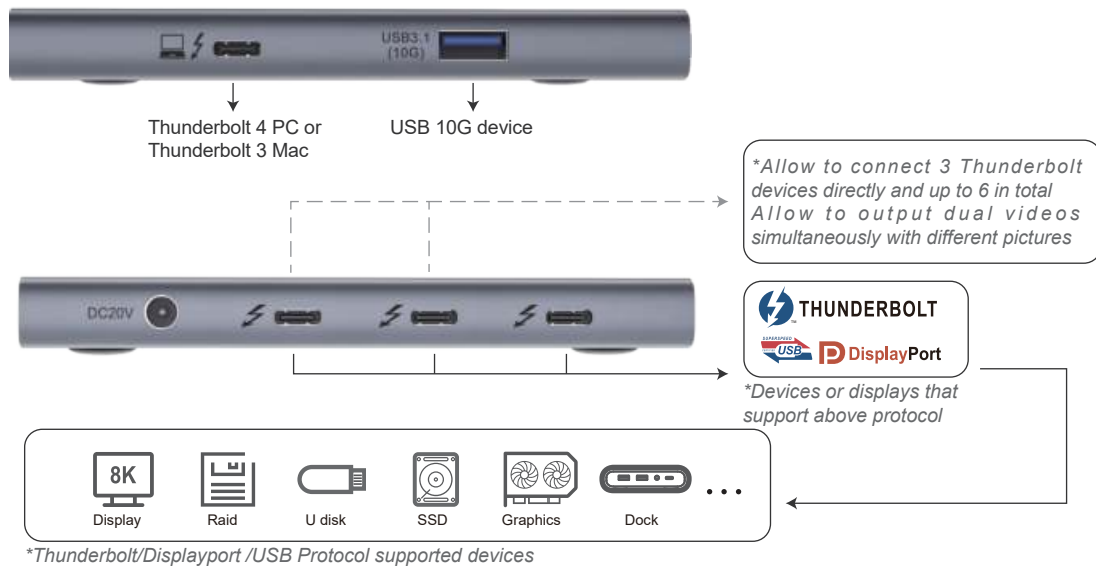

Model: TB4-DOCK02-D/TB4-DOCK02/U4-DOCK02
 Name: Thunderbolt 4/USB4 15-in-1 Docking Station



TB4-DOCK02-D



TB4-DOCK02/U4-DOCK02

Parameter	U4-DOCK02	TB4-DOCK02/TB4-DOCK02-D
Upstream	USB4/Thunderbolt 4*1 ●Max 40Gbps, Goshen Ridge Solution ●Universal Compatible	
Downstream	USB4/Thunderbolt 4*2 ●Share max 40Gbps bandwidth, downward compatible with Thunderbolt 3, DP Alt mode, USB ●Support daisy chain ●Support 15W downstream charging ●Support max 8K DisplayPort*2 ●Support DP1.4 max 8K HDMI*2 ●Compliant with HDMI2.0 with max 4K/60Hz Stream 1: HDMI 1 Stream2: DisplayPort1 Stream3: HDMI 2 or DisplayPort 2 Among all video ports, support max 8K/30Hz for one port, or 4K/60Hz+4K/60Hz+4K/30Hz Simultaneously with different picture Type-C Gen2*1 ●Max 10Gbps ●Support max PD 30W downstream charging USB-A x3 ●2 USB-A supports max 10Gbps, one USB-A supports max 5Gbps RJ45*1 ●Max 2.5G bandwidth SD/TF*1 ●Supports SD4.0 with max 312MBps ●Allow 2 cards to work at the same time 3.5mm Audio*1 ●Max 384KHz sampling rate DC Power Jack*1 ●150W power supply, max 96W for host charging ●Support smart charging, dynamically allocate power to host and connected devices	
Power Supply	Optional to be 100W or 150W	150W
Certification	No demand	Intel Thunderbolt certified
Cable	USB4 Cable	TBT4 Cable(TB4-DOCK02) with captive cable(TB4-DOCK02-D)
Customized product	Flexible for self-defined	Follow Intel reference design
Schedule	Self schedule	Follow Intel certification schedule

Thunderbolt

Model: TB4-DOCK03-D/TB4-DOC03/U4-DOCK03
 Name: Thunderbolt 4/USB 4 11-in-1 Docking Station



TB4-DOCK03-D

TB4-DOCK03/U4-DOCK03

Parameter	U4-DOCK03	TB4-DOCK03/TB4-DOCK03-D
Upstream	USB 4/Thunderbolt 4*1 <ul style="list-style-type: none"> ●Max 40Gbps, Goshen Ridge Solution ●Universal Compatible 	
Downstream	USB4/Thunderbolt 4*3 <ul style="list-style-type: none"> ●Share max 40Gbps bandwidth, downward compatible with Thunderbolt 3, DP Alt mode, USB ●Support daisy chain ●Each port support 15W downstream charging ●Support max 8K or dual 4K/60Hz USB3.2 Type-A Gen2*2 <ul style="list-style-type: none"> ●Max 10Gbps ●Max 900mA downstream charging USB-A 2.0 x1 <ul style="list-style-type: none"> ●Max 480Mbps SD/TF*1 <ul style="list-style-type: none"> ●SD supports SD4.0 with max 312MBps ●TF supports SD3.0 with max 104MBps RJ45*1 <ul style="list-style-type: none"> ●10M/100M/1000M bandwidth 3.5mm Audio*1 <ul style="list-style-type: none"> ●Max 96KHz sampling rate DC Power Jack*1 <ul style="list-style-type: none"> ●150W power supply, max 96W for host charging ●Support smart charging, dynamically allocate power to host and connected devices 	
Power Supply	Optional to be 100W or 150W	150W
Certification	No demand	Intel Thunderbolt certified
Cable	USB4 Cable	TBT4 Cable(TB4-DOCK03) with captive cable(TB4-DOC03-D)
Customized product	Flexible for self-defined	Follow Intel reference design
Schedule	Self schedule	Follow Intel certification schedule

Model: TB4-DOCK05/U4-DOCK05

Name: Thunderbolt4/USB4 13-in-1 Docking Station with Daisy Chain



Parameter	U4-DOCK05	TB4-DOCK05
Upstream	USB4/Thunderbolt 4*1 <ul style="list-style-type: none"> ●Max 40Gbps, Goshen Ridge Solution ●Universal Compatible 	
Downstream	USB4/Thunderbolt4*1 <ul style="list-style-type: none"> ●Share max 40Gbps bandwidth, downward compatible with Thunderbolt 3, DP Alt mode, USB ●Support daisy chain ●Support 15W downstream charging ●Support max 8K HDMI*2 <ul style="list-style-type: none"> ●Compliant with HDMI2.0 with max 4K/60Hz Stream 1: HDMI 1 Stream2: HDMI2 Support dual 4K/60Hz with different pictures Type-C Gen2 *1 <ul style="list-style-type: none"> ●Max 10Gbps USB-A x4 <ul style="list-style-type: none"> ●2 USB-A supports max 10Gbps, 2 USB-A supports max 5Gbps RJ45*1 <ul style="list-style-type: none"> ●Max 1000M bandwidth SD/TF*1 <ul style="list-style-type: none"> ●Supports SD4.0 with max 312MBps ●Allow 2 cards to work at the same time 3.5mm Audio*1 <ul style="list-style-type: none"> ●Max 384KHz sampling rate DC Power Jack*1 <ul style="list-style-type: none"> ●134W power supply ●Support smart charging, dynamically allocate power to host and connected devices 	
Power Supply	134W	134W
Certification	No demand	Intel Thunderbolt certified
Cable	USB4 Cable	TBT4 Cable(TB4-DOCK03) with captive cable(TB4-DOC03-D)
Customized product	Flexible for self-defined	Follow Intel reference design
Schedule	Self schedule	Follow Intel certification schedule

Thunderbolt

Model: TB4-DOCK06/U4-DOCK06

Name: Thunderbolt4/USB4 13-in-1 Docking Station with Daisy Chain



Parameter	U4-DOCK06	TB4-DOCK06
Upstream	USB4/Thunderbolt 4*1 <ul style="list-style-type: none"> ●Max 40Gbps, Goshen Ridge Solution ●Universal Compatible 	
Downstream	USB4/Thunderbolt4*1 <ul style="list-style-type: none"> ●Share max 40Gbps bandwidth, downward compatible with Thunderbolt 3, DP Alt mode, USB ●Support daisy chain ●Support 15W downstream charging ●Support max 8K HDMI*2 <ul style="list-style-type: none"> ●Compliant with HDMI2.1 with max 8K/60Hz Stream 1: HDMI 1 Stream2: HDMI2 Support dual 4K/60Hz or 8K/30Hz+4K/30Hz with different pictures or one max 8K/60Hz Type-C Gen2 *1 <ul style="list-style-type: none"> ●Max 10Gbps and max PD 30W output USB-A x4 <ul style="list-style-type: none"> ●2 USB-A supports max 10Gbps, 2 USB-A supports max 5Gbps RJ45*1 <ul style="list-style-type: none"> ●Max 2.5G bandwidth SD/TF*1 <ul style="list-style-type: none"> ●Supports SD4.0 with max 312MBps ●Allow 2 cards to work at the same time 3.5mm Audio*1 <ul style="list-style-type: none"> ●Max 384KHz sampling rate DC Power Jack*1 <ul style="list-style-type: none"> ●150W power supply, max 96W for host ●Support smart charging, dynamically allocate power to host and connected devices 	
Power Supply	150W	150W
Certification	No demand	Intel Thunderbolt certified
Cable	USB4 Cable	TBT4 Cable
Customized product	Flexible for self-defined	Follow Intel reference design
Schedule	Self schedule	Follow Intel certification schedule

Model: TB4-DOCK07/U4-DOCK07

Name: Thunderbolt4/USB4 14-in-1 Docking Station with Daisy Chain



Parameter	U4-DOCK07	TB4-DOCK07
Upstream	USB4/Thunderbolt 4*1 <ul style="list-style-type: none"> ●Max 40Gbps, Goshen Ridge Solution ●Universal Compatible 	
Downstream	USB4/Thunderbolt4*1 <ul style="list-style-type: none"> ●Share max 40Gbps bandwidth, downward compatible with Thunderbolt 3, DP Alt mode, USB ●Support daisy chain ●Support 15W downstream charging ●Support max 8K HDMI*2 <ul style="list-style-type: none"> ●Compliant with HDMI2.1 with max 8K/60Hz Stream 1: HDMI 1 Stream2: HDMI2 Support dual 4K/60Hz or 8K/30Hz+4K/30Hz with different pictures or one max 8K/60Hz Type-C Gen2 *1 <ul style="list-style-type: none"> ●Max 10Gbps and max PD 30W output USB-A x4 <ul style="list-style-type: none"> ●2 USB-A supports max 10Gbps, 2 USB-A supports max 5Gbps RJ45*1 <ul style="list-style-type: none"> ●Max 2.5G bandwidth SD/TF*1 <ul style="list-style-type: none"> ●Supports SD4.0 with max 312MBps ●Allow 2 cards to work at the same time 3.5mm Audio*1 <ul style="list-style-type: none"> ●Max 384KHz sampling rate DC Power Jack*1 <ul style="list-style-type: none"> ●150W power supply, max 96W for host ●Support smart charging, dynamically allocate power to host and connected devices 	
Power Supply	150W	150W
Certification	No demand	Intel Thunderbolt certified
Cable	USB4 Cable	TBT4 Cable
Customized product	Flexible for self-defined	Follow Intel reference design
Schedule	Self schedule	Follow Intel certification schedule

Thunderbolt

Name: 10-in-1 Thunderbolt 3 Docking
 Model: TB3-DOCK02

Certified by Intel



Aluminium Housing

Upstream:

- Thunderbolt 3 Female:
- ◆ Titan Ridge Solution, support to work on both TBT3 and Type-C host
 - ◆ Max 40Gbps Bandwidth
- Thunderbolt 3 Female 2:
- ◆ Daisy Chain

Downstream:

- Video:
- ◆ DisplayPort1.4x1 (max 8K/30Hz)
- Data:
- ◆ USB-A 10Gx2
 - ◆ USB-C 10Gx1
 - ◆ RJ45X1(Gigabit Ethernet)
 - ◆ Combo Audiox1
 - ◆ SD/Micro SD 4.0 (Allow two cards to work simultaneously)
- Power:
- ◆ DC 120W (20V/6A, bypass 60W to host)

Name: 11-in-1 Thunderbolt 3 Docking
 Model: TB3-DOCK03-R

Certified by Intel



Aluminium Housing

Upstream:

- Thunderbolt 3 Female:
- ◆ Titan Ridge Solution, support to work on both TBT3 and Type-C host
 - ◆ Max 40Gbps Bandwidth

Downstream:

- Video:
- ◆ DisplayPortx2 (one max 8K/30Hz or dual max 4K/60Hz)
- Data:
- ◆ USB-A 10Gx2
 - ◆ USB-A 5Gx1
 - ◆ USB-C 10Gx1
 - ◆ RJ45X1(Gigabit Ethernet)
 - ◆ Combo Audiox1
 - ◆ SD/Micro SD 3.0 (Allow two cards to work simultaneously)
- Power:
- ◆ DC 120W (20V/6A, bypass 60W to host)

Name: 16-in-1 Thunderbolt 3 Docking
Model: TB3-DOCK04

Certified by Intel



Upstream:

Thunderbolt 3 Femalex1:

- ◆ Titan Ridge Solution, Max 40Gbps Bandwidth, support both TBT and USB-C hosts

Thunderbolt 3 Femalex2:

- ◆ Daisy Chain

Downstream:

Video:

- ◆ DP1.4x1 (max 8K/30Hz)

Data:


- ◆ USB-A 10Gx2
- ◆ USB-A 5Gx3
- ◆ USB-C 10Gx1
- ◆ RJ45X1 (Gigabit Ethernet)
- ◆ Combo Audiox1
- ◆ Toslink x1
- ◆ Coaxialx1
- ◆ SD/Micro SD 4.0 (Allow two cards to work simultaneously)
- ◆ QC3.0X1

Power:

- ◆ DC 180W (20V/9A, bypass 85W to host)

Name: 6-in-1 Thunderbolt 3 Hub With PD Charging
Model: TB3-DOCK05

Certified by Intel

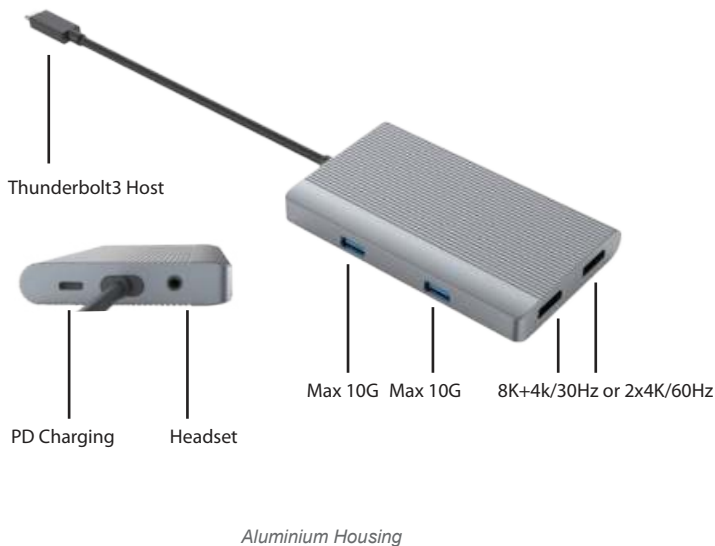

Upstream:

Thunderbolt 3 Malex1

- ◆ Titan Ridge Solution, Max 40Gbps Bandwidth, support TBT hosts
- ◆ 40Gbps

Downstream:

Video:

- ◆ DisplayPort Femalex2 (max one 8K/30Hz or dual 4K/60Hz under MST mode)

Data:

- ◆ USB-A 10Gx2
- ◆ 3.5mm Combo audiox1 (384KHz)

Power:

- ◆ USB-C PD Adapter (Max 60W host charging)

Thunderbolt

Name: 15-in-1 Type-C Triple Displays Docking Station with Dual Power Supplies
 Model: TB3-DOCK07



Specifications			
Interface/Model		TB3-DOCK07	
Upstream	Thunderbolt 3 Femalex2		Thunderbolt Port 1 (connect host) ➤Support both TBT and USB-C MFDP mode ➤Support both TBT and USB-C hosts ➤Max 40Gbps Thunderbolt Port 2 (for daisy chain) ➤Supply 15W for daisy chain device
Downstream	Video	DPx1	➤DP1.4, max 8k/30Hz
	Data	USB-Ax5	➤USB-A 5Gx3 ➤USB-A 10Gx2 ➤Type-C 10Gx1
		Type-Cx1	
	USB Smart Charging		➤QC3.0
	Card Slot	SD/Micro SDx1	➤SD/Micro SD 4.0
	Ethernet	RJ45x1	➤10M/100M/1000Mbps
	Audio	Combo 3.5mm Jackx1 Toslinkx1	➤Support both microphone and headphone
	Power	DC3.5mm	➤180W (bypass 85W to host)

Name: Thunderbolt 3 to Dual DisplayPort

Model: TB3-2DP1.4

(Aluminium Housing)

Features:

- ◆ Support Thunderbolt™ 3 Male input, 2 DisplayPort Female output
- ◆ Max 40Gbps Bandwidth
- ◆ Max Resolutions: 2x4k/60Hz or 1x8k
- ◆ Support dual 4k/60Hz DisplayPort outputs simultaneously with different picture
- ◆ USB-Bus Powered
- ◆ Compatible with Windows 11, MacOS 12.13 and lower versions
- ◆ No extra driver is required



Certified by Intel

Aluminium Housing

Name: Thunderbolt3 Female to Dual HDMI Adapter

Model: TB3-2H

(Plastic Housing)

Features:

- ◆ Support Thunderbolt™ 3 Female input, 2 HDMI Female output
- ◆ Max 40Gbps Bandwidth
- ◆ Support dual 4k/60Hz HDMI outputs simultaneously under MST mode
- ◆ USB-Bus Powered
- ◆ Compatible with Windows 10, MacOS 10.12 and lower versions
- ◆ No extra driver is required



Certified by Intel

Plastic Housing

Name: Thunderbolt 3 to Dual HDMI

Model: TB3-2H02

(Aluminium Housing)

Features:

- ◆ Support Thunderbolt™ 3 Male input, 2 HDMI Female output
- ◆ Max 40Gbps Bandwidth
- ◆ Support dual 4k/60Hz HDMI outputs simultaneously under MST mode
- ◆ USB-Bus Powered
- ◆ Compatible with Windows 10, MacOS 10.12 and lower versions
- ◆ No extra driver is required



Aluminium Housing

Certified by Intel

USB4

Name: USB4 6-in-1 Hub with daisy chain
Model: U4-HUB01

Introduction

This is a USB4 portable Hub which provides the most advanced, efficient, and versatile I/O solution available with up to 40Gb/s for data and video. This USB4 Hub has 3 USB4 downstream ports that allow you to cascade USB4 devices up to 6 levels, to one 8K or two 4K 60Hz monitors, it can also easily connect to any USB Type-C device, all while simultaneously charging the PC. Besides, it supports smart power function which enables to distribute power according to the power consumption of the connected device, making full use of external power supply. It is designed for USB4 and Thunderbolt host.




Highlights

- ◆ Adopting Goshen Ridge solution;
- ◆ Slim compact aluminium design;
- ◆ Designed for USB4 and Thunderbolt hosts;
- ◆ Support USB4 max 40Gbps for high speed data and outstanding video transfer, compatible with USB4、TBT3、DP Alt mode protocol;
- ◆ 3 USB4 downstream ports allow to allow you to cascade USB4 devices up to 6 levels
- ◆ 3 USB4 downstream ports support max 40Gbps data transfer, support Type-C dongle/adaptor/dock, not support PD power adapter;
- ◆ 3 USB4 downstream ports support max 8K for one video output, be more efficient for dual 4K/60Hz
- ◆ Self-powered from 100W DC power adapter with max 60W for host, max 90W for host and Hub;
- ◆ Support smart power
- ◆ Compatibility Details:

Windows 10 or above version supported USB4 and Thunderbolt host
Mac OS 11 or above version supported USB4 and Thunderbolt host

Connection Diagram

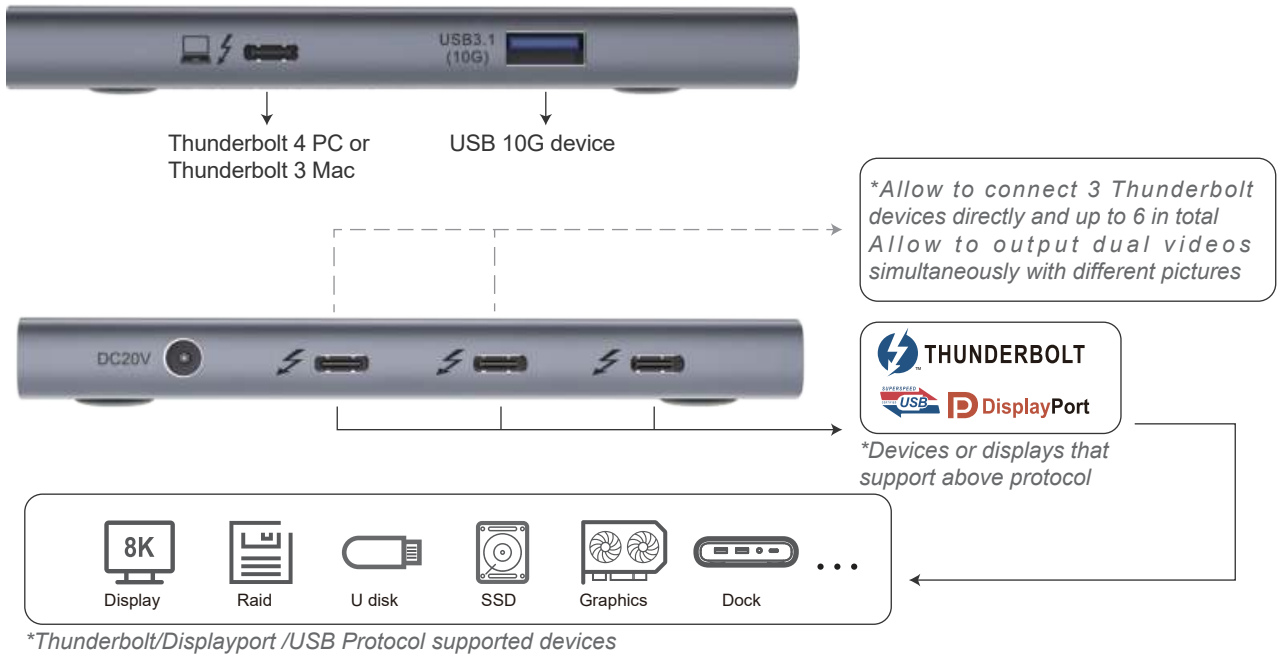

Name: USB4 6-in-1 Multiple Port 8K Adapter

Model: U4-C2UCEH8(10G)

(Aluminium Housing)

Features:

- ◆ Support USB4 max 40Gbps bandwidth, enabling to output max 8K video and 10G data simultaneously;
- ◆ Support to work on all USB4 and TBT4 supported host;
- ◆ Support HDMI ultra high resolution max 8K/60Hz;
- ◆ Support max 2.5Gbps Ethernet transfer;
- ◆ Support max 10Gbps data transfer;
- ◆ Support PD3.0 max 100W charging, fast role swap;
- ◆ Silicone gel cable material brings ultra soft and flexible user experience;
- ◆ Stainless steel anti-fingerprint surface design



Aluminium Housing

Name: USB4 9-in-1 Portable Dock with Dual Displays

Model: U4-DOCK01-HR

(Plastic Housing)

Features:

Upstream:

- ◆ USB4 Female*1 (Max 40Gbps)

Downstream:

- ◆ Type-C Female*1 (Max 8K video or 10Gbps data transmission)
- ◆ DP*2 (Max 8K)

Among above videos, allow to output dual videos at the same time, dual 4K/60Hz or 8K+4K/30Hz

- ◆ USB-C 10G*1
- ◆ USB-A 10G*2
- ◆ USB-A 2.0*1
- ◆ RJ45*1 (2.5G)
- ◆ DC 134W, max 96w for host charging



Plastic Housing

Name: USB4 40G Portable Dock with Dual Displays

Model: U4-DOCK02-HR

(Aluminium Housing)

Features:

Upstream:

- ◆ USB4 Male*1 (Max 40Gbps)

Downstream:

- ◆ HDMI *1: max 8K
- ◆ DP *1: max 8K
- ◆ Type-C Female*1 (Max 8K video or 10Gbps data transmission)

Among above videos, allow to output dual videos at the same time, dual 4K/60Hz or 8K+4K/30Hz

- ◆ USB-A 10G*1
- ◆ USB-A 2.0x1
- ◆ PD100W Charging



Aluminium Housing

USB and Type-C

Name: Type-C 5-in-1 Hub with 2.5G Ethernet

Model: UTC-C2UC2.5G-SL

(Plastic Housing)

Features:

Upstream:

- ◆ Type-Cx1

Downstream:

- ◆ RJ45*1,USB-A*2, USB-C*1, PD*1
- ◆ Support 2.5G Ethernet
- ◆ 2 USB-A support max 10Gbps data transfer
- ◆ Type-C data port supports max 10Gbps data transfer
- ◆ Support Type-C PD3.0 max 100W PD charging



Plastic Housing

Name: Type-C to 2.5G Ethernet with PD Charging

Model: UTC-C2.5G-SL

(Plastic Housing)

Features:

Upstream:

- ◆ Type-Cx1

Downstream:

- ◆ RJ45*1, PD*1
- ◆ Support 2.5G Ethernet
- ◆ Support Type-C PD3.0 max 100W PD charging



Plastic Housing

Name: Type-C 5-in-1 Hub with 2.5G Ethernet

Model: UTC-C3U2.5G-SL

(Plastic Housing)

Features:

Upstream:

- ◆ Type-Cx1

Downstream:

- ◆ RJ45*1,USB-A*3, PD*1
- ◆ Support 2.5G Ethernet
- ◆ 3 USB-A support max 10Gbps data transfer
- ◆ Support Type-C PD3.0 with max 100W PD charging



Plastic Housing

Name: Type-C 5-in-1 Multiple Port Adapter with Recycled-Material housing

Model: UTC-HUB501-DP1.4-SP(R)

(Plastic Housing)

Features:

Upstream:

- ◆ Type-C Malex1 (DP1.4 Alt mode)

Downstream:

- ◆ HDMI*1, USB-A 5G*3, PD Charging*1
- ◆ Support HDMI max 4K/60Hz
- ◆ USB-A supports max 5G high speed transmission, downward compatible with lower versions
- ◆ USB-C supports PD3.0 max 100W charging
- ◆ Recycled materials are used in cable and housing part



Plastic Housing

Name: Type-C 7-in-1 Multiple Port Adapter with Recycled-Material housing

Model: UTC-HUB701-DP1.4-SA(R)

(Aluminium Housing)

Features:

Upstream:

- ◆ Type-C Malex1 (DP1.4 Alt mode)

Downstream:

- HDMI*1, USB-A 5G*2, RJ45*1, SD/TF*1, PD Charging*1
- ◆ Support HDMI max 4K/60Hz
- ◆ USB-A supports max 5G high speed transmission, downward compatible with lower versions
- ◆ RJ45 supports Gigabit Ethernet
- ◆ SD/TF card slots support max 104MBps data transmission, and 2 card slots can work simultaneously
- ◆ USB-C supports PD3.0 max 100W charging
- ◆ Recycled materials are used in cable and housing part



Aluminium Housing

Name: Type-C 6-in-1 Hub For Steam Deck

Model: UTC-C2UCEUH-STK

(Plastic Housing)

Features:

Upstream:

- ◆ Type-Cx1

Downstream:

- ◆ RJ45*1, USB-A*2, HDMI*1, USB-C data, USB-C PD*1
- ◆ Support HDMI 4K/60Hz
- ◆ 2 USB-A and USB-C data support max 5Gbps data transfer
- ◆ Support Gigabit Ethernet
- ◆ Support Type-C PD3.0 max 100W PD charging



Plastic Housing

USB and Type-C

Name: Type 6-in-1 Multiple Port with HDMI 8K Adapter

Model: UTC-C2UCEH801-DP1.4-SA

(Aluminium Housing)

Features:

- ◆ Support DP1.4 Alt mode
- ◆ Support HDMI max 8K@30Hz
- ◆ Support HDR10+
- ◆ 2 USB-A and Type-C data ports all support max 5Gbps data transmission
- ◆ One USB-A support max 1.5A downstream charging
- ◆ Support Gigabit Ethernet, 10M/100M/1000M
- ◆ Support PD3.0 with max 100W PD charging
- ◆ Support Fast Role Swap of PD 3.0, the connected device will not get disconnected while plugging out PD Adapter



Aluminium Housing

Name: Type 7-in-1 Multiple Port with HDMI 8K Adapter

Model: UTC-C2UEH8MS01-DP1.4-SA

(Aluminium Housing)

Features:

- ◆ Support DP1.4 Alt mode
- ◆ Support HDMI max 8K@30Hz
- ◆ Support HDR10+
- ◆ 2 USB-A and Type-C data ports all support max 5Gbps data transmission
- ◆ One USB-A support max 1.5A downstream charging
- ◆ Support Gigabit Ethernet, 10M/100M/1000M
- ◆ Support PD3.0 with max 100W PD charging
- ◆ Support Fast Role Swap of PD 3.0, the connected device will not get disconnected while plugging out PD Adapter



Aluminium Housing

Name: Type-C to HDMI(8K) and DisplayPort1.4 Adapter

Model: UTC-H8DP-DP1.4-SP

(Plastic Housing)

Features:

- ◆ Type-C Malex1 (DP1.4 Alt mode)
- Downstream:
- ◆ HDMI Femalex1 (max 8K/30Hz)
 - ◆ DisplayPort Femalex1 (DP1.4, max 8K/30Hz)
 - ◆ Allow to output HDMI and DisplayPort simultaneously with dual 4K/60Hz under MST mode
 - ◆ Support HDR



Plastic Housing

Name: Type-C to DisplayPort Adapter with HBR3

Model: UTC-DP-SL-HBR3

(Plastic Housing)

Features:

- ◆ Supports DisplayPort 1.4/1.2 Alt mode
- ◆ Supports per lane data rates of 8.1Gbps(HBR3), 5.4Gbps (HBR2), 2.7Gbps (HBR) and 1.62Gbps (RBR)
- ◆ Support DisplayPort resolution up to 8k@30Hz
- ◆ HDCP bypass
- ◆ HDR bypass

Related Products

Model: UTC-DP-AL-HBR3

(Aluminium Housing)



Plastic Housing



Aluminium Housing

Name: Type 9-in-1 Multiple Port Adapter with DP1.4 Alt mode

Model: UTC-C2UCEUHMSA01-DP1.4-SA

(HDMI 2.0, 4k/60Hz, Aluminium Housing)

Features:

- ◆ Support DP1.4 Alt mode
- ◆ Support HDMI max 4K@60Hz
- ◆ Support HDR
- ◆ USB-C data port supports max 5Gbps data transmission
- ◆ Max 5Gbps data transmission for USB-A port
- ◆ One USB-A port supports max 5V/1.5A downstream charging
- ◆ Support SD3.0 with max 104Mbps transmission rate, allow 2 card slots to work simultaneously
- ◆ Support 10M/100M/1000M for Ethernet port
- ◆ RJ45 supports to work with Nintendo Switch
- ◆ Support Mic in and headphone
- ◆ Type-C charging port supports PD charging max 100W (20V/5A)
- ◆ Support Fast Role Swap of PD 3.0, the connected device will not get disconnected while plugging out PD Adapter



Aluminium Housing

Name: Name: Type-C to HDMI(4K/60Hz)/USB-Ax3/PD

Charging Adapter with DP1.4 Alt mode

Model: UTC-C3UUH01-DP1.4-SA

(HDMI 2.0, 4k/60Hz, Aluminium Housing)

Features:

- ◆ Support DP1.4 Alt mode
- ◆ Support HDMI max 4K@60Hz
- ◆ Support HDR
- ◆ USB-A supports max 5Gbps data transmission
- ◆ One USB-A supports 5V/1.5A downstream charging
- ◆ USB-C supports max 100W PD Charging

Related Products

Model: UTC-C3UUH01-DP1.4-SP

(HDMI 2.0, 4k/60Hz, Plastic Housing)



Aluminium Housing



Plastic Housing

USB and Type-C

Name: Type-C to HDMI 8K Adapter

Model: UTC-H801-DP1.4-PRO

(Plastic Housing)

Features:

- ◆ Support DP1.4 Alt mode
- ◆ Support HDMI max 8K/60Hz
- ◆ Support Dynamic HDR10+
- ◆ Supports HDCP1.4&HDCP2.3 specification
- ◆ Support HPD
- ◆ Support DSC 1.1/1.2a decoder mode
- ◆ Support 8/10/12 bit color depth output
- ◆ Support output pixel format RGB/ YCbCr4:4:4/ YCbCr4:2:2/ YCbCr4:2:0
- ◆ Support 1 to 32 channel LPCM 192kHz audio output
- ◆ Supports HBR audio up to 1536kHz



Related Products

Model: UTC-H8-DP1.4-AL-PRO

(Aluminium Housing 1)

Model: UTC-H8-DP1.4-PRO

(Aluminium Housing 2)

Name: Type-C to HDMI(8K/60Hz) Adapter with PD Charging

Model: UTC-CH8-DP1.4

(Aluminium Housing)

Features:

- ◆ Type-C Malex1 (DP1.4 Alt mode)
- Downstream:(HDMIx1)
- ◆ Support HDMI max 8K/60Hz
- ◆ Support Dynamic HDR10+
- ◆ Supports HDCP1.4&HDCP2.3 specification
- ◆ Support DSC 1.1/1.2a decoder mode
- ◆ Support 8/10/12 bit color depth output
- ◆ Support output pixel format RGB/ YCbCr4:4:4/ YCbCr4:2:2/ YCbCr4:2:0
- ◆ Type-C PD Chargingx1:
- ◆ Support PD3.0 max 100W charging
- ◆ Support Fast Role Swap of PD 3.0, the connected device will not get disconnected while plugging out PD Adapter



Name: Type-C 6-in-1 Multiple Port with HDMI 8K Adapter

Model: UTC-C2UCEH801(10G)-DP1.4

(Aluminium Housing)

Features:

- Upstream: USB-Cx1
- Downstream: HDMI*1,USB-A*2, USB-C*1, RJ45*1, PD*1
- ◆ Support DP1.4 Alt mode
- ◆ Support HDMI max 8K@30Hz
- ◆ Support HDR10+
- ◆ 2 USB-A and Type-C data ports all support max 10Gbps data transmission
- ◆ One USB-A support max 1.5A downstream charging
- ◆ Support Gigabit Ethernet,10M/100M/1000M
- ◆ Support PD3.0 with max 100W PD charging
- ◆ Support Fast Role Swap of PD 3.0, the connected device will not get disconnected while plugging out PD Adapter



Name: 18-in-1 Type-C Triple Displays Docking Station with Dual Power Supplies
 Model: UTC-DOCK09-DP1.4



Specifications		
Interface/Model		UTC-DOCK09-DP1.4
Upstream	Type-C Femalex1	<ul style="list-style-type: none"> ➤Type-C Femalex1 ➤DP1.4 Alt mode ➤Connect this port to host via our equipped Type-C M/M Cable
Downstream	Video	<ul style="list-style-type: none"> ➤HDMIX2, DPX1, VGAX1 ➤Stream 1: HDMI 1(Max 4K/60Hz) ➤Stream 2: HDMI 2(Max 4K/60Hz) ➤Stream 3: DP or VGA(DP max 4K/60Hz or VGA max 1080P) ➤Allow to output 3 video streams simultaneously under MST mode ➤Single video: max 4k/60Hz ➤Dual videos: dual max 4k/30Hz ➤Triple videos: max 1x4k/30Hz+2x1080p/60Hz
	USB-AX5	<ul style="list-style-type: none"> ➤USB-A 3.1 10GX2 ➤USB-A 2.0X2 ➤USB-A QC3.0x1
	Type-C X1	➤10G, 1.5A
	RJ45X1	➤Gigabit Ethernet
	SD/MicroSDX1	<ul style="list-style-type: none"> ➤Support UHS-II 4.0 with max 312MBps ➤Allow 2 card slots to work at the same time
	Audiox3	3.5mmx1, Toslinkx1, Coaxialx1
	Power	Dual Power Options: Option 1: Type-C Female: 100W PD3.0 charging (dynamic distribution) Option 2: DC 120W (dynamic distribute max 100W to host)

USB and Type-C

Name: Type-C 15-in-1 Triple Displays Docking Station
 Model: UTC-DOCK13-DP1.4



Specifications

Interface/Model		UTC-DOCK13-DP1.4
Upstream	Type-C Female x1	<ul style="list-style-type: none"> ➢ Type-C Female x1 ➢ DP1.4 Alt mode
Downstream	Video	<ul style="list-style-type: none"> ➢ Stream1: HDMI1 (Max 4K/30Hz on windows or max 4K/60Hz on Macbook) ➢ Stream2: Displayport1 (max 4K/60Hz) ➢ Stream3: HDMI2 or Displayport2 (max 4K/60Hz) ➢ Among all video ports, support max 4K/60Hz for one port, max dual 4K/30Hz under MST and max 4K/30Hz+2X1080P under MST
	Type-C x3	<ul style="list-style-type: none"> ➢ Max 10Gbps data transmission ➢ One port supports max PD 30W downstream charging
	USB-A x3	<ul style="list-style-type: none"> ➢ 3 USB-A support max 10Gbps
	RJ45 x1	<ul style="list-style-type: none"> ➢ Gigabit Ethernet
	SD/TF Card slots	<ul style="list-style-type: none"> ➢ SD supports SD4.0 with max 312MBps ➢ TF supports SD3.0 with max 104MBps
	Audio x1	<ul style="list-style-type: none"> 3.5mm audio*1 ➢ Max 96KHz sampling rate
	Power	<ul style="list-style-type: none"> DC Power Jack ➢ 150W power supply, Dynamic distribution, max 96W for host charging

Name: Type-C 11-in-1 Dual Displays Dock with PD Charging
 Model: UTC-DOCK16-DP1.4-AL
 (Aluminium Housing)



Specifications		
Interface/Model		UTC-DOCK16-DP1.4-AL
Upstream	Type-C Female x1	<ul style="list-style-type: none"> ➤ Type-C Male x1 ➤ DP1.4 Alt mode
Downstream	Video x2	<ul style="list-style-type: none"> ➤ HDMIX1, DPx1 ➤ Stream 1: HDMI max 4K/60Hz ➤ Stream 2: DP max 8K/30Hz ➤ Allow to output dual videos (max 4K/30Hz*2) simultaneously under MST
	USB-C Gen 1x1	<ul style="list-style-type: none"> ➤ Max 5Gbps bandwidth
	USB-A Gen 1x3	<ul style="list-style-type: none"> ➤ Max 5Gbps bandwidth ➤ One port support max 1.5A downstream charging
	RJ45x1	<ul style="list-style-type: none"> ➤ Gigabit Ethernet
	SD/MicroSDx1	<ul style="list-style-type: none"> ➤ Support UHS-I 3.0 with max 104MBps ➤ Allow 2 card slots to work at the same time
	3.5mm Audio x1	<ul style="list-style-type: none"> ➤ Support headphone and microphone
	Type-C PD Charging x1	<ul style="list-style-type: none"> ➤ Support PD3.0 fast role swap ➤ Support max 100W PD Charging

USB and Type-C

Name: Type-C Dual Displays Portable Dock
 Model: UTC-DOCK12-DP1.4-SA-PD
 (Aluminium Housing)



Specifications

Interface/Model		UTC-DOCK12-DP1.4-SA-R
Upstream	Type-C Femalex1	<ul style="list-style-type: none"> ➤ Type-C Femalex1 ➤ DP1.4 Alt mode
Downstream	Video x2	HDMIx2 ➤ Support single 4K/60Hz or dual 4K/30Hz with different picture
	Type-C 5G*1	➤ Max 5Gbps data transmission
	USB-A 5Gx3	➤ Max 5Gbps data transmission
	SD/TF Card slots	<ul style="list-style-type: none"> ➤ SD supports SD4.0 with max 312MBps ➤ TF supports SD3.0 with max 104MBps ➤ Support 2 card slots to work simultaneously
	RJ45x1	➤ Gigabit Ethernet
	3.5mm Audiox1	<ul style="list-style-type: none"> ➤ Support headphone and microphone ➤ Max 96KHz sampling rate
	Charging port	Type-C PD Chargingx1 ➤ Support PD3.0 fast role swap ➤ Support max 100W PD Charging

Name: 16-in-1 Type-C Triple Displays Docking Station with Dual Power Supplies
 Model: UTC-DOCK11-DP1.4
 (Aluminium Housing)



Specifications		
Interface/Model		UTC-DOCK11-DP1.4
Upstream	Type--C Femalex1	<ul style="list-style-type: none"> ➢Type-C Femalex1 ➢DP1.4 Alt mode ➢Connect this port to host via our equipped Type-C M/M Cable
Downstream	Video	<ul style="list-style-type: none"> ➢HDMIx2, DPx1, VGAX1 ➢Stream 1: HDMI 1 (max 4K/60Hz) ➢Stream 2: HDMI 2 (max 4K/60Hz) ➢Stream 3: DP(max 4K/60Hz) or VGA(max 1920x1200/60Hz) ➢Allow to output dual videos (2x4K/30Hz) or Triple videos (1x4K/30Hz+2x1080P/60Hz)simultaneously under MST mode
	USB-Ax4	<ul style="list-style-type: none"> ➢USB-A 3.1 10GX2 ➢USB-A 3.1 5GX2 ➢USB-A QC3.0x1
	Type-C x1	➢ 10G, 1.5A
	RJ45X1	➢Gigabit Ethernet
	SD/MicroSDx1	<ul style="list-style-type: none"> ➢Support UHS-II 4.0 with max 312MBps ➢Allow 2 card slots to work at the same time
	Audiox3	➢3.5mmx1, Toslinkx1
	Power	Dual Power Options: ➢Option 1: Type-C Female: 100W PD3.0 charging (dynamic distribution) ➢Option 2: DC 120W (dynamic distribute max 100W to host)

USB and Type-C

Name: 12-in-1 Type-C Triple Displays Portable Dock

Model: UTC-DOCK10-AL

(HDMI2.0, 4K/60Hz, Aluminium Housing)

Features:

- ◆ Type-C Malex1 (DP1.2 Alt mode)
- ◆ Support HDMI max 4K/30Hz, VGA max1920x1200/60Hz
- Allow to output dual videos (2x1080P/60Hz) or Triple video (1x1080p+2x720p/60Hz) simultaneously under MST mode
- ◆ Support HDCP1.4
- ◆ Support Gigabit Ethernet
- ◆ Support USB3.2 Gen1 with max 5Gbps data transfer
- ◆ Support headphone and microphone
- ◆ Support SD3.0 UHS-I with max 104MBps
- ◆ Support max 100w PD Charging, fast role swap of PD3.0



Aluminium Housing

Name: 9-in-1 Type-C Multiple Port Adapter with DP1.4 Alt mode

Model: UTC-DOCK08-DP1.4-AL

(HDMI 2.0, 4k/60Hz, Aluminium Housing)

Features:

Interface:

- ◆ Type-C Malex1 (connect to Type-C host PC)
- ◆ Type-C Female x2 (one for data and one for PD Charging)
- ◆ USB-A Female x2 ; HDMI Female x1; VGA female x1; RJ45 x1;
- ◆ SD slotx1, Micro SD slotx1
- ◆ Support HDMI resolution up to 4kx2k@60Hz, VGA max 1920x1200@60Hz
- ◆ Allow dual videos to work at the same time under SST mode
- ◆ Support 10/100 /1000Mbps for RJ45 port
- ◆ SD/Micro SD slots support Secure Digital v3.0 UHS-I
- ◆ Allow SD/Micro SD slots to work simultaneously
- ◆ Support max 5Gbps data transmission for USB-A port
- ◆ One USB-A port supports max 7.5W(5V/1.5A)
- ◆ Type-C data port supports max 5Gbps data transmission
- ◆ Type-C charging port supports PD charging max 100W (20V/5A)
- ◆ Support Fast Role Swap of PD 3.0, the connected device will not get disconnected while plugging in and out PD Adapter



Aluminium Housing

Name: 12-in-1 Type-C Triple Displays Docking with Dual power Supply

Model: UTC-DOCK07-PRO

(Aluminium Housing)

Features:

- ◆ Support Video Resolution up to 4kx2k@30Hz (DisplayPort), 4kx2k@30Hz (HDMI), 1920x1200@60Hz (VGA)
- ◆ Output triple videos simultaneously under MST mode(Dual 1080p/60Hz or 1 x 1080p/60Hz + dual 720p/60Hz)
- ◆ Max 5Gbps data transmission for per USB-A port
- ◆ Among the 4 USB-A ports, 1 ports support max 7.5W(5V/1.5A) output
- ◆ Support 10/100 /1000Mbps for Ethernet port
- ◆ Type-C female supports max 5Gbps data transmission or max 100W (20V/5A) PD Charging
- ◆ Support Audiox2 (one be connected to headset, another to amplifier)
- ◆ Support two power sources: Type-C female (max 100w) or DC port (max 75W)
- ◆ Support Fast Role Swap of PD 3.0, the connected device will not get disconnected while plugging in and out PD Adapter



Aluminium Housing

Name: Dual Displays Portable Dock with Type-C Video

Model: UTC-DOCK21-SA

(Aluminium Housing)

Features:

- ◆ DP1.4 Alt mode
- Stream 1: HDMI 1 (max 4K/60Hz)
- Stream 2: Type-C*1 (max 4K/60Hz&10G data transfer)
- Allow to output Type-C and HDMI simultaneously under MST mode with dual 4K/60Hz DSC or dual 4K/30Hz non-DSC mode
- ◆ USB-A x2(10G)
- ◆ RJ45 1G
- ◆ POWER Type-C PD 100W
- ◆ Aluminum



Aluminium Housing

Name: Portable Dock with DP1.4 Alt mode

Model: UTC-DOCK22-SA(10-in-1)

(Aluminium Housing)

Features:

- ◆ DP1.4 Alt mode
- Stream 1: HDMI 1 (max 4K/60Hz)
- Stream 2: Type-C*1 (max 4K/60Hz&10G data transfer)
- Allow to output Type-C and HDMI simultaneously under MST mode with dual 4K/60Hz DSC or dual 4K/30Hz non-DSC mode
- ◆ USB-A x2(10G)
- ◆ USB-A x1(5G)
- ◆ RJ45 1G
- ◆ SD/TF4.0(312MBps)
- ◆ 3.5mm Audio*1(96KHz)
- ◆ Type-C PD 100W
- ◆ Aluminum



Aluminium Housing

Name: Type-C 11-in-1 Triple Displays Portable Dock with DP1.4 Alt mode and USB mode

Model: UTC-DOCK17-SM

(Aluminium Housing)

Features:

- ◆ Type-C malex1
- DP1.4 Alt mode+USB mode
- ◆ HDMIx2, VGAX1
- Stream 1: HDMI max 4K/60Hz (DP1.4 Alt mode)
- Stream 2: HDMI max 4K/30Hz (USB mode)
- Stream 3: VGA max 1080P/60Hz (USB mode)
- Allow to output triple different video simultaneously on windows system or Mac book (including M1)
- ◆ USB-C Gen 1x1 Max 5Gbps bandwidth
- ◆ USB-A Gen 1x2 Max 5Gpbs bandwidth
- One port support max 1.5A downstream charging
- ◆ RJ45X1 Gigabit Ethernet
- ◆ SD/TFX1 Max 104MBps
- ◆ 3.5mm Audiox1 Support headphone and microphone
- ◆ PD Chargingx1 Support PD3.0 max 100W PD charging



Aluminium Housing

USB and Type-C

Name: Type-C 8-in-1 Multiple Port Adapter with wrapped design under DP1.4 Alt mode

Model: UTC-C2UE2UHMS01-DP1.4-WAL-R
(HDMI 2.0, 4k/60Hz, Aluminium Housing)

Features:

- ◆ Support DP1.4 Alt mode
- ◆ Support HDMI max 4K/60Hz
- ◆ Support Dual 4K/30Hz under MST mode
- ◆ Support HDR
- ◆ Support max 5Gbps data transmission
- ◆ Support max 7.5W(5V/1.5A) downstream charging one USB-A port
- ◆ Support Gigabit Ethernet
- ◆ Support SD3.0 UHS-I up to 104MBps data rate
- ◆ Support 2 card slots to work simultaneously
- ◆ Support PD3.0 with max 100w PD charging



Aluminium Housing

Name: 7-in1 Type-C Dual Displays Portable Dock with DP1.4 Alt mode

Model: UTC-C2UCE2DP01(10G)-DP1.4-AL
(Aluminium Housing)

Features:

- ◆ Type-C Malex1 (DP1.4 Alt mode)
- ◆ Support DP1.4 Alt mode
- ◆ Support DP max 4K@60Hz per port
- ◆ Support output dual 4K@30Hz simultaneously under MST mode
- ◆ Support 8/10/12 bit color depth output
- ◆ Support output pixel format RGB/YCbCr4:4:4/YCbCr4:2:2/YCbCr4:2:0
- ◆ Support HDR
- ◆ Support HDCP2.2&1.4
- ◆ Max 10Gbps data transmission per USB port
- ◆ Support max 7.5W(5V/1.5A) downstream charging the USB-A port far from RJ45
- ◆ Support Gigabit Ethernet, 10M/100M/1000M
- ◆ Support max 100W PD charging
- ◆ Support PD3.0 Fast Role Swap, the connected device will not get disconnected while plugging in and out PD Adapter



Aluminium Housing

Name: 14-in-1 Type-C 4K Triple Display Docking Station with DP1.4 alt mode

Model: UTC-DOCK-PD3.0-DP1.4
(Plastic Housing)



Type-C M to M cable can be wrapped onto the bottom



Type-C M to M cable can be flexibly connected to PC from either left side or right side

Specifications				
Interface/Model		UTC-DOCK-PD3.0-DP1.4		
Upstream	Type-C Femalex1	<ul style="list-style-type: none"> ➢DP1.4 Alt mode ➢Connect this port to host via our equipped angled Type-C M/M Cable ➢The angled Type-C M/M Cable can be wrapped into the bottom 		
Downstream	Video	DPx1	<ul style="list-style-type: none"> ➢HDMI *1: Support max 4K/60Hz ➢DP *1: Support max 4K/60Hz ➢VGA*1: Support max 1920x1200/60Hz ➢Dual 4K/30Hz outputs under MST mode ➢Triple video (1x4K/30Hz+2x1080p@60Hz) outputs under MST mode 	
		HDMIx1		
		VGAx1		
	Data	USB-A 3.0 X3		<ul style="list-style-type: none"> ➢Max 5Gbps for per USB-A 3.0 ➢max 480Mbps per USB-A 2.0 ➢Type-C supports max 5Gbps data transmission and 1.5A downstream charging
		USB-A 2.0 X2		
		Type-C X1		
	Card Slot	SD/Micro SD	<ul style="list-style-type: none"> ➢Allow 2 card slots to work simultaneously ➢Support SD3.0 with max 104MBps 	
	Ethernet	RJ45X1	<ul style="list-style-type: none"> ➢10M/100M/1000Mbps 	
Audio	3.5mm Jackx1	<ul style="list-style-type: none"> ➢Max 96KHz sampling rate ➢Support both microphone and headphone 		
Power	Type-C Female	<ul style="list-style-type: none"> ➢PD3.0 100W ➢Fast Role Swap ➢Support Dynamic Current Detection and Power Distribution, the product no longer intercepts the fixed power from the external PD power supply, but intercepts it according to the actual power consumed by itself, so that the PC can be dynamically charged more power 		

USB and Type-C

Name: Type-C 7-in-1 Multiple Port Adapter with wrapped design under DP1.4 Alt mode

Model: UTC-C2UEUHMS01-DP1.4-WAL
(HDMI 2.0, 4k/60Hz, Aluminium Housing)

Features:

- ◆ Support DP1.4 Alt mode
- ◆ Support HDMI max 4K/60Hz
- ◆ Support HDR
- ◆ Support max 5Gbps data transmission
- ◆ Support max 7.5W(5V/1.5A) downstream charging the port next to SD card slot, another port supports max 900mA downstream charging.
- ◆ Support Gigabit Ethernet
- ◆ Support SD3.0 UHS-I up to 104Mbps data rate
- ◆ Support 2 card slots to work simultaneously
- ◆ Support PD3.0 with max 100w PD charging



Aluminium Housing

Name: Type-C 7-in-1 Multiple Port Adapter with DP1.4 Alt mode

Model: UTC-C2UEUHMS01-DP1.4-SA
(HDMI 2.0, 4k/60Hz, Aluminium Housing)

Features:

- ◆ Support DP1.4 Alt mode
- ◆ Support HDMI max 4K@60Hz
- ◆ Max 5Gbps data transmission for USB-A port
- ◆ SD/Micro SD slots support Secure Digital v3.0 UHS-I, allow SD and Micro SD card slots to work simultaneously
- ◆ Support 10M/100M/1000M for Ethernet port
- ◆ Type-C charging port supports PD charging max 100W (20V/5A)
- ◆ Support Fast Role Swap of PD 3.0, the connected device will not get disconnected while plugging in and out PD Adapter



Aluminium Housing



Plastic Housing

Related Products

Model: UTC-C2UEUHMS01-DP1.4-SP
(HDMI 2.0, 4k/60Hz, Plastic Housing)

Name: Type-C 5-in-1 Multiple Port Adapter for Ipad

Model: UTC-CU2U3UHA01-iPAD
(HDMI 2.0, 4k/60Hz, Aluminium Housing)

Features:

- ◆ Simple, slender and space gray shell
- ◆ New ID makes the plug better connected to the iPad
- ◆ Support DP1.4 Alt mode, downward compatible with DP1.2 Alt mode
- ◆ Support HDMI max 4K/60Hz
- ◆ Support mic in and phone out with digital audio max 96KHz ADC sampling rate and 24bits ADC resolution
- ◆ Support CTIA&OMTP auto detection
- ◆ 2 USB-A ports share max 1.5A, one USB-A port supports USB2.0, another supports USB3.0
- ◆ Support PD Charging 100W (20V/5A), max 92W for host
- ◆ Support Fast Role Swap of PD 3.0, the connected device will not get disconnected while plugging out PD Adapter



Aluminium Housing

Name: Type-C 6-in-1 Adapter with Retractable design

Model: UTC-CUFHMS-Mac

(HDMI 1.4, 4k/30Hz, Aluminium Housing)

Features:

- ◆ Support HDMI max 4K@30Hz
- ◆ Max 5Gbps data transmission for USB-A port
- ◆ USB-A supports max 7.5W(5V/1.5A) downstream charging
- ◆ SD/Micro SD slots support Secure Digital v3.0 UHS-I Support Fast Role Swap of PD3.0, the connected USB device will not get disconnected when plugging out PD Adapter
- ◆ Type-C female supports max 5Gbps data transmission or max 100W (20V/5A) PD Charging



Aluminium Housing

Name: Type-C 6-in-1 Adapter with Wireless Charging

Model: WL-UTC-C2UMSA01-WR

(HDMI 2.0, 4k/60Hz, Aluminium Housing)

Features:

- ◆ Support max 5Gbps for USB transmission, one USB-A supports max 7.5W (5V/1.5A) downstream charging
- ◆ Support 3.5mm audio output
- ◆ Support SD3.0 UHS-I with max 104Mbps
- ◆ Allow 2 card slots to work at the same time
- ◆ Support wireless charging with max 10W and auto-adjust to 7.5W/5W/2.5W based on requirement of the device
- ◆ Type-C female supports max 100W PD charging or max 5Gbps data transmission
- ◆ Compact design, Type-C Cable can be wrapped on the bottom
- ◆ Designed with anti-slip silicon pad on the wireless charging area



Aluminium Housing

Name: USB3.2 Full-Featured Type-C Active Cable with Re-timer-5m

Model: UTCFAC-5m

(Plastic Housing, max 6ft)

Features:

- ◆ Type-C Bi-directional extension cable with built-in re-timer
- ◆ Support video bi-directional transmission
- ◆ Support USB max 10Gbps
- ◆ Support DP1.4 8.1Gbps per channel with max 8K
- ◆ Support PD Charging max 60W



Plastic Housing

USB and Type-C

Name: Type-C 6-in-1 Multiple Port Adapter with PD3.1 Power Supply

Model: UTC-HUB03-SA-PD3.1

(Aluminium Housing)

Features:

- ◆ DP1.4 Alt mode
- ◆ HDMIX1:Max 4K/60Hz
- ◆ USB-A x2(10G)
- ◆ 3.5mm Audio*1(96KHz)
- ◆ Type-C PD3.1 140W
(max 100W for host)
- ◆ Aluminum



Aluminium Housing

Name: Type-C 10-in-1 Multiple Port Adapter with PD3.1 Power Supply

Model: UTC-HUB04-SA-PD3.1

(Aluminium Housing)

Features:

- ◆ DP1.4 Alt mode
- ◆ HDMIX1:Max 4K/60Hz
- ◆ Type-C Gen2 *1(10G)
- ◆ USB-A x2(10G)
- ◆ USB-A 2.0 x1
- ◆ RJ45 1G
- ◆ SD/TF4.0(312MBps)
- ◆ Type-C PD3.1 140W
(max 100W for host)
- ◆ Aluminum



Aluminium Housing

Name: Type-C 8-in-1 Multiple Port Adapter with PD3.1 Power Supply

Model: UTC-HUB02-SP-PD3.1

(Plastic Housing)

Features:

- ◆ Type-C Malex1 (DP1.4 Alt mode)
- ◆ Downstream:
HDMI*1, USB-A 10G*2, RJ45*1, SD/TF*1, PD Charging*1
- ◆ Support HDMI max 4K/60Hz
- ◆ USB-A supports max 10G high speed transmission, downward compatible with lower versions
- ◆ RJ45 supports Gigabit Ethernet
- ◆ SD/TF card slots support max 104MBps data transmission, and 2 card slots can work simultaneously
- ◆ USB-C supports PD3.1 max 140W charging, max 100W for host charging



Plastic Housing

Name: Type-C to 4 USB 5G Stand Hub with PD Charging for laptop

Model: UTC-C4U01-SHL

Features:

- ◆ Support Type-C input, 4USB-A output with PD Charging
- ◆ USB-A supports max 5Gbps data transmission
- ◆ One USB-A supports max 1.5A, 4 USB-A share max 3A
- ◆ Type-C female supports max 100W PD Charging
- ◆ Support fast role swap of PD3.0



Aluminium Housing

Name: Type-C 7-in-1 Multiple Port Adapter with Stand ID design

Model: UTC-C2UCFHMS01-SHL

Features:

- ◆ Extend one Type-C port to be HDMI, 2 USB-A. 1 USB-C for data, SD/TF with PD Charging
- ◆ Support DP1.2 Alt mode
- ◆ HDMI supports max 4K/30Hz
- ◆ USB-A supports max 5Gbps data transmission
- ◆ USB-C data port supports max 5Gbps
- ◆ One USB-A port Supports 5V/1.5A downstream charging
- ◆ Allow SD/TF to work simultaneously, compliant with SD3.0 with max 104Mbps
- ◆ Type-C female supports max 100W PD Charging
- ◆ Support fast role swap of PD3.0



Aluminium Housing

Name: Type-C 6-in-1 Multiple Port Adapter with Stand ID design

Model:UTC-C2UCEFH01-SHL

Features:

- ◆ Extend one Type-C port to be HDMI, 2 USB-A. 1 USB-C for data, RJ45 with PD Charging
- ◆ Support DP1.2 Alt mode
- ◆ HDMI supports max 4K/30Hz
- ◆ USB-A supports max 5Gbps data transmission
- ◆ USB-C data port supports max 5Gbps
- ◆ One USB-A port Supports 5V/1.5A downstream charging
- ◆ RJ45 supports Gigabit Ethernet
- ◆ Type-C female supports max 100W PD Charging
- ◆ Support fast role swap of PD3.0




Aluminium Housing

Based on the stand ID design

Highlights

Flexibly adjustment:

5 gears for flexibly adjustment from 15° to 36° based on personal preferences

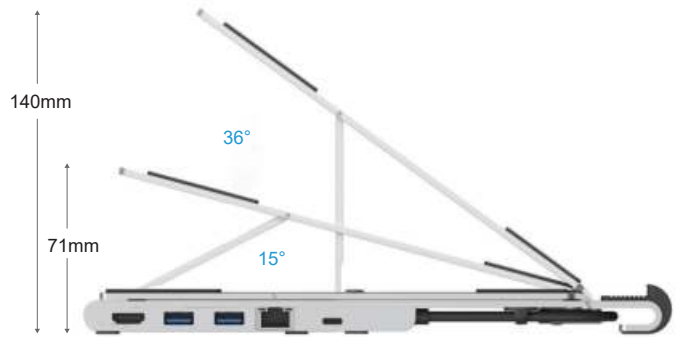

Folding Design:

it can be folded and unfolded



Fold state



Full-unfold state

Cable Wrapped Design:

Type-C cable can be wrapped on the bottom of this product,



Name: USB 3.0 to Gigabit Ethernet Adapter
Model: U3-GE01-AX
(Plastic Housing 1)

Features:

- ◆ 10M/100M/1000M for Ethernet port
- ◆ Support to work with Nintendo Switch
- ◆ Support Operating system as below:
Windows: Windows 7-windows10 (Latest)
Windows Vista/ Windows XP (32/64bit)
Mac: Mac10.12.5 and lower versions

Related Products

- Model: U3-GE07-AX
(Plastic Housing 2, LED)
- Model: U3-GE04-AX
(Aluminium Housing1 , LED)
- Model: U3-GE-SE-AX
(Aluminium Housing2 , LED)



Plastic Housing 1



Plastic Housing 2, LED



Aluminium Housing 1, LED



Aluminium Housing 2, LED

Name: USB3.0 to 2.5G Ethernet Adapter
Model: U3-2.5GE-SL-BV
(Plastic Housing)

Features:

- ◆ Input: USB 3.0 Male
Output: 2.5Gbps RJ45
- ◆ Integrated 10/100/1000M/2.5G transceiver
- ◆ Support 2.5G and 1G Lite mode
- ◆ Support twisted pair crossover detection and auto-correction
- ◆ Support Full Duplex flow control (IEEE 802.3x)
- ◆ Auto-Negotiation with Extended Next Page capability (XNP)
- ◆ Support Wake-On-LAN Technology (remote wake-up)



Plastic Housing

Name: USB 3.0 to USB-Ax3/Gigabit Ethernet Adapter
Model: U3-3UE02-AX
(Plastic Housing)

Features:

- ◆ Max 5Gbps data transmission for USB-A
- ◆ Max 900mA per USB-A port
- ◆ Support 10/100 /1000Mbps for Ethernet port
- ◆ RJ45 supports to work with Nintendo Switch

Related Products

Model: U3-3UE04S
(Aluminium Housing)



Plastic Housing



Aluminium Housing

USB and Type-C

Name: DP Alt Mode Docking Station(with Triple Displays)

Model: UTC-DOCK18-DP1.4

(Aluminium Housing)

Features:

- ◆ DP1.4 Alt mode
- ◆ Stream 1: DP max 4K
Stream 2: HDMI max 4K/60Hz
Stream 3: DP max 4K/60Hz
- ◆ Type-C Gen2 *1(10G)
- ◆ USB-A x2(10G)
- ◆ RJ45 1G
- ◆ SD/TF3.0(104MBps)
- ◆ 3.5mm Audio*1(96KHz)
- ◆ DC 134W
(max 96W for host charging)



Aluminium Housing

Name: DP Alt Mode Docking Station(with Triple Displays)

Model: UTC-DOCK19-DP1.4

(Aluminium Housing)

Features:

- ◆ DP1.4 Alt mode
- ◆ Stream 1: HDMI max 4K
Stream 2: HDMI max 4K/60Hz
Stream 3: DP max 4K/60Hz
- ◆ Type-C Gen2 *1(10G)
- ◆ RJ45 1G
- ◆ SD/TF3.0(104MBps)
- ◆ 3.5mm Audio*1(96KHz)
- ◆ DC 134W
(max 96W for host charging)



Aluminium Housing

Name: Type-C 5-in-1 Multiple Port adapter with PD3.1 Charging

Model: UTC-HUB01-SA-PD3.1

(Aluminium Housing)

Features:

- ◆ Type-C Malex1 (DP1.4 Alt mode)
- ◆ Downstream:
HDMI*1, USB-A 10G*1, USB-C 10G*1, USB-A 2.0*1, PD
Charging*1
- ◆ Support HDMI max 4K/60Hz
- ◆ USB-A supports max 10G high speed transmission, downward compatible with lower versions
- ◆ USB-A 2.0 supports max 480Mbps
- ◆ USB-C supports PD3.1 max 140W charging, max 100W for host charging
- ◆ One chipset enables to achive above functions



Aluminium Housing

Name: Type-C 5-in-1 Hub with 2.5G Ethernet

Model: UTC-C2UC2.5G-SL

(Plastic Housing)

Features:

- ◆ Input: Type-C Female*2
Type-C Power 5V*1
- ◆ Output: Type-C male*1 (SR-SR:50CM)
- ◆ Support DP1.4 specification
- ◆ Support 8K video output &10G data transmission & 100W PD Charging
- ◆ Support Full Feature Bi-directional Switch
- ◆ The input source can be arbitrarily switched by pressing the key
- ◆ The two input terminals can also be used as output terminals, supporting Bi-directional video ,data, PD transmission.



Plastic Housing

Name: USB 3.0 to USB3.0x4 Hub

Model: U3-4U01-R

(Plastic Housing)

Features:

- ◆ Max 900mA per port (only one port is connected), max 900mA for four ports when four ports are connected
- ◆ Support USB 3.0 super speed (5Gbps) transmission, downward compatible with USB 2.0
- ◆ USB 3.0 port supports to charge and transmit data for the USB device simultaneously
- ◆ Easy to carry and use



Plastic Housing

Name: USB 3.0 to USB3.0x4 Hub

Model: U3-4U04S

(Aluminium Housing)

Features:

- ◆ Max 900mA per port (only one port is connected), max 900mA for four ports when four ports are connected
- ◆ Support USB 3.0 super speed (5Gbps) transmission, downward compatible with USB 2.0
- ◆ USB 3.0 port supports to charge and transmit data for the USB device simultaneously
- ◆ Easy to carry and use



Aluminium Housing


DisplayLink

Name: 12-in-1 Type-C Dual Displays Docking Station with DisplayLink
 Model: DL-DOCK02-DC
 (Aluminium Housing)



Specifications		
Interface/Model		DL-DOCK02-DC
Upstream	Type-C Femalex1	<ul style="list-style-type: none"> ➢ Type-C Femalex1 ➢ DisplayLink Solution, USB mode ➢ Allow to connect to a USB-A host via a USB-A to Type-C converter for extending USB-A port to be multiple ports
Downstream	Video	<ul style="list-style-type: none"> ➢ HDMIX2, DPX2 ➢ Stream 1: DP1 or HDMI 1 ➢ Stream 2: DP2 or HDMI 2 ➢ Allow to output dual 4K/60Hz simultaneously
	USB-A 3.1 10Gx2	<ul style="list-style-type: none"> ➢ Max 10Gbps bandwidth ➢ 2 USB-A support max 900mA downstream charging per port
	USB-C 3.1 10Gx1	<ul style="list-style-type: none"> ➢ Max 10Gbps bandwidth ➢ Max 900mA downstream charging
	USB-A Smart Chargingx1	<ul style="list-style-type: none"> ➢ QC3.0
	RJ45x1	<ul style="list-style-type: none"> ➢ Gigabit Ethernet
	3.5mm Audiox1	<ul style="list-style-type: none"> ➢ Support headphone and microphone
	Dual Power Supplies	Dual Power Options: Option 1:Type-C Female:100W PD3.0 charging (dynamic distribution) Option 2:DC 120W (dynamic distribute max 100W to host)

Name: 14-in-1 Type-C Triple Displays Docking Station with DisplayLink and DP Alt mode
 Model: DL-DOCK01-DC
 (Plastic Housing)

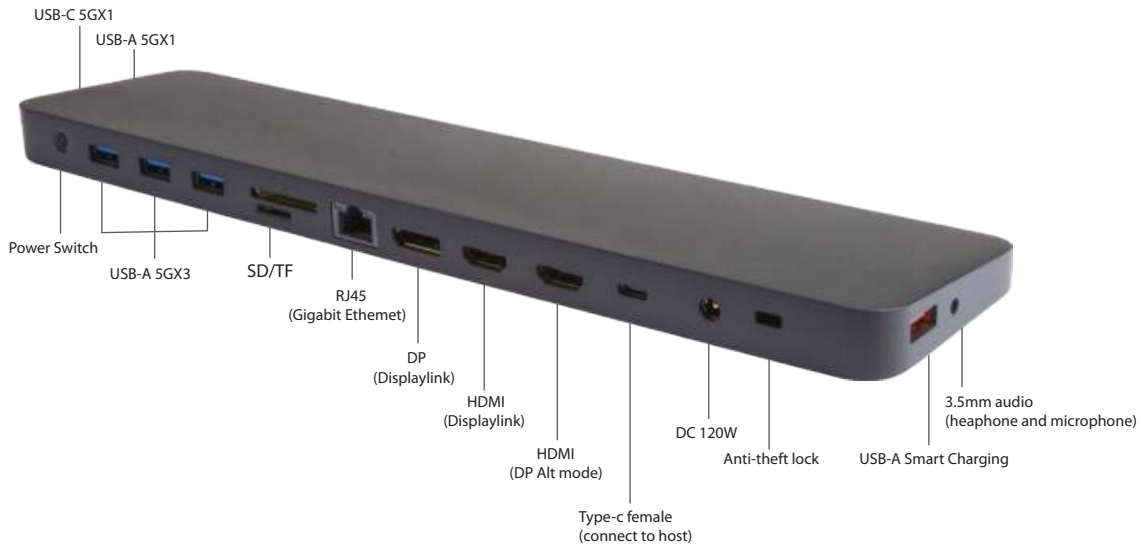

Specifications

Interface/Model		DL-DOCK01-DC
Upstream	Type-C Femalex1	<ul style="list-style-type: none"> ➤Type-C Femalex1 ➤DP1.2 Alt mode ➤Connect this port to host via our equipped Type-C M/M Cable
Downstream	Video	<ul style="list-style-type: none"> ➤HDMI2, DPX1 ➤Stream 1: HDMI max 4K/30Hz (DP Alt mode) ➤Stream 1: HDMI 4K/60Hz (Displaylink) ➤Stream 3: DP 4K/60Hz (Displaylink) ➤Allow to output 3 displays (2x4K/60Hz+1x4K/30Hz) simultaneously under MST
	USB-A 3.1 Gen 1x4	<ul style="list-style-type: none"> ➤Max 5Gpbs bandwidth ➤Max 900mA downstream charging per USB-A port ➤4 USB-A share max 3.5A downstream charging with Type-C data port
	USB Smart Chargingx1	<ul style="list-style-type: none"> ➤Support max 5V/2.4A quick charging ➤QC3.0
	USB-C 3.1 Gen1x1	<ul style="list-style-type: none"> ➤Max 5Gpbs bandwidth ➤Max 5V/1.5A downstream charging ➤4 USB-A share max 3.5A downstream charging with Type-C data port
	RJ45x1	<ul style="list-style-type: none"> ➤Gigabit Ethernet
	SD/MicroSDx1	<ul style="list-style-type: none"> ➤Support UHS-I 3.0 with max 104MBps ➤Allow 2 card slots to work at the same time
	3.5mm Audiox1	<ul style="list-style-type: none"> ➤Support headphone and microphone
	DC Power Supplyx1	<ul style="list-style-type: none"> ➤Max 120W (bypass max 80W to PC)

DisplayLink

Name: 13-in-1 Type-C Dual Displays Docking Station with DisplayLink
 Model: DL-DOCK05-DC
 (Aluminium Housing)



Specifications		
Interface/Model		DL-DOCK05-DC
Upstream	Type-C Femalex1	<ul style="list-style-type: none"> ➤ Type-C Femalex1 ➤ DisplayLink Solution, USB mode ➤ Allow to connect to a USB-A host via a USB-A to Type-C converter for extending USB-A port to be multiple ports
Downstream	Videox4	<ul style="list-style-type: none"> ➤ HDMIX2, DPX2 ➤ Stream 1: DP1 or HDMI 1 (Max 4K/60Hz) ➤ Stream 2: DP2 or HDMI 2 (Max 4K/60Hz) ➤ Allow to output dual 4K/60Hz simultaneously with different picture
	USB-A GEN1 5Gx5	<ul style="list-style-type: none"> ➤ Max 5Gbps bandwidth ➤ One port supports max 5V/1.5A downstream charging
	USB-C GEN1 5Gx1	<ul style="list-style-type: none"> ➤ Max 5Gbps bandwidth ➤ Supports max 5V/1.5A downstream charging
	RJ45x1	<ul style="list-style-type: none"> ➤ Gigabit Ethernet
	3.5mm Audiox1	<ul style="list-style-type: none"> ➤ Support headphone and microphone
	DC Power Supplyx1	<ul style="list-style-type: none"> ➤ Dual power specification for options: ➤ Option 1: DC 100W, max 65W to host ➤ Option 2: DC 135W, max 96W to host

Name: 13-in-1 Type-C Triple Displays Docking Station with DisplayLink and DP1.4 Alt mode
 Model: DL-DOCK06-DC
 (Aluminium Housing)



Specifications		
Interface/Model		DL-DOCK06-DC
Upstream	Type-C Femalex1	<ul style="list-style-type: none"> ➤Type-C Femalex1 ➤DP1.4 Alt mode+DisplayLink ➤Connect this port to host via our equipped Type-C M/M Cable
Downstream	Video	<ul style="list-style-type: none"> ➤HDMI3, DPX2 ➤Stream 1: HDMI max 4K/60Hz (DP1.4 Alt mode) ➤Stream 2: HDMI or Displayport 4K/60Hz (Displaylink) ➤Stream 3: HDMI or Displayport 4K/60Hz (Displaylink) ➤Allow to output triple 4K/60Hz simultaneously under MST
	USB-C Gen 2x1	➤Max 10Gbps bandwidth
	USB-A Gen 2x1	➤Max 10Gbps bandwidth
	USB-A Gen 1x3	<ul style="list-style-type: none"> ➤Max 5Gpbs bandwidth ➤One port support max 1.5A downstream charging
	RJ45x1	➤2.5 Gigabit Ethernet
	3.5mm Audiox1	➤Support headphone and microphone
	Power Supplyx1	<ul style="list-style-type: none"> ➤Dual power specification for options: Option 1: DC 100W, max 65W to host Option 2: DC 134W, max 96W to host

AV Distribution

Name: 15-in-1 Type-C Triple Displays Docking Stations with DP Alt mode and DisplayLink
 Model: DL-DOCK03-DC
 (Aluminium Housing)



Specifications		
Interface/Model		DL-DOCK03-DC
Upstream	Type-C Femalex1	<ul style="list-style-type: none"> ➢Type-C Femalex1 ➢DP1.2 Alt mode+DisplayLink ➢Connect this port to host via our equipped Type-C M/M Cable
Downstream	Video	<ul style="list-style-type: none"> ➢HDMI2, DPx1 ➢Stream 1: HDMI max 4K/30Hz (DP Alt mode) ➢Stream 1: HDMI 4K/60Hz (Displaylink) ➢Stream 3: DP 4K/60Hz (Displaylink) ➢Allow to output 3 displays (2x4K/60Hz+1x4K/30Hz) simultaneously under MST
	USB-A 3.1 10Gx3	<ul style="list-style-type: none"> ➢Max 5Gbps bandwidth ➢Max 900mA downstream charging per port ➢3 USB-A ports close to each other share max 2A
	USB Smart Chargingx1	➢QC3.0
	USB-C 3.1 10Gx1	<ul style="list-style-type: none"> ➢Max 5Gbps bandwidth ➢Max 1.5A downstream charging
	RJ45x1	➢Gigabit Ethernet
	SD/MicroSDx1	<ul style="list-style-type: none"> ➢Support UHS-I 3.0 with max 104MBps ➢Allow 2 card slots to work at the same time
	3.5mm Audiox1	➢Support headphone and microphone
	Downstream Power Supplyx1	<ul style="list-style-type: none"> ➢Dual Power Options: ➢Option 1: Type-C Female: 100W PD3.0 charging (dynamic distribution) ➢Option 2: DC 120W (dynamic distribute 60-100W to host)

Name: 19-in-1 Type-C Quad Displays Docking Stations with DisplayLink
 Model: DL-DOCK04-DC
 (Aluminium Housing)



Specifications		
Interface/Model		DL-DOCK04-DC
Upstream	Type-C Femalex1	<ul style="list-style-type: none"> ➢Type-C Femalex1 ➢DisplayLink Solution , USB mode ➢Allow to connect to a USB-A host via a USB-A to Type-C converter for extending USB-A port to be multiple ports
Downstream	Video	HDMIX4, DPX4 Stream 1: DP1 or HDMI 1 Stream 2: DP2 or HDMI 2 Stream 3: DP3 or HDMI 3 Stream 4: DP4 or HDMI 4 Allow to output dual four videos simultaneously with max 4K/60Hz
	USB-A 3.1 10Gx3	Max 10Gpbs bandwidth Support 900mA downstream charging per port,the 2 ports (close to the USB-A Quick Charging) share max 1.5A
	USB Smart Chargingx1	➢QC3.0
	USB-C 3.1 10Gx1	<ul style="list-style-type: none"> ➢Max 10Gpbs bandwidth ➢Max 5V/1.5A downstream charging
	RJ45x1	➢Gigabit Ethernet
	SD/MicroSDx1	<ul style="list-style-type: none"> ➢Support UHS-I 3.0 plus with max 104MBps ➢Allow 2 card slots to work at the same time
	3.5mm Audiox1	➢Support headphone and microphone
	Dual Power Supplies	Option 1: DC Jack ➢Max 120W(60-100W for host) Option 2: Type-C PD Charging ➢Max 100W (20V/5A) ➢Fast Role Swap of PD3.0 ➢Dynamic Power Distribution

AV Distribution

Name: DisplayPort1.4 to HDMI (8K) Adapter

Model: DP14-H8-AL

(DP1.4, HDMI 2.1, 8k, Aluminium Housing1)

Features:

- ◆ Support DisplayPort input, HDMI output
- ◆ Support DP1.4 Alt mode
- ◆ Support HDMI max 8K/30Hz
- ◆ Support HDMI max 4K/120Hz
- ◆ Support Dynamic HDR10+
- ◆ Supports HDCP1.4&HDCP2.3 specification
- ◆ Support HPD
- ◆ Support DSC 1.1/1.2a decoder mode
- ◆ Support 8/10/12 bit color depth output
- ◆ Support output pixel format RGB/ YCbCr4:4:4/ YCbCr4:2:2/ YCbCr4:2:0
- ◆ Support 1 to 32 channel LPCM 192kHz audio output
- ◆ Supports HBR audio up to 1536kHz

Related Products

Model: MDP14-H8-AL

(DP1.4, HDMI 2.1, 8k, Aluminium Housing2)



Aluminium Housing1



Aluminium Housing2

Name: DisplayPort1.4 Bi-directional Switch for 8K

Model: DP14BS-2

(Plastic Housing)

Features:

- ◆ Input: DP Female*2
Output: DP male*1 (SR-SR:50CM)
- ◆ Support DP1.4 specification
- ◆ Support 8K video output
- ◆ The input source can be arbitrarily switched by pressing the key
- ◆ Support bidirectional Switch
- ◆ You can connect 2 DisplayPort source devices to a display or connect one DisplayPort source to 2 displays



Plastic Housing

Name: HDMI 2-in-1 Bi-directional Switch for 8K

Model: H8BS-2

(Plastic Housing)

Features:

- ◆ Input: HDMI Female*2
Output: HDMI male*1 (SR-SR:50CM)
- ◆ Support 8K video output
- ◆ The input source can be arbitrarily switched by pressing the key
- ◆ Support bidirectional Switch
- ◆ You can connect 2 HDMI source devices to a display or connect one HDMI source to 2 displays



Plastic Housing

Name: HDMI to USB-C Female (8K) Adapter with USB-A 5V Power supply

Model: H21-UTC

(Plastic Housing)

Features:

- ◆ Support HDMI input, USB-C output with resolution up to 8K@30Hz or 4K@120Hz

HDMI Male x1:

- ◆ Support 8bit color Depth
- ◆ Support HDCP1.4/2.2/2.3
- ◆ Support HDR
- ◆ Support Status and Control Data Channel (SCDC)
- ◆ Support Resolution up to 8K@30Hz for 4:4:4 format

USB-A Male x1:

- ◆ Connect to 5V power and supply power for the product
- ◆ The Connected power should larger than 5V/2A

USB-C Female x1:

- ◆ Support DP 1.4 specification
- ◆ Support Resolution up to 8K@30Hz
- ◆ Support 8bit color Depth
- ◆ Support Hot-Plug Detect
- ◆ Support HDR
- ◆ Support positive and negative connection
- ◆ Max 5V/1.5A power provide for downstream device when USB-A connected to external 5V power



Plastic Housing

Name: HDMI to DisplayPort (8K) Adapter

Model: H21-DP14

(Plastic Housing)

Features:

- ◆ Support HDMI input, DisplayPort output with resolution up to 8K@30Hz or 4K@120Hz

HDMI Male x1:

- ◆ Support 8bit color Depth
- ◆ Support HDCP1.4/2.2/2.3
- ◆ Support HDR
- ◆ Support Status and Control Data Channel (SCDC)
- ◆ Support Resolution up to 8K@30Hz for 4:4:4 format

USB-A Male x1:

- ◆ Connect to 5V power and supply power for the product
- ◆ The Connected power should larger than 5V/1A

DisplayPort Female x1:

- ◆ Support DP 1.4 specification
- ◆ Support Resolution up to 8K@30Hz
- ◆ Support Four Lanes with 1.62Gbps (RBR), 2.7Gbps (HBR) ,5.4Gbps (HBR2) ,or 8.1Gbps(HBR3) Data Rate per lane
- ◆ Support 8bit color Depth
- ◆ Support Hot-Plug Detect
- ◆ Support HDR



Plastic Housing

AV Distribution

Name: DisplayPort 1.4 KVM 4x1 Switcher

Model: KVM-DP14SW0401-M

(Metal Housing)

Features:

- ◆ Support to switch 2 DP sources into 1 DP/HDMI display
- ◆ Support resolution max 4k/60Hz
- ◆ Support KVM function
- ◆ Support a display (Either DP or HDMI) and a set of Keyboard and Mouse to control four PCs with DP ports



Metal Housing

Name: HDMI KVM 4X1 Switcher for 4k/60Hz

Model: KVM-HSWUH0401-M

(HDMI 2.0, 4K/60Hz Metal Housing)

Features:

- ◆ Support to switch 4 HDMI sources into 1 HDMI display
- ◆ Support HDMI max 4k/60Hz
- ◆ Support KVM function
- ◆ Support a HDMI display and a set of Keyboard and Mouse to control four PCs with HDMI ports



Metal Housing

Name: HDMI 8K Switcher 3x1

Model: HSWH80301

(HDMI 1.4, 4k/30Hz, Aluminium Housing)

Features:

- ◆ This HDMI 8K Switcher has many features that enable it to perform in a superior manner.
- ◆ Enable both mechanical and intelligent switching
- ◆ Own excellent compatibility
- ◆ Support highest video resolution up to 8k@60Hz
- ◆ Support Full 3D
- ◆ HDCP pass through
- ◆ Support compressed audio
- ◆ EDID bypass



Aluminium Housing

Name: HDMI 1x4 Splitter

Model: HSPUH0104Q-L

(Metal Housing1 , HDMI 2.0, 4K/60Hz)

Features:

- ◆ Support to distribute 1 HDMI source into 4 HDMI displays
- ◆ Support HDMI max 4k/60Hz
- ◆ Support HDR
- ◆ Support 7 levels of cascading

Related Products

Model: HSPUH0104-SML

(Metal Housing2 , HDMI 2.0, 4K/60Hz)



Metal Housing1



Metal Housing2

Cable



- USB4 Cable
- Type-C Cable
- USB Adapter
- VR Cable
- Active Optical Cable
- DisplayPort Cable
- HDMI Cable
- LAN Cable
- Lightning Cable

Full-featured USB-C Cable(USB4)



USB4 LOGO USAGE

CM TO CM	DATA POWER	CABLE LOGO (EPR)	PACKAGING LOGO
USB4 GEN2 5A	USB4 GEN2		
USB4 GEN2 3A			
USB4 GEN3 5A	USB4 GEN3		
USB4 GEN3 3A			

USB4, 40G/240W, With Redriver

Name: Full-featured USB-C Cable (USB4 Gen3)-Enabling up to 240W Cable length up to 3m

Key spec:

- Bandwidth up to 40Gbps
- Supports single 8K@60Hz,4K@120Hz or dual 4K@60Hz resolution
- EPR capable with power up to 240W (48V/5A)
- Over mold AL-Alloy+TPE
- Cable length: 3m (with redriver)
- OD: 5.3mm
- You can use this cable to connect PC with Thunderbolt 3,Thunderbolt 4 and USB4 ports to monitors and devices with Thunderbolt and USB ports, such as Studio Display, Pro Display XDR, docks and hard drives



Al-Alloy+TPE

- 40Gbps Bandwidth
- Max 240W
- E-mark Cable
- 3M

Name: Full-featured USB-C Cable (USB4 Gen3)-Enabling up to 240W Cable length up to 2m

Key spec:

- Bandwidth up to 40Gbps
- Supports single 8K@60Hz,4K@120Hz or dual 4K@60Hz resolution
- EPR capable with power up to 240W (48V/5A)
- Over mold ABS+TPE
- Cable length: 2m (with redriver)
- OD: 4.6mm
- You can use this cable to connect PC with Thunderbolt 3, Thunderbolt 4 and USB4 ports to monitors and devices with Thunderbolt and USB ports, such as Studio Display, Pro Display XDR, docks and hard drives



ABS+TPE



ABS+TPE

- 40Gbps Bandwidth
- Max 240W
- E-mark Cable
- 2M

Name: Full-featured USB-C Cable (USB4 Gen3)-Enabling up to 240W up to 1.2m

Key spec:

- Bandwidth up to 40Gbps
- Supports single 8K@60Hz,4K@120Hz or dual 4K@60Hz resolution
- EPR capable with power up to 240W (48V/5A)
- TPE molding
- Cable length: 1.2m (without redriver)
- OD: 5mm
- You can use this cable to connect PC with Thunderbolt 3, Thunderbolt 4 and USB4 ports to monitors and devices with Thunderbolt and USB ports, such as Studio Display, Pro Display XDR, docks and hard drives



TPE

- 40Gbps Bandwidth
- Max 240W
- E-mark Cable
- 1.2M

USB4 Cable

USB, 40G/240W, Without Redriver

Name: Full-featured USB-C Cable (USB4 Gen3)-Enabling up to 240W

Key spec:

- Bandwidth up to 40Gbps
- Supports single 8K@60Hz, 4K@120Hz or dual 4K@60Hz resolution
- EPR capable with power up to 240W (48V/5A)
- Over mold AL-Alloy+TPE
- Cable length: 0.8m max
- OD: 5.0mm
- You can use this cable to connect PC with Thunderbolt 3, Thunderbolt 4 and USB4 ports to monitors and devices with Thunderbolt and USB ports, such as Studio Display, Pro Display XDR, docks and hard drives



AL-Alloy+TPE

- 40Gbps Bandwidth
- Max 240W
- E-mark Cable
- 0.8M

Name: Full-featured USB-C Cable (USB4 Gen3)-Enabling up to 240W

Key spec:

- Bandwidth up to 40Gbps
- EPR capable with power up to 240W (48V/5A)
- Over mold ABS+PVC/ABS+TPE
- Cable length: 1m max
- OD: 5.0
- USB IF Certified
- TID: 7392



ABS+PVC/ABS+TPE

- 40Gbps Bandwidth
- 5Amp Current
- E-mark Cable
- 1M

Name: Full-featured USB-C Cable (USB4 Gen3)-Enabling up to 240W

Key spec:

- Bandwidth up to 40Gbps
- EPR capable with power up to 240W (48V/5A)
- Over mold TPE/PVC
- Cable length: 0.8m max
- OD: 5.0



TPE/PVC

- 40Gbps Bandwidth
- Max 240W
- E-mark Cable
- 0.8M

Name: Full-featured USB-C Cable (USB4 Gen3)-Enabling up to 240W

Key spec:

- Bandwidth up to 40Gbps
- EPR capable with power up to 240W (48V/5A)
- Over mold ABS+PVC/TPE
- Cable length: 0.8m max
- OD:5.0



ABS+PVC/TPE

- 40Gbps Bandwidth
- Max 240W
- E-mark Cable
- 0.8M

Name: Full-featured USB-C Cable (USB4 Gen3)-Enabling up to 240W (Ultra Soft Silicone Cable)

Key spec:

- Bandwidth up to 40Gbps
- Supports single 8K@60Hz,5K@60Hz or dual 4K@60Hz resolution
- EPR capable with power up to 240W (48V/5A)
- Over mold TPE+Silicon Gel material
- Cable length: 1m max
- OD: 6.0mm
- Reversible USB Type-C connector
- Silicon Gel material, ultra soft and flexible to touch
- Remain tangle-free after being bended, twisted, flexed



TPE+Silicon Gel material

- 40Gbps Bandwidth
- Max 240W
- E-mark Cable
- 1M

Name: Full-featured USB-C Cable (USB4 Gen3)-Enabling up to 240W (Twisted Cable)

Key spec:

- Bandwidth up to 40Gbps
- Power output up to 5Amp max
- Over mold ABS+PVC/ABS+TPE
- Cable length 0.7m max
- OD:5.0
- TID:7515



ABS+PVC/ABS+TPE

- 40Gbps Bandwidth
- 5Amp Current
- E-mark Cable
- 0.7M

USB4 Cable

USB4, 20G/240W, Without Redriver

Name: Full-featured USB-C Cable (USB4 Gen2)-Enabling up to 240W (Ultra Soft Silicone Cable)

Key spec:

- Bandwidth up to 20Gbps
- EPR capable with power up to 240W (48V/5A)
- Over mold TPE+Silicon Gel material
- Cable length: 2m max
- OD: 6.0mm
- Reversible USB Type-C connector
- Silicon Gel material, ultra soft and flexible to touch
- Remain tangle-free after being bended, twisted, flexed



TPE+Silicon Gel material

Name: Full-featured USB-C Cable (USB4 Gen2)-Enabling up to 240W

Key spec:

- Bandwidth up to 20Gbps
- Power output up to 5Amp max
- Over mold ABS+PVC/ABS+TPE
- Cable length 2m max
- OD:5.0mm
- TID:7271



ABS+PVC/ABS+TPE

- 20Gbps Bandwidth
- 5Amp Current
- E-mark Cable
- 2M

Name: Full-featured USB-C Cable (USB4 Gen2)-Enabling up to 240W (Twisted Cable)

Key spec:

- Bandwidth up to 20Gbps
- EPR capable with power up to 240W (48V/5A)
- Over mold ABS+PVC/ABS+TPE
- Cable length&OD:
1M---OD:4.7MM
2M---OD:5.0MM



ABS+PVC/ABS+TPE

- 20Gbps Bandwidth
- Max 240W
- E-mark Cable

Intelligent LED Digital Display

The large LCD screen constantly shows the real-time performance and charging speed of the port, no more guessing whether they are charging normally



Type-C Cable

Name: USB2.0 Type-C to Type-C Cable with Intelligent LED digital display

Key spec:

- Transmission speed:480M bps
- Power output up to 48V/5Amp max
- Max length: 2m
- Cable length&OD: TPE Cable----1m(OD3.8),2m(OD4.0)
- Digisplay capable with power up to 240W (48V/5A)
- Intelligent LED digital display: the large LED screen constantly shows the real-time performance,the current temperature and charging speed of the port, no more guessing whether they are charging normally
- Copper wires for data transmission and charging
- TPE+Zinc alloy Overmold
- TPE cable jacket



Name: USB2.0 USB-A to Type-C Cable with Intelligent LED Digital display

Key spec:

- Transmission speed:480M bps
- Power output up to 5V/3Amp max
- Max length: 2m
- Cable length&OD: TPE Cable----1m(OD3.0)- 2m(OD3.5) or Silicon Gel material cable---1m(OD4.25)-2m(OD4.25)
- Digisplay capable with power up to 15W (5V/3A)
- Intelligent LED digital display: the large LED screen constantly shows the real-time performance,the current temperature and charging speed of the port, no more guessing whether they are charging normally
- Copper wires for data transmission and charging
- TPE+Zinc alloy Overmold
- TPE or Silicon Gel material cable jacket



Name: USB2.0 USB-A to Type-C Cable with Intelligent LED Digital display

Key spec:

- Transmission speed:480M bps
- Power output up to 5V/3Amp max
- Max length: 2m
- Cable length&OD: TPE Cable----1m(OD3.0)- 2m(OD3.5) or Silicon Gel material cable---1m(OD4.25)-2m(OD4.25)
- Digisplay capable with power up to 15W (5V/3A)
- Intelligent LED digital display: the large LED screen constantly shows the real-time performance,the current temperature and charging speed of the port, no more guessing whether they are charging normally
- Copper wires for data transmission and charging
- Silicon Gel material cable jacket+Zinc alloy Overmold
- Silicon Gel material cable jacket



Ultra Soft Silicone Cable

Silicon Gel material, ultra soft and flexible to touch; Remain tangle-free after being bended, twisted, flexed.



Model 1



USB4 Gen3&Gen2 &USB3.2 Gen2

Model 2



USB2.0-EPR 240W

Model 3



USB2.0 & Lightning Connector Without Braided

Model 4



USB2.0 & Lightning Connector Without Braided

Name: USB2.0 Type-C to Type-C Cable Ultra Soft Silicone Cable

Key spec:

- Bandwidth up to 480Mbps
- Power output up to 3Amp
- Over mold TPE(2-color)+Silicon Gel material
- Cable length&OD: 1m----OD:4.3mm; 2m----OD:4.3mm;
- Reversible USB Type-C connector
- Silicon Gel material, ultra soft and flexible to touch
- Remain tangle-free after being bended, twisted, flexed
- Color can be customized according to various requirements



Without Braided



With Braided

Type-C Cable

Name: USB2.0 Type-C to USB-A cable Ultra Soft Silicone Cable

Key spec:

- Bandwidth up to 480Mbps
- Power output up to 3Amp
- Over mold TPE(2-color)+Silicon Gel material
- Cable length&OD: 1m----OD:4.3mm;
2m----OD:4.3mm;
- Reversible USB Type-C connector
- Silicon Gel material, ultra soft and flexible to touch
- Remain tangle-free after being bended, twisted, flexed
- Color can be customized according to various requirements



Without Braided



With Braided



Color can be customized according to various requirements

Type-C Gen2 full-Fetured Cable

Name: Full-featured USB-C Cable (USB3.2 Gen2)-Enabling up to 240W Ultra Soft Silicone Cable

Key spec:

- Bandwidth up to 10Gbps
- EPR capable with power up to 240W (48V/5A)
- Over mold TPE+Silicon Gel material
- Cable length: 1m max
- OD: 5.5mm
- Reversible USB Type-C connector
- Silicon Gel material, ultra soft and flexible to touch
- Remain tangle-free after being bended, twisted, flexed



- 10Gbps Bandwidth
- 5Amp Current
- E-mark Cable

TPE+Silicon Gel material

Name: Full-featured USB-C Cable (USB3.2 Gen2)-Enabling up to 240W

Key spec:

- Bandwidth up to 10Gbps
- EPR capable with power up to 240W (48V/5A)
- Over mold TPE/PVC
- Cable length: 1m max
- OD:5.2mm



- 10Gbps Bandwidth
- 5Amp Current
- E-mark Cable

TPE/PVC

USB3.2 Type-C to Type-C Cable

Name: USB3.2 Gen2 Full-featured Type-C Cable

Key spec:

- Speed up to 10Gbps
- Power output up to 5Amp
- Max 4K/60Hz video bypass from DP Alt mode supported host
- Cable length max 1.0 meter
- E-marked cable
- Reversible USB Type-C connector
- PVC/TPE
- Cable TID: 3968

Related Products

- 10Gbps Bandwidth
- 5Amp Current
- E-mark Cable



PVC/TPE+ABS



PVC



PVC/TPE

Cable TID: 3968



PVC/TPE



AL-Alloy

Type-C Cable

Name: USB3.2 Gen2 Full-featured Type-C Extension Cable

Key spec:

- Speed up to 10Gbps
- Power output up to 5Amp
- Max 4K/60Hz video bypass from DP Alt mode supported host
- Cable length max 0.5m for 10G, 1.0m for 5G
- Reversible USB Type-C connector.
- Over molding PVC available.



10Gbps
Bandwidth

5Amp
Current

E-mark
Cable

PVC

USB2.0 Type-C to Type-C Cable

Name: USB2.0 Type-C to Type-C cable-Enabling up to 240W

Key features:

- Bandwidth up to 480Mbps
- EPR capable with power up to 240W (48V/5A)
- Over mold TPE/PVC
- Cable length: 2m max
- OD:4.0mm
- 2m---TID:7091
- 1m---TID:7495
- Other models can up to 4 meters



480Mbps
Bandwidth

5Amp
Current

E-mark
Cable

TPE/PVC

Name: USB2.0 Type-C to Type-C Cable-Enabling up to 240W Ultra Soft Silicone Cable

Key features:

- Bandwidth up to 480Mbps
- EPR capable with power up to 240W (48V/5A)
- Over mold TPE+Aluminum alloy+Silicon Gel material
- Cable length&OD: 1m---OD:4.5mm;
2m---OD:5.0mm;
- Reversible USB Type-C connector
- Silicon Gel material, ultra soft and flexible to touch
- Remain tangle-free after being bended, twisted, flexed



480Mbps
Bandwidth

5Amp
Current

E-mark
Cable

TPE+Aluminum alloy+Silicon Gel material

Name: USB2.0 Type-C Silicon Cable

Key features:

- Speed up to 480Mb/s
- Power output up to 3Amp
- Cable length: 4ft,6ft
- Reversible USB Type-C connector
- Silicon Gel material, ultra soft and flexible to touch
- Remain tangle-free after being bended, twisted, flexed
- Super strengt h: Estimated 25000 times bending lifespan



Silicon Gel material

480Gbps
Bandwidth

3Amp
Current

Name: USB 2.0 Type-C to Type-C Ultra soft Cable

Key features:

- Speed up to 480Mb/s
- Power output up to 3Amp
- Cable length 0.15 meter
- Reversible USB Type-C connector.
- This USB Type-C to Type-C USB FPC OTG cable enables an OTG-capable smart phone/tablet to work as a PC host by connecting, another Type-C equipped device for charging, data transfer.
- flexible bending property and thin thickness
- light weight



FPC/TPE

480Gbps
Bandwidth

3Amp
Current

Name: USB2.0 Type-C to Type-C Cable

Key spec:

- Speed up to 480Mb/s
- Power output up to 3Amp
- Reversible USB Type-C connector.
- TPE, AL-Alloy+ PVC, ABS+ PVC available.
- Cable length max 2.0 meter



AL-Alloy+ PVC



TPE

480Gbps
Bandwidth

3Amp
Current

Type-C Cable

Name: USB2.0 Type-C to USB-A Cable Ultra Soft Silicone Cable

Key features:

- ◆ Bandwidth up to 480Mbps
- ◆ Power output up to 3Amp
- ◆ Over mold TPE(2-color)+Silicon Gel material
- ◆ Cable length&OD: 1m----OD:4.3mm;
2m----OD:4.3mm;
- ◆ Reversible USB Type-C connector
- ◆ Silicon Gel material, ultra soft and flexible to touch
- ◆ Remain tangle-free after being bended, twisted, flexed
- ◆ Color can be customized according to various requirements



Without Braided

With Braided

Name: USB2.0 Type-C to Type-A Cable

Key features:

- ◆ Speed up to 480Mb/s
- ◆ Power output up to 3Amp
- ◆ Reversible USB Type-C connector.
- ◆ TPE, AL-Alloy+ PVC, ABS+ PVC available.
- ◆ Cable length max 2.0 meter



ABS+ PVC

Related Products:



TPE



AL-Alloy+ PVC



PVC



PVC+AL-Alloy



PVC+AL-Alloy



AL-Alloy

USB Adapter

Name: USB3.2 Type-C CM to CF Receptacle Cable Adapter

Key spec:

- ◆ Speed up to 10Gbps.
- ◆ Power output up to 5Amp
- ◆ Max 4K/60Hz video bypass from DP Alt mode supported host
- ◆ Reversible USB Type-C connector.
- ◆ AL-Alloy, PVC available.



Name: USB 2.0 Micro-B to Type-C Cable Adapter

Key spec:

- ◆ Speed up to 480Mb/s
- ◆ Power output up to 3Amp
- ◆ Reversible USB Type-C connector.
- ◆ Size: 15.5*13.3*5.8
- ◆ PVC+AL-Alloy available.



Name: USB2.0 Type-C to Micro-B Cable

Key spec:

- ◆ Speed up to 480Mb/s
- ◆ Power output up to 3Amp
- ◆ Reversible USB Type-C connector.
- ◆ PVC+AL-Alloy available.



Related Products :



VR Cable Introduction

Feature highlight:

- ◆ Provide exceptional performance for PC VR gaming on your Oculus Quest and Quest 2 while simultaneously powering it with max 60W(3A)
- ◆ Give you access to various games on Oculus Rift apps and Steam app
- ◆ Specially designed for game enthusiasts, optimal length reaches 5M, providing a best-in-class experience with flexible
- ◆ “L” shaped design is reduce the bending degree at the connection point and protect the cable from damage
- ◆ PVC/TPE outer cover for alternative to meet your various needs

VR Cable Feature



various games on Oculus Rift apps and Steam app



*“L” shaped design ,
reduce the bending degree*



Fixed strap design makes the game experience better



Work with USB-A or USB-C host

**Name: Type-C Passive Copper Cable
VR Passive Cable**

Key spec:

- ◆ Transmission speed:5G bps
- ◆ Power output up to 3Amp max
- ◆ Max length: 5m
- ◆ Cable OD: 5.5mm
- ◆ Weighing only 227g, it is lighter than other brands VR cable of the same length
- ◆ Compatible with Oculus Quest and Quest 2
- ◆ Support to access game on Oculus Rift apps and Steam app

Copper wires for data transmission

- ◆ PVC Overmold
- ◆ Backwards compatible with USB3.0,USB2.0
- ◆ No external power needed



**Name: Type-C Passive Copper Cable
VR Passive Cable**

Key spec:

- ◆ Transmission speed:5G bps
- ◆ Power output up to 3Amp max
- ◆ Max length: 5m
- ◆ Cable OD: 6.2mm
- ◆ Compatible with Oculus Quest and Quest 2
- ◆ Support to access game on Oculus Rift apps and Steam app
- ◆ Copper wires for data transmission
- ◆ TPE Overmold+Silicon Gel material
- ◆ Super Strong, Ultra Soft and Flexible
- ◆ Backwards compatible with USB3.0, USB2.0
- ◆ No external power needed



**Name: Type-C Active Copper Cable
VR Passive Cable**

Key spec:

- ◆ Transmission speed:5G bps
- ◆ Power output up to 2Amp max(CM/CM)
- ◆ Power output up to 1.5Amp max (CM/AM)
- ◆ Max length: 5m
- ◆ Cable OD:5.0mm
- ◆ Compatible with Oculus Quest and Quest 2
- ◆ Support to access game on Oculus Rift apps and Steam app
- ◆ Copper wires for data transmission
- ◆ Over mold AL-Alloy+PVC
- ◆ Backwards compatible with USB3.0, USB2.0
- ◆ No external power needed



**Name: Type-C Active Optical Cable
VR Active Cable**

Key spec:

- ◆ Transmission speed:10G bps
- ◆ Power output up to 3Amp max
- ◆ Max length: 5m
- ◆ Cable OD: 4.5mm
- ◆ Compatible with Oculus Quest and Quest 2
- ◆ Support to access game on Oculus Rift apps and Steam app
- ◆ E-mark IC
- ◆ fiber wires and copper wires for data transmission
- ◆ Weighing only 206g, it is lighter than other core material VR cable of the same length
- ◆ Thinner, lighter and softer than conventional copper cable
- ◆ Highly resistant with EMI and RF1
- ◆ TPE Overmold
- ◆ Backwards compatible with USB3.0, USB2.0
- ◆ No external power needed



**Name: Full-Featured Type-C Active Cable with Re-timer-5m
VR Active Cable**

Key spec:

- ◆ Model: UTCFAC-5M-A
- ◆ Transmission speed:10G bps
- ◆ Power output up to 3Amp max
- ◆ Max length: 5m
- ◆ Type-C male to male bi-directional transmission
- ◆ Support DP1.4 with max theoretical resolution up to 8K/60Hz
- ◆ Offers perfect solution for VR gaming
- ◆ Compatible with Oculus Quest and Quest 2
- ◆ Support to access game on Oculus Rift apps and Steam app
- ◆ TPE+ABS Overmold
- ◆ Backwards compatible with USE



Active Optical Cable

Name: 48G Ultra High Speed HDMI Active Optical Cable

Key features:

- ◆ High Speed Fiber Optics, Ultra HD (8K), Deep Color (48-bit) Supports 3D Displays
- ◆ Bandwidth: 48Gbps Max.
- ◆ Extend HDMI Up to 200m over Fiber Optics(MMF)
- ◆ Cable OD: 4.8mm
- ◆ Compliant to Link with all HDMI A-type Connector devices
- ◆ Support 8k/4k/3D/1080p/1080i/720p Format
- ◆ Support HDCP/EDID/CEC/DDC/Audio
- ◆ Support Dynamic HDR
- ◆ Highly resistant with EMI and RFI
- ◆ Support HDMI Resolution up to 8K@60Hz, 4K@120Hz
- ◆ Zinc Alloy Housing



Name: 18G Premium HDMI Active Optical Cable

Key features:

- ◆ Compliant to link with all HDMI A-type connector devices
- ◆ Bandwidth up to 18Gbps
- ◆ Max length: 200m
- ◆ Cable OD: 4.8mm
- ◆ Support 4Kx2K@60Hz UHD/3D/1080p/1080i/720p format
- ◆ Support HDCP/EDID/CEC/DDC/Audio
- ◆ Thinner, lighter and softer than conventional copper cable
- ◆ Highly resistant with EMI and RFI
- ◆ No external power needed
- ◆ Zinc Alloy Housing



Name: 48G Ultra High Speed HDMI Active Optical Cable

Key features:

- ◆ Optical Electronic hybrid cable
- ◆ Support HDMI Resolution up to 8K@60Hz, 4K@120Hz
- ◆ Bandwidth: 48Gbps Max
- ◆ Max length: 10m
- ◆ Cable OD: 6.8
- ◆ Support HDCP/EDID/CEC/DDC/Audio
- ◆ Support Dynamic HDR
- ◆ Highly resistant with EMI and RFI
- ◆ Under Certification
- ◆ Zinc Alloy Housing



Name: 48G Ultra High Speed HDMI Active Optical Cable

Key features:

- ◆ Optical Electronic hybrid cable
- ◆ Support HDMI Resolution up to 8K@60Hz, 4K@120Hz
- ◆ Bandwidth: 48Gbps Max
- ◆ Max length: 10m
- ◆ Cable OD: 6.4
- ◆ Support HDCP/EDID/CEC/DDC/Audio
- ◆ Support Dynamic HDR
- ◆ Highly resistant with EMI and RFI
- ◆ Support HDMI Resolution up to 8K@60Hz, 4K@120Hz



Name: Type-C to HDMI Active Optical Cable

Key features:

- ◆ Support HDR(High-Dynamic-Range) display
- ◆ Support HDMI Max 4Kx2K@60Hz
- ◆ Max length: 50m
- ◆ Cable OD: 5.8mm
- ◆ Highly resistant with EMI and RFI
- ◆ Complies with DisplayPort 1.2 specification and is compatible with DP Alternate Mode on USB Type C Standard
- ◆ Zinc Alloy Housing



Name: Type-C C/M TO C/M AOC (Audio/Video Only)

Key features:

- ◆ Compliant to link with all Type-C C/M Video interface devices
- ◆ Complies with DisplayPort 1.2 specification and is compatible with DP Alt-Mode on USB 3.1 SPEC
- ◆ Bandwidth up to 21.6Gbps
- ◆ Support : 4K@60Hz
- ◆ Highly resistant with EMI and RFI
- ◆ Max length: 20m
- ◆ Cable OD: 4.8mm
- ◆ Overmold Zinc Alloy available
- ◆ No external power needed



Name: HDMI A to D Active Optical Cable (with a HDMI A/M to D/F Adapter)

Key features:

- ◆ Bandwidth up to 18Gbps
- ◆ Max length: 100m
- ◆ Cable OD: 4.8mm
- ◆ Support 4K@60Hz, 3D/1080p/1080i/720p format
- ◆ Support HDCP/EDID/CEC/DDC
- ◆ Thinner, lighter and softer than conventional copper cable
- ◆ Highly resistant with EMI and RFI
- ◆ No external power needed
- ◆ Zinc Alloy Housing



Name: USB3.0 A/M TO A/F Active Optical Cable

Key features:

- ◆ Bandwidth up to 5Gbps
- ◆ Support USB specification
- ◆ Max length: 100m
- ◆ Cable OD: 4.6mm
- ◆ Overmold Zinc Alloy available
- ◆ Highly resistant with EMI and RFI
- ◆ Plug-n-play, no driver installation required
- ◆ The cable must be powered by an external power supply to work
- ◆ This product can only be used for USB 3.0 extension and it's not compatible with USB2.0 and USB 3.1.

Connect the USB3.0 Male to device and then connect the Micro USB power supply. Then connect the USB3.0 Female to USB device.

Attention: It's necessary to operate the product as the step above, otherwise it won't work normally




DisplayPort Introduction



High-definition



Dynamic HDR10+



High Refresh Rate

Application:

Our premium DisplayPort cable is your best choice for connecting a DisplayPort equipped computer to an HD monitor or projector. It transmits high definition video and audio from the computer to a monitor under either mirror or extended mode. It supports video resolution up to 8K with flawless audio transmission.

DisplayPort cable



Mirror mode



Extended mode

Key features:

The DisplayPort 2.0 standard, its Multi-Stream Transport (MST) capability enables high-resolution support of multiple monitors on a single display interface. The maximum link bandwidth to 40Gbps, with each of four lanes running at a link rate of 10 Gbps/lane. Display resolution with the new standard include 8K@60Hz HDR deep color and 4K@120Hz HDR deep color.

DP v1.2 VS DP v1.4 VS DP v2.0

DP version	DP v1.2	DP v1.4	DP v2.0
Bandwidth	21.6Gbps	32.4Gbps	40Gbps
Resolution (Maximum)	4k/60hz	8k/60hz	8k/60hz
Audio sample rate	8 channels 192kHz	32 channels 1536kHz	32 channels 1536kHz
Dynamic HDR	No	Yes	Yes
Multi-Stream Transport	Yes	Yes	Yes

Name: DP2.1-DP40 M TO M Cable

Key features:

- ◆ Support bandwidth up to 40Gbps
- ◆ Support Resolution up to 8K/60Hz
- ◆ Up to 32 audio channels
- ◆ Up to 1536kHz audio sample frequency
- ◆ Support Multi-Stream Transport
- ◆ Support 3D
- ◆ Support Dynamic HDR
- ◆ Over mold ABS+PC available(SR--PVC)
- ◆ 30AWG
- ◆ Cable Length: Max 2m
- ◆ DP v2.x compliant
- ◆ Status:Under Certification



Name: DP2.1-DP80 M TO M Cable

Key features:

- ◆ Support bandwidth up to 80Gbps
- ◆ Support Resolution up to 10K/30Hz
- ◆ Up to 32 audio channels
- ◆ Up to 1536kHz audio sample frequency
- ◆ Support Multi-Stream Transport
- ◆ Support 3D
- ◆ Support Dynamic HDR
- ◆ Over mold ABS+PC available(SR--PVC)
- ◆ 30AWG
- ◆ Cable Length: Max 1m
- ◆ DP v2.x compliant
- ◆ Status:Preliminary verification




PVC Moulding

Name: DisplayPort male to male Cable

Key features:

- ◆ Bandwidth up to 21.6Gbps
- ◆ Resolution up to 4k x 2k@60Hz
- ◆ Support Multi-Stream Transport
- ◆ Support 3D
- ◆ Over mold PVC/PVC+ABS available
- ◆ DP v1.2 compliant

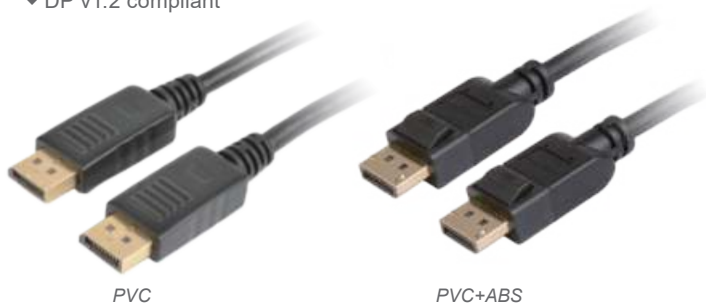

Name: DisplayPort 1.2 Extension Cable

Key features:

- ◆ Bandwidth up to 21.6Gbps
- ◆ Resolution up to 4k x 2k@60Hz
- ◆ Support Multi-Stream Transport
- ◆ Support 3D
- ◆ Over mold PVC+ABS available




HDMI INTRODUCTION


Feature highlight:

HDMI has become the norm for HD digital devices. It combines audio and video into one convenient cable. Our HDMI cables completely meet HDMI latest specification and have been verified by ATC.

Use our HDMI cable to connect a small mobile, home-entertainment or gaming devices to a big screen HDTV, large projector or computer monitor, enjoy reliable performance.

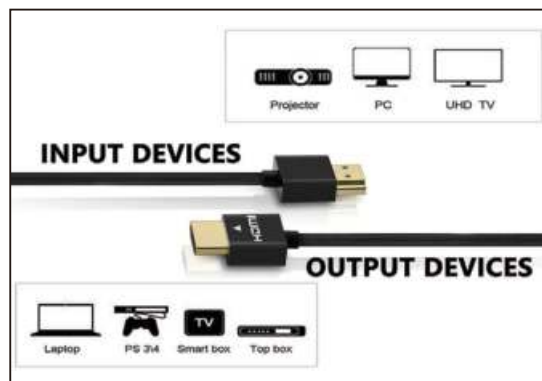

HDMI feature comparison

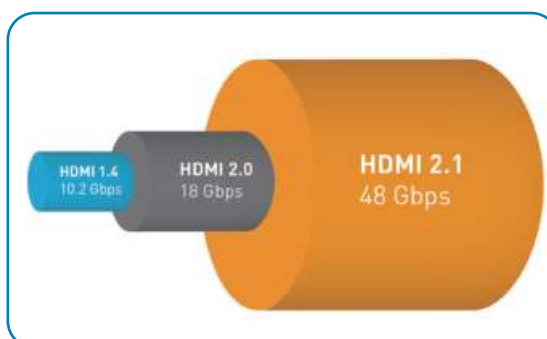

HDMI version	v1.4	v2.0	v2.1
Bandwidth (maximum)	10.2Gbps	18Gbps	48Gbps
Resolution (maximum)	4K 4096*2160 @30Hz	4K 4096*2160 @60Hz	8K@60Hz 4K@120Hz



Key features:

8K delivers a super immersive viewing experience.

60Hz enables smooth and sharp viewing of content with high-speed action.

Dynamic HDR enables a noticeable progression in overall video image quality from SDR to static HDR, and now static HDR to dynamic HDR.

48G cable ensures high-bandwidth dependent features are delivered including enhanced video and audio performance, and accounting for new EMI characteristic.

eARC (Enhanced Audio Return Channel) supports the most advanced audio formats and enables advanced audio signal control capabilities.

Game Mode VRR (variable refresh rate) produces a more fluid and better detailed gameplay experience.

HDMI2.0 Cable

Name: Premium High Speed Cable with Ethernet
Type-A to Type-A

Key features:

- ◆ Bandwidth up to 18Gbps
- ◆ Resolution up to 4k x 2k @60Hz
- ◆ Out jacket PVC/TPE
- ◆ Over mold PVC/TPE/AL-alloy
- ◆ HDMI 2.0 Compliance



PVC

Name: Premium High Speed Cable with Ethernet
Type-A to Type-A

Key features:

- ◆ Bandwidth up to 48Gbps
- ◆ Resolution up to 8K
- ◆ Support Dynamic HDR
- ◆ Backwards compatible with HDMI 2.0, 1.4
- ◆ HDMI Forum certified
- ◆ Over mold PVC or TPE
- ◆ Cable length:
- ◆ 3ft-----OD 6.0 30AWG
- ◆ 6ft-----OD 6.0 30AWG
- ◆ 10ft----OD 6.5 28AWG
- ◆ 15ft----OD 8.0 25AWG



PVC

Name: Premium High Speed Cable with Ethernet **HDMI**
Type-A to Type-A Ultra-slim Active cable

Key features:

- ◆ Bandwidth up to 18Gbps
- ◆ Resolution up to 4k x 2k @60Hz
- ◆ Out jacket PVC/TPE
- ◆ Over mold PVC/TPE/ABS
- ◆ HDMI 2.0 Compliance
- ◆ Max 5m



PVC

HDMI Cable

Name: Ultra High Speed HDMI Cable

Key features:

- ◆ Bandwidth up to 48Gbps
- ◆ Compliant to Link with all HDMI A-type Connector devices
- ◆ Resolution up to 8K@60Hz, 4K@120Hz
- ◆ EMI compliance
- ◆ HDMI Forum certified
- ◆ Max length 6.6ft/2m
- ◆ Cable OD:6.0mm
- ◆ Backwards compatible with HDMI 2.0, 1.4
- ◆ Over mold AL-alloy+PVC available
- ◆ HDMI Forum certified.



AL-alloy

Name: DisplayPort1.4 to HDMI (8K) Cable

Model: DP14H8-6FT-SP

(DP1.4, HDMI 2.1, 8K, IC in HDMI board, max 6ft, Plastic Housing1)

Features:

- ◆ Support DisplayPort input, HDMI output
- ◆ Support DP1.4 Alt mode
- ◆ Support HDMI max 8K/30Hz
- ◆ Support HDMI max 4K/120Hz
- ◆ Support Dynamic HDR10+
- ◆ Supports HDCP1.4&HDCP2.3 specification
- ◆ Support HPD
- ◆ Support DSC 1.1/1.2a decoder mode
- ◆ Support 8/10/12 bit color depth output
- ◆ Support output pixel format RGB/ YCbCr4:4:4/ YCbCr4:2:2/ YCbCr4:2:0
- ◆ Support 1 to 32 channel LPCM 192kHz audio output
- ◆ Supports HBR audio up to 1536kHz length:max 6ft

Related Products:

Model: DP14H8-6FT-AL

(DP1.4, HDMI 2.1, 8K, IC in HDMI board, max 6ft, Aluminium Housing1)

Model: MDP14H8-6FT-AL

(DP1.4, HDMI 2.1, 8K, IC in HDMI board, max 6ft, Aluminium Housing2)



Aluminium Housing1



Aluminium Housing2

Name: HDMI to DisplayPort cable

Model: H20-DP12-5M

(Plastic Housing , HDMI2.0, 4K/60Hz)

Features:

- ◆ DP 1.2a compliant
- ◆ Support Resolution up to 4Kx2K@60Hz
- ◆ Support Four Lanes with 1.62Gbps (RBR), 2.7Gbps (HBR) or 5.4Gbps (HBR2) Data Rate
- ◆ Max length: 5M



Plastic Housing

Name: HDMI to DisplayPort Adapter

Model: H20-DP12-5M

(Plastic Housing , HDMI2.0, 4K/60Hz)

Features:

- ◆ Support DisplayPort max 4k/60Hz
- ◆ DP++, compliant with DP1.2
- ◆ RGB/YCC (4:4:4) – 16-bit color YCC (4:2:2) – 16-bit Color space conversion – YUV to RGB and RGB to YUV



Plastic Housing

Name: HDMI to USB-C Male (4K/60Hz) Cable Max 6ft

Model: H20-UTC-6FT

(HDMI 2.0, 4K/60Hz, HDR, Plastic Housing, max 6ft)

Features:

- ◆ Support Resolution up to 4Kx2K@60Hz
- ◆ Support 8/10/12-bit Deep color
- ◆ Support HDCP1.4/2.2
- ◆ Support HDR
- ◆ Support Status and Control Data Channel (SCDC)
- ◆ Support Resolution up to 4Kx2K@60Hz for 4:4:4 format
- ◆ Support DP 1.2 specification
- ◆ Support Four Lanes with 1.62Gbps (RBR), 2.7Gbps (HBR) or 5.4Gbps (HBR2) Data Rate per lane
- ◆ Support Resolution up to 4Kx2K@60Hz for 4:4:4 format
- ◆ Support 8/10/12-bit Deep Color
- ◆ Support Hot-Plug Detect
- ◆ Support positive and negative connection



Plastic Housing

Name: Type-C to HDMI (8k/60Hz)Cable

Model: UTCH8-3M-DP1.4-SP-PRO

(HDMI 2.1, 8K, Plastic Housing, max 3m)

Features:

- ◆ Support DP1.4 Alt mode
- ◆ Support HDMI max 8K/60Hz
- ◆ Support Dynamic HDR10+
- ◆ Supports HDCP1.4&HDCP2.3 specification
- ◆ Support HPD
- ◆ Support DSC 1.1/1.2a decoder mode
- ◆ Support 8/10/12 bit color depth output
- ◆ Support output pixel format RGB/ YCbCr4:4:4/ YCbCr4:2:2/ YCbCr4:2:0
- ◆ Support 1 to 32 channel LPCM 192kHz audio output
- ◆ Supports HBR audio up to 1536kHz
- ◆ Support cable length max 3m



Plastic Housing

HDMI Cable

Name: Type-C to HDMI (8k/60Hz)Cable

Model: UTCH8-3M-DP1.4-SP-PRO

(HDMI 2.1, 8K, Plastic Housing, max 3m)

Features:

- ◆Support DP1.4 Alt mode
- ◆Support HDMI max 8K/60Hz
- ◆Support Dynamic HDR10+
- ◆Supports HDCP1.4&HDCP2.3 specification
- ◆Support HPD
- ◆Support DSC 1.1/1.2a decoder mode
- ◆Support 8/10/12 bit color depth output
- ◆Support output pixel format RGB/ YCbCr4:4:4/ YCbCr4:2:2/ YCbCr4:2:0
- ◆Support 1 to 32 channel LPCM 192kHz audio output
- ◆Supports HBR audio up to 1536kHz
- ◆Support cable length max 3m

Related Products:

Model: UTCH8-3M-DP1.4-AL-PRO

(HDMI 2.1, 8K, Aluminium Housing, max 3m)



Name: Type-C to HDMI Cable

Model: UTCUH-3M-HDR-SP

(HDMI 2.0, 4K/60Hz, Plastic Housing , max 3m)

Features:

- ◆Support DP1.2 Alt mode
- ◆HDMI supports max 4k/60Hz, support HDR
- ◆Support cable length max 3m



Name: Type-C to HDMI Cable

Model: UTCUH-3M-HDR-AL

(HDMI 2.0, 4K/60Hz, HDR, Aluminium Housing 1, max 3m)

Features:

- ◆Support DisplayPort Alt mode
- ◆Support HDMI 4K/60Hz,max 3m
- ◆Support HDR



LAN Cable (Horizontal (Solid) Cable)

Our bulk cable is ideal for network installation in your home, office buildings, or on the campus. This cable is supplied in 1000FT in pull box for easier installation. It meets Cat7 specifications and has excellent attenuation and crosstalk characteristics. 4 pairs are easily identified by color stripes.



Name: Category 7A S/FTP Horizontal Cable

Features:

- ◆ Transmission performance 1000MHz / 600MHz
- ◆ Screening by individual foil per pair and by overall braid for best EMC performance
- ◆ Category 7A, S/FTP Twisted pair 23AWG 4Pairs (Solid conductor)
- ◆ LSZH or PVC jacket available
- ◆ RoHS compliant
- ◆ CM, CMR, CMG rated available

Standard:


ISO/IEC 11801, EN50173-1

Certificate:

- ◆ ETL Verified for Category 7A Horizontal Cable
- ◆ UL/cUL Listed

Applications:

- ◆ 10GBASE-T Ethernet
- ◆ 10GBASE-TX Ethernet
- ◆ 1000BASE-Tx Gigabit Ethernet
- ◆ 10BASE-T, 100BASE-TX Fast Ethernet (IEEE 802.3)
- ◆ 100 VG – Any LAN (IEEE802.12)
- ◆ 550 MHz Broadband Video.
- ◆ Voice, T1, ISDN, 155/622 Mbps ATM

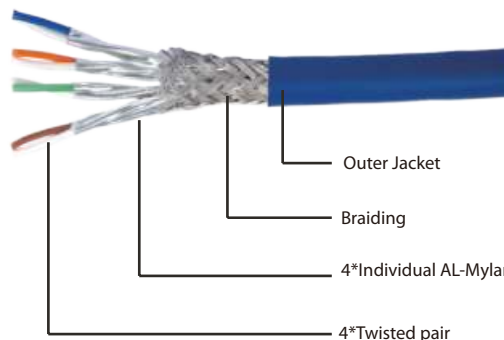

*S/FTP(*PIMF): Pairs in metal foil*

Name: Category 6A/6 F/UTP Horizontal Cable

Features:

- ◆ Transmission performance 500MHz / 250MHz
- ◆ Category 6A/6, F/UTP Twisted pair 24AWG 4Pairs (Solid conductor)
- ◆ LSZH or PVC jacket available
- ◆ RoHS compliant
- ◆ CM, CMR, CMG rated available

Standard:


ANSI/TIA-568-C.2 , ISO/IEC 11801 Category 6A

Certificate:

- ◆ ETL Verified for Category 6 F/UTP Horizontal Cable
- ◆ UL/cUL Listed

Applications:

- ◆ 10GBASE-T Ethernet
- ◆ 100BASE-TX Fast Ethernet
- ◆ 1000BASE-T Gigabit Ethernet
- ◆ 1000BASE-TX Gigabit Ethernet
- ◆ 10BASE-TX Ethernet
- ◆ ATM CB1G
- ◆ 155/622 Mbps ATM
- ◆ 100 Mbps TP-PMD
- ◆ 100VG-AnyLAN
- ◆ 4/16 Mbps Token Ring

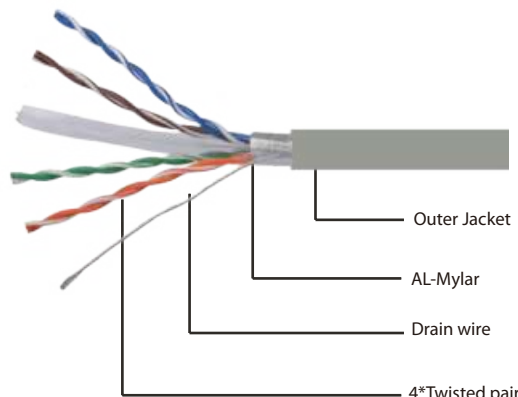


F/UTP

LAN Cable

Name: Category 6A/6 S/FTP Horizontal Cable

Features:

- ◆ Transmission performance 500MHz
- ◆ The particular saw-tooth design of jacket towards inner can enhance the resistance of alien crosstalk
- ◆ The unique design of PE cross reduces the NEXT and RL ,and ◆ provides better transmission.
- ◆ Category 6A+ FTP Twisted pair 24AWG 4Pairs(Solid conductor)
- ◆ LSZH or PVC jacket available
- ◆ RoHS compliant
- ◆ CM, CMR,CMG rated available

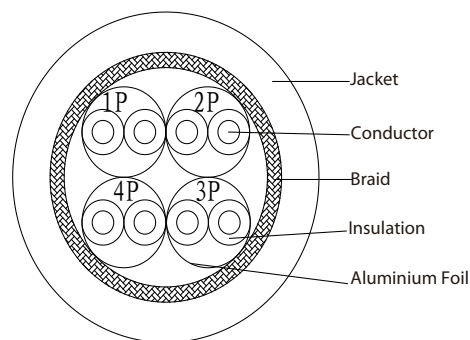

Standard:

ANSI/TIA-568-C.2 , ISO/IEC 11801 Category 6A

Certificate:

- ◆ ETL Verified for Category 6 F/UTP Horizontal Cable
- ◆ UL/cUL Listed

Applications:

- ◆ 10GBASE-T Ethernet
- ◆ 100BASE-TX Fast Ethernet
- ◆ 1000BASE-T Gigabit Ethernet
- ◆ 1000BASE-TX Gigabit Ethernet
- ◆ 10BASE-TX Ethernet
- ◆ ATM CB1G
- ◆ 155/622 Mbps ATM
- ◆ 100 Mbps TP-PMD
- ◆ 100VG-AnyLAN
- ◆ 4/16 Mbps Token Ring



*S/FTP(*PIMF): Pairs in metal foil*

Name: Category 6 U/UTP Horizontal Cable, Outdoor & Sunlight Resistance

Features:

- ◆ Transmission performance 250MHz
- ◆ Category 6, UTP Twisted pair 24AWG 4Pairs (Solid conductor)
- ◆ XLPE jacket available
- ◆ RoHS compliant
- ◆ CM, CMR,CMG rated available

Standard:


ANSI/TIA-568-C.2 , ISO/IEC 11801,EN 50173-1, Category 6

Certificate:

- ◆ ETL Verified for Category 6 UTP Horizontal Cable
- ◆ UL/cUL Listed

Applications:

- ◆ 10GBASE-T ETHERNET (IEEE P802.3an) Proposed
- ◆ 1000BASE-TX Fast Ethernet
- ◆ 1000BASE-T Gigabit Ethernet
- ◆ 100BASE-TX Fast Ethernet
- ◆ 10BASE-T Ethernet
- ◆ 155/622 Mbps ATM
- ◆ 4/16 Mbps Token Ring
- ◆ 100VG-AnyLAN
- ◆ 100 Mbps TP-PMD
- ◆ 1.2Gb/s ATM

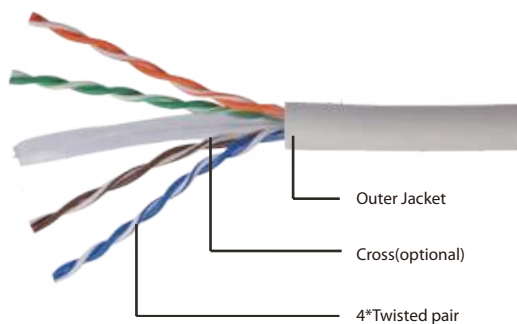

U/UTP

LAN Cable (Gigabit Ethernet Patch Cable (Stranded))

Application:

- ◆ Our Cat8 patch cable is perfect for network hubs, routers, ADSL modem, switch,
- ◆ laptops and other high performance networking applications. It supports bandwidth
- ◆ up to 1000MHz and is backward compatible
- ◆ with Cat7/7A Cat6A/Cat6/Cat5e cable.



Name: Category 8 SFTP Patch Round Cable

Features:

- ◆ Transmission performance 2000MHz
- ◆ Screening by individual AL-Mylar per pair and by overall braiding for best EMC performance
- ◆ SFTP Twisted pair 23AWG(stranded conductor)
- ◆ LSZH or PVC Jacket available
- ◆ RJ45 shielded connectors
- ◆ Type CM, CMR.
- ◆ RoHs & REACH compliant
- ◆ Max Length: 25M

Standard

- ◆ ANSI/TIA-568-C.2, ISO/IEC 11801, IEC 61935-2

Certificate:

- ◆ UL/cUL listed
- ◆ ETL verified for Category 8 Patch Cable
- ◆ CPR



Name: Category 7A/7 SFTP Patch Ultra-slim Round Cable

Features:

- ◆ Transmission performance 1000MHz /600MHz
- ◆ Category 7A/7, SFTP Twisted pair 32AWG 4Pairs (Stranded conductor)
- ◆ LSZH or PVC jacket available
- ◆ Connector RJ45 8P8C 50U"gold-plated
- ◆ Cable outer diameter 4.2mm
- ◆ Available in many different length, colors
- ◆ RoHS compliant

Standard:

- ANSI/TIA-568-C.2, ISO/IEC 11801, IEC 61935-2

Certificate:

- ◆ ETL Verified for Category 7A Patch Cable
- ◆ UL/cUL Listed

Applications:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	10GBASE-T	ATM-25
ATM-51	ATM-155	100VG-AnyLan
TR-4	TR-16 Active	TR-16 Passive



LAN Cable

Name: Category 7A/7 FTP Patch Flat Cable

Features:

- ◆ Transmission performance 1000MHz / 600MHz
- ◆ Category 7A/7, STP Twisted pair 32AWG 4Pairs (Stranded conductor)
- ◆ LSZH or PVC jacket available
- ◆ Connector RJ45 8P8C 50U"gold-plated
- ◆ Available in many different lengths, colors
- ◆ RoHS compliant

Standard:

ANSI/TIA-568-C.2, ISO/IEC 11801, IEC 61935-2

Certificate:

- ◆ ETL Verified for Category 7 Patch Cable
- ◆ UL/cUL Listed

Applications:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	10GBASE-T	ATM-25
ATM-51	ATM-155	100VG-AnyLan
TR-4	TR-16 Active	TR-16 Passive



Name: 2.2.5 Category 6A/6 F/UTP Patch Ultra-slim Round Cable

Features:

- ◆ Transmission performance 500MHz / 250MHz
- ◆ Category 6A/6, UTP Twisted pair 32AWG 4Pairs (Stranded conductor)
- ◆ LSZH or PVC Jacket available
- ◆ Connector RJ45 8P8C 50U"gold-plated
- ◆ Cable outer diameter 2.8mm
- ◆ Available in many different lengths, colors
- ◆ RoHS compliant

Standard:

ANSI/TIA-568-C.2, ISO/IEC 11801, IEC 61935-2

Certificate:

- ◆ ETL Verified for Category 6 Patch Cable
- ◆ UL/cUL Listed

Applications:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	10GBASE-T	ATM-25
ATM-51	ATM-155	100VG-AnyLan
TR-4	TR-16 Active	TR-16 Passive



FTP



UTP

Name: Category 6A/6 F/UTP Extension Cable

Features:

- ◆ Transmission performance 500MHz / 250MHz
- ◆ Category 6A/6, UTP Twisted pair 24AWG 4Pairs (Stranded conductor)
- ◆ LSZH or PVC Jacket available
- ◆ Connector RJ45 8P8C 50U"gold-plated
- ◆ Available in many different lengths, colors
- ◆ RoHS compliant

Standard:

ANSI/TIA-568-C.2, ISO/IEC 11801, IEC 61935-2

Certificate:

- ◆ ETL Verified for Category 6 Patch Cable
- ◆ UL/cUL Listed

Applications:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	10GBASE-T	ATM-25
ATM-51	ATM-155	100VG-AnyLan
TR-4	TR-16 Active	TR-16 Passive




UTP



FTP

Lightning Cable

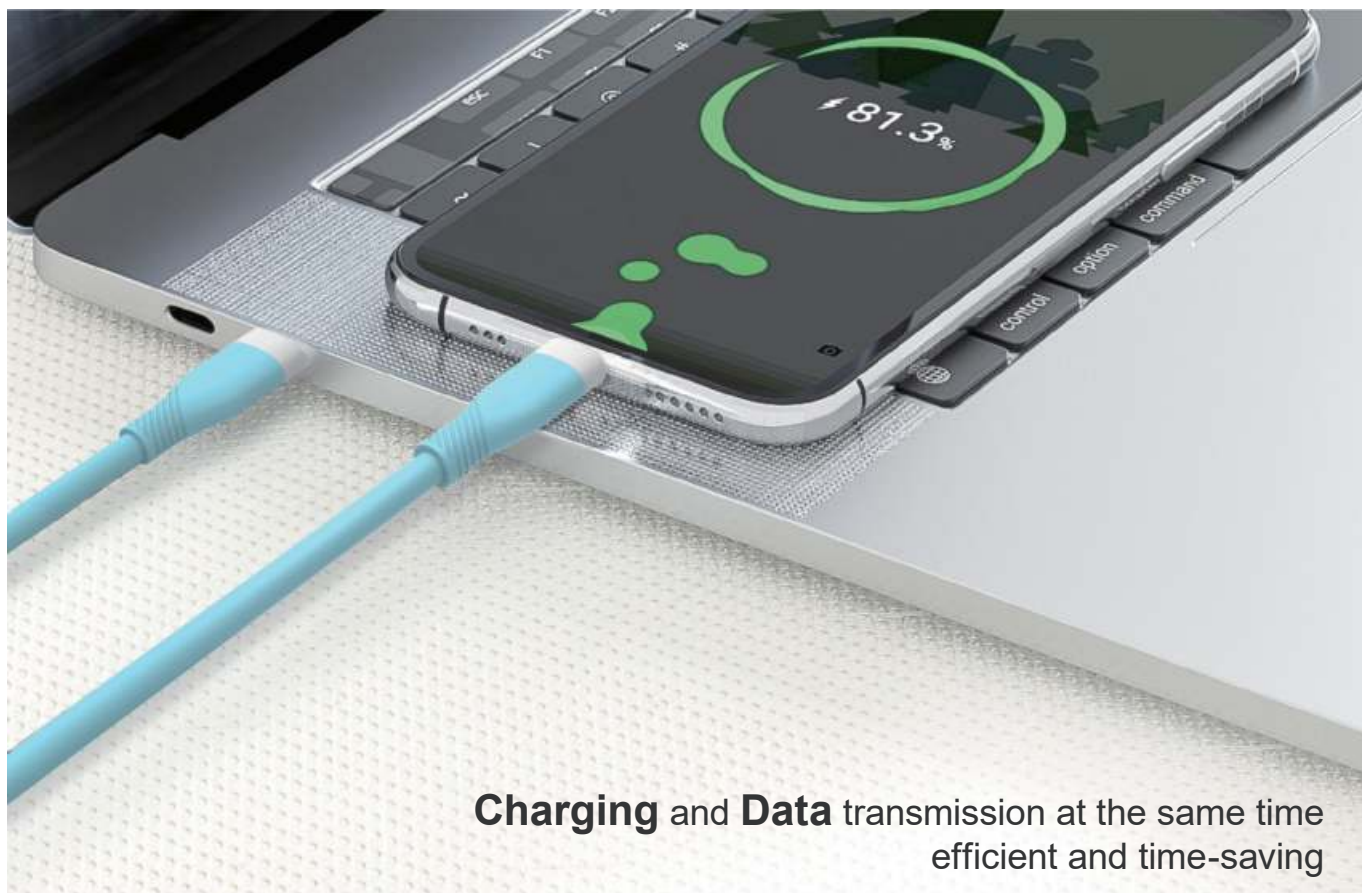

Charging and Data transmission at the same time
efficient and time-saving



Name: USB-A to Lightning M/M Cable

Features:

- ◆ Connectors:
Lightning Malex1 (connect this port to Apple devices)
USB-A Malex1 (connect this port to PC or to power adapter)
- ◆ Transmission speed: compatible with USB 2.0 max 480Mbps
- ◆ Max 2.4A power output



Silicon Gel material (ultra soft)
Max length : 1.83M



Silicon Gel material (ultra soft)
Without Braided Max length :1M&2M



Silicon Gel material (ultra soft)
With Braided Max length:1M&2M

Lightning Cable



PVC+ABS,
Max length: 1.83m



TPE Moulding
Max length: 3m



Aluminium Alloy+braided Cable
Max length: 1.83m

Name: USB-C to Lightning M/M Cable

Features:

- ◆ Connectors:
 - Lightning Malex1 (connect this port to Apple devices)
 - USB-C Malex1 (connect this port to PC or to power adapter)
- ◆ Transmission speed: compatible with USB 2.0 max 480Mbps
- ◆ Max 3A PD Charging



TPE+ABS
Max length: 1.83m



Silicon Gel material (ultra soft)
Without Braided Max length:1M&2M



Silicon Gel material (ultra soft)
With Braided Max length:1M&2M



PVC+ABS
Max length: 1.83m



TPE Moulding
Max length: 3m



Aluminium Alloy+braided Cable
Max length: 1.83m

Name: 3-in-1 Lightning Cable

Features:

- ◆ Connectors:
 - USB-A Malex1
 - Micro USB Malex1
 - Lightning to Micro USB Adapterx1
 - USB-C to Micro USB Adatperx1
- ◆ Transmission speed: compatible with USB 2.0 max 480Mbps
- ◆ Power: Max 3A
- ◆ Cable length: 1.2m



PVC+ABS
Max length: 1.2m



Aluminium Alloy+braided cable
Max length: 1.2m

Name: Lightning to 3.5mm Audio

Features:

- ◆ Connectors:
 - Lightning Malex1 (connect this port to Apple devices)
 - 3.5mm Audio Malex1 (connect this port to car stereo, speaker system, etc)
- ◆ Cable length: 1.2m
- ◆ Support analog audio output



Material: ABS
Cable length: 1.2m

Name: 3.5mm Audio Adapter

Features:

- ◆ Connectors:
 - Lightning Malex1 (connect this port to Apple devices)
 - 3.5mm Audio Jackx1 (connect this port to 3.5mm headset)
- ◆ Support analog audio output
- ◆ Cable length: 6cm



Material: ABS
Cable length: 6cm



CC-808-1
1 Channel Cable Organizer
With Tape
Material: TPR
Net Size:



CC-809-6
6 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-808-2
2 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-809-8
8 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-808-3
3 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-815
Big Size Cable Organizer
With Tape
Material: TPR
Net Size:



CC-809-1
1 Channel Cable Organizer
With Tape
Material: TPR
Net Size:



CC-807
Big Size Cable Organizer
With Tape
Material: TPR
Net Size:



CC-809-2
2 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-987
4 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-809-4
4 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-999
Organizer with Type A
Protector
Material: TPR
Net Size:



CC-816-1
1 Channel Cable Organizer
With Tape
Material: TPR
Net Size:



CC-817-5
5 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-816-3
3 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-817-7
7 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-816-5
5 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-818-1
1 Channel Cable Organizer
With Tape
Material: TPR
Net Size:



CC-816-7
7 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-818-3
3 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-817-1
1 Channel Cable Organizer
With Tape
Material: TPR
Net Size:



CC-818-5
5 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-817-3
3 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-819-1
1 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-819-3
3 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-819-5
5 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-819-9
9 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-955
4 Channels Cable Organizer
With Tape
Material: TPR
Net Size:



CC-996
Free Channels Cable Clips
With Tape
Material: TPR
Net Size:



CC-570
Liftable Rabbit Phone Holder
Material: ABS+EVA
Net Size:



CC-803
Combo Cable Organizer
Material: TPR
Net Size: 3 Different Size



AY11
Selfie Stick with Bluetooth
Material: ABS+PVC+Stainless
Steel Tube
Net Size:21cm



CC-967C
10 pcs Combo Cable Organizer
Material: TPR
Net Size: 5 Different Size




A-229S
POP UP Cable Management Box
Material: ABS
Net Size: 40x15x13.5cm



CC-986
4 Channels Cable Organizer
Material: TPR
Net Size: 2cm



A-6562
Adjustable Monitor Stand
Material: ABS
Net Size:54*22*7.3cm



CC-988
6 Channels Cable Organizer
Material: TPR
Net Size: 9.1*2*1.5cm



A-6562B
Adjustable Monitor Stand
with Drawer
Material: ABS
Net Size:36*22*8cm



A-1073
Cable Organizer
Material: Silicon
Net Size:



A-3072
Desktop Trash Bin
Material: PP
Net Size: 16.5x16.5x17cm



CC-577
Desktop Tripod Stand for
Phone and Tablet
Material: ABS+TPR
Net Size:16.8*3.6*1.6cm



A-3101
Massage Hair Brush
Material: ABS+TPR
Net Size: 8.2x8.2x7.8cm

KIMPORT



CC-908
Multipurpose Cable Clips
Material: TPR
Net Size: 2.9x2.9x1.5cm



CC-942
2-Channel Cable Organizer
Material: TPR
Net Size: 3.5x3.5x1.2cm



CC-908M
Multipurpose Cable Clips
Material: TPR
Net Size: 2x2x1.2cm



CC-943
3-Channel Cable Organizer
Material: TPR
Net Size: 3.4x3.4x1.6cm



Mini908
Multipurpose Cable Clips
Material: TPR
Net Size: 1.5x1.5x1cm



CC-959
3-Channel Cable Organizer
Material: TPR
Net Size: 5.17x2.04x1.15cm



CC-941
Rabbit Cable Organizer
Material: TPR
Net Size: 2.4x2.4x2.8cm



CC-957
4-Channel Cable Organizer
Material: TPR
Net Size: 8.2x2x1.2cm



CC-929
2-Channel Cable Organizer
Material: TPR
Net Size: 2.9x2.9x1cm



CC-960
4-Channel Cable Organizer
Material: TPR
Net Size: 6.4x2.13x1.17cm



MINI929
2-Channel Cable Organizer
Material: TPR
Net Size: 2x2x1.2cm



CC-587
4-Channel Cable Organizer
Material: TPR
Net Size: 4x4x2cm



CC-961
4-Channel Cable Organizer
Material: TPR
Net Size:2.5x2.5x1.4cm



CC-970
3-Channel Cable Organizer
Material: TPR+ABS
Net Size:3.5x3.5x1.5cm



CC-963
Honeycomb Cable Organizer
Material: TPR
Net Size:5.4x2x1.1cm



CC-962
7-Channel Cable Organizer
Material: TPR
Net Size:8.2x2x1.3cm



CC-965
Triangle Cable Organizer
Material: TPR
Net Size:3x2x1.2cm



CC-976
3-Channel Cable Organizer
Material: TPR
Net Size:3.6x1.8x1.25cm



CC-966
Semicircle Cable Organizer
Material: TPR
Net Size: 2.2x3.2x1.6cm



CC-978
Clover Cable Organizer
Material: TPR
Net Size:3.2x3.2x1cm



CC-967
Trapezoid Cable Organizer
Material: TPR
Net Size: 5.9x2.1x1.1cm



CC-979
Leaf Cable Organizer
Material: TPR
Size:2.75x2.45x1.4cm



CC-947
5-Channel Cable Organizer
Material: TPR
Net Size: 6.6x2.8x1.15cm



CC-953
Cable Organizer
Material: TPR
Net Size: 3.8x3.6x1.4cm

KIMPORT



CC-981
4-Channel Cable Organizer
Material: TPR
Net Size: 5.1x2.3x0.9cm



A-2169
Combo Cable Organizer
Material: Silicon
Net Size: 2.4x2.4x1cm
4.5x2.4x1cm



CC-982
Mini Cable Organizer
Material: TPR
Net Size: 1.5x1.5x1cm



CC-949
Combo Cable Organizer
Material: TPR
Net Size: 5 Different Size




CC-983
4-Channel Cable Organizer
Material: TPR
Net Size: 3.4x3.4x1.5cm



CC-803
Combo Cable Organizer
Material: TPR
Net Size: 3 Different Size



A-602
Cable Organizer
Material: TPR
Net Size: 7x2x1.3cm



CC-967C
10 pcs Combo Cable Organizer
Material: TPR
Net Size: 5 Different Size





A-2128
Cable Organizer
Material: PP
Net Size: 3.7x2cm



CC-968
8 pcs Combo Cable Organizer
Material: TPR
Net Size: 4 Different Size



A-2135
Cable Organizer
Material: TPU
Net Size: 3.2x2.3x0.8cm



CC-949F
16 pcs Combo Cable Organizer
Material: TPR
Net Size: 4 Different Size

KIMPORT



CC-901
Cable Organizer
Material: PP
Net Size: 1.7x2.2cm



CC-926
Combo Cable Organizer
Material: PP
Net Size: 3 Different Size



CC-902
Cable Organizer
Material: PP
Net Size: 6x4.5x2.5cm



CC-595
Cable Organizer
Material: PP
Net Size: 7.8x1.8cm



CC-903
Cable Organizer
Material: PP
Net Size: 3.8x3.6x2cm



CC-980
Cable Organizer
Material: PP
Size: 3.4x1.3x1.3cm



CC-905
Cable Organizer
Material: PP
Net Size: 2.8x1.5x1.3cm



CC-948
Cable Organizer
Material: PP
Net Size: 2.8x2x1.2cm



CC-912
Cable Organizer
Material: PP
Net Size: 5.5x1.5x1.6cm



CC-950
Cable Organizer
Material: PP
Net Size: 3.6x3.6x1.9cm



CC-913
Cable Organizer
Material: PP
Net Size: 8.9x1.5x2.2cm



A-346
Magnet Cable Tie
Material: Silicon+ Magnet
Net Size: 13.7x2cm

KIMPORT



A-332T
Magnetic Cable Tie
Material: PVC
Net Size: 10x2.5cm



CC-972
Cable Protector
Material: TPR
Net Size: 4.2x1cm



A-524
Silicon Cable Tie
Material: Silicon
Net Size: 9.7x1cm



A-547
Cable Tie
Material: Silicon
Net Size: 11.2x1.7cm



CC-973
Cable Tie
Material: TPE
Net Size: 2.6*7.7cm



A-564
Cable Tie
Material: Silicon
Net Size: 9.4x1cm



CC-973B
Cable Tie
Material: TPE
Net Size: 1.8*6.3cm



A-565
Cable Tie
Material: Silicon
Net Size: 19x1.8cm



A-6215
Cable Tie
Material: Silicon
Net Size: 6.5x1cm



A-1224
Cable Tie
Material: Silicon
Net Size: 10x2.5cm



A-526
Cable Tie
Material: Silicon
Net Size: 7.8x2.7cm



A-1225
Cable Tie
Material: Silicon
Net Size: 15/20/25/30/
35/45cm

KIMPORT



CC-945
Cord Clips
Material:PP
Net Size:2.8*1.6*0.8cm



CC-986
4 Channels Cable Organizer
Material: TPR
Net Size:




CC-946
Cord Management
Material:PP
Net Size:2.8*1.6*0.8cm



CC -907
Cable Organizer
Material: Nylon
Net Size:



CC-940
Cord Tabs
Material:PVC
Net Size:2.7*1.5*0.54cm



A-3073
Cable Organizer
Material: ABS
Net Size: 8.2x1.4x2cm




CC-935
Cord Saddle
Material:PP
Net Size:2*2*2cm



A-1145
Cable Organizer
Material: Silicon
Net Size: 1.1x2.4cm



CC-936
Cord Twister
Material:pp
Net Size:1.3*2.3*3.5cm



A-1073
Cable Organizer
Material: Silicon
Net Size:



CC-937
Cord Saddle
Material:PP
Net Size:3*1.6*2.1cm



CC-988
6 Channels Cable Organizer
Material: TPR
Net Size: 9.1*2*1.5cm

LD-1407

KIMPORT



CC-989
4 Channels Cable Organizer
Material: TPR
Net Size: 2.9*1.4cm



CC-921
Flat Cable Winder(L)
Material:TPR
Net Size:6*5*2.5cm



A-539
Cable Organizer
Material: Silicon
Net Size: 5x5.5cm



CC-922
Flat Cable Winder(M)
Material:TPR
Net Size:3.8*3.4*1.2cm



A-1222
Cable Organizer
Material: Silicon
Net Size: 12x2.2cm



CC-923
S Flat Cable Winder(S)
Material:TPR
Net Size:2.5*2.5*1.1cm



CC-586
Earphone Line Cable Winder
Material:ABS+TPR
Net Size:11*6.5*2.5cm



CC-596
Flexible Wire Winder
Material:TPR
Net Size:10*1.6cm



A-347
Cable Organizer
Material: Silicon
Net Size: 6.9x5cm



CC-931
Cable Winder
Material:TPR
Net Size:6.5*3cm



A-331
Cable Organizer
Material: TPE
Net Size: 7x7x1.75cm



CC-591
Fish Bone Cable Winder
Material:TPR
Net Size:7.4*3.3*0.8cm

KIMPORT



CC-585
USB Line Cable Winder
Material:ABS
Net Size:7*8*3cm



CC-906
USB Cable Winder
Material:PP+ABS
Net Size:7*3cm



CC-909
Cable winder with Magnet
Material:ABS Magnet
Net Size:4*1.5cm



A-2856
Hook&Loop Cable Tie
Material:Nylon
Net Size:2*5.5cm



CC-588
Clip-on Cable Winder
Material:ABS
Net Size:4.9*4.9*2cm



CC-915
Hook&Loop Cable Tie
Material:Nylon
Net Size:2*100cm



CC-910
Turtle Cable winder
Material:TPR
Net Size:7*3cm



CC-916
Hook&Loop Cable Tie
Material:Nylon
Net Size:2*10cm/15cm/20cm



CC-917
Peanut Cable winder
Material:TPR
Net Size:6.8*3.2*2.7cm



CC-918B
Hook&Loop Cable Tie
Material:Nylon
Net Size:2*18cm



CC-928
Candy Earphone Line Winder
Material:TPR
Net Size:3*1.5cm



CC-918
Hook&Loop Cable Tie
Material:Nylon
Net Size:2*18cm

KIMPORT



CC-581
Flat Cord Identifier
Material:PVC
Net Size:2.6*1.5cm



A-2134
Cable Conclear
Material:PP
Net Size:30*8.5cm



CC-583
Circle Cord Identifier
Material:PP
Net Size:2.5*1.3cm



CW-1701
Material:PVC
Net Size:All Size



CC-583B
Circle Cord Identifier
Material:PP
Net Size:2*1.7cm



CW-1702
Material:PVC
Net Size:All Size



CC-583C
Long Cord Identifier
Material:PP
Net Size:2.4*17.5cm




CW-1704
Material:PVC
Net Size:3.9*1.7cm



CC-977
Flat Cable Identifier
Material:TPE
Net Size:6.3*1.3*0.2cm



CW-1705
Material:PVC
Net Size:7.5*2.8cm



A-6339
Cabel Trunk
Material:PVC
Net Size:6.3*2.9cm



CW-1706
Material:PVC
Net Size:5*1.1cm

KIMPORT



CC-572
Phone holder
Material: ABS
Net Size:



CC-578
Phone Holder with Mirror
Material: ABS
Net Size: 11.3*3.6*13.5cm



CC-705
Adjustable Phone Holder
Material: ABS
Net Size:7.1*8.4*1.3cm



CC-706
Foldable Laptop Stand
Material: ABS+Silicon
Net Size:



CC-571
Phone Holder
Material: Phone Holder
Net Size:



A-2213
Foldable Laptop Stand
Material: ABS+Silicon
Net Size: 27.8*28cm



CC-701
Mobile Phone
Charging Partner
Material: PP
Net Size:11.9*7cm



A-2214
Foldable Laptop Stand
Material: Aluminum
Net Size: 27.4*4.3cm



CC-593
Name Card Phone holder
Material: PP
Net Size:5.4*8.9*0.1cm



A-158W
Cooling Laptop Stand
Material: Aluminum
Net Size: 27.4*4.3cm



CC-592
Suction Cup Phone holder
Material: TPR
Net Size:D:3.2cm H:4cm



CC-577
Desktop Tripod Stand for
Phone and Tablet
Material: ABS+TPR
Net Size:16.8*3.6*1.6cm



AY6
Selfie Stick
Material: ABS+PVC+
Stainless Steel Tube
Net Size:18.5cm



A-2208A
Monitor Stand with Drawer
Material: ABS
Net Size:32.5*12*23cm



AY11
Selfie Stick with Bluetooth
Material: ABS+PVC+Stainless
Steel Tube
Net Size:21cm



A-2208B
Monitor Stand with Drawer
Material: ABS
Net Size:50.5*23*16cm



AT10
Selfie Stick With Bluetooth
Material: ABS+PVC+ Stainless
Steel Tube
Net Size:19cm



A-6562
Adjustable Monitor Stand
Material: ABS
Net Size:54*22*7.3cm



AR1
Selfie Stick With Bluetooth
Material: ABS+PVC+ Stainless
Steel Tube
Net Size:19cm



A-6562B
Adjustable Monitor Stand
with Drawer
Material: ABS
Net Size:36*22*8cm



AT10Mini
Selfie Stick With Bluetooth
Material: ABS+PVC+ Stainless
Steel Tube
Net Size:15.5cm



A-2132
Cable Management Box
Material: ABS
Net Size: 32x13x11.5cm



A-1197
Adjustable Monitor Stand
with Drawer
Material: ABS
Net Size:36*22*8cm



A-5325
Cable Organizer Box
Material: PP+PS
Net Size: 12.5x12.5x5.5cm



A-329
Cable Management Box
Material: ABS
Net Size: 28.2x14x13cm



A-3032
Sink Organizer
Material: PE
Net Size: 14.8x7x7.3cm



A-361
Cable Management Box
Material: ABS
Net Size: 31x12.5x31cm



A-399
Expandable Organizer
Material: PP
Net Size: 36x20x5cm



A-229S
POP UP Cable Management Box
Material: ABS
Net Size: 40x15x13.5cm



A-7143
Collapsible Organizer
Material: PP
Net Size: 20x29.8x15.7cm
25x37x20.5cm
31.7x44.5x25.8cm



A-131
Cable Management Box
Material: PS
Net Size: S: 23.5x13.5x12.1cm
M: 32x13.5x12.7cm
L: 40.6x15.6x13.4cm



A-3003
Sink Organizer
Material: PE
Net Size: 13x5.5x8.2cm



A-589
Umbrella Holder
Material: ABS
Net Size: 12.8x18x29.5cm



A-3072
Sink Organizer
Material: PE
Net Size: 13x5.5x8.2cm



A-6345
Umbrella Holder
Material: ABS+Iron+PP
Net Size: 22x9x28cm



A-1389
Desktop Trash Bin
Material: ABS+PP
Net Size: 13.5x13.5x14cm



A-229
Mini Desktop Trash Bin
Material: ABS
Net Size: 5.8x5.8x2.5cm



A-5174
Under Desk Storage Box
Material: ABS
Net Size: 26*12.6*5cm (S)
26*19*7cm (M)
26*34*7cm (L)



A-338
Mini Desktop Trash Bin
Material: PP
Net Size: 21x9x14.5cm



A-5207
Deduct Under Desk Storage Box
Material: ABS
Net Size: 17*20*15.2cm



A-339
Trash Can
Material: PP
Net Size: 33x15.5x21cm



A-6552
Under Desk Storage Box
Material: ABS
Net Size: 10*19*4cm
14.5*26*6cm



CC-2001
Sensor Trash Can
Material: PP
Net Size: 33x15.5x21cm



A-2216
Desktop Organizer
Material: ABS
Net Size: 24x32.5x5cm
15.2x24x4cm
11.2x15.5x9.5cm



A-297
Collapsible Trash Can with Hanger
Material: PP
Net Size: 29*25*18cm/ 9L
24*21*15cm/ 6L



A-6480
Desktop Book Organizer
Material: ABS
Net Size:



A-2893
Trash Can with Hanger
Material: PP
Net Size: 16*13*20.5cm/ 3L
21*17.5*24.5cm/ 5L




A-1498
Desktop Rotating Organizer
Material: ABS
Net Size: 25.4x25.4x12cm
30x30x11.5cm

KIMPORT



CC-106
5 in 1 Opener
Material: ABS+TPR+IRON
Net Size: 14.6x5.5x2.8cm



A-1335
Foldable Hanger
Material: PP
Net Size: 19.5x6cm



CC-107
3 in 1 Opener
Material: ABS+IRON
Net Size: 10.8x5.35x1cm



LF011
Wall Mounted Hanger
Material: ABS
Net Size: 7x5.2x2.5cm



CC-108
6 in 1 Opener
Material: ABS+TPR+IRON
Net Size: 14.5x6.2x2.4cm



LF001
Air Cooler
Material: ABS
Net Size: 16.5x16.5x16.5cm



CC-109
4 in 1 Opener
Material: ABS+TPR+IRON
Net Size: 13.5x2.8x0.7cm



A-590
Drawer Organizer
Material: PP
Net Size: 6.5x34.7cm



LF007
Cable Management
Material: ABS
Net Size: 7x7x2cm



LF002
Drawer Organizer
Material: ABS
Net Size: 32x8.8x5.3cm



A-205W
Cup Set
Material: ABS
Net Size: 10x17.5cm



A-2202
Dividabel Shoe Organizer
Material: PP
Net Size: 26x24cm

KIMPORT



LF003
Wall Mounted Hanger
Material: ABS
Net Size: 5.8x5.8x2.5cm



A-101
Baby Safety Lock for Door
Material: ABS
Net Size: 3.5x9.6x1.5cm



LF005
Wall Mounted Hanger
Material: ABS
Net Size: 12.1x10.9x3.8cm



A-103
Baby Safety Lock for Fridge
Material: ABS+Nylon
Net Size: 20x5cm



LF006
Holder and Hanger
Material: ABS
Net Size: 7.5x5.4x2.7cm



A-174W
Belgium Safety Plug
Material: ABS
Net Size: 3.8*3.8cm



A-3045
Massage Hair Brush
Material: ABS+TPR
Net Size: 6*4*9.8cm



A-2193
Socekt Cover
Material: ABS
Net Size: 3.3x3.5cm



A-3101
Massage Hair Brush
Material: ABS+TPR
Net Size: 8.2x8.2x7.8cm



A-1436
Massage Hair Brush
Material: ABS+TPU
Net Size: 7.5x7.5x4cm

LD-1407

Wired Optical Mouse

Model:AM5064



- Wired Mouse
- Cable: 1.5M rubber
- Button: 3 buttons with scroll wheel
- Sensor Type: Optical
- Resolution: 1000 DPI
- Product Size:113.5x60.8x38.8MM
- Interface: USB, Plug and Play

OEM
MOQ:3000pcs
FOB:shenzhen yiantian

Wired Optical Mouse Model:AM5061



- Wired Mouse
- Cable: 1.5M rubber
- Button: 3 buttons with scroll wheel
- Sensor Type: Optical
- Resolution: 1000 DPI
- Product Size:115X50X32MM
- Interface: USB, Plug and Play

OEM

MOQ:3000pcs

FOB:shenzhen yiantian

Wired Optical Mouse

Model:AM5117



- Wired Mouse
- Cable: 1.5M rubber
- Button: 3 buttons with scroll wheel
- Sensor Type: Optical
- Resolution: 1000 DPI
- Product Size:105.5x59x37.6MM
- Interface: USB, Plug and Play

OEM
MOQ:3000pcs
FOB:shenzhen yiantian

Wired Optical Mouse Model:AM5009



- Wired Mouse
- Cable: 1.5M rubber
- Button: 5 buttons with scroll wheel
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: 1600 DPI
- Product Size:122x73x39MM
- Interface: USB, Plug and Play



OEM

MOQ:3000pcs

FOB:shenzhen yiantian

KIMPORT

Wired Optical Mouse Model:AM5160



- Wired Mouse
- Cable: 1.5M rubber
- Button: 6 buttons with scroll wheel
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: up to 3600 DPI
- Product Size:108.3x65x37.7MM
- Interface: USB, Plug and Play

OEM

MOQ:3000pcs

FOB:shenzhen yiantian

KIMPORT

Wireless & Bluetooth Optical Mouse

Model:AM8003



- 2.4Ghz & Bluetooth dual model connection
- Receiver: Nano USB storable
- Range: up to 10 meters
- 4 Buttons, **magnetic cover**
- Battery: Rechargeable Li-ion battery or 1*AA
- on/off power button
- Resolution: 1000/1200/1600 DPI
- Rubberized scroll wheel
- Product Size:100*62*35MM
- Compatible with Windows® 8/10/11
- CE/REACH/ROHS compliance



OEM

MOQ: 3000pcs

FOB Port:Yantian,Shenzhen

KIMPORT

Wireless & Bluetooth Optical Mouse Model:AM8027



- 2.4Ghz & Bluetooth dual model connection
- Receiver: Nano USB storable
- Range: up to 10 meters
- 4 Buttons, **Sliding cover**
- Battery: Rechargeable Li-ion battery or 1*AA
- on/off power button
- Resolution: 1000/1200/1600 DPI
- Aluminum alloy or rubberized scroll wheel
- Product Size:115*56*35mm
- Compatible with Windows® 8/10/11
- CE/REACH/ROHS compliance

OEM

MOQ: 3000pcs

FOB Port:Yantian,Shenzhen

KIMPORT

Wireless Optical Mouse Model:AM8009



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 5 buttons with scroll wheel
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution:1000 DPI
- Product Size:102.9x60.7x38.7MM
- Battery: 2 x AAA
- Interface: USB, Plug and Play

OEM

MOQ:3000pcs

FOB:shenzhen yiantian

KIMPORT

Wireless Optical Mouse Model:AM8012



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 3 buttons with scroll wheel
- Sensor Type: Optical
- Resolution:1000 DPI
- Product Size:99x61.5x35MM
- Battery: 2 x AAA
- Interface: USB, Plug and Play

OEM

MOQ:3000pcs

FOB:shenzhen yiantian

KIMPORT

Wireless Optical Mouse Model:AM8064



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 3 buttons with scroll wheel
- Sensor Type: Optical
- Resolution:1000 DPI
- Product Size:113.5x60.8x38.8MM
- Battery: 2 x AAA
- Interface: USB, Plug and Play

OEM

MOQ:3000pcs

FOB:shenzhen yiantian

KIMPORT

Wireless Optical Mouse Model:AM8117

- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 3 buttons with scroll wheel
- Sensor Type: Optical
- Resolution:1000 DPI
- Product Size:105.5x59x37.6MM
- Battery: 2 x AAA
- Interface: USB, Plug and Play



OEM

MOQ:3000pcs

FOB:shenzhen yiantian

KIMPORT

Wireless Optical Mouse Model:AM8121



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 6 buttons with scroll wheel
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution:1000/1200/1600 DPI
- Product Size:99.7x63.5x37.3MM
- Battery: 2 x AAA
- Interface: USB, Plug and Play

OEM

MOQ:3000pcs

FOB:shenzhen yiantian

KIMPORT

Wireless Optical Mouse Model:AM8126



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 3 buttons with scroll wheel
- Sensor Type: Optical
- Resolution:1000 DPI
- Product Size:99.3x59.3x31.5MM
- Battery: 2 x AAA
- Interface: USB, Plug and Play

OEM

MOQ:3000pcs

FOB:shenzhen yiantian

KIMPORT

Wireless Optical Mouse Model:AM8128



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 5 buttons with scroll wheel
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: 1000 DPI
- Product Size:94x57x35.6MM
- Battery: 2 x AAA
- Interface: USB, Plug and Play

OEM

MOQ:3000pcs

FOB:shenzhen yiantian

KIMPORT

Wireless Optical Mouse Model:AM8130



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 3 buttons with scroll wheel
- Sensor Type: Optical
- Resolution:1000 DPI
- Product Size:106.5x60.7x39.4MM
- Battery: 1*AA
- Interface: USB, Plug and Play

OEM

MOQ:3000pcs

FOB:shenzhen yiantian

KIMPORT

Wireless Optical Mouse Model:AM8160



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 6 buttons with scroll wheel
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: 1000/1200/1600 DPI
- Product Size:108.3x65x37.7MM
- Battery: 2 x AAA
- Interface: USB, Plug and Play

OEM

MOQ:3000pcs

FOB:shenzhen yiantian

KIMPORT

Wireless Optical Mouse Model:AM8182



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 3 buttons with scroll wheel
- Sensor Type: Optical
- Resolution:1000 DPI
- Product Size:98.2x61.9x37.5MM
- Battery: 1 x AA
- Interface: USB, Plug and Play

OEM

MOQ:3000pcs

FOB:shenzhen yiantian

KIMPORT

Wireless Optical Mouse Model:AM8183



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 6 buttons with scroll wheel
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: 1000/1200/1600 DPI
- Product Size:119.5x75.2x37.5MM
- Battery: 2 x AAA
- Interface: USB, Plug and Play

OEM

MOQ:3000pcs

FOB:shenzhen yiantian

KIMPORT

Wireless Optical Mouse Model:AM8184



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 4 buttons with scroll wheel
- Sensor Type: Optical
- Resolution: 1000/1200/1600 DPI
- Product Size:95x56x40MM
- Battery: 2 x AAA
- Interface: USB, Plug and Play

OEM

MOQ:3000pcs

FOB:shenzhen yiantian

KIMPORT

Wireless Optical Mouse Model:AM8185



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 3 buttons with scroll wheel
- Sensor Type: Optical
- Resolution: 1000 DPI
- Product Size:103x60.7x38.7MM
- Battery: 2 x AAA
- Interface: USB, Plug and Play

OEM

MOQ:3000pcs

FOB:shenzhen yiantian

KIMPORT

Wireless Optical Mouse Model:AM8187



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 6 buttons with scroll wheel
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: 1000/1200/1600 DPI
- Product Size:102.3x68x42.8MM
- Battery: 2 x AAA
- Interface: USB, Plug and Play

OEM

MOQ:3000pcs

FOB:shenzhen yiantian

KIMPORT

Wireless Optical Mouse Model:AM8179



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 4 buttons with scroll wheel
- Sensor Type: Optical
- Resolution: 1000/1200/1600 DPI
- Product Size: 95.7x56.9x40.3MM
- Battery: Rechargeable Li-ion battery
- Interface: USB, Plug and Play

OEM

MOQ:3000pcs

FOB:shenzhen yiantian

Slim Wireless Optical Mouse

Model:AM8399



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 3 buttons with scroll wheel
- Magnet upper cover, aluminum alloy wheel
- Sensor Type: Optical
- Resolution: 1000/1200/1600 DPI
- Product Size: 112.4*60.4*32.4MM
- Battery: 1xAA
- Interface: USB, Plug and Play

Slim Wireless Optical Mouse

Model:AM8499



- 2.4Ghz & Bluetooth dual model connection
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 3 buttons with scroll wheel
- Magnet upper cover, aluminum alloy wheel
- Sensor Type: Optical
- Resolution: 1000/1200/1600 DPI
- Product Size: 112.4*60.4*32.4MM
- Battery: 1xAA
- Interface: USB, Plug and Play

Wireless Optical Mouse Model:AM8011



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 3 buttons with scroll wheel
- Sensor Type: Optical
- Resolution: 1200 DPI
- Product Size:103x63x37MM
- Battery: 1 x AA
- Interface: USB, Plug and Play

Wireless Optical Mouse Model:AM8022



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 3 buttons with scroll wheel
- Sensor Type: Optical
- Resolution: 1200 DPI
- Product Size:105x60x40MM
- Battery: 1 x AA
- Interface: USB, Plug and Play

Wireless Optical Mouse

Model:AM8023



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 4 buttons with scroll wheel
- Sensor Type: Optical
- Resolution: 800/1200/1600 DPI
- Product Size:97x60x30MM
- Battery: 1 x AA
- Interface: USB, Plug and Play

RGB Wireless Optical Mouse

Model:AM8021



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 4 buttons with scroll wheel
- Sensor Type: Optical
- Resolution: 800/1200/1600 DPI
- Light: RGB
- Product Size:107x65x38MM
- Battery: Rechargeable Li-ion battery
- Interface: USB, Plug and Play

RGB Wireless Optical Mouse

Model:AM8024



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 4 buttons with scroll wheel
- Aluminum alloy wheel
- Sensor Type: Optical
- Resolution: 800/1200/1600 DPI
- Lighting: RGB
- Product Size:109x60x31MM
- Battery: Rechargeable Li-ion battery
- Interface: USB, Plug and Play

Wireless Optical Mouse Model:AM8266



- 2.4Ghz Wireless Mouse or 2.4Ghz+bluetooth
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 6 buttons with scroll wheel
- Aluminum alloy wheel
- Sensor Type: Optical
- Resolution: 800/1200/1600 DPI
- Product Size:102*59*36mm
- Battery: Rechargeable Li-ion battery or AA
- Interface: USB, Plug and Play

Wireless Optical Mouse Model:AM8268



- 2.4Ghz Wireless Mouse or 2.4Ghz+bluetooth
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 6 buttons with scroll wheel
- Aluminum alloy wheel
- Sensor Type: Optical
- Resolution: 800/1200/1600/2400/4000DPI
- Product Size:113*63*38mm
- Battery: Rechargeable Li-ion battery 350mAh
- Interface: USB, Plug and Play

Wireless Optical Mouse Model:AM8260



- 2.4Ghz Wireless Mouse (blue light)
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 6 buttons with scroll wheel
- Aluminum alloy wheel
- Sensor Type: Optical
- Resolution: 1000/1600/2400 DPI
- Product Size:113*63*38mm
- Battery: 2*AA
- Interface: USB, Plug and Play

Wireless Optical Mouse Model:AM8002



- 2.4Ghz Wireless Mouse (blue light)
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 3 buttons with scroll wheel
- Aluminum alloy wheel
- Sensor Type: Optical
- Resolution: 800/1200/1600 DPI
- Product Size:102*59*36mm
- Battery: Rechargeable Li-ion battery 230mAh or 1*AAA
- Interface: USB, Plug and Play

Wireless Optical Mouse Model:AM8302



- 2.4Ghz Wireless Mouse or 2.4Ghz+bluetooth
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 6 buttons with scroll wheel
- Aluminum alloy wheel
- Sensor Type: Optical
- Resolution: 800/1200/1600 DPI
- Product Size:105*69.5*36.5mm
- Battery: Rechargeable Li-ion battery 500mAh or 1*AA
- Interface: USB, Plug and Play

Wireless Optical Mouse Model:AM8165



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 6 buttons with scroll wheel
- Aluminum alloy wheel
- Sensor Type: Optical
- Resolution: 1000/1200/1600 DPI
- Product Size:113*69.2*41.7mm
- Battery: 1*AA
- Interface: USB, Plug and Play

Wireless Optical Mouse Model:AM8594



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 6 buttons with scroll wheel
- Aluminum alloy wheel
- Sensor Type: Optical
- Resolution: 1000/1600(默认)/2400
- Product Size:123.7*75.2*44.5mm
- Battery: 2*AA
- Interface: USB, Plug and Play

Wireless Optical Mouse Model:AM8509



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 6 buttons with scroll wheel
- Aluminum alloy wheel
- Sensor Type: Optical PAW3205((PIXART))
- Resolution: 1000/1200(默认)/1600
- Product Size:127*81*78.6mm
- Lithium battery: 750mAh
- Type-C cable
- Lighting RGB
- Interface: USB, Plug and Play

Wireless Optical Mouse Model:AM8510



- 2.4Ghz Wireless Mouse /2.4Ghz+bluetooth
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 6 buttons with scroll wheel
- Aluminum alloy wheel
- Sensor Type: Optical PAW3212((PIXART))
- Resolution: 1000/1200(默认)/1600/2400/3600
- Product Size:122.3*83.7*47.9mm
- Lithium battery: 500mAh/1*AA
- Type-C cable
- Lighting RGB/Not lighting
- Interface: USB, Plug and Play

Wireless Optical Mouse Model:AM8015



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 4 buttons with scroll wheel
- Aluminum alloy wheel
- Sensor Type: Optical FCT3065
- Resolution: 1000/1200(默认)/1600
- Product Size:103.3*63.9*37.7mm
- Battery: 1*AA
- Interface: USB, Plug and Play

Wireless Optical Mouse Model:AM8064



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 3 buttons with scroll wheel
- Aluminum alloy wheel
- Sensor Type: Optical FCT3065
- Resolution: 1000/1200(默认)/1600
- Product Size:113.5*60.8*39mm
- Li-Battery: 450mAh
- MICRO USB
- Interface: USB, Plug and Play

Wireless Optical Mouse Model:AM8301



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 4 buttons with scroll wheel
- Aluminum alloy wheel
- Sensor Type: Optical PAW3205DB(PIXART)
- Resolution: 1000/1200(默认)/1600
- Product Size:113.5*60.8*39mm
- Battery: 1*AA
- Interface: USB, Plug and Play

Wireless Optical Mouse

Model:AM8259



- 2.4Ghz Wireless Mouse
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 6 buttons with scroll wheel
- Aluminum alloy wheel
- Sensor Type: Optical PAW3205DB(PIXART)
- Resolution: 1000/1200(默认)/1600
- Product Size:111.6*66.7*34.5mm
- Battery: 2*AAA
- Interface: USB, Plug and Play

KIMPORT

Wired Gaming Mouse & Wireless Gaming Mouse

Model:AM5507/AM8507



- Wired Gaming Mouse (Entry)
- Cable: 1.5M / 1.8M rubber
- Button: 8 buttons with scroll wheel
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: 800-1600(默认)-3200-6400-8000-12000
- Lighting: RGB
- Product Size:106*63.5*39mm
- Interface: USB, Plug and Play

Wired Gaming Mouse Model:AM5583



- Wired Gaming Mouse
- Cable: 1.5M / 1.8M, rubber / braided-fiber
- Button: 8 buttons, programable
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: up to 7200 DPI
 - up to 16000DPI (advance version)
 - up to 19000DPI (professional version)
- Lighting: Rainbow / RGB
- Product Size:125x63.4x39.3MM
- Interface: USB, Plug and Play

KIMPORT

Wired Gaming Mouse Model:AM5226



- Wired Gaming Mouse
- Cable: 1.5M / 1.8M, rubber / braided-fiber
- Button: 4 buttons with scroll wheel
- Sensor Type: Optical
- Resolution: up to 3600 DPI (Entry version)
- up to 6000 - 7200 DPI (Middle version)
- up to 16000DPI (advance version)
- Lighting: Single color / Rainbow / RGB
- Product Size:114.8x62.9x35.8MM
- Interface: USB, Plug and Play

KIMPORT

Wired Gaming Mouse Model:AM5568



- Wired Gaming Mouse
- Cable: 1.5M / 1.8M, rubber / braided-fiber
- Button: 4 buttons with scroll wheel
- Sensor Type: Optical
- Resolution: up to 3600 DPI (entry version)
- up to 7200 DPI (middle version)
- Lighting: Single color / Rainbow / RGB
- Product Size:124.6x68.5x38MM
- Interface: USB, Plug and Play

KIMPORT

Wired Gaming Mouse Model:AM5596



- Wired Gaming Mouse
- Cable: 1.5M / 1.8M, rubber / braided-fiber
- Button: 6 buttons, programable(middle version)
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: up to 3600 DPI (entry version)
- up to 7200 DPI (middle version)
- Lighting: Single color / Rainbow / RGB
- Product Size:119.4x66x40.5MM
- Interface: USB, Plug and Play

KIMPORT

Wired Gaming Mouse Model:AM5511



- Wired Gaming Mouse
- Cable: 1.5M / 1.8M, rubber / braided-fiber
- Button: 7 buttons, programable
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: up to 3600 DPI (entry version)
 - up to 6000 - 7200 DPI (middle version)
 - up to 16000DPI (advance version)
 - up to 19000DPI (professional version)
- Lighting: Single color / Rainbow / RGB
- Product Size:131.9x72x42.9MM
- Interface: USB, Plug and Play

KIMPORT

Wired Gaming Mouse Model:AM5591



- Wired Gaming Mouse
- Cable: 1.5M / 1.8M, rubber / braided-fiber
- Button: 8 buttons, programable
- 3 thumb buttons: Browser back/next, fire key
- Sensor Type: Optical
- Resolution: up to 7200 DPI (middle version)
- up to 16000DPI (advance version)
- up to 19000DPI (professional version)
- Lighting: Single color / Rainbow / RGB
- Product Size:130.5x75.8x42.2MM
- Interface: USB, Plug and Play

KIMPORT

Wired Gaming Mouse Model:AM5227



- Wired Gaming Mouse
- Cable: 1.5M / 1.8M, rubber / braided-fiber
- Button: 7 buttons, programable
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: up to 7200 DPI
 - up to 16000DPI (advance version)
 - up to 19000DPI (professional version)
- Lighting: Rainbow / RGB
- Product Size:122.5x65.5x37MM
- Interface: USB, Plug and Play

KIMPORT

Wired Gaming Mouse Model:AM5180A



- Wired Gaming Mouse
- Cable: 1.5M / 1.8M, rubber / braided-fiber
- Button: 7 buttons, programable
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: up to 7200 DPI
 - up to 16000DPI (advance version)
 - up to 19000DPI (professional version)
- Lighting: Rainbow / RGB
- Product Size:131.7x 69.4x41.4MM
- Interface: USB, Plug and Play



Wired Gaming Mouse Model:AM5597



- Wired Gaming Mouse
- Cable: 1.5M / 1.8M, rubber / braided-fiber
- Button: 6 buttons, programable
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: up to 7200 DPI
 - up to 16000DPI (advance version)
 - up to 19000DPI (professional version)
- Lighting: Rainbow / RGB
- Product Size:124.3x68.8x40.8MM
- Interface: USB, Plug and Play

KIMPORT

Wired Gaming Mouse Model:AM5599



- Wired Gaming Mouse
- Lightweight Honeycomb Shell
- Cable: 1.5M / 1.8M, lightweight umbrella cord braided
- Button: 6 buttons, programable
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: up to 7200 DPI
 - up to 12000DPI (advance version)
 - up to 19000DPI (professional version)
- Lighting: Rainbow / RGB
- Product Size:128.7x67.3x38.4MM
- Interface: USB, Plug and Play

KIMPORT

Wired Gaming Mouse Model:AM5660



- Wired Gaming Mouse
- Cable: 1.5M / 1.8M, rubber / braided-fiber
- Button: 7 buttons,programmable
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: up to 7200 DPI
 - up to 16000DPI (advance version)
 - up to 19000DPI (professional version)
- Lighting: Rainbow / RGB
- Product Size:126x64x39.5MM
- Interface: USB, Plug and Play

KIMPORT

Wireless Gaming Mouse & Wired Gaming Mouse

Model:AM8600



- 2.4Ghz wireless & wired dual mode connection
- Receiver: Nano USB storable
- Cable: 1.5M/1.8M, detachable
- Range: up to 10 meters
- Button: 6 buttons, programable
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: 800-1600-3200-6400-12000-24000 dpi
- Lighting: RGB
- Product Size: 125x63.4x39.3MM
- Battery: Rechargeable Li-ion battery
- Interface: USB, Plug and Play

KIMPORT

Wired Gaming Mouse

Model:AM5388



- Wired Gaming Mouse
- Cable: 1.5M / 1.8M, rubber / braided-fiber
- Button: 6 buttons, programable
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: up to 7200 DPI
 - up to 16000DPI (advance version)
 - up to 19000DPI (professional version)
- Lighting: Rainbow / RGB
- Product Size:119x63.8x40.6MM
- Interface: USB, Plug and Play

KIMPORT

Wired Gaming Mouse

Model:AM8503



- Wired Gaming Mouse
- Cable: 1.5M / 1.8M, rubber / braided-fiber
- Button: 6 buttons,programmable
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical 3335/3370
- Resolution: up to 7200 DPI
 - up to 16000DPI (advance version)
 - up to 19000DPI (professional version)
- Lighting: Rainbow / RGB
- Product Size:119x63.8x40.6MM
- Interface: USB, Plug and Play

KIMPORT

Wireless Gaming Mouse

Model:AM8660



- 2.4Ghz wireless & wired dual mode connection
- Receiver: Nano USB storable
- Cable: 1.5M/1.8M ,detachable
- Range: up to 10 meters
- Button: 6 buttons,programable
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: up to 5000 DPI (10000 DPI by software)
- up to 16000DPI (advance version)
- up to 19000DPI (professional version)
- Lighting: RGB
- Product Size: 119x63.8x40.6MM
- Battery: Rechargeable Li-ion battery
- Interface: USB, Plug and Play

KIMPORT

Wireless Gaming Mouse Model:AM8180



- 2.4Ghz wireless & wired dual mode connection
- Receiver: Nano USB storable
- Cable: 1.5M/1.8M, detachable
- Range: up to 10 meters
- Button: 7 buttons, programable
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: up to 5000 DPI (10000 DPI by software)
 - up to 16000DPI (advance version)
 - up to 19000DPI (professional version)
- Lighting: RGB
- Product Size: 131.7x69.4x41.4MM
- Battery: Rechargeable Li-ion battery
- Interface: USB, Plug and Play

KIMPORT

Wireless Gaming Mouse Model:AM8597



- 2.4Ghz wireless & wired dual mode connection
- Receiver: Nano USB storable
- Cable: 1.5M/1.8M, detachable
- Range: up to 10 meters
- Button: 6 buttons, programable
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: up to 5000 DPI (10000 DPI by software)
 - up to 16000DPI (advance version)
 - up to 19000DPI (professional version)
- Lighting: RGB
- Product Size: 124.3*68.8*40.8MM
- Battery: Rechargeable Li-ion battery
- Interface: USB, Plug and Play

KIMPORT

Wireless Gaming Mouse Model:AM8591



- 2.4Ghz wireless & wired dual mode connection
- Receiver: Nano USB storable
- Cable: 1.5M/1.8M, detachable
- Range: up to 10 meters
- Button: 8 buttons, programable
- 3 thumb buttons: Browser back/next, fire key
- Sensor Type: Optical
- Resolution: up to 5000 DPI (10000 DPI by software)
 - up to 16000DPI (advance version)
 - up to 19000DPI (professional version)
- Lighting: RGB
- Product Size: 130.5x75.8x42.2MM
- Battery: Rechargeable Li-ion battery
- Interface: USB, Plug and Play

KIMPORT

Wireless & Bluetooth Ergo Mouse

Model:AM8400



- 2.4Ghz & Bluetooth dual model connection
- Receiver: Nano USB storable
- Range: up to 10 meters
- 6 Buttons, **Ergo design**
- Battery: Rechargeable Li-ion battery or 1*AA
- on/off power button
- Resolution: 1000/1200/1600 DPI
- Rubberized scroll wheel
- Product Size:110*76*75mm
- Compatible with Windows® 8/10/11
- CE/REACH/ROHS compliance

MOQ: 3000pcs

FOB Port:Yantian,Shenzhen

Wireless & Bluetooth RGB Mouse Model:AM8190



- 2.4Ghz & Bluetooth dual model connection
- Receiver: Nano USB storable
- Range: up to 10 meters
- 6 Buttons, **Ergo design**
- Battery: Rechargeable Li-ion battery or 1*AA
- on/off power button
- Resolution: 1000/1200/1600/2400 DPI
- Rubberized scroll wheel
- Product Size:110*76*75mm
- Compatible with Windows® 8/10/11
- CE/REACH/ROHS compliance

MOQ: 3000pcs

FOB Port:Yantian,Shenzhen

Wireless ergonomic mouse
Model:AM8189



- Button: 6 buttons with scroll wheel
- Resolution: 800/1200/1600/2000/2400 dpi
- Color: black
- lithium battery (500mAh)
- Product Size:105*72*84.5mm
- 1.5M long TYPC black charging cable
- 2.4G Nano receiver

Wireless Ergonomic Mouse

Model:AM8087



- 2.4Ghz / Bluetooth Wireless Mouse
- Ergonomics design
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 6 buttons with scroll wheel
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: 800/1200/1600 DPI
- Product Size: 123.6 x 70.1 x 61.8MM
- Battery: 2 x AAA
- Interface: USB, Plug and Play

Wired Ergonomic Mouse

Model:AM5087



- Wired Mouse
- Ergonomics design
- Cable: 1.5M / 1.8M, rubber / braided-fiber
- Button: 6 buttons with scroll wheel
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: 800/1600/2400 DPI
- Product Size: 123.6 x 70.1 x 61.8MM
- Interface: USB, Plug and Play

Wireless Ergonomic Mouse Model:AM8189



- 2.4Ghz / Bluetooth Wireless Mouse
- Ergonomics design
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 6 buttons with scroll wheel
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: 800/1200/1600 DPI
- Product Size: 108x72x61MM
- Battery: 2 x AAA
- Interface: USB, Plug and Play

Wireless Ergonomic Mouse Model:AM8398



- 2.4Ghz / Bluetooth Wireless Mouse
- Ergonomics design
- Magnetic and detachable palm, wrist support
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 6 buttons with scroll wheel
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: 800/1200/1600 DPI
- Mouse size: 123.5 x 86 x 58 mm
- With mouse pad size: 183 x 113 x 58 mm
- Battery: 1 x AA
- Interface: USB, Plug and Play

Wired Ergonomic Mouse Model:AM5398



- Wired Optical Mouse
- Ergonomics design
- Magnetic and detachable palm, wrist support
- Cable: 1.5M / 1.8M, rubber / braided-fiber
- Button: 6 buttons with scroll wheel
- 2 thumb buttons: Browser back/next
- Sensor Type: Optical
- Resolution: 1200/1800/2400/3600 DPI
- Mouse size: 123.5x86x58 mm (Larger Version)
- With mouse pad size: 183x113x58 mm Interface: USB, Plug and Play

Wireless Trackball Mouse

Model:AM8698



- 2.4Ghz / Bluetooth Wireless Trackball Mouse
- With smooth and precision trackball
- Receiver: Nano USB storable
- Range: up to 10 meters
- Button: 8 buttons with scroll wheel
- 2 thumb buttons: Browser back/next
- Resolution: 1000/1600/2400 DPI
- Lighting: Rainbow / RGB
- Mouse size: 125x63.4x39.3MM
- Battery: Rechargeable Li-ion battery
- Interface: USB, Plug and Play

EK1100/1200 Series

EK2100/2200 Series

EK1100



EK2100



Size	40"	42"	50"	55" 4K
Loading Quantity 20' GP/40' GP/40HQ	408/832/832	291/597/796	207/432/432	130/266/399
Carton Size L*W*H(mm)	964*126*582	1006*126*617	1215*145*735	1324*146*785
Cabinet Material	Plastic	Plastic	Plastic	Plastic



KIMPORT

DK1300/2300 Series



LD-0570




Size	22" FHD	24" HD
Loading Quantity 20' GP/40' GP/40HQ	1128/2316/2702	1038/2118/2118
Carton Size L*W*H(mm)	549*120*360	596*120*384
Front Cabinet Material	Plastic	Plastic

F2010/2110 Series

F2010



F2110

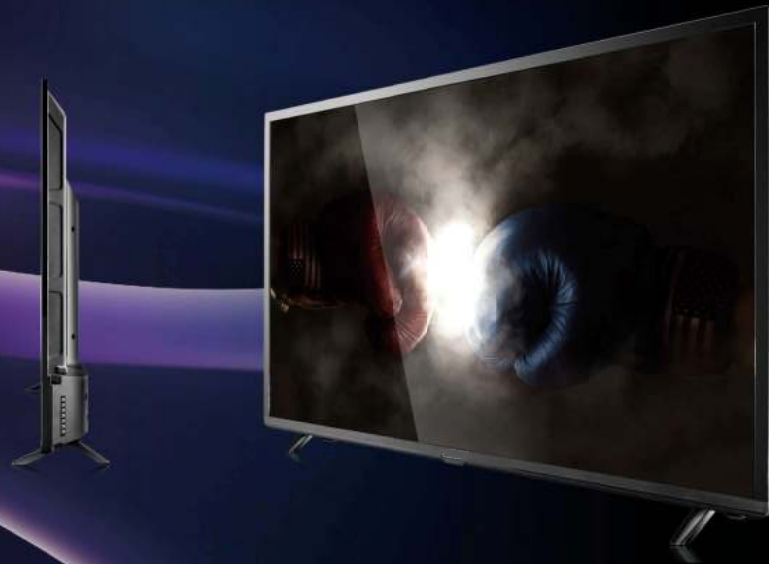

Size	22"	24"	28"	32"	39"	43"	50"	55"
Loading Quantity 20"GP/40"GP/40HQ	1044/2160/2520	825/1665/1998	524/1060/1325	464/960/1200	288/538/784	228/474/632	189/384/384	100/212/318
Carton Size L*W*H(mm)	592*120*374	632*120*400	709*136*468	786*141*520	960*138*600	1048*155*660	1200*165*743	1340*181*815
Material	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic



KIMPORT

F2210/2310 Series

F2210

F2310



Size	22"	24"	28"	32"	39"	43"	50"	55"
Loading Quantity 20'GP/40'GP/40HQ	1044/2160/2520	825/1665/1998	524/1060/1325	464/960/200	288/588/784	228/474/632	189/384/384	100/212/318
Carton Size L*W*H(mm)	592*120*374	632*120*400	709*136*468	786*141*520	960*138*600	1048*155*660	1200*165*743	1340*181*815
Front Cabinet Material	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic

LD-0570

S2000/2100 Series

S2000

S2100



Size	22"	32"
Loading Quantity 20' GP/40' GP/40HQ	710/1460/1752	376/752/940
Carton Size L*W*H(mm)	688*130*405	938*150*520
LD-0570 Front Cabinet Material	Plastic	Plastic



A35/36/37 Series



A35




A36



A37



Size	16"	19"	22"	24"	32"
Loading Quantity 20' GP/40' GP/40' HQ	1860/3757/4294	1254/2553/2960	1044/2160/2520	825/1665/1998	464/960/1200
Carton Size L*W*H(mm)	415*118*325	524*118*375	592*120*374	632*120*400	786*120*400
LD-0576 Cabinet Material	Plastic	Plastic	Plastic	Plastic	Plastic



TV remote control



RS41

KIMPORT

RF&SMART remote control



RS22



F51A



R45A

KIMPORT



LD-0570



4k2k UHD TV

An abbreviation of Organic Light-Emitting Diode, it's the latest display technology.

FEATURES

- Ⓜ Response sooner
It has a response time less than 0.01ms, enabling a refresh rate up to 100,000Hz.
- Ⓜ Better power efficiency and thickness
It's power consumption is 50% less than LED and it's thickness can be made under 1mm.
- Ⓜ Wider viewing angles and improved brightness
It can enable a greater artificial contrast ratio and a wider viewing angle compared to LED pixel colors appear correct and unshifted, even as the viewing angle approaches 90° from normal.

411

No border Ultrathin
EH1100/1200 Series

KIMPORT

EH1100

EH1200



Size	50"	55"
Loading Quantity 20' GP/40' GP/40HQ	207/432/432	130/266/399
Carton Size L*W*H(mm)	1215*145*735	1340*181*815
LD-0570 Front Cabinet Material	Aluminum	Aluminum



The aluminum frame
EP1100/1200 Series

KIMPORT

EP1100

EP1200



Size	40"	42"	50"	55" 4K
Loading Quantity 20'GP/40'GP/40HQ	408/832/832	291/597/796	207/432/432	130/266/399
Carton Size L*W*H(mm)	964*126*582	1006*126*617	1215*145*735	1324*146*785
Front Cabinet Material	Aluminum	Aluminum	Aluminum	Aluminum

LD-0570

Surface
UK1300/1500 Series

KIMPORT

UK2300/2500 Series

UK1300



UK2500



Size	32"
Loading Quantity 20'GP/40'GP/40HQ	528/1090/1350
Carton Size L*W*H(mm)	786*126*520
Front Cabinet Material	Plastic

LD-0570



Surface
UK3500/3500 Series

KIMPORT

UK5300/5500 Series

UK3500

UK5300



LD-0570





Size	32"
Loading Quantity 20:GP/40 GP/40HQ	528/ 080/1350
Carton Size L*W*H(mm)	786* 126*520
Front Cabinet Material	Plastic

Surface DU2000/3000Series

KIMPORT

DU2000

DU3000

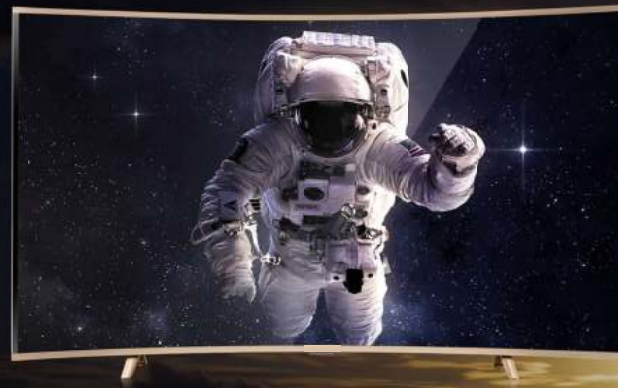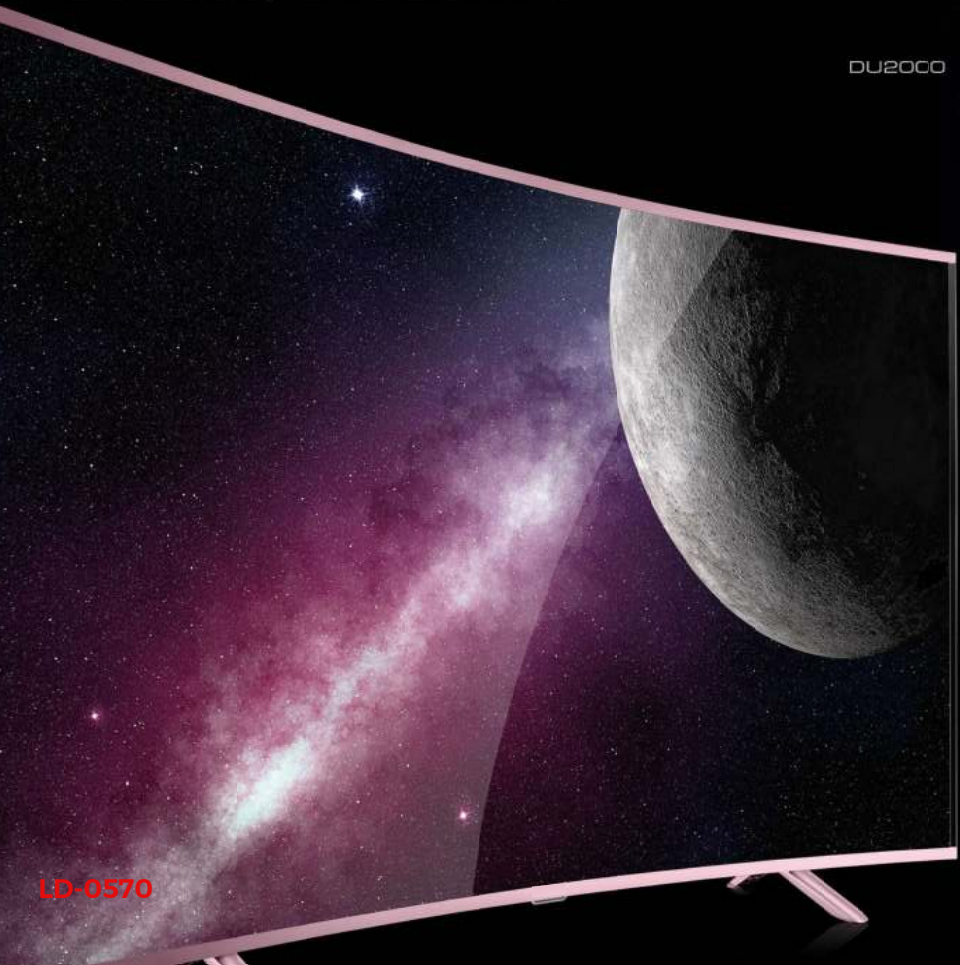

Size	32"	39"	43"	49"	55"	65"
Loading Quantity 20'GP/40'GP/40'HQ	500/1020/1275	312/632/632	198/414/552	162/336/336	84/176/264	70/150/150
Carton Size L*W*H(mm)	786*140*509	965*167*575	1033*184*646	1174*194*720	1303*213*805	1551*218*929
Front Cabinet Material	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic

LD-0570

417

Surface UP1100 Series

KIMPORT

DU1000 Series

UP1100



DU1000



Size	32"
Loading Quantity 20'GP/40'GP/40HQ	528/1080/1350
Carton Size L*W*H(mm)	786*126*520
Front Cabinet Material	Aluminum



Size	32"	39"	43"	49"	55"	65"
Loading Quantity 20'GP/40'GP/40HQ	500/1020/1275	312/632/632	198/414/552	162/336/336	84/176/264	70/150/150
Carton Size L*W*H(mm)	786*140*509	965*167*575	1033*184*646	1174*194*720	1303*213*805	1524*213*928
Front Cabinet Material	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic

LD-0570



YM-336

Portable Karaoke Speaker With Wireless Microphone

- Colorful RGB, super cool light effect
- Portable karaoke speaker
- Come with two wireless microphones
- Top handle convenient for outdoor activities
- Bluetooth 5.3
- USB/TF Play

Specification

- 2.0 speaker system.
- Output Power :10W(5W*2)
- Unit Size :3" 4ohm, 8W
- Built-in lithium battery 3.7V/2000mAh
- Microphone build in lithium battery: 3.7V/500mAh
- Accessory: Type-C cable
- Product Dimension :287L*153W*188Hmm



COLORFUL RGB



USB PLAYER



Bluetooth™



KARAOKE



RD2348

Portable Karaoke Speaker With Wireless Microphone

- Colorful REG, super cool light effect
- Portable karaoke speaker
- Come with two wireless microphones
- Top handle convenient for outdoor activities
- Bluetooth 5.3
- USB/TF Play

Specification

- 2.0 speaker system.
- Output Power :30W(15W*2)
- Unit Size :5" 4ohm, 18W
- Built-in lithium battery 11.1V/3000mAh
- Microphone build in lithium battery: 3.7V/500mAh
- Accessory: Type-C cable
- Product Dimension :383L*150W*252Hmm



COLORFUL RGB



USB PLAYER



Bluetooth™



KARAOKE



RD2353

Retro CD Player with Bluetooth out

- CD/MP3 player, CD-R/CD-RW
- Aux in and Earphone jack
- USB/TF player
- Bluetooth Function
- Bluetooth out(Optional)
- LCD displayer
- Type-C charging

Specification

- 2.0 speaker system
- Output Power :1.2W*2
- Speaker Size: 2" 4ohm 3W
- Built-in lithium battery 3.7V/2400mAh(18650)
- Product Dimension:L210*W160*H70mm



CD-R/CD-RW



Bluetooth™



USB PLAYER



RD2347

CD/USB/MP3 player, CD-R/CD-RW

- FM/AM Radio
- CD/MP3/CD-R/CD-RW player
- USB player
- Bluetooth function(Optional)
- Aux in and Earphone jack
- LCD displayer

Specification

- 2.0 Speaker System
- Output Power :1.5W*2
- Speaker Size : 2.5" 4ohm 3W
- AC Power:100-230V~60/50Hz
- 6xUM-2 1.5V Battery(Not included in shipment)
- Product Dimension :L214.5*W215*H121.5mm



CD-R/CD-RW



FM/AM RADIO



USB PLAYER



Bluetooth™



PHONES JACK



YM-332/YM-332A

Alarm clock Radio

- FM radio with frequency 87.5-108MHz
- Dual alarm and dimmer
- 3 Level Dimmer adjustment
- Snooze function
- Temperature(Optional)
- Humidity(Optional)

Specification

- 1.0 speaker System
- Output Power 1W
- Speaker Size : 2"8ohm 1W
- 1.8 inch (White/Red/Green) LED display
- DC5V/1A external certificated adaptor
- Product Dimension:203L*58W*82H mm



DUAL ALARM



FM RADIO



PHONE CHARGER



YM-227/YM-227DAB

Micro Component Bluetooth Audio Streaming

- Bluetooth
- USB/TF Play&5V/1A USB charging
- PLL Tuning FM Radio
- Multi-Function LED Display with Backlight & Dimmer Control
- Aux in
- Dual Alarm
- Sleep Timer Function
- Wake up to Buzzer/ Radio & Snooze

Specification

- 2.0 Speaker System
- Output Power: 2 x 5W
- Speaker Size: 3"4ohm 5W
- DC5V/2A or 9V/2A external certificated adaptor
- Product Dimension: L240*W138*H125.5mm



FM Radio



Bluetooth™



USB PLAYER




YM-2301

Alarm clock Radio

- FM/AM Radio(AM Radio Optional)
- Dual alarm/Dimmer Control
- Alarm Clock
- Memory for 20 channel
- Snooze function

Specification

- 1.0 speaker System
- Output Power 0.5W
- Speaker Size : 2" 8ohm 0.5W
- 0.9inch (White/Red/Green) LED display
- Type-C charging
- Product Dimension:L130*W123*H58 mm



FM/AM Radio



Dual Alarm



YM-236/YM-236F

DAB/FM Alarm clock Radio

- DAB+/DAB Band III & FM Digital Radio
- Multi-Function Dot Matrix LCD Display
- Easy Backlight and Dimmer Control
- Automatic DAB Synchrony Real Time Clock
- Bluetooth built-in
- Dual alarm
- Earphone Jack

Specification

- 1.0 speaker System
- Output Power 1W
- Speaker Size : 2" 4ohm 1W
- Built-in lithium battery 1200mAh(18650)
- Type C charging cable
- Product Dimension:123L*24.5W*64.8H mm



FM RADIO



PHONES JACK



Bluetooth™



DUAL ALARM



YM-2343/YM-2343F

DAB/FM Alarm clock Radio

- DAB+/DAB Band III & FM Digital Radio
- Multi-Function Dot Matrix LCD Display
- Easy Backlight and Dimmer Control
- Automatic DAB Synchrony Real Time Clock
- Bluetooth built-in
- Dual alarm
- Earphone Jack

Specification

- 1.0 speaker System
- Output Power 1W
- Speaker Size : 2" 4ohm 1W
- Built-in lithium battery 1200mAh(18650)
- Type C charging cable
- Product Dimension:133L*30.5W*83H mm



FM RADIO



PHONES JACK



Bluetooth™



DUAL ALARM



YM-2151

DAB/FM Clock Radio

- DAB+/DAB Band III & FM Digital Radio
- Multi-Function Dot Matrix LCD Display
- Easy Backlight and Dimmer Control
- Automatic DAB Synchrony Real Time Clock
- Bluetooth V5.0
- Earphone Jack

Specification

- 1.0 speaker system
- Output Power:1.5W
- Speaker Size:2.5" 4ohm 5W
- LCD display
- 4x AA Battery(Not included in shipment)
- Type C charging cable
- Product Dimension :L177*W50*H108mm



FM RADIO



Bluetooth™



DUAL ALARM




YM-323

Weather Alert Radio

- WB/FM/AM Radio
- Weather Alert function
- Torch function
- Bluetooth
- Memory for 20 channel
- LCD Display
- Solar Panel or Hand Crank(Optional)
- Type-C charging

Specification

- 1.0 speaker System
- Output Power 3W
- Unit Size : 2" 4ohm 3W
- USB-A charging output: 5V/1A
- Built-in lithium battery 3.7V/2500mAh
- 3x AA Battery(Not included in shipment)
- Product Dimension:L172*W61.5*H100.5 mm

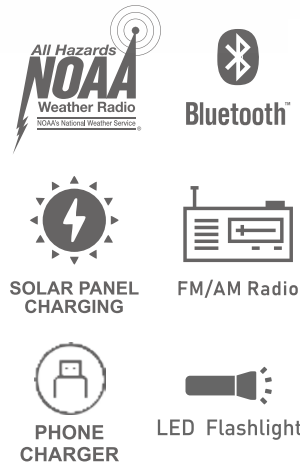

YM-188

Alarm clock Radio

- FM radio with frequency 87.5-108MHz
- AM Radio (Optional)
- Bluetooth (Optional)
- Dual alarm and dimmer control
- Alarm Clock Function
- Snooze function

Specification

- 1.0 speaker System
- Output Power 1W
- Speaker Size : 2"8ohm 1W
- 1.8inch (White/Red/Green) LED display
- DC5V/1A external certificated adaptor
- Product Dimension:202L*60W*82H mm






YM-189

Alarm clock Radio

- FM radio with frequency 87.5-108MHz
- Dual alarm and dimmer control
- Alarm Clock Function
- Snooze function
- Type-C charging

Specification

- 1.0 speaker System
- Output Power 1W
- Speaker Size : 2"8ohm 1W
- Built-in lithium battery 1200mAh(18650)
- 1.8inch (White/Red/Green) LED display
- Product Dimension:156L*45W*188H mm




YM-9268

ALARM CLOCK WHITE NOISE MACHINE

- White noise sound machine
- Dual alarm function
- 12 white noise background sound source
- Dual alarm and dimmer control
- 5V/1A USB port for charging

Specification

- 1.0 speaker system
- Output Power:3W
- 1.1 inch adjustable LCD display
- Speaker Size :1.5" 4ohm 3W
- DC5V/1A external certificated adaptor
- Product Dimension :96(L) × 85(D) × 59.5(H) mm

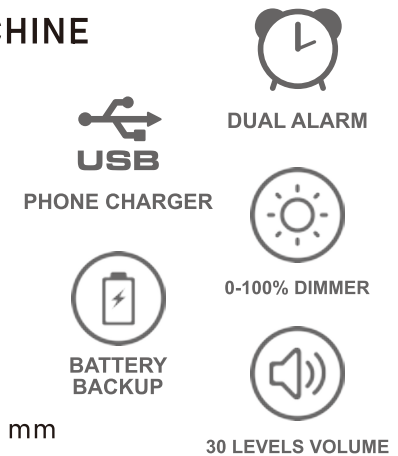



YM-2122

ALARM CLOCK WHITE NOISE MACHINE

- Dual alarm for Weekday/Weekend/All 7 days
- 7 Natural Alarm sounds
- 0-100% Display Dimmer

Specification

- 1.0 speaker system
- Output Power:3W
- 0.8 inch LED display
- Speaker Size :1.5" 4ohm 3W
- DC5V/1A external certificated adaptor
- Product Dimension :120(L) × 64.5(D) × 67.2(H) mm



DUAL ALARM



0-100% DIMMER



30 LEVELS VOLUME




YM-201

Wireless Charging Clock

- Wireless charging 5W or 10W(Optional)
- Dual alarm and dimmer control
- Snooze function
- Date month year

Specification

- DC12V/3.5A external certificated adaptor
- USB-A 5V/1A charging
- USB-C 18W(max.) charging
- 0.6inch (White/Red/Green) LED display
- Product Dimension :L163*W100*H35mm



WIRELESS QUICK-CHARGER



PHONE CHARGER



DUAL ALARM



YM-202

Alarm clock Radio

- FM Radio
- Dual alarm and dimmer control
- Alarm Clock Function
- Memory for 10 channel
- Snooze function
- Temperature
- Humidity

Specification

- 1.0 speaker System
- Output Power 1W
- Speaker Size : 2" 4ohm 1W
- 0.6inch (White/Red/Green) LED display
- Type C charging cable
- Product Dimension:L163*W100*H35 mm



FM Radio



Dual Alarm



YM-183DAB/YM-183

Wireless Charging DAB/FM Clock Radio

- DAB+/DAB Band III & FM Digital Radio
- Multi-Function Dot Matrix LCD Display
- Easy Backlight and Dimmer Control
- Automatic DAB Synchron Real Time Clock
- Bluetooth Function(Optional)
- Wireless charging 5W or 10W(Optional)
- Dual alarm
- Snooze function

Specification

- 1.0 speaker system.
- Output Power:2W
- Speaker Size:2" 4ohm 3W
- LCD display
- DC5.5V/1.5A or 9V/2A external certificated adaptor
- Product Dimension:L170*W118*H61mm



WIRELESS CHARGER



FM RADIO



Bluetooth™



PHONE CHARGER



DUAL ALARM



YM-186DAB / YM-186

Wireless Charging DAB/FM Clock Radio

- DAB+/DAB Band III & FM Digital Radio
- Multi-Function Dot Matrix LCD Display
- Easy Backlight and Dimmer Control
- Automatic DAB Synchrony Real Time Clock
- Bluetooth Function(Optional)
- Wireless charging 5W or 10W(Optional)
- Dual alarm
- Snooze function



FM RADIO



Bluetooth™



PHONE CHARGER



DUAL ALARM

Specification

- 1.0 speaker system
- Output Power:2W
- Speaker Size:2" 4ohm 3W
- LCD display
- DC5.5V/1.5A or 9V/2A external certificated adaptor(Optional)
- Product Dimension:L161*W128.5*H61mm



YM-607DAB / YM-607

Wireless Charging DAB/FM Clock Radio

- DAB+/DAB Band III & FM Digital Radio
- Multi-Function Dot Matrix LCD Display with Backlight and Dimmer Control
- Automatic DAB Synchrony Real Time Clock
- Bluetooth V5.0
- Wireless charging 5W or 10W(Optional)
- Dual alarm
- Snooze



FM RADIO



Bluetooth™



PHONE CHARGER



DUAL ALARM

Specification

- 2.0 speaker system
- Output Power :4W*2
- Speaker Size: 45mm 4ohm 5W
- LCD display
- DC9V/2A external certificated adaptor
- Product Dimension :200(WX 102(D)×82(H)mm



YM-608DAB / YM-608

Wireless Charging DAB/FM Clock Radio

- DAB+/DAB Band II & FM Digital Radio
- Multi-Function Dot Matrix LCD Display
- Easy Backlight and Dimmer Control
- Automatic DAB Synchron Real Time Clock
- Bluetooth V5.0
- Wireless charging 5W or 10W(Optional)

Specification

- 2.0 speaker system
- Output Power:4W*2
- Speaker Size:1.5" 4ohm 5W
- LCD display
- DC5V/1.5A or 9V/2A external certificated adaptor(Optional)
- Product Dimension:L195*W130*H65.8mm



WIRELESS CHARGER



FM RADIO



Bluetooth™



PHONE CHARGER



DUAL ALARM



YM-609

Wireless Charging Clock Radio

- Wireless charging 5W or 10W(Optional)
- FM radio with frequency 87.5-108MHz
- Bluetooth V5.0
- AUX-IN and USB port for charging
- Dual alarm and dimmer control
- 5V/1A USB charge

Specification

- 2.0 speaker system
- Output Power:4W*2
- Speaker Size : 2" 4ohm 5W
- 1.4inch white LED display
- DC9V/2A external certificated adaptor
- Product Dimension :194(W) × 148D)×75(H) mm



WIRELESS CHARGER



FM RADIO



Bluetooth™



PHONE CHARGER



DUAL ALARM



YM-612

Wireless Charging Clock Radio

- Wireless charging 5W or 10W(Optional)
- FM radio with frequency 87.5-108MHz
- Bluetooth V5.0
- AUX-IN and USB port for charging
- Dual alarm and dimmer control
- 5V/1A USB charge

Specification

- 1.0 speaker system
- Output Power:3W
- Speaker Size : 2.5" 4ohm 5W
- 0.8inch white LED display
- DC5.5V/1.5A or DC9V/2A external certificated adaptor
- Product Dimension :115(W) × 115(D)×112(H) mm



WIRELESS QUICK-CHARGER



DUAL ALARM



FM RADIO



Bluetooth™



PHONE CHARGER



YM-2152

Micro System with DAB/AM/FM/CD/BT & USB Playback

- DAB+/DAB band II & FM PLL Radio
- Front loading drawer type CD player (CD/CD-R/CD- RW/CD-MP3/WMA playback)
- Multi-Function TFT Displayer
- Dual Alarm
- Bluetooth stereo music streaming function
- USB-MP3 playback
- Aux in and Earphone jack

Specification

- 2.0 Speaker System
- Output Power: 2*10W(2*20W Optional)
- Speaker Size: 3" 4ohm 10W (20W Optional)
- DC15V/2.7A external certificated adaptor
- Product Dimension :376(W) × 211.7(D) ×131(H) mm



CD-R/CD-RW



FM RADIO



Bluetooth™



PHONES JACK



USB PLAYER



YM-2153/YM-2153FB

DAB+/Bluetooth/ Alarm Clock Radio

- DAB+/DAB band III & FM PLL Radio
- Multi-Function TFT Displayer
- Dual Alarm
- Wireless charging 5W or 10W(Optional)
- Bluetooth stereo music streaming function
- USB playback
- Aux in and Earphone jack
- Hand-made wooden case

Specification

- 1.0 speaker system
- Output Power: 6W
- Speaker Size: 3" 4ohm 8W
- DC5V/2A external certificated adaptor
- Product Dimension: L210*W128.6*H121mm



USB PLAYER

FM Radio



Bluetooth™



YM-8818

DAB+/Bluetooth/Alarm Clock Radio

- Wireless charging 5W or 10W(Optional)
- FM PLL Radio
- CD/USB/AUX/MP3 player, CD-R/CD-RW
- 3.5mm Earphone jack for music
- 5V/1A USB charging output
- Dual alarm function
- Bluetooth Function(Optional)
- Bluetooth out(Optional)
- Snooze/Dimmer control
- Remote(Optional)

Specification

- 2.0 speaker system
- Output Power :1.25W*2
- Speaker Size: 2" 4ohm 3W
- 0.9 inch (White/Red/Green) LED display
- AC power:100-240V 50/60Hz
- Product Dimension:L186.5*W186*H73.5mm



WIRELESS CHARGER



CD-R/CD-RW



FM/AM RADIO



PHONE CHARGER

MP3



Bluetooth™



YM-8368

YM-8369

No Cassette Version

YM-8368&YM-8369

Cassette/CD/USB/MP3 player, CD-R/CD-RW

- FM/AM Radio
- CD/MP3/CD-R/CD-RW player
- USB player
- Bluetooth function(Optional)
- Aux in and Earphone jack
- LCD display
- Cassette recorder & stereo player
- Remote(Optional)

Specification

- 2.0 Speaker System
- Output Power :1.5W*2
- Speaker Size : 2.5" 8ohm 3W
- AC Power:100-230V~60/50Hz
- 6xUM-2 1.5V Battery(Not included in shipment)
- Product Dimension :L214.5*W215*H121.5mm



Cassette

FM/AM RADIO



PHONE CHARGER

MP3



Bluetooth™



YM-2192 / YM-2192A

TURNTABLE

- 3 Speed (33-1/3, 45, 78 RPM) Turntable
- Aux-in Jack 3.5mm
- Headphone jack 3.5mm
- RCA output jack
- Bluetooth(Optional)

Specification

- 2.0 speaker System
- Output Power 1.8Wx2
- Speaker unit: 40*70mm 4ohm 3W
- DC9V/800mA external certificated adaptor
- Product Dimension:L350*W258*H115mm



Bluetooth™



PHONES JACK



AUX IN



YM-2198

TURNTABLE

- 3 Speed (33-1/3, 45, 78 RPM) Turntable
- USB Player
- USB Record(Optional)
- Aux-in Jack 3.5mm
- Headphone jack 3.5mm
- RCA output jack
- Bluetooth input
- Bluetooth out(Optional)

Specification

- 2.0 speaker System
- Output Power 2Wx2
- Sbeaker unit: 40*70mm 4ohm 3W
- DC5V/1A external certificated adaptor
- Product Dimension:L322*W306*H132mm



Bluetooth™



PHONES JACK



AUX IN



YM-335

Alarm clock Radio

- FM radio with frequency 87.5-108MHz
- Dual alarm and dimmer control
- Alarm Clock Function
- Bluetooth Function
- Night light for white and Red level
- 5V/1A USB charging port for wired charge

Specification

- 1.0 speaker System
- Output Power 2W
- Speaker Size : 2"4ohm 3W
- Black Housing case
- DC5V/1A external certificated adaptor
- Product Dimension:188L*50W*69H mm



DUAL ALARM



FM RADIO



LIGHT



PHONE CHARGER



Bluetooth™



YM-315

FM/AM Radio

- FM Radio with frequency 87.5-108MHz
- AM Radio
- Bluetooth Function
- Earphone Jack
- Torch Function
- MP3 support device: USB/SD/TF
- Type-C Charging

Specification

- 1.0 speaker System
- Output Power 2W
- Speaker Size : 2"40hm 3W
- Built-in lithium battery 600mAh
- Red LED display
- Product Dimension:125L*33W*75H mm



USB PLAYER



FM/AM Radio



TF PLAYER



LIGHT



YM-326

Digital Solar FM/AM Radio

- 15 front key control
- LED display
- Solar panel charging(Optional)
- FM/AM radio
- MP3 support device: USB/SD/TF
- Bluetooth V5.0
- Earphone jack
- Pull rod telescopic antenna

Specification

- Mono speaker
- Solar panel:130*105mm
- Built-in lithium battery 1200mAh(18650)
- Output power max. 2W
- TYPE-C charging cable
- Speaker size 3.5" 40hm 5W
- Size: L200*W50*H135mm



FM/AM Radio



TF PLAYER



SOLAR PANEL CHARGING





VGW-801C

Art Digital Clock

DESIGN
PATENT



VGW-801

VGW-801C

Size: 20.2 x 2 x 8.1cm
 LCD VA: 18.5 x 6.4cm
 MEAS: 50.1x30.5x29.5cm
 N.W.: 10.8KGS G.W.: 14.5KGS
 PCS/CTN: 60
 Battery: AAAx2 (not included)



VGW-801B



VGW-801



WiFi LCD weather station clock



Size: 20.2 x 2 x 8.1cm
 LCD VA: 18.5 x 6.4cm
 MEAS: 50.1x30.5x29.5cm
 N.W.: 10.8KGS G.W.: 14.5KGS
 KGSPCS/CTN: 60
 Battery: included 1.0m Micro USB Cable





VGW-9552CN



VGW-779



VGW-9552JP




VGW-9552

VGW-9552CN



Size:36 x 15 x 32cm
 LCD VA : 33.7 x 12.6cm
 MEAS : 41.2 x 32 x 35cm
 PCS/CTN:10
 GW:6.5KGS NW:5.8KGS
 Battery: AA x 4(not included)

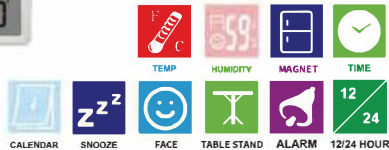

VGW-779

Size: 7.4*9.3*5.2cm
 LCD(VA):5.3*7.3cm
 MEAS:27*30.5*41.5cm
 PCS/CTN:60
 G.W:7.9KGS N.W:7KGS
 Battery:AAA*2(Not Included)





VGW-767A

Size:12.1 x 17.5 x 4.6cm
 LCD VA : 12.5 x 8cm
 MEAS : 56.5 x 37.3 x 29.5cm
 1 meter Micro USB cable included
 N.W.: 7.8KGS G.W.:11.2KGS



VGW-767B

Size:12.1 x 17.5 x 4.6cm
 LCD VA : 12.5 x 8cm
 MEAS : 56.5 x 37.3 x 29.5cm
 1 meter Micro USB cable included
 N.W.: 7.8KGS G.W.:11.2KGS





VGW-767

OEM Color selection



Size: 12.1x17.5x4.6cm
 LCD VA: 12.5x8cm
 MEAS: 56.5x37.3x29.5cm
 PCS/CTN: 36
 N.W.: 7.75KGS G.W.: 11.2KGS
 Battery: AAx2(not included)



VGW-537

OEM Color selection



Size: 17.0x13.0x5.5cm
 LCD VA: 15x9cm
 MEAS: 38x34x30.5cm
 PCS/CTN: 20
 N.W.: 5.8KGS G.W.: 10KGS
 Battery: AAx3 and AAx1(not included)
 or TypeC Supply





KB-2303TH



VGW-2301



LD-0328



VGW-2303

Size: 7.4x1.6 cm
 LCD: 9.6.3 cm
 MEAS: 33x18x18.9 cm
 PCS/CTN: 40
 N.W.: 5KGS G.W.: 5.5KGS



VGW-2301

Size: 8 x 8.3 x 1.95 cm
 LCD VA: 7.7 cm
 MEAS: 19.1 x 31.5 x 20.7 cm
 PCS/CTN: 40
 Battery: AAA x 1 (not included)





VGW-536

OEM Color selection



Size: 8x2.4x11.13cm
 LCD VA: 5.5x8.24cm
 MEAS: 40.5x30.5x27.5cm
 PCS/CTN: 80
 N.W.: 7.4KGS
 G.W.: 8.2KGS
 Battery: 3xAAA(Not included)



VGW-532

OEM Color selection



Size: 9.3x4.25x9.4cm
 LCD VA: 7.5x7.6cm
 MEAS: 41.5x34.5x32cm
 PCS/CTN: 60
 N.W.: 7.75KGS G.W.: 11.2KGS
 Battery: AAx2(not included)





VGW-712



Colorful Background

RCC-751



DESIGN
PATENT



RCC-712

VGW-712

OEM Color selection



Size: 23.5x1.6 x16.5cm
 LCD VA: 16.5 x9.3cm
 MEAS:51.2x26.5x37.2cm
 PCS/CTN: 40
 N.W.: 10.8KGS G.W.:14.8KGS
 Battery: AAA x 2 (not included)



VGW-751

OEM Color selection



Size: 11.2x9.3x5.0cm
 LCD VA: 7.5x7.6cm
 MEAS: 43x31.5x38.5cm
 PCS/CTN: 60
 N.W.: 7.75KGS G.W.: 11.2KGS
 Battery: AAAx2(not included)





VGW-531

DESIGN
PATENT



VGW-8775



VGW-8775C

OEM Color selection



Size: 15.2 x 4.8 x 8.8cm
LCD VA: 11 x 4.9cm
MEAS: 54.5 x 50 x 21.5cm
PCS/CTN: 60
N.W:10.8 KGS G.W: 15 KGS
Battery:AAAX3(not included)



There are other displays :



RCC-531(DCF)



RCC-531(WWVB)



RCC-531(JJY)



VGW-531T(Talking)

TALKING
CLOCK



Size: 14.9x5.2x5.6cm
LCD VA:13x3.7cm
MEAS: 34x32.5x29cm
PCS/CTN: 40
N.W: 6.2KGS G.W: 8.1KGS
Battery: AAx2(not included)



VGW-702

DESIGN
PATENT



OEM Color selection



Item size: 7.0x14.5x3.8cm
MEAS:47.8x24.8x34.3cm
PCS/CTN: 60
N.W: 10.8KGS G.W: 15KGS
Battery: AAAX2(not included)



RCC-702(DCF)



VGW-762

OEM Color selection



Size: 7.7x4.35x6.45cm
 MEAS: 46.5x29.5x33cm
 PCS/CTN: 100
 N.W.: 9.2KGS G.W.: 9.8KGS
 Battery: AAx2(not included)



VGW-108

OEM Color selection



Size: 7.7x4.35x6.45cm
 MEAS: 46.5x29.5x33cm
 PCS/CTN: 100
 N.W.: 8.2KGS G.W.: 8.8KGS
 Battery: AAx2(not included)



VGW-761

OEM Color selection



Size: 9.8x3.3x8.05cm
 LCD VA:7.45x5.2cm
 MEAS: 45x23x29cm
 PCS/CTN:60
 N.W.: 6.3KGS
 G.W.: 7.2KGS
 Battery: 2xAAA(Not included)





DESIGN
PATENT



VGW-710 (Gray)

VGW-710 (White)



Talking



VGW-507



VGW-710 (JJY)

Item materials: ABS
size: 7.5x5.5x10.5cm
MEAS: 48x34x29.5cm
PCS/CTN: 60
N/ W : 5.5KGS G.W: 8KGS
Battery: AAAx2(not included)



China Talking



German Talking



French Talking



Talking

VGW-710 (Thling Clock)

Item materials: ABS
size: 7.5x5.5x10.5cm
MEAS: 48x34x29.5cm
PCS/CTN: 60
N/ W : 5.5KGS G.W: 8KGS
Battery: AAAx2(not included)



English Talking



Size: 11.7 x 6.2 x 11cm
LCD VA: 7.7 x 3.4cm
MEAS: 52 x 38 x 38cm
PCS/CTN: 60
N.W: 10KGS G.W: 14KGS
Battery: AA x 2(not included)





RCC-9551(WWVB)



Back

Size: 24x4x15.8cm
 LCD VA: 16.8x9.3cm
 MEAS: 52.5x26.5x36cm
 PCS/CTN: 20
 N.W.: 6.8KGS G.W.: 9.2KGS
 Battery: AAx2(not included)



RCC-D8017(DCF)

SIZE: 12.8 x 5x10cm
 LCD VA: 10.6 x 7.2cm
 MEAS: 55.7 x 30 x 23.8cm
 PCS/CTN: 40
 N.W.: 8.7 KGS G.W.: 9.4 KGS
 Battery: AAx2(not included)



VGW-9551



RCC-9551(DCF)



RCC-9551(JJY)



VGW-9551C



RCC-8017(JJY)



RCC-8017RH(JJY)



VGW-8017C



VGW-8017



RCC-8017(WWVB)



RCC-1010(DCF)



Size: 19.9x3.2x13.9cm
 LCD VA: 13.8x8.8cm
 MEAS: 56x30.5x35.3cm
 PCS/CTN: 36
 N.W.: 9KGS G.W.: 12KGS
 Battery: AAx2(not included)



RCC-530(DCF)



RCC-530(JJY)

OEM Color selection



Size: 21.6 x 3.0 x 6.6cm
 LCD VA: 19.2 x 4.2cm
 MEAS: 47 x 38.5 x 24cm
 PCS/CTN: 60
 N.W.: 13.32KGS G.W.: 18.10 KGS
 Battery: AA x 2(not included)



RCC-1010(WWVB)



VGW-1010



VGW-530



RCC-683(DCF)

Size: 17.2 x 2.1 x 14.5cm
 LCD VA: 4.6 x 2.05cm
 Photo Size: 12.7 x 8.9cm
 MEAS: 38 x 32 x 33.5cm
 PCS/CTN: 40
 N.W.: 10 KGS G.W.: 12 KGS
 Battery: AAA1 (not included)



VGW-683



RCC-683(JJY)



VGW-1011

SIZE: 11 x 7 x 5cm
 LCD VA: 5.5 x 3.5cm
 MEAS: 57 x 34 x 38.4cm
 PCS/CTN: 80
 N.W.: 9.93 KGS
 G.W.: 14.7 KGS
 Battery: AAAx2 (not included)



RCC-1011(JJY)



VGW-9015

OEM Color selection



Item materials: ABS
 Item size: 13.7x9.4x3.6cm
 MEAS: 54x28.5x32cm PCS/CTN: 60
 N.W.: 8.1 KGS G.W.: 10.3 KGS
 Battery: AG13x2



VGW-8015

OEM Color selection



2 Sided Clock with Calculator

SIZE: 6.0 x 3.5 x 11.5cm
 LCD VA: 4.0 x 6.0 cm/4.3 x 0.8cm
 MEAS: 43.5 x 37 x 27.5 cm PCS/CTN: 100
 N.W.: 8.5 KGS G.W.: 12 KGS
 Battery: AG13 x 2



VGW-3002RF

OEM Color selection



Clock size: 7.5x10.2x2.15cm
 Sensor size: 9x5x2.15cm
 LCD VA: 6.0x4.5cm
 MEAS: 46x42x36.5cm
 PCS/CTN: 120
 N.W.: 1.02 KGS G.W.: 1.35 KGS
 Clock battery: AAAx2 (not included)
 Sensor battery: AAAx2 (not included)



VGW-3002

Size: 10.2x7.5x2.3cm
 LCD VA: 6.0x4.5cm
 MEAS: 35x35.2x35.5cm
 PCS/CTN: 120
 N.W.: 8.1 KGS
 G.W.: 12.6 KGS
 Battery: AAAx1 (not included)

Flashing Remote Doorbell



VGW-8010

Patent Number: 200920136833.5

OEM Color selection



- LED display: hour, minute, second and day of the week
- Alarm, Stopwatch, Night light function
- Up to 50 meters remote controlled doorbell
- 32 music selectable doorbell
- Up to 50 meters remote controlled flashing light (suitable for elderly and hard-of-hearing users)
- Size: 14 x 8 x 14 cm MEAS: 46.7 x 34 x 32 cm
- PCS/CT: 20 N.W.: 8 KGS G.W.: 10.1 KGS
- Doorbell battery: AAAx4 (not included) / DC POWER
- LCD VA: 9 x 2.5 cm
- Remote controlled battery: 23A (not included)

Position	Time display	Night light	Doorbell	Flashing light
A	✓	✗	✗	✓
B	✓	✗	✓	✗
C	✓	✓	✓	✓
D	✓	✓	✗	✗



VGW-8026

OEM Color selection



Multifunctional Digital Clock

Three holders, Calendar, Calculator
Worldtime ,Alarm function
Countdown timer
SIZE: 18 x 5.8 x 5cm
MEAS: 39 x 34.5 x 30.5cm
PCS/CTN:50
N.W.:8.1KGS G.W.:10.88KGS
Battery: AG10 x 2



VGW-2700

OEM Color selection



Simple but creative arc design
Quartz watch
Pen holder available
SIZE: 7 x 10.3 x 13cm
MEAS: 57.5 x 39 x 36cm
PCS/CTN: 60
N.W: 5KGS G.W.: 9KGS
Battery: AG13x1



VGW-269

Transparent Pen Holder Clock

Transparent Pen holder, Calendar
Alarm and snooze function
Temperature, Birthday reminding
Count-down timer
SIZE: 10.5 x 5.5 x 12cm
MEAS: 45 x 33 x 41cm
N.W.: 6.6KGS G.W.:10KGS
Battery: CR2025 x1



VGW-525

Remember Your Trash Day

Set alarm for day and time you want to be reminded to take out trash
LED will flash for one hour beginning at programmed time
LED will turn off automatically after one hour, or push any button to manually turn off LED
Alarm automatically resets for the next week
LED uses only AAA batteries, which last 3 -24 months depending on use
57% of households forget trash day
2 of 3 households report remembering trash at the last minute
Those surveyed reported undesirable storage and health hazards due to forgetting trash day
Size: 12 x 1.9 x 6.0cm
LCD VA: 5.0 x 2.2cm
Inner carton: 16 x 15.5 x 16cm
PCS/CTN:10
Meas: 48.5 x 34 x 18.5cm
PCS/CTN: 60 G.W: 7.5 KGS
Battery: AAA x 2(not including) / AG13X2



Blister Packaging
with 4C Insert Card



VGW-8037

OEM Color selection



Size: 9x5x16.2cm
LCD VA: 5.2 x 7.9cm
MEAS: 51 x 30 x 36cm
PCS/CTN: 50
N.W.: 7.6 KGS G.W.: 10.53 KGS
Battery: AAA x 3(not included)



VGW-8005



VGW-8005B

Size: 12.5x5.2x9.2cm
LCD VA: 6.8 x 4.3cm
MEAS: 52 x 30.5 x 21.5cm
PCS/CTN: 50
N.W.: 6 KGS G.W.: 9.55 KGS
Battery: AAA x 3(not included)





RCC-602(DCF)



RCC-602(JJY)



VGW-602



RCC-602(WWVB)

Size: 29.0 x 2.6 x 19.0cm
 LCD VA: 14.8 x 6cm
 MEAS: 42.0 x 32.0 x 32.5cm
 PCS/CTN:20
 N.W.:9.5KGS G.W.:13.0KGS
 Battery:AA x 2(not included)



RCC-608(DCF)



RCC-608(JJY)



VGW-608



RCC-608(WWVB)

Radio Controlled Clock

Size: 22.0 x 2.2 x 25.0cm
 LCD VA: 14.8 x 6 cm/14.8 x3cm
 MEAS : 48.5 x 33 x 28cm
 PCS/CTN:20
 N.W.:9.5KGS G.W.:13.0KGS
 Battery:AA x 2(not included)



RCC-600(DCF)



RCC-600(JJY)



VGW-600



RCC-600(WWVB)

Size: 29.0 x 2.6 x 19.0cm
 LCD VA: 14.8 x 6 cm
 MEAS: 42.0 x 32.0 x 32.5cm
 PCS/CTN:20
 N.W.:9.5KGS G.W.:13.0KGS
 Battery:AA x 2(not included)



RCC-608A(DCF)



RCC-608A(JJY)



VGW-608A



RCC-608A(WWVB)

Radio Controlled Clock

Size: 22.0 x 2.2 x 25.0cm
 LCD VA: 14.8 x 6 cm/14.8 x3cm
 MEAS : 48.5 x 33 x 28cm
 PCS/CTN:20
 N.W.:9.5KGS G.W.:13.0KGS
 Battery:AA x 2(not included)



RCC-601(DCF)



VGW-601



RCC-601(WWVB)



RCC-601(JJY)



RF-601 808

Size: 29.0 x 2.6 x 19.0cm
 LCD VA: 14.8 x 6cm
 MEAS: 42.0 x 32.0 x 32.5cm
 PCS/CTN:20
 N.W.:9.5KGS G.W.:13.0KGS
 Battery:AA x 2(not included)



RCC-608D(DCF)



RCC-608D(WWVB)



VGW-608D



RCC-608D(JJY)



VGW-608W

Size: 22 x 2.2 x 25cm
 LCD VA: 14.8 x 6 cm/14.8 x3cm
 MEAS : 48.5 x 33.0 x 28.0cm
 PCS/CTN:20
 N.W.:8.0KGS G.W.:11.0KGS
 Battery:AA x2 (not included)



3D Night Light Clock

KIMPORT



VGW-703


Color Changing



Clock Size: 8.7x7.5x5cm

Top part:

1. OEM 3D design pattern on top changeable!
2. Touch Light: 3 levels of brightness: high → medium → low or multiple light color

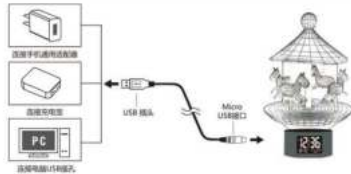

Top button to adjust the light
Bright → weak → dark



VGW-YX005

OEM Color selection



Size: 11.8x10.4x10.4cm
MEAS: 54.4x44x27.5cm
PCS/CTN: 40PCS
N.W.: 12.7KGS
G.W.: 16.5KGS

Battery: including one 18650 1800 Mah Lithium battery



LED Alarm Clock

Customized colorful LED alarm clock
3 Levels of brightness: High, medium and low
18PM to 6 AM automatically entered into low light brightness
1 meter Micro USB cable included
SIZE: 19.2 x 7.5 x 2.2cm
MEAS: 42 x 17 x 32cm
PCS/CTN: 60
N.W.: 7.8KGS G.W.: 13KGS



VGW-E701(Outline)



Support aux line input, TF card and receivable radio station



VGW-YX001

Size: 9.0x6.6x9.1cm
LED VA: 8.6x8.6cm
MEAS: 47.3x25.5x39cm
PCS/CTN: 40PCS
N.W.: 13.5KGS
G.W.: 15.0KGS
Battery: including one 18650 1800 Mah Lithium battery



VGW-YX002

OEM Color selection



Size: 18.0x5.0x8.4cm
LED VA: 8.6x8.6cm
MEAS: 42x24x29cm
PCS/CTN: 20PCS
N.W.: 9.5KGS
G.W.: 10.6KGS
Battery: including one 18650 1800 Mah Lithium battery



VGW-YX003

OEM Color selection



Size: 14.5x4.5x7cm
MEAS: 37.3x29.5x43.5cm
PCS/CTN: 50PCS
N.W.: 15.0KGS
G.W.: 18.2KGS
Battery: including one 18650 2000 Mah Lithium battery



Timer Clock

KIMPORT



VGV-901
OEM Color selection
LCD VA: 3.6x2.5cm
Size:5x4.6x1.2cm
MEAS:31.5x13x24.5cm
PCS/CTN:200
N.W.:5.0 KGS G.W.:7.0 KGS
Battery:CR2025X1



VGV-519
OEM Color selection
LCD VA: 3.8 x 2cm
MEAS:63.0x32.5x23.0cm
PCS/CTN:200
N.W.: 7.5KGS G.W:8.5 KGS
Battery: AG13 x 2



VGV-708
(Stainless steel Timer)
OEM Color selection
Item size: 6.5x2.0x7.2cm
LCD VA: 4.5x2cm
MEAS.:37x27x32.8cm
PCS/CTN:200
N.W.:11.4KG G.W: 14.5KG
Battery:AAAx1 (not included)



VGV-508
OEM Color selection
SIZE: 9.0 x 5.5 x 1.0cm
LCD VA: 4.4 x 3.4cm
MEAS: 32 x 21 x 32cm
PCS/CTIN:200
N.W.:7.85KGS G.W.:11.3KGS
Battery: AG10 x 2



VGV-501B
OEM Color selection
Size: 9.4 x 6.2 x 2cm
LCD VA: 5.3 x 2.1cm
MEAS: 42 x 29 x 32cm
PCS/CTN:200
N.W.:11.2KGS G.W.:16KGS
Battery:AAA x 1 (not included)



VGV-502
Size: 6 x 3.2 x 11cm
MEAS: 33 x 36 x 48cm
PCS/CTN:200
N.W.:12KGS G.W.:17KGS
Battery:AG13 x 2



VGV-511
OEM Color selection
Size: 7 x 2.1 x 5.5cm
LCD VA: 3.8 x 1.8cm
MEAS: 26.8 x 26.5 x 38.8cm
PCS/CTN: 200 N.W.:5.87KGS
G.W.:8.17KGS
Battery: AG13 x 1



VGV-516
OEM Color selection
Size: 5.5 x 4.4 x 1.4cm
LCD VA: 3.8 x 1.8cm
MEAS: 31.5 x 13.0 x 24.5cm
PCS/CTN:200
N.W.:5.0KGS G.W.:7.0KGS
Battery:AG13 x 1



VGV-521
OEM Color selection
Size:5.3 x 0.85 x 7.0cm
LCD VA: 3.7 x 2.8cm
MEAS:37 x 36 x 16.9cm
N.W.: 5.2KGS G.W.:7.5KGS
QTY/CTN: 200PCS
Battery:AG10 x 1



VGV-8002

OEM Color selection
Size: 4.5 x 4.5 x 11cm
LCD VA: 1.6 x 5.7cm
MEAS: 48 x 24.5 x 24.5cm
PCS/CTN: 100
N.W.: 6.1 KGS G.W.: 8.5KGS
Battery:AAAx1 (not included)





KB-110(Y01)



KB-110(Y01D)



KB-110(Y08)



KB-110TH



KB-110(Y01)

Rounded corners and curved edges




KB-110TH

Rounded corners and curved edges



KB-110(Y01)

Rounded corner



Outer Size



KB-110WTH



KB-110J



KB-90(Y01)




KB-90(Y01D)



KB-90(Y03)



KB-90(Y04)



Outer Size



KB-90WTH




KB-90J



KB-109(Y01)



KB-109(Y02)



Outer Size



KB-109(Y03)



KB-136(Y01)



KB-136



KB-136(Y01D)



KB-136TE



KB-136(Y01)
Rounded corner




KB-136TH



KB-136(Y01)
Rounded corners and curved edges



KB-136TH
Rounded corners and curved edges



Outer Size



KB-136HDX



KB-136(Y01)




KB-136TH03



KB-136TH04



KB-84(Y01)



Outer Size



KB-84(Y01D)



KB-84(Y02)




KB-84(Y01T)



KB-84(Y03)



KB-103



Outer Size




KB-103(Y01)



KB-103(Y01D)



KB-134(Y01)



Outer Size



KB-173(Y01)



Outer Size



KB-173(Y01D)



KB-220(Y02D)



Outer Size



KB-220(Y02)



KB-220WTH



KB-220(Y03)



KB-93TH




KB-93T



KB-93H



KB-93Y01



KB-170TH



LD-0333

7-in-1 Professional Weather Station with color display

YT60231

- » Large colorful screen display with LED backlight.
- » RCC time sync with DST Time, calendar & weekday.
- » Alarm with snooze function.
- » Moon Phase display.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy, storm, snowy).
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Barometric pressure reading with trend.
- » Light intensity and UVI displays.
- » Hourly, Daily, Weekly, Monthly, Total rainfall and Rainfall rate in past hour.
- » Average wind speed, gust wind speed and wind direction displays
- » Absolute and relative Barometric pressure displays with trend.
- » Weather index display: Feel likes, Wind Chill, Heat index, Dew point
- » Max/Min records for Indoor & outdoor temperature and humidity.
- » Hi/Lo alert setting (Indoor/outdoor temperature and humidity).
- » Indoor 3-level comfort level indication.
- » 8 languages for weekday (DE/DK/EN/ES/FR/IT/NL/RU).
- » 9 touch functional buttons.
- » 3-level brightness of backlight.
- » Low battery indication.
- » Wall mount / desktop usage.
- » 3 x AAA backup batteries (not included).
- » 1 pc Wireless transmitter (R53) included (3 x AA batteries, not included)
- » AC-AC Adaptor : AC 5V/150mA, included.
- » WWVB/DCF/MSF versions available.
- » Product size:
Weather station receiver : 191.6 x 127 x 28.8mm
Weather station transmitter : 408 x 350 x 367mm



Weather station exterior colours

Thermo-hygro sensor exterior colours

WEATHER STATION [RCC+RF]

7-in-1 WIFI Professional Weather Station with color display

YT60234

- » Large colorful screen display with LED backlight.
- » WiFi sync with Time Server and Live Weather Servers (Weather Underground and Weather Cloud).
- » Alarm with snooze function.
- » Moon Phase.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy, storm, snowy).
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Barometric pressure reading with trend.
- » Light intensity and UVI displays.
- » Hourly, Daily, Weekly, Monthly, Total rainfall and Rainfall rate in past hour.
- » Average wind speed, gust wind speed and wind direction displays
- » Absolute and relative Barometric pressure displays with trend.
- » Weather index display: Feel likes, Wind Chill, Heat index, Dew point
- » Max/Min records for indoor & outdoor temperature and humidity.
- » Indoor 3-level comfort level indication.
- » Hi/Lo alert setting (indoor/outdoor temperature & humidity).
- » 8 languages for weekday (DE/DK/EN/ES/FR/IT/NL/RU).
- » 9 touch function buttons.
- » 3-level brightness of backlight.
- » Low battery indication.
- » Wall mount / desktop usage.
- » 3 x AAA backup batteries (not included).
- » 1 pc Wireless transmitter (R53) included (3 x AA batteries, not included)
- » AC-DC Adaptor : DC 5V/1A, included.
- » Product size:
Weather station receiver : 191.6 x 127 x 28.8mm
Weather station transmitter : 408 x 350 x 367mm



Weather station exterior colours

LD-0333

WEATHER STATION [RCC+RF]

5-in-1 WIFI Professional Weather Station with color display

YT60238

- » Large colorful screen display with LED backlight.
- » WiFi sync with Time Server and Live Weather Servers (Weather Underground and Weather Cloud).
- » Alarm with snooze function.
- » Moon Phase.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy, storm, snowy).
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Barometric pressure reading with trend.
- » Hourly, Daily, Weekly, Monthly, Total rainfall and Rainfall rate in past hour.
- » Average wind speed, gust wind speed and wind direction displays
- » Absolute and relative Barometric pressure displays with trend.
- » Weather index display: Feel likes, Wind Chill, Heat index, Dew point
- » Max/Min records for indoor & outdoor temperature and humidity.
- » Indoor 3-level comfort level indication.
- » Hi/Lo alert setting (indoor/outdoor temperature & humidity).
- » 8 languages for weekday (DE/DK/EN/ES/FR/IT/NL/RU).
- » 9 touch function buttons.
- » 3-level brightness of backlight.
- » Low battery indication.
- » Wall mount / desktop usage.
- » 3 x AAA backup batteries (not included).
- » 1 pc Wireless transmitter (R58) included (3 x AA batteries, not included)
- » AC-DC Adaptor : DC 5V/1A, included.
- » Product size:
Weather station receiver : 191.6 x 127 x 28.8mm
Weather station transmitter : 408 x 350 x 367mm



Weather station exterior colours
Thermo-hygro sensor exterior colours

455

5-in-1 Professional Weather Station with color display

YT60239

- » Large colorful screen display with LED backlight.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Alarm with snooze function.
- » Moon Phase.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy, storm, snowy).
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Barometric pressure reading with trend.
- » Hourly, Daily, Weekly, Monthly, Total rainfall and Rainfall rate in past hour.
- » Average wind speed, gust wind speed and wind direction displays
- » Absolute and relative Barometric pressure displays with trend.
- » Weather index display: Feel likes, Wind Chill, Heat index, Dew point
- » Max/Min records for indoor & outdoor temperature and humidity.
- » Indoor 3-level comfort level indication.
- » 8 languages for weekday (DE/DK/EN/ES/FR/IT/NL/RU).
- » 9 touch function buttons.
- » 3-level brightness of backlight.
- » Low battery indication.
- » Wall mount / desktop usage.
- » 3 x AAA backup batteries (not included).
- » 1 pc Wireless transmitter (R50) included (3 x AA batteries, not included)
- » AC-AC Adaptor : AC 5V/150mA, included.
- » WWVB/DCF/MSF versions available.
- » Product size:
Weather station receiver : 191.6 x 127 x 28.8mm
Weather station transmitter : 408 x 350 x 36.7mm



Weather station exterior colours

LD-0333

Weather Station with color display

YT60232

- » Large colorful screen display with LED backlight.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Alarm with snooze function.
- » Moon Phase display.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy, storm, snowy).
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Barometric pressure reading with trend.
- » Weather index display: Heat index, Dew point
- » Max/Min records for indoor & outdoor temperature and humidity.
- » Indoor 3-level comfort level indication.
- » Hi/Lo alert setting (indoor/outdoor temperature & humidity).
- » 8 languages for weekday (DE/DK/EN/ES/FR/IT/NL/SE).
- » 3-level brightness of backlight.
- » Low battery indication.
- » 7 functional buttons.
- » 3 x AAA backup batteries (not included).
- » AC-AC Adaptor : AC 5V/150mA, included.
- » 1 pc wireless thermo-hygro sensor (R50) included (2 x AAA batteries, not included).
- » WWVB/DCF/MSF versions available.
- » Product size :
Weather station receiver : 145 x 86 x 30mm
Thermo-hygro sensor (R50) : 104 x 40 x 26mm



Weather station exterior colours

Thermo-hygro sensor exterior colours

456

Professional Weather Station with color display

YT60160

- » Colorful and big digit display with super bright backlight.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Dual Alarm with snooze function.
- » Moon Phase.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy, snowy, Strom).
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Barometric pressure reading (M/hpa, Ft/inHg).
- » Historical bar chart with past 12 hours pressure change.
- » Max/Min records for indoor & outdoor temperature and humidity.
- » Rain rate, Daily, Weekly, Monthly rainfall (mm/in).
- » Gust or average wind speed (mph, km/h).
- » Real time & dominant wind direction in 16-direction resolution.
- » Hi/Lo alert setting (indoor/outdoor temperature).
- » 7 languages for weekday (DE/DK/EN/ES/FR/IT/NL).
- » 7 touch function buttons.
- » 3-level brightness of backlight.
- » Low battery indication.
- » Wall mount / desktop usage.
- » 3 x AAA backup batteries (not included).
- » 1 pc Wireless Anemometer (R45) included (4 x AA batteries, not included).
- » 1 pc Wireless Rain gauge (R46) included (2 x AA batteries, not included).
- » AC-DC Adaptor : DC 5V/300mA, included.
- » Product size :
Weather station receiver : 191.6 x 127 x 16mm
Anemometer(R45) : 152 x 279 x 393mm
Rain Gauge(R46) : 166 x 105.5 x 118mm
- » YT60160-1 (WWVB version)
YT60160-2 (DCF version)
YT60160-4 (MSF version)



Weather station exterior colours
Thermo-hygro sensor exterior colours

Rain Gauge

Anemometer

LD-0333

Wireless Weather Station with color display

YT60163

- » Colorful and big digit display with super bright backlight.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Dual Alarm with snooze function.
- » Moon Phase.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy, storm).
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Barometric pressure reading (M/hpa, Ft/inHg).
- » Pressure change trend.
- » Max/Min records for indoor & outdoor temperature and humidity.
- » Hi/Lo alert setting (indoor/outdoor temperature).
- » 7 languages for weekday (DE/DK/EN/ES/FR/IT/NL).
- » 7 touch function buttons.
- » 3-level brightness of backlight.
- » Low battery indication.
- » Wall mount / desktop usage.
- » RF433MHz Remote range: 100meters(open space).
- » 2 x AAA backup batteries (not included).
- » AC-DC Adaptor : AC 5V/150mA, included.
- » 1 pc wireless thermo-hygro sensor (R50) included (2 x AAA batteries, not included).
- » Product size :
Weather station receiver : 191.6 x 127 x 16mm
Thermo-hygro sensor (R50) : 104 x 40 x 26mm
- » YT60163-1 (WWVB version)
YT60163-2 (DCF version)
YT60163-4 (MSF version)



Weather station exterior colours
Thermo-hygro sensor exterior colours

457

Weather Station with color display

YT60180

- » Colorful and big digit display with super bright backlight.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Dual Alarm with snooze function.
- » Moon Phase.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy, storm).
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Barometric pressure reading (M/hpa, Ft/inHg).
- » Historical bar chart with past 12 hours pressure change.
- » Max/Min records for indoor & outdoor temperature and humidity.
- » Hi/Lo alert setting (indoor/outdoor temperature).
- » 7 languages for weekday (DE/DK/EN/ES/FR/IT/NL).
- » 7 touch function buttons.
- » 3-level brightness of backlight.
- » Low battery indication.
- » Wall mount / desktop usage.
- » 3 x AAA backup batteries (not included).
- » AC-DC Adaptor : DC 5V/300mA, included.
- » 1 pc wireless thermo-hygro sensor (R47) included (2 x AAA batteries, not included).
- » Product size :
Weather station receiver : 191.6 x 127 x 16mm
Thermo-hygro sensor(R47) : 62.5 x 100 x 16.5mm
YT60180-1 (WWVB version)
YT60180-2 (DCF version)
YT60180-4 (MSF version)



Weather station exterior colours
Thermo-hygro sensor exterior colours

LD-0333

5-in-1 Professional Weather Station with color display

YT60161

- » Large Colorful and big digit display with super bright backlight.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Dual Alarm with snooze function.
- » Moon Phase display.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy, snowy, Storm).
- » Indoor & Outdoor temperature (C/°F) & humidity readings with trend.
- » Barometric pressure reading with trend.
- » Hourly, Daily, Weekly, Monthly, Total rainfall display.
- » Gust or average wind speed.
- » Real time & dominant wind direction in 360° & 16-direction resolution.
- » Max/Min records for indoor & outdoor temperature and humidity.
- » Historical bar chart with past 12 hours pressure change.
- » Indoor 3-level comfort level indication.
- » Hi/Lo alert setting (indoor/outdoor temperature & humidity).
- » 8 languages for weekday (DE/DK/EN/ES/FR/IT/NL/SE).
- » 7 touch functional buttons.
- » 3-level brightness of backlight.
- » Low battery indication.
- » Wall mount / desktop usage.
- » 3 x AAA backup batteries (not included).
- » 1 pc Wireless Anemometer (R55) included (4 x AA batteries, not included).
- » 1 pc Wireless Rain gauge (R46) included (2 x AA batteries, not included).
- » AC-AC Adaptor : AC 5V/150mA, included.
- » WWVB/DCF/MSF versions available.
- » Product size :
Weather station receiver : 191.6 x 127 x 28.8mm
Anemometer(R55) : 152 x 279 x 393mm
Rain Gauge(R46): 166 x 105.5 x 118mm



Weather station exterior colours
Thermo-hygro sensor exterior colours

Rain Gauge

Anemometer

458

Wireless Weather Forecast Station

YT6003

- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Easy to read display 7.7" / 19,6 cm.
- » Wireless outdoor sensor (range up to 30 meter).
- » Equipped with sensors for registration of :
 - Temperature (indoor and outdoor)
 - Humidity (indoor and outdoor)
- » Memory lowest and highest measured values.
- » Weather forecast.
- » Moon phase indication.
- » Displays date and time.
- » Alarm clock with snooze.
- » Can be placed on flat surface or wall mount.
- » 2 x AA batteries for weather station receiver (not included).
- » 1 pc wireless thermo-hygro sensor (R50) included (2 x AAA batteries, not included).
- » Product size: 132x221x27mm (weather station)
 - 104x40x26mm (sensor)
- » YT6003-1 (WWVB version)
- » YT6003-2 (DCF version)
- » YT6003-4 (MSF version)



Weather station exterior colours

Weather Forecast Station with In/Outdoor Temperature & Humidity

YT6030

- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Alarm with snooze function.
- » Moon Phase.
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy).
- » 3-level Comfort level Indications.
- » 7 languages for weekday (DE/DK/EN/ES/FR/IT/NL).
- » Low battery indication.
- » Support up to 3 sensors.
- » 2 x AA batteries for weather station receiver (not included).
- » 1 pc wireless thermo-hygro sensor (R50) included (2 x AA batteries, not included).
- » Product size :
 - Weather station receiver : 130 x 130 x 25mm
 - Thermo-hygro sensor (R50) : 104 x 40 x 26mm
- » YT6030-1 (WWVB version)
- » YT6030-2 (DCF version)
- » YT6030-4 (MSF version)



Weather station exterior colours
 Thermo-hygro sensor exterior colours

Wireless Color Display Weather Station

YT6077

- » Colorful and big digit display with super bright backlight.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Alarm with snooze function.
- » Moon Phase.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy, storm).
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Pressure change trend.
- » Max/Min records for indoor & outdoor temperature and humidity.
- » 3-level comfort level indication
- » Heat index&dew point display
- » 7 languages for weekday (DE/DK/JEN/ES/FR/IT/NL).
- » 3-level brightness of backlight.
- » Low battery indication.
- » Wall mounted / desktop.
- » 3 x AAA backup batteries (not included).
- » AC-AC Adaptor : AC 5V/150mA, included.
- » 1 pc wireless thermo-hygro sensor (R50) included (2 x AAA batteries, not included).
- » Product size :
- » Weather station receiver : 205.9 x 141.6 x 26.5mm
- » Thermo-hygro sensor (R50) : 104 x 40 x 26mm
- » YT6077-1 (WWVB version)
- » YT6077-2 (DCF version)
- » YT6077-4 (MSF version)

Weather station exterior colours

Thermo-hygro sensor exterior colours



KIMPORT

Color Display Weather Station with 3 Wireless Sensors

YT60125

- » Colorful and big digit display with super bright backlight.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Dual Alarm with snooze function.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy, storm).
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Barometric pressure reading (Mhpa, FtInHg).
- » Pressure change trend.
- » 3 outdoor temperature&humidity sensors
- » Max/Min records for indoor & outdoor temperature and humidity.
- » Indoor & outdoor 3-level comfort level indication
- » 7 languages for weekday (DE/DK/JEN/ES/FR/IT/NL).
- » 7 touch function buttons.
- » 3-level brightness of backlight.
- » Low battery indication.
- » Wall mount / desktop.
- » 2 x AAA backup batteries (not included).
- » AC-AC Adaptor : AC 5V/150mA, included.
- » 1 pc wireless thermo-hygro sensor (R50) included (2 x AAA batteries, not included).
- » Product size :
- » Weather station receiver : 192 x 127 x 16mm
- » 3 Thermo-hygro sensors(R50) : 104 x 40 x 26mm
- » YT60125-1 (WWVB version)
- » YT60125-2 (DCF version)
- » YT60125-4 (MSF version)

Weather station exterior colours

Thermo-hygro sensor exterior colours



Wifi Weather Forecast Station

YT60166

- » 6 Buttons: Mode, Channel, Alert, +, -, Snooze/Light, Network/Brightness.
- » 5-Day weather forecast and high/low temperature forecast.
- » Month/day/week display.
- » Comfort indicator.
- » comfort indicator.
- » 3 Alarm clocks: Locally support weekday/weekend/all-day mode settings. The APP can support the independent setting of the week.
- » Indoor/outdoor temperature alarm, support local/APP settings.
- » °C/°F switch, support local & APP settings
- » Temperature and humidity max/min record.
- » History: Support APP viewing.
- » Supports up to 3 outdoor temperature and humidity sensors.
- » 3 x AAA batteries for weather station receiver (not included).
- » AC-DC Adaptor : DC 5V/300mA, included.
- » 1 pc wireless thermo-hygro sensor (R50) included (2 x AAA batteries, not included).
- » Product size: Weather Station: 191.6x127x25mm
Sensor (R50): 104 x40 x26mm



Weather station exterior colours

Thermo-hygro sensor exterior colours

LD-0333

Wireless Color Display Weather Station

YT60183

- » 6 Buttons: Mode, Up, Down, Max/Min, Channel, Light/Snooze
- » Weather forecast function
- » Moonphase display
- » Low power indication
- » Snooze alarm clock
- » Temperature in °C/°F
- » 12/24 hour time display
- » 7 languages for weekday (DE/DK/EN/ES/FR/IT/NL).
- » Barometric pressure display and Historical bar chart with past 12 hours pressure change.
- » Max/Min records for indoor & outdoor temperature and humidity.
- » Indoor/outdoor temperature and humidity trend function.
- » Freeze/Indoor mold alert
- » Backlight function.
- » 3 x AAA batteries for weather station receiver (not included).
- » AC-AC Adaptor : AC 5V/150mA, included.
- » 1 pc wireless thermo-hygro sensor (R48) included (2 x AAA batteries, not included).
- » Product size: Weather station: 191.6x127x25mm
Sensor (R48): 98 x 40 x 26mm
- » YT60183-1 (WVVB version)
- » YT60183-2 (DCF version)
- » YT60183-4 (MSF version)



Weather station exterior colours

461

Weather Station with color display

YT60186

- » Colorful and big digit display with super bright backlight.
- » RCC time sync with DST Time, calendar, weekday & week number (DCF/MSF/WWVB).
- » Dual Alarm with snooze function.
- » Moon Phase.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy).
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Comfort level indication.
- » Barometric pressure reading (hpa, inHg).
- » Pressure change trend.
- » Pressure change data in the past 12 hours.
- » Max/Min records for indoor & outdoor temperature and humidity.
- » Hi/Lo alert setting (indoor/outdoor temperature).
- » 7 languages for weekday (DE/DK/JEN/ES/FR/IT/NL).
- » 4 function buttons.
- » 1 Slide switch.
- » Low battery indication.
- » A 5V/2A output charging port.
- » 2 x AA batteries for weather station receiver (not included).
- » AC-DC Adaptor : DC 5V/2.5A, included.
- » 1 pc wireless thermo-hygro sensor (R41) included (2 x AAA batteries, not included).
- » Product size :
Weather station receiver : 144 x 86 x 36.5mm
Thermo-hygro sensor (R41) : 98 x 40 x 25mm
- » YT60186-1 (WWVB version)
YT60186-2 (DCF version)
YT60186-4 (MSF version)



Weather station exterior colours

Thermo-hygro sensor exterior colours

Weather Station with color display

YT60187

- » Colorful and big digit display with super bright backlight.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Dual Alarm with snooze function.
- » Moon Phase.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy, snowy).
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Barometric pressure reading (mb/hpa,inhg).
- » Historical bar chart with past 12 hours pressure change.
- » Max/Min records for indoor & outdoor temperature and humidity.
- » Hi/Lo alert setting (indoor/outdoor temperature).
- » 7 languages for weekday (DE/DK/JEN/ES/FR/IT/NL).
- » 9 function buttons.
- » Low battery indication.
- » 3 x AA batteries for weather station receiver (not included).
- » AC-DC Adaptor : DC 5V/300mA, included.
- » 1 pc wireless thermo-hygro sensor (R41) included (2 x AAA batteries, not included).
- » Product size :
Weather station receiver : 180 x 130 x 74.4mm
Thermo-hygro sensor (R41) : 98 x 40 x 25mm
- » YT60187-1 (WWVB version)
YT60187-2 (DCF version)
YT60187-4 (MSF version)



Weather station exterior colours

Thermo-hygro sensor exterior colours

WEATHER STATION [RCC+RF]

Weather Forecast Station with In/Outdoor Temperature & Humidity

YT60193

- » Clear and Big LCD display.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Alarm with snooze function.
- » Moon Phase.
- » Indoor temperature (°C/°F) & humidity readings with trend.
- » Outdoor temperature (°C/°F) reading with trend.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy).
- » Max/Min records for indoor temperature and humidity.
- » Max/Min records for outdoor temperature.
- » Hi/Lo alert setting (indoor/outdoor temperature).
- » 7 languages for weekday (DE/DK/EN/ES/FR/IT/NL).
- » 8 function buttons.
- » Low battery indication.
- » 2 x AAA batteries for weather station receiver (not included).
- » 1 pc wireless thermo sensor (R50) included (2 x AAA batteries, not included).
- » Product size :
Weather station receiver : 78 x 204 x 78mm
Thermo sensor (R50) : 104 x 40 x 26mm
- » YT60128-1 (WWVB version)
- » YT60128-2 (DCF version)
- » YT60128-4 (MSF version)



Weather station exterior colours
Thermo-hygro sensor exterior colours

LD-0333

WEATHER STATION [RCC+RF]

Wireless Color Display Weather Station

YT60200

- » Colorful and big digit display with super bright backlight.
- » RCC time sync with DST Time auto/off, calendar & weekday(WWVB).
- » Dual Alarm with snooze function.
- » Weather forecast(Sunny, partly cloudy, cloudy, rainy, snowy, Storm).
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » 3-levels brightness of backlight.
- » Low battery Indication.
- » 8 functional buttons.
- » Wall mount/ desktop usage.
- » 3 x AAA backup batteries(not included).
- » AC-AC Adaptor : AC 5V/150mA, included.
- » 1 pc wireless thermo-hygro sensor (R50)included(2 x AAA batteries, not included).
- » Product size:
Weather station receiver: 205.9 x 141.6 x 26.5 mm
Thermo-hygro sensor (R50): 104 x 40 x 26mm
- » YT60200-1 (WWVB version)



Weather station exterior colours
Thermo-hygro sensor exterior colours

463

Weather Forecast Station with In/Outdoor Temperature & Humidity

YT60201

- » Clear and clean LCD display.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Dual Alarm with snooze function.
- » Moon Phase.
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy, storm).
- » Barometric pressure reading (hpa).
- » Historical bar chart with past 12 hours pressure change.
- » Max/Min records for indoor & outdoor temperature and humidity.
- » 6 touch function buttons and 1 LIGHT/SNOOZE function button.
- » White LED backlight.
- » Low battery indication.
- » Wall mount / desktop usage.
- » 3 x AAA batteries for weather station receiver (not included).
- » 1 pc wireless thermo-hygro sensor (R50) included (2 x AAA batteries, not included).
- » Product size :
 Weather station receiver : 158 x 119 x 25mm
 Thermo-hygro sensor (R50) : 104 x 40 x 26mm
- » YT60201-1 (WWVB version)
 YT60201-2 (DCF version)
 YT60201-4 (MSF version)



Weather station exterior colours
 Thermo-hygro sensor exterior colours

LD-0333

Weather Station with color display

YT60209

- » Colorful and big digit display with super bright backlight.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Dual Alarm with snooze function.
- » Moon Phase.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy, snowy).
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Barometric pressure reading (inHg/hpa).
- » Historical bar chart with past 12 hours pressure change.
- » Max/Min records for indoor & outdoor temperature and humidity.
- » Hi/Lo alert setting (indoor/outdoor temperature & humidity).
- » 7 languages for weekday (DE/DK/EN/ES/FR/IT/NL).
- » 9 function buttons.
- » Low battery indication.
- » Wall mount / desktop usage.
- » 3 x AA batteries for weather station receiver (not included).
- » AC-DC Adaptor : DC 5V/300mA, included.
- » 1 pc wireless thermo-hygro sensor (R41) included (2 x AAA batteries, not included).
- » Product size :
 Weather station receiver : 130 x 180 x 30mm
 Thermo-hygro sensor (R41) : 98 x 40 x 25mm
- » YT60209-1 (WWVB version)
 YT60209-2 (DCF version)
 YT60209-4 (MSF version)



Weather station exterior colours
 Thermo-hygro sensor exterior colours

464

Weather Station with color display

YT60210

- » Colorful and big digit display with super bright backlight.
- » RCC time sync with DST Time, calendar, weekday (DCF/MSF/WWVB).
- » Moon phase.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy, snowy, Storm).
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Outdoor temperature (°C/°F) readings with trend.
- » Barometric pressure reading (hpa/inHg).
- » Pressure change trend.
- » Max/Min records for indoor & outdoor temperature.
- » Max/Min records for indoor humidity.
- » 3-level dimmer & auto dimmer function for backlight.
- » 4 function buttons.
- » Low battery indication.
- » 3 x AAA batteries for weather station receiver (not included).
- » AC-DC Adaptor : DC 5V/300mA, included.
- » 1 pc wireless thermo sensor (R49) included (2 x AAA batteries, not included).
- » Product size :
Weather station receiver : 86 x 147 x 48mm
Thermo sensor (R49) : 104 x 40 x 26mm
- » YT60210-1 (WWVB version)
YT60210-2 (DCF version)
YT60210-4 (MSF version)

Weather station exterior colours

Thermo-hygro sensor exterior colours



LD-0333

Professional Rain Gauge with Thermo-Hygro & Clock

YT60212

- » Colorful and big digit display with super bright backlight.
- » Time, calendar, weekday.
- » Rainfall Warning function.
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Rain rate, Daily, Weekly, Monthly rainfall (mm/in).
- » Pressure change trend.
- » Max/Min records for indoor & outdoor temperature and humidity.
- » 4 function buttons.
- » Low battery indication.
- » 3 x AAA batteries for weather station receiver (not included).
- » AC-DC Adaptor : DC 5V/300mA, included.
- » 1 pc Wireless Anemometer (R48) included (2 x AAA batteries, not included).
- » 1 pc Wireless Rain gauge (R52) included (2 x AA batteries, not included).
- » Product size :
Station receiver : 86 x 147 x 48mm
Rain Gauge(R52) : 166 x 105.5 x 118mm
Thermo-hygro sensor (R48) : 104 x 40 x 26mm

Weather station exterior colours

Thermo-hygro sensor exterior colours




465

KIMPORT

Product						
Model	YT60231	YT60234	YT60238	YT60239	YT60252	YT60160
Weather Forecast	●	●	●	●	●	●
Barometric pressure reading	●	●	●	●	●	●
Temperature	In/Out	In/Out	In/Out	In/Out	In/Out	In/Out
Humidity	In/Out	In/Out	In/Out	In/Out	In/Out	In/Out
Wind Speed & Direction	360° & 16-wind direction	360° & 16-wind direction	360° & 16-wind direction	360° & 16-wind direction		16-wind direction
Rainfall	●	●	●	●	●	●
Light Intensity & UVI	●	●	●	●	●	●
RCC	●	●	●	●	●	●
Moon Phase	●	●	●	●	●	●
Alarm & Snooze	●	●	●	●	●	●
Weekday display language	DE/UK/EN/ES/FR/IT/NL/RU	DE/UK/EN/ES/FR/IT/NL/RU	DE/UK/EN/ES/FR/IT/NL/RU	DE/UK/EN/ES/FR/IT/NL/RU	DE/UK/EN/ES/FR/IT/NL/SE	DE/UK/EN/ES/FR/IT/NL
Max/Min Record	●	●	●	●	●	●
Hi/Lo Alert setting	●	●	●	●	●	●
Historical bar chart/graph record	●	●	●	●	●	●
Low Battery Indication	●	●	●	●	●	●
Color Display	●	●	●	●	●	●
LED Backlight	●	●	●	●	●	●
Remote sensors support	R53 7-in-1 sensor	R53 7-in-1 sensor	R58 5-in-1 sensor	R58 5-in-1 sensor	R50 thermo-hygro sensor	R45 Anemometer R40 Rain Gauge
RF Wireless frequency	868/915MHz	868/915MHz	868/915MHz	868/915MHz	433MHz	433MHz
RF Transmission Range	Up to 150m	Up to 150m	Up to 150m	Up to 150m	Up to 100m	Up to 100m
Button	9	9	9	9	7	7
Main unit power	3 x AAA	3 x AAA	3 x AAA	3 x AAA	2 x AA	3 x AAA
Remote sensor power	3 x AA	3 x AA	3 x AA	3 x AA	3 x AA	R45 --- 4 x AA R46 --- 2 x AA
AC-DC adaptor used	AC 5V / 150mA	DC 5V / 1A	DC 5V / 1A	AC 5V / 150mA		DC 5V / 300mA
Product size (main unit)	191.6 x 127 x 16mm	191.6 x 127 x 16mm	191.6 x 127 x 28.8mm	191.6 x 127 x 28.8mm	180 x 150 x 74.4mm	191.6 x 127 x 16mm
Product size (sensor)	408 x 550 x 567mm	408 x 350 x 367mm	408 x 550 x 367mm	408 x 350 x 367mm	104 x 40 x 26mm	R45 --- 152 x 279 x 393mm R46 --- 166 x 105.5 x 118mm

LD-0333

Product						
Model	YT60163	YT60180	YT60161	YT6003	YT6030	YT6077
Weather Forecast	●	●	●	●	●	●
Barometric pressure reading	●	●	●	●	●	●
Temperature	In/Out	In/Out	In/Out	In/Out	In/Out	In/Out
Humidity	In/Out	In/Out	In/Out	In/Out	In/Out	In/Out
Wind Speed & Direction			360° & 16-wind direction			
Rainfall	●	●	●	●	●	●
Light Intensity & UVI	●	●	●	●	●	●
RCC	●	●	●	●	●	●
Moon Phase	●	●	●	●	●	●
Alarm & Snooze	●	●	●	●	●	●
Weekday display language	DE/UK/EN/ES/FR/IT/NL	DE/UK/EN/ES/FR/IT/NL	DE/UK/EN/ES/FR/IT/NL/SE		DE/UK/EN/ES/FR/IT/NL	DE/UK/EN/ES/FR/IT/NL
Max/Min Record	●	●	●	●	●	●
Hi/Lo Alert setting	●	●	●	●	●	●
Historical bar chart/graph record	●	●	●	●	●	●
Low Battery Indication	●	●	●	●	●	●
Color Display	●	●	●	●	●	●
LED Backlight	●	●	●	●	●	●
Remote sensors support	R50 thermo-hygro sensor	R47 thermo-hygro sensor	R55 Anemometer R46 Rain Gauge	R50 thermo-hygro sensor	R50 thermo-hygro sensor	R50 thermo-hygro sensor
RF Wireless frequency	433MHz	433MHz	433MHz		433MHz	433MHz
RF Transmission Range	Up to 100m	Up to 100m	Up to 100m	Up to 30m	Up to 30m	Up to 100m
Button	7	7	7	6	6	6
Main unit power	2 x AAA	3 x AAA	3 x AAA	2 x AA	2 x AA	3 x AAA
Remote sensor power	2 x AAA	2 x AAA	R45 --- 4 x AA R46 --- 2 x AA	2 x AAA	2 x AA	2 x AAA
AC-DC adaptor used	AC 5V / 150mA	DC 5V / 300mA	AC 5V / 150mA			AC 5V / 150mA
Product size (main unit)	191.6 x 127 x 16mm	191.6 x 127 x 16mm	191.6 x 127 x 16mm	132 x 221 x 27mm	150 x 150 x 25mm	205.9 x 141.6 x 26.5mm
Product size (sensor)	104 x 40 x 26mm	62.5 x 100 x 16.5mm	R55 --- 152 x 279 x 393mm R46 --- 166 x 105.5 x 118mm	98 x 40 x 26mm	104 x 40 x 26mm	104 x 40 x 26mm

466

KIMPORT

Product						
Model	YT60125	YT60166	YT60183	YT60186	YT60187	YT60193
Weather Forecast	●	●	●	●	●	●
Barometric pressure reading	●	●	●	●	●	●
Temperature	In/Out	In/Out	In/Out	In/Out	In/Out	In/Out
Humidity	In/Out	In/Out	In/Out	In/Out	In/Out	In
Wind Speed & Direction						
Rainfall						
Light Intensity & UVI		●				
RCC	●	●	●	●	●	●
Moon Phase	●	●	●	●	●	●
Alarm & Snooze	●	●	●	●	●	●
Weekday display language	DE/DK/EN/ES/FR/IT/NL	EN	EN/ES	DE/DK/EN/ES/FR/IT/NL	DE/DK/EN/ES/FR/IT/NL	DE/DK/EN/ES/FR/IT/NL
Max/Min Record	●	●	●	●	●	●
Hi/Lo Alert setting	●	●	●	●	●	●
Historical bar chart/graph record						
Low Battery Indication	●	●	●	●	●	●
Color Display	●	●	●	●	●	●
LED Backlight	●	●	●	●	●	●
Remote sensors support	3 x R50 thermo-hygro sensor	R50 thermo-hygro sensor	R48 thermo-hygro sensor	R41 thermo-hygro sensor	R41 thermo-hygro sensor	R50 thermo sensor
RF Wireless frequency	433MHz		433MHz	433MHz	433MHz	433MHz
RF Transmission Range	Up to 100m	Up to 100m	Up to 100m	Up to 100m	Up to 100m	Up to 50m
Button	7	7	6	4	7	6
Main unit power	2 x AAA	3 x AAA	3 x AAA	2 x AAA	3 x AA	2 x AAA
Remote sensor power	2 x AAA	2 x AAA	2 x AAA	2 x AAA	2 x AAA	2 x AAA
AC-DC adaptor used	AC 5V / 150mA	DC 5V / 300mA	AC 5V / 150mA	DC 5V / 2.5A	DC 5V / 300mA	
Product size (main unit)	192 x 127 x 16mm	193.6 x 127 x 25mm	191.6 x 127 x 25mm	144 x 86 x 36.5mm	180 x 130 x 74.4mm	78 x 204 x 78mm
Product size (sensor)	104 x 40 x 26mm	104 x 40 x 26mm	104 x 40 x 26mm	98 x 40 x 25mm	98 x 40 x 25mm	104 x 40 x 26mm

LD-0333

Product					
Model	YT60200	YT60201	YT60209	YT60210	YT60212
Weather Forecast	●	●	●	●	●
Barometric pressure reading	●	●	●	●	●
Temperature	In/Out	In/Out	In/Out	In/Out	In/Out
Humidity	In/Out	In/Out	In/Out	In	In/Out
Wind Speed & Direction					
Rainfall					●
Light Intensity & UVI					
RCC	●	●	●	●	●
Moon Phase	●	●	●	●	●
Alarm & Snooze	●	●	●	●	●
Weekday display language	EN	EN	DE/DK/EN/ES/FR/IT/NL	EN	EN
Max/Min Record	●	●	●	●	●
Hi/Lo Alert setting	●	●	●	●	●
Historical bar chart/graph record					
Low Battery Indication	●	●	●	●	●
Color Display	●	●	●	●	●
LED Backlight	●	●	●	●	●
Remote sensors support	R50 thermo-hygro sensor	R50 thermo-hygro sensor	R41 thermo-hygro sensor	R49 thermo sensor	R48 thermo-hygro sensor R52 Rain Gauge
RF Wireless frequency	433MHz	433MHz	433MHz	433MHz	433MHz
RF Transmission Range	Up to 100m	Up to 100m	Up to 100m	Up to 100m	Up to 100m
Button	8	6	9	4	4
Main unit power	3 x AAA	2 x AAA	3 x AA	3 x AAA	3 x AAA
Remote sensor power	2 x AAA	2 x AAA	2 x AAA	2 x AAA	R48 — 2 x AAA R52 — 2 x AA
AC-DC adaptor used	AC 5V / 150mA		DC 5V / 300mA	DC 5V / 300mA	DC 5V / 300mA
Product size (main unit)	205.9 x 143.6 x 26.5mm	150 x 119 x 25mm	130 x 180 x 30mm	86 x 147 x 48mm	86 x 147 x 48mm
Product size (sensor)	104 x 40 x 26mm	104 x 40 x 26mm	98 x 40 x 26mm	104 x 40 x 26mm	R48 — 104 x 40 x 26mm R52 — 146 x 105.5 x 118mm

467



KIMPORT

DIGITAL CLOCK [RCC]

Jumbo RC Clock with Indoor/Outdoor temperature

YT60220

- » Large digit LCD display, easy to read.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Alarm with snooze function.
- » Indoor & Outdoor temperature (°C/°F) readings.
- » 7 languages for weekday (DE/DK/EN/ES/FRI/IT/NL).
- » 5 function buttons.
- » Low battery indication.
- » 4 x AA batteries (not included).
- » 1 pc wireless thermo sensor (R51) included (2 x AAA batteries, not included).
- » WWVB/DCF/MSF versions available.
- » Product size :
Weather station receiver : 362 x 236 x 28.5mm
Thermo sensor (R51) : 104 x 40 x 26mm

Exterior colours

Alarm Clock with temperature

YT65109

- » Clear LCD display.
- » Alarm with snooze function.
- » Indoor temperature (°C/°F) & humidity readings.
- » 7 languages for weekday (DE/DK/JEN/ES/FR/IT/NL).
- » 6 function buttons.
- » 2 x AAA batteries (not included).
- » Product size :50 x 125 x 45.5mm

Exterior colours

LD-0333

KIMPORT

RC Clock with In/Outdoor temperature

YT6074

- » RCC time sync with DST Time, calendar & weekday (DCF/MSF).
- » Dual Alarm with snooze function.
- » Indoor & Outdoor temperature (°C/°F) readings.
- » 8 languages for weekday (DE/DK/JEN/ES/FR/IT/NL/SE).
- » 6 function buttons.
- » Low battery indication.
- » Wall mount / desktop usage.
- » 3 x AA batteries (not included).
- » 1 pc wireless thermo sensor (R51) included (2 x AAA batteries, not included).
- » Product size :
 - Main receiver : 222 x 201.5 x 22.5mm
 - Thermo sensor (R51) : 104 x 40 x 26mm
- » YT6074-2 (DCF version)
- » YT6074-4 (MSF version)

Exterior colours 

469

RC Clock with In/Outdoor temperature

YT6075

- » Clear and Big LCD display.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF).
- » Dual Alarm with snooze function.
- » Indoor & Outdoor temperature (°C/°F) readings.
- » 8 languages for weekday (DE/DK/EN/ES/FRI/IT/NL/SE).
- » 6 function buttons.
- » Low battery indication.
- » Wall mount / desktop usage.
- » 3 x AA batteries (not included).
- » 1 pc wireless thermo sensor (RS1) included (2 x AAA batteries, not included).
- » Product size :
Main receiver : 243 x 201.5 x 26mm
Thermo sensor (RS1) : 104 x 40 x 26mm
- » YT6075-2 (DCF version)
YT6075-4 (MSF version)

Exterior colours

LD-0333

KIMPORT

RC Clock with In/Outdoor temperature

YT6076

- » Clear and Big LCD display.
- » RCC time sync with DST Time, calendar & weekday (WWVB).
- » Dual Alarm with snooze function.
- » Indoor & Outdoor temperature (°C/°F) readings.
- » 8 languages for weekday (DE/DK/EN/ES/FRI/IT/NL/SE).
- » 5 function buttons.
- » Low battery indication.
- » Wall mount / desktop usage.
- » 2 x AA batteries (not included).
- » 1 pc wireless thermo sensor (RS1) included (2 x AAA batteries, not included).
- » Product size :
Main receiver : 216 x 159.5 x 26.8mm
Thermo sensor (RS1) : 104 x 40 x 26mm
- » YT6076-1 (WWVB version)

Exterior colours

470

DIGITAL CLOCK [RCC]

RC Alarm Clock with temperature & humidity

YT65106

- » RC time sync automatically and manually.
- » Time, calendar & weekday display.
- » Alarm with snooze function.
- » Indoor temperature (°C/°F) & humidity readings.
- » Low Battery indication.
- » LED Backlight.
- » 6 function buttons.
- » 2 x AAA batteries (not included).
- » Product size : 152 x 60 x 50mm
- » YT65106-1 (WWVB version)
- » YT65106-2 (DCF version)
- » YT65106-3 (JJY version)
- » YT65106-4 (MSF version)



Exterior colours

LD-0333

DIGITAL CLOCK [RCC]

Multifunction LCD Alarm Clock

YT6178

- » Functions : Clock, Calendar, Alarm, Temperature, Timer
- » 4 directions of rotation to achieve different function with corresponding backlight colors.
- » Temperature reading with display.
- » The count-down timer is up to 99 minutes 59 seconds.
- » 2 function buttons.
- » 2 x AA batteries (not included).
- » Product size : 75.5 x 75.5 x 38mm



Exterior colours

471

DIGITAL CLOCK [RCC]

RC Alarm Clock with temperature & Humidity

YT6508

- » RCC time sync automatically and manually.
- » Time, calendar & weekday display.
- » Alarm with snooze function.
- » Indoor temperature & humidity readings.
- » LED Backlight.
- » 6 function buttons.
- » 2 x AA batteries (not included).
- » Product size : 148 x 82 x 40mm
- » YT6508-3 (JJY version)



Exterior colours 

LD-0333

KIMPORT

DIGITAL CLOCK [RCC]

RC Alarm Clock with temperature

YT6551

- » RCC time sync automatically and manually.
- » Time, calendar & weekday display.
- » Dual Alarm with snooze function.
- » Indoor temperature (°C/°F) readings.
- » Low Battery indication.
- » LED Backlight.
- » 5 function buttons.
- » 5 languages for weekday (DE/EN/ES/FR/IT).
- » 2 x AAA batteries (not included).
- » Product size : 71 x 101 x 45mm
- » YT6551-1 (WWVB version)
- » YT6551-2 (DCF version)
- » YT6551-3 (JJY version)
- » YT6551-4 (MSF version)



Exterior colours 

472

DIGITAL CLOCK [RCC]

RC Alarm Clock with temperature

YT6556

- » RC time sync automatically and manually.
- » Time, calendar & weekday display.
- » Alarm with snooze function.
- » Indoor temperature, humidity readings.
- » LED Backlight.
- » 6 function buttons and 1 slide switch for alarm on/off.
- » 2 x AA batteries (not included).
- » Product size : 106 x 99 x 44mm
- » YT6556-3 (JJY version)



Exterior colours

LD-0333

KIMPORT

DIGITAL CLOCK [RCC]

RC Alarm Clock with temperature

YT6567

- » RC time sync automatically and manually.
- » Time, calendar & weekday display.
- » Dual Alarm with snooze function.
- » Count down timer function.
- » Indoor temperature (°C/°F) readings.
- » Low Battery indication.
- » LED Backlight.
- » 7 languages for weekday (DE/DK/EN/ES/FR/IT/NL).
- » 6 function buttons.
- » 2 x AAA batteries (not included).
- » Product size : 72 x 95 x 33mm



Exterior colours

473

KIMPORT

DIGITAL CLOCK [RCC]

RC Alarm Clock with temperature & humidity

YT6599

- » RC time sync automatically and manually.
- » Time, calendar & weekday display.
- » Dual Alarm with snooze function.
- » Indoor temperature (°C/°F) & humidity readings.
- » Low Battery indication.
- » LED Backlight.
- » 4 function buttons & 1 slide switch for alarm.
- » 2 x AAA batteries (not included).
- » Product size : 116 x 96 x 36mm



Exterior colours

LD-0333

DIGITAL CLOCK [RCC]

Multifunction LCD Alarm Clock

YT6984

- » 3 function keys
- » Clock and perpetual calendar function
- » Indoor temperature display function
- » Alarm clock function
- » Power : 2 x AAA batteries (not included).
- » Product size : 72 x 56 x 25mm



Exterior colours

474

RC Wall Clock with In/Outdoor temperature & humidity

YT60100

- » Large digit LCD display, easy to read.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Alarm with snooze function.
- » Indoor & Outdoor temperature (°C/°F) & humidity readings.
- » 8 languages for weekday (DE/DK/EN/ES/FR/IT/NL/SE).
- » 5 function buttons.
- » Low battery indication.
- » Wall mount / desktop usage.
- » 4 x AA batteries (not included).
- » 1 pc wireless thermo-hygro sensor (R50) included (2 x AAA batteries, not included).
- » Product size :
 Clock : 362 x 236 x 28.5mm
 Thermo-hygro sensor (R50) : 104 x 40 x 26mm
- » YT60100-1 (WWVB version)
- » YT60100-2 (DCF version)
- » YT60100-4 (MSF version)



Exterior colours

LD-0333

RC Wall Clock with In/Outdoor temperature

YT60101

- » Large digit LCD display, easy to read.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Alarm with snooze function.
- » Indoor & Outdoor temperature (°C/°F) readings.
- » 8 languages for weekday (DE/DK/EN/ES/FR/IT/NL/SE).
- » 5 function buttons.
- » Low battery indication.
- » Wall mount / desktop usage.
- » 4 x AA batteries (not included).
- » 1 pc wireless thermo sensor (R51) included (2 x AAA batteries, not included).
- » Product size :
 Weather station receiver : 362 x 236 x 28.5mm
 Thermo sensor (R51) : 104 x 40 x 26mm
- » YT60101-1 (WWVB version)
- » YT60101-2 (DCF version)
- » YT60101-4 (MSF version)



Exterior colours

475

RC Wall Clock with Indoor temperature & humidity

YT60102

- » Large digit LCD display, easy to read.
- » RCC time sync with DST Time auto/off, calendar & weekday written in full letters. (DCF/MSF/WWVB).
- » Alarm with snooze function
- » Indoor temperature (°C/°F) and humidity readings.
- » 8 languages for weekday (DE/DK/EN/ES/FR/IT/NL/SE).
- » 6 function buttons.
- » Low battery indication.
- » 4 x AA batteries (not included).
- » Product size : 562 X 236 X 28.5mm
- » YT60102-1 (WWVB version)
- » YT60102-2 (DCF version)
- » YT60102-4 (MSF version)

Exterior colours 

LD-0333

KIMPORT

RC Alarm Clock with temperature

YT60142

- » RC time sync automatically and manually.
- » Time, calendar & weekday display.
- » Alarm with snooze function.
- » Indoor temperature (°C/°F) readings.
- » Low Battery indication.
- » LED Backlight.
- » 7 languages for weekday (DE/DK/EN/ES/FR/IT/NL).
- » 5 function buttons.
- » 2 x AAA batteries (not included).
- » Product size : 72 x 60 x 40mm
- » YT60142-1 (WWVB version)
- » YT60142-2 (DCF version)
- » YT60142-3 (JJY version)
- » YT60142-4 (MSF version)

Exterior colours     
    

476

RC Alarm Clock with temperature

YT60143

- » RC time sync automatically and manually.
- » Time, calendar & weekday display.
- » Alarm with snooze function.
- » Indoor temperature (°C/°F) & humidity readings.
- » Low Battery indication.
- » LED Backlight.
- » 7 languages for weekday (DE/DK/EN/ES/FR/IT/NL).
- » 6 function buttons.
- » 2 x AAA batteries (not included).
- » Product size : 120 x 59 x 50mm
- » YT60143-1 (WWVB version)
- » YT60143-2 (DCF version)
- » YT60143-3 (JJY version)
- » YT60143-4 (MSF version)



Exterior colours

LD-0333

RC Alarm Clock with temperature

YT60167

- » RC time sync automatically and manually.
- » Time, calendar & weekday display.
- » Dual Alarm with snooze function.
- » Indoor temperature (°C/°F) & humidity readings.
- » Low Battery indication.
- » LED Backlight.
- » 7 languages for weekday (DE/DK/EN/ES/FR/IT/NL).
- » 4 function buttons and 1 slide switch for alarm.
- » AC-DC Adaptor : DC 5V/2.0A, included.
- » USB charging with 5V/1.5A.
- » 2 x AAA batteries (not included).
- » Product size : 142 x 84 x 33.5mm
- » YT60167-1 (WWVB version)
- » YT60167-2 (DCF version)
- » YT60167-3 (JJY version)
- » YT60167-4 (MSF version)



Exterior colours

477

DIGITAL CLOCK [RCC]

RC Alarm Clock with temperature

YT60169

- » RC time sync automatically and manually.
- » Time, calendar & weekday display.
- » Dual Alarm with snooze function.
- » Indoor temperature (°C/°F) readings.
- » Low Battery indication.
- » LED Backlight.
- » 5 languages for weekday (DE/EN/ES/FR/IT).
- » 5 function buttons.
- » 2 x AAA batteries (not included).
- » Product size : 97.7 x 40 x 25mm
- » YT60169-1 (WWVB version)
- » YT60169-2 (DCF version)
- » YT60169-3 (JJY version)
- » YT60169-4 (MSF version)



Exterior colours

LD-0333

DIGITAL CLOCK [RCC]

RC Wall Clock with Indoor temperature

YT60204

- » Clear and Big LCD display.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Dual Alarm with snooze function.
- » Indoor & Outdoor temperature (°C/°F) readings.
- » 8 languages for weekday (DE/DK/EN/ES/FR/IT/NL/SE).
- » 6 function buttons.
- » Low battery indication.
- » Wall mount / desktop usage.
- » 3 x AA batteries (not included).
- » 1 pc wireless thermo sensor (R51) included (2 x AAA batteries, not included).
- » Product size :
- » Main receiver : 226 x 187.5 x 24.5mm
- » Thermo sensor (R51) : 104 x 40 x 26mm
- » YT60204-1 (WWVB version)
- » YT60204-2 (DCF version)
- » YT60204-4 (MSF version)



Exterior colours

478

RC Clock with temperature & humidity

YT60207

- » Clear and Big LCD display.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Dual Alarm with snooze function.
- » Indoor temperature (°C/°F) & humidity readings.
- » 8 languages for weekday (DE/DK/EN/ES/FR/IT/NL/SE).
- » 5 function buttons.
- » Low battery indication.
- » Wall mount / desktop usage.
- » 3 x AA batteries (not included).
- » Product size : 226 x 187,5 x 24,5mm
- » YT60207-1 (WWVB version)
- » YT60207-2 (DCF version)
- » YT60207-4 (MSF version)



Exterior colours

LD-0333

Jumbo RC Wall Clock with In/Outdoor temperature & humidity

YT60215

- » Large digit LCD display, easy to read.
- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Alarm with snooze function.
- » Indoor & Outdoor temperature (°C/°F) & humidity reading.
- » 7 languages for weekday (DE/DK/EN/ES/FR/IT/NL).
- » 6 function buttons.
- » Low battery indication.
- » 4 x AA batteries(not included).
- » 1 pc wireless thermo-hygro sensor (R48) included (2 x AAA batteries, not included).
- » Product size :
- » Clock: 362 x 236 x 28,5mm
- » Outdoor transmitter (R48) : 104 x 40 x 26mm



Weather station exterior colours
Thermo-hygro sensor exterior colours

479

KIMPORT

Product						
Model	YT60220	YT65109	YT6074	YT6075	YT6076	YT65106
RCC	•		•	•	•	•
Alarm & Snooze	•	•	•	•	•	•
Temperature	In/Out	In	In/Out	In/Out	In/Out	In
Humidity		In				In
Moon Phase						
Weekday display language	DE/DK/EN/ES/FR/IT/NL	DE/DK/EN/ES/FR/IT/NL	DE/DK/EN/ES/FR/IT/NL/SE	DE/DK/EN/ES/FR/IT/NL/SE	DE/DK/EN/ES/FR/IT/NL/SE	DE/DK/EN/ES/FR/IT/NL
Max/Min Record						
USB Charging						
Timer						
Low Battery Indication	•		•	•	•	•
Color Display						
LED Backlight		•				•
Remote sensors support	RS1 thermo sensor		RS1 thermo sensor	RS1 thermo sensor	RS1 thermo sensor	
RF Wireless frequency	433MHz		433MHz	433MHz	433MHz	
RF Transmission Range	Up to 100m		Up to 100m	Up to 100m	Up to 100m	
Button	5	6	6	6	5	6
Power	4 x AA	2 x AAA	3xAAA(Receiver)(2xAAA)Sensor	3xAAA(Receiver)(2xAAA)Sensor	3xAAA(Receiver)(2xAAA)Sensor	2 x AAA
AC-DC adaptor used						
Product size (main unit)	562 x 236 x 28.5mm	121 x 47x 45mm	222 x 201.5 x 22.5mm	245 x 201.5 x 26mm	216 x 189.5 x 26.8mm	152 x 60 x 50mm
Product size (sensor)	104 x 40 x 26mm		104 x 40 x 26mm	104 x 40 x 26mm	104 x 40 x 26mm	

Product						
Model	YT6178	YT6508	YT6551	YT6556	YT6567	YT6599
RCC		•	•	•	•	•
Alarm & Snooze	•	•	•	•	•	•
Temperature	In	In	In	In	In	In
Humidity		In		In		In
Moon Phase						
Weekday display language			DE/EN/ES/FR/IT			
Max/Min Record						
USB Charging						
Timer	•				•	
Low Battery Indication			•		•	•
Color Display						
LED Backlight	•	•	•		•	•
Remote sensors support						
RF Wireless frequency						
RF Transmission Range						
Button	2	6	5	6		4
Power	2 x AA	2 x AA	2 x AAA	2 x AA	2 x AAA	2xAAA
AC-DC adaptor used						
Product size (main unit)	75.5 x 75.5 x 38mm	148 x 82 x 40mm	71 x 101 x 45mm	106 x 99 x 44mm	72 x 95 x 33mm	116 x 96 x 36mm
Product size (sensor)						

KIMPORT

Product						
Model	YT6984	YT60100	YT60101	YT60102	YT60142	YT60143
RCC		•	•	•	•	•
Alarm & Snooze	•	•	•	•	•	•
Temperature	In	In/Out	In/Out	In	In	In
Humidity		In/Out		In		In
Moon Phase						
Weekday display language		DE/DK/EN/ES/FR/IT/NL/SE	DE/DK/EN/ES/FR/IT/NL/SE	DE/DK/EN/ES/FR/IT/NL/SE	DE/DK/EN/ES/FR/IT/NL	DE/DK/EN/ES/FR/IT/NL
Max/Min Record						
USB Charging						
Timer						
Low Battery Indication		•	•	•	•	•
Color Display						
LED Backlight					•	•
Remote sensors support		R50 thermo-hygro sensor	R51 thermo sensor			
RF Wireless frequency		433MHz	433MHz			
RF Transmission Range		Up to 100m	Up to 100m			
Button	3	5	5	5	5	6
Power	2 x AAA	4xAAA(Recharge)(2xAAA(Sensor)	4xAAA(Recharge)(2xAAA(Sensor)	4xAAA(Recharge)	2 x AAA	2 x AAA
AC-DC adaptor used						
Product size (main unit)	72 x 56 x 25mm	562 x 256 x 28.5mm	562 x 236 x 28.5mm	562 x 256 x 28.5mm	72 x 60 x 40mm	120 x 59 x 50mm
Product size (sensor)		104x40x26mm	104x40x26mm			

Product						
Model	YT60167	YT60169	YT60204	YT60207	YT60215	YT60219
RCC	•	•	•	•	•	•
Alarm & Snooze	•	•	•	•	•	•
Temperature	In	In	In/Out	In	In/Out	In
Humidity	In			In	In/Out	In
Moon Phase						
Weekday display language		DE/EN/ES/FR/IT/NL	DE/EN/ES/FR/IT/NL	DE/DK/EN/ES/FR/IT/NL/SE	DE/DK/EN/ES/FR/IT/NL/SE	DE/DK/EN/ES/FR/IT/NL
Max/Min Record						
USB Charging						
Timer						
Low Battery Indication	•	•	•	•	•	•
Color Display						
LED Backlight	•	•				
Remote sensors support			R51 thermo sensor		R48 thermo-hygro sensor	
RF Wireless frequency			433MHz		433MHz	
RF Transmission Range			Up to 100m		Up to 100m	
Button	4	5	6	6	4	6
Power	2 x AAA	2 x AAA	3xAAA(Recharge)(2xAAA(Sensor)	3 x AA	4xAAA(Recharge)(2xAAA(Sensor)	4 x AA
AC-DC adaptor used						
Product size (main unit)	142 x 84 x 33.5mm	97.7 x 40 x 25mm	226 x 187.5 x 21.5mm	226 x 187.5 x 24.5mm	562 x 256 x 28.5mm	562 x 256 x 28.5mm
Product size (sensor)			104 x 40 x 26mm		104 x 40 x 26mm	

Product	
Model	YT45105
RCC	•
Alarm & Snooze	•
Temperature	In
Humidity	In
Moon Phase	
Weekday display language	CZ/DE/EN/KR/US/ES/PT/FR
Max/Min Record	
USB Charging	
Timer	
Low Battery indication	•
Color Display	
LED Backlight	•
Remote sensors support	
RF Wireless frequency	
RF Transmission Range	
Button	9
Power	3 x AAA
AC-DC adaptor used	DC 5V / 300mA
Product size (main unit)	192 x 127 x 24.5mm
Product size (sensor)	



THERMOMETER

Indoor Thermometer Hygrometer

YT6930

- » Indoor temperature (°C/°F) & humidity readings.
- » Max/Min records for indoor temperature and humidity.
- » Indoor 3-level comfort level indication.
- » 1 function button.
- » Low battery indication.
- » 2 x AAA backup batteries (not included).
- » Product size : 70 x 110 x 21.7mm



Exterior colours

LD-0333

THERMOMETER

Indoor Thermometer Hygrometer

YT6931

- » Indoor temperature (°C/°F) & humidity readings.
- » Max/Min records for indoor temperature and humidity.
- » Indoor 3-level comfort level indication.
- » 1 function button.
- » Low battery indication.
- » 2 x AAA backup batteries (not included).
- » Product size : 80 x 80 x 25mm



Weather station exterior colours
 Thermo-hygro sensor exterior colours

483

Wireless Indoor Outdoor Thermometer with clock

YT6932

- » Clock display.
- » Indoor & Outdoor temperature (°C/°F) readings.
- » Max/Min records for indoor & outdoor temperature.
- » 2 function buttons.
- » Low battery indication.
- » 2 x AAA backup batteries (not included).
- » 1 pc wireless thermo sensor (R39) included (2 x AAA batteries, not included).
- » Product size :
Thermo station : 70 x 110 x 21.7mm
Wireless thermo sensor (R39) : 40 x 98 x 25mm

Exterior colours 



KIMPORT


Wireless Thermometer Hygrometer

YT6029

- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Alarm with snooze function.
- » Moon Phase.
- » Indoor & Outdoor temperature (°C/°F) readings with trend and Max/Min records
- » Indoor humidity reading with Max/Min records
- » 3-level Comfort level indications.
- » 7 languages for weekday (DE/DK/EN/ES/FR/IT/NL).
- » LED backlight.
- » Low battery indication.
- » 2 x AA batteries for station receiver (not included).
- » 1 pc wireless thermo sensor (R51) included (2 x AAA batteries, not included).
- » Product size :
Receiver : 147.4 x 76.9 x 38.2 mm
Thermo sensor (R51) : 104 x 40 x 26mm



Weather station exterior colours 

Thermo-hygro sensor exterior colours 

THERMOMETER

Digital In/Out Thermometer

YT6909

- » Suitable to use in Car.
- » Real Time Clock display with calendar.
- » Alarm with snooze function.
- » Indoor & Outdoor temperature (°C/°F) readings.
- » Max/Min records for temperature.
- » Snow icon indication when outdoor temperature -1-3°C.
- » Low battery indication.
- » 6 function buttons.
- » 1 x AA batteries (not included).
- » Product size : 110 x 58 x 35mm.



Exterior colours

LD-0333

THERMOMETER

Wireless Indoor Outdoor Thermometer

YT6915

- » In/Out Thermometer with Clock display.
- » Max/Min records for temperature.
- » Low battery indication.
- » 4 function buttons.
- » 2 x AAA batteries for Thermo station (not included).
- » 1 pc wireless thermo sensor (R39) included (2 x AAA batteries, not included).
- » Product size :
- » Receiver : 80 x 80 x 25mm.
- » Outdoor transmitter(R39) : 40 x 98 x 25mm.



Weather station exterior colours
 Thermo-hygro sensor exterior colours

485

Wireless Indoor Outdoor Thermometer with Clock

YT6922

- » Clock display.
- » Indoor & Outdoor temperature (°C/°F) readings with trend.
- » Max/Min records for temperature.
- » Low battery indication.
- » 3 function buttons.
- » 2 x AAA batteries for Thermo station (not included).
- » 1 pc wireless thermo sensor (R49) included (2 x AAA batteries, not included).
- » Product size :
Thermo station : 61 x 107 x 20mm
Wireless thermo sensor (R49) : 40 x 104 x 26mm



Weather station exterior colours

Thermo-hygro sensor exterior colours

LD-0333

KIMPORT

RC Wireless Thermometer Station

YT60149

- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Dual Alarm with snooze function.
- » Max/Min records for indoor & outdoor temperature.
- » 5 languages for weekday (DE/EN/ES/FR/IT).
- » LED backlight.
- » Low battery indication.
- » 5 function buttons.
- » 2 x AAA batteries for station receiver (not included).
- » 1 pc wireless thermo sensor (R39) included (2 x AAA batteries, not included).
- » Product size :
Station receiver : 130 x 70.4 x 28.4mm
Thermo sensor (R39) : 40 x 98 x 25mm
- » YT60149-1 (WWVB version)
YT60149-2 (DCF version)
YT60149-4 (MSF version)



Weather station exterior colours

Thermo-hygro sensor exterior colours

486

RC Alarm Clock with temperature

YT60177

- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Time, calendar & weekday display.
- » Dual Alarm with snooze function.
- » Indoor & outdoor temperature (°C/°F) readings.
- » Max/Min records for temperature.
- » Low Battery indication.
- » LED Backlight.
- » 5 languages for weekday (DE/EN/ES/FR/IT).
- » 6 function buttons.
- » 2 x AAA batteries for thermo station (not included).
- » 1 pc wireless thermo sensor (R39) included (2 x AAA batteries, not included).
- » Product size :
Thermo station : 98 x 80 x 34mm
Wireless thermo sensor (R39) : 40 x 98 x 25mm
- » YT60177-1 (WWVB version)
YT60177-2 (DCF version)
YT60177-3 (JJY version)
YT60177-4 (MSF version)

Weather station exterior colours

Thermo-hygro sensor exterior colours



LD-0333

Dual USB Charging Clock with In/Outdoor Temperature & Humidity

YT60190

- » RCC time sync with DST Time, calendar & weekday (DCF/MSF/WWVB).
- » Single Alarm with snooze function.
- » Indoor & Outdoor temperature (°C/°F) & humidity readings.
- » 4-level brightness of backlight.
- » Max/Min records for indoor & outdoor temperature and humidity.
- » 5 languages for weekday (DE/EN/ES/FR/IT).
- » Low battery indication.
- » 6 function buttons.
- » Dual USB ports for mobile charging (Total maximum output 2.1A).
- » 2 x AAA batteries for thermo station receiver (not included).
- » AC-DC Adaptor : DC 5V/2500mA, included.
- » 1 pc wireless thermo-hygro sensor (R41) included (2 x AAA batteries, not included).
- » Product size :
Thermo-hygro station receiver : 95 x 134 x 44.5mm
Thermo-hygro sensor (R41) : 40 x 98 x 25mm
- » YT60190-1 (WWVB version)
YT60190-2 (DCF version)
YT60190-4 (MSF version)

Weather station exterior colours

Thermo-hygro sensor exterior colours



487

KIMPORT

Product						
Model	YT6930	YT6931	YT6932	YT6029	YT6909	YT6915
RCC				•		
Alarm & Snooze					•	
Temperature	In	In	In/Out	In/Out	In/Out	In/Out
Humidity	In	In		In		
Moon Phase				•		
Weekday display language				DE/UK/EN/ES/FR/IT/NL		
Max/Min Record	•	•	•	•	•	•
USB Charging						
Timer						
Low Battery Indication	•	•	•	•	•	•
Color Display						
LED Backlight				•		
Remote sensors support			R39 thermo sensor	R31 thermo sensor		R39 thermo sensor
RF Wireless frequency				433MHz		433MHz
RF Transmission Range				Up to 100m		Up to 100m
Button	1	1	2	8	4	4
Power	2 x AAA	2 x AAA	2xAAA(Receiver)/2xAAA(Sensor)	2xAAA(Receiver)/2xAAA(Sensor)	1 x AA	2xAAA(Receiver)/2xAAA(Sensor)
AC-DC adaptor used						
Product size (main unit)	70 x 110 x 36.7mm	80 x 80 x 25mm	70 x 110 x 21.7mm	147.4 x 76.9 x 38.2mm	110 x 66 x 35mm	80 x 60 x 25mm
Product size (sensor)			40 x 98 x 25mm	65.5 x 92 x 27mm		40 x 98 x 25mm

Product					
Model	YT6922	YT60149	YT60177	YT60190	
RCC		•	•	•	
Alarm & Snooze		•	•	•	
Temperature	In/Out	In/Out	In/Out	In/Out	
Humidity				In/Out	
Moon Phase					
Weekday display language		DE/EN/ES/FR/IT	DE/EN/ES/FR/IT	DE/EN/ES/FR/IT	
Max/Min Record	•	•	•	•	
USB Charging				Dual	
Timer					
Low Battery Indication	•	•	•	•	
Color Display					
LED Backlight		•	•	•	
Remote sensors support	R49 thermo sensor	R39 thermo sensor	R39 thermo sensor	R41 thermo-hygro sensor	
RF Wireless frequency	433MHz	433MHz	433MHz	433MHz	
RF Transmission Range	Up to 100m	Up to 100m	Up to 100m	Up to 100m	
Button	3	3	6	6	
Power	2xAAA(Receiver)/2xAAA(Sensor)	2xAAA(Receiver)/2xAAA(Sensor)	2xAAA(Receiver)/2xAAA(Sensor)	2 x AAA (Sensor)	
AC-DC adaptor used				DC 5V/2500mA	
Product size (main unit)	61 x 107 x 20mm	130 x 70.4 x 28.4mm	98 x 80 x 34mm	91 x 154 x 44.5mm	
Product size (sensor)	40 x 104 x 26mm	40 x 98 x 25mm	40 x 98 x 25mm	40 x 98 x 25mm	



LD-0333

LED Clock

YT6520

- » Large and Super bright LED digits display.
- » RCC time sync with DST Time, calendar (DCF/MSF/LJY/WWVB).
- » Dual sets of Alarm function.
- » 3-level dimmer & auto dimmer function for LED display.
- » 5 function buttons.
- » Different colors of LED display available (Green, Red, Blue, White).
- » 3 x AAA backup batteries (not included).
- » AC-DC Adaptor : DC 5V/300mA, included.
- » Product size : 169.5 x 76.5 x 110mm
- » YT68002-1 (WWVB version)
- » YT68002-2 (DCF version)
- » YT68002-3 (LJY version)
- » YT68002-4 (MSF version)



Exterior colours

489

LED CLOCK

LED Clock



YT60168

- » 4 LED digits display
- » Switchable time/date/temperature
- » 3 groups of alarm
- » Temperature display in °C/°F
- » Alarm and snooze function
- » Three kind of display mode for option
- » Power saving by sound control. The display can be reactivated by sound.
- » Size: 64 X 64 X 63mm
- » Battery: AAA x3pcs(not included)/DC 5V
- » Material: MDF+ABS



Exterior colours

LD-0333

Product		
Model	YT6520	YT60168
RCC	•	
Alarm & Snooze		•
Temperature		•
Humidity		
Moon Phase		
Weekday display language		
Max/Min Record		
USB Charging		
Timer		
Low Battery Indication		
Color Display		
LED Backlight	•	•
Remote sensors support		
RF Wireless frequency		
RF Transmission Range		
Button	5	3
Power	3 x AAA	3 x AAA
AC-DC adaptor used		DC 5V/300mA
Product size (main unit)	169.5 x 76.5 x 110mm	64 x 64 x 63mm
Product size (sensor)		



Kitchen Timer

YT6709

- » Up to 99 min 59 sec count down function.
- » 3 functional keys.
- » Powerful magnets on the back for placement on any iron surface directly
- » 1 x AAA battery (not included).
- » Product size : $\phi 80 \times 20$ mm



Exterior colours 

TIMER

Rotary Kitchen Timer

YT6712

- › Rotary count up/ down timer.
- › Auto sleep function.
- › Up to 99 min 55s count up/ down function.
- › 3 inches LED screen.
- › 3 x AAA battery (not included).
- › Magnet Function.
- › Brightness setting.
- › Product size : ϕ 85*25mm



Exterior colours 

LD-0333

KIMPORT

TIMER

Kitchen Timer

YT6716

- › Count down function.
- › Up to 99 min 59s count down function.
- › 3 functional buttons.
- › 1 x AAA battery.
- › With stand and magnet.
- › Product size : 85 x 80 x 21mm



Exterior colours 

492

TIMER

Kitchen Timer

YT6717

- › Count down function.
- › Up to 99 min 59s count down function.
- › 3 functional buttons.
- › 1 x AAA battery.
- › With stand and magnet.
- › Product size : 84 x 70 x 29mm



Exterior colours

LD-0333

KIMPORT

TIMER

Timer

YT6732

- › 60 seconds count down timer.
- › 2 functional buttons.
- › Battery used: 1*CR2032
- › Product size: 53.5 x 64 x 6.5mm



Exterior colours

493

TIMER

Kitchen Timer

YT6738

- » Count up/ count down function.
- » Up to 99 min 59s count up/ down function.
- » 4 touch functional buttons.
- » 2 x AAA battery (not included).
- » With stand and magnet.
- » Product size : 80 x 80 x 25mm



Exterior colours

LD-0333

Product						
Model	YT6709	YT6712	YT6716	YT6717	YT6732	YT6738
Count up Timer		up to 99 min 55 sec				up to 99 min 59 sec
Count down Timer	up to 99 min 59 sec	up to 99 min 55 sec	up to 99 min 59 sec	up to 99 min 59 sec	up to 99 min 60 sec	up to 99 min 59 sec
With Stand & Magnet	•	•	•	•		•
Button	3	1	3	3	2	4
Power	1 x AAA	3 x AAA	1 x AAA	1 x AAA	1 x CR2032	2 x AAA
Product Size	ø80*20mm	ø85*25mm	85 x 80 x 21mm	84 x 70 x 29mm	53.5 x 64 x 6.3mm	80 x 80 x 25mm



LD-0333

LED Desk Lamp with Wireless Charger

WP001

- › No flicker, ideal for reading, working or studying etc.
- › Folding Design.
- › 5 Touch keys.
- › 5 levels of brightness.
- › 3 color temperature for different environments.
- › Built-in Qi-certified Wireless Charging for 5W (standard charging)/7.5W/10W (fast charging).
- › Built-in 5V/1A USB Charging port on the base.
- › AC-DC Adaptor : DC 12V/2.5A
- › Product size : ø180 x 336mm

Exterior colours



495

WIRELESS CHARGER

Desk Clock with Wireless Charger

WP002

- » 3 buttons.
- » Clock Display.
- » 12 / 24 hour.
- » Built-In Qi-certified Wireless Charging for 5W (standard charging)/7.5W/10W (fast charging).
- » 1m Micro USB Cable is included.
- » Input : Micro USB, 5V/2A , 9V/2A, using QC 2.0/3.0 adaptor is recommended (not Included).
- » Product size : 115 x 115 x 22.5mm



Exterior colours  

LD-0333

KIMPORT

WIRELESS CHARGER

Foldable Wireless Charger

WP003

- » Folding Design.
- » Wireless Charging for 5W /10W(Standard Charging).
- » Input : Micro USB, 5V/2A, adaptor is not included.
- » Product size : 82 x 72 x 20mm



Exterior colours 

496

WIRELESS CHARGER

Dual Wireless Charger Pad

WP005

- » Slim Design.
- » 2 in 1 Wireless Charging Station, can charge multiple devices at the same time with high speed.
- » Built-in Qi-certified Wireless Charging 5W (standard charge)/7.5W/10W (fast charge) for each pad.
- » 1m USB Type C Cable Is Included.
- » Input : Type C, 9V/3A, 12V/2.5A, 15V/2V using QC 2.0/3.0 or PD adaptor is recommended (not included).
- » Product size : 180 x 85 x 9.8mm



Exterior colours 

LD-0333

WIRELESS CHARGER

Wireless Charger With Stand

WP006

- » Detachable stand design.
- » Wide Charging area, designed with two coils offer you much wider charging area.
- » Built-in Qi-certified Wireless Charging for 5W (standard charging)/7.5W/10W (fast charging).
- » 1m USB Type C Cable Is Included.
- » Input : Type C, 5V/2A , 9V/2A, using QC 2.0/3.0 or PD adaptor is recommended(not included).
- » Product size : 68 x 134 x 16mm



Exterior colours 

497

WIRELESS CHARGER

Wireless Charger Pad

WP007

- » Slim Design.
- » Built-in Qi-certified Wireless Charging for 5W (standard charging)/7.5W/10W (fast charging).
- » 1m USB Type C Cable is included.
- » Input : Type C, 5V/2A, 9V/2A, using QC 2.0/3.0 or PD adaptor is recommended (not included).
- » Product size : ϕ 103.6 x 17.3mm



Exterior colours 

LD-0333

WIRELESS CHARGER

3 in 1 Wireless Charging Station

WP009

- » Built-in Qi-certified Wireless Charging for 5W (standard charging) /7.5W/10W (fast charging).
- » Charging station for Watch.
- » Built-in 5V/1A USB Charging port.
- » 1m USB Type C Cable is included.
- » 9V/3A using QC 2.0/3.0 or PD adaptor is recommended (not included).
- » Product size : 180 x 84 x 85mm



Exterior colours 

498

WIRELESS CHARGER

Wireless Charger Pad

WP010

- » Slim design.
- » Built-in Qi-certified Wireless Charging for 5W (standard charging)/7.5W/10W (fast charging).
- » 1m USB Type C Cable is included.
- » Input : Type C, 5V/2A , 9V/2A, using QC 2.0/3.0 or PD adaptor is recommended (not included).
- » Product size : ø102 x 12mm



Exterior colours

LD-0333

WIRELESS CHARGER

Wireless Charger Stand

WP015

- » Wide Charging area, designed with two coils offer you much wider charging area.
- » Built-in Qi-certified Wireless Charging for 5W (standard charging) /7.5W/10W (fast charging).
- » 1m USB Type C Cable is included.
- » Input : Type C, 5V/2A , 9V/2A, using QC 2.0/3.0 or PD adaptor is recommended (not included).
- » Product size : 70 x 78 x 115mm



Exterior colours

499

WIRELESS CHARGER

Dual Wireless Charger Pad

WPO16

- » Slim Design.
- » 2 in 1 Wireless Charging Station, can charge multiple devices at the same time with high-speed.
- » Built-In Qi-certified Wireless Charging 5W (standard charge)/7.5W/10W (fast charge) for each pad.
- » 1m USB Type C Cable is included.
- » Input : Type C, 9V/3A, 12V/2.25A using QC 2.0/3.0 or PD adaptor is recommended (not included).
- » Product size : 180 x 85 x 9.5mm



Exterior colours

LD-0333

KIMPORT

WIRELESS CHARGER

Travel alarm Clock with Wireless Charger

YT80100

- » Foldable design.
- » Clock with calendar and weekday display.
- » Alarm & snooze functions.
- » Indoor temperature (°C/°F).
- » 7 languages for weekday (DE/DK/JEN/ES/FR/IT/NL).
- » Built-In Qi-certified Wireless Charging for 5W (standard charging) /7.5W/10W (fast charging).
- » Built-In 5V/1A USB Charging port.
- » 1 pcs CR2032 Backup battery (not included).
- » AC-DC Adaptor : DC 9V/2.5A 9V/3A using QC 2.0/3.0 or PD adaptor is recommended (not included).
- » Product size : 141 x 91 x 36.5mm



Exterior colours

500

WIRELESS CHARGER

Wireless Color Weather Station with Wireless Charger

YT80102

- » Colorful display with super bright backlight.
- » RC Clock with DST time, calendar and weekday.
- » Dual Alarm & Snooze functions.
- » Moon Phase.
- » Weather forecast (Sunny, partly cloudy, cloudy, rainy, snowy).
- » Indoor & Outdoor temperature (°C/°F) & humidity readings with trend.
- » Comfort level indication.
- » Barometric pressure reading (mb/hPa or inHg) with past 12 hours history.
- » Max/Min records for indoor & outdoor temperature and humidity.
- » 3 levels of brightness.
- » 7 languages for weekday (DE/DK/EN/ES/FR/IT/NL).
- » Built-in Qi-certified Wireless Charging for 5W (standard charging)/7.5W/10W (fast charging).
- » 1 pc wireless thermo-hygro sensor (R48) included.
- » Support up to 3 thermo-hygro sensors (R48).
- » 2 pcs AA Backup battery (not included).
- » AC-DC Adaptor : DC 9V / 2A.
- » Product size :
Station receiver : 133 x 113 x 129mm
Thermo-hygro sensor (R48) : 40 x 104 x 26mm



Exterior colours

LD-0333

WIRELESS CHARGER

Digital Alarm Clock with Qi Charging Station

YT68015







- » 6 digit LED display
- » Switchable time/date/temperature
- » Alarm and snooze function
- » The display can be reactivated by sound.
- » 3 groups of alarm
- » Temperature display in °C or °F switchable
- » 3 brightness levels
- » Qi charging
- » Size: 160 x 70 x 70 mm
- » Battery: AAA x 4pcs(not included)
- » Adaptor :9V 2A (included)



Exterior colours

501

KIMPORT

Product						
Model	WP001	WP002	WP003	WP005	WP006	WP007
Number of Charging Pad	Single	Single	Single	Dual	Single	Single
5W Wireless Charging	•	•	•	•	•	•
7.5W Wireless Charging	•	•	•	•	•	•
10W Wireless fast Charging	•	•	•	•	•	•
USB Charging Port	1 x 5V/1A					
Wireless Charging Indication	•	•	•	•	•	•
Alarm & Snooze						
Temperature						
Humidity						
Moon Phase						
Weekday display language						
Low Battery Indication						
Color Display						
Backlight Color						
RF Wireless frequency						
RF Transmission Range						
Remote sensors support						
Input port	5mm DC Jack	Micro USB	Micro USB	Type C	Type C	Type C
input	DC 12V/2.5A	DC 5V/2A, 9V/2A	DC 5V/2A	DC 9V/3A, 12V/2.5A, 15V/2A	DC 5V/2A, 9V/2A	DC 5V/2A, 9V/2A
QC2.0/5.0 adaptor compatibility		Yes		Yes	Yes	Yes
PD adaptor compatibility		Yes		Yes	Yes	Yes
Button	1	3				
Backup Battery						
Remote sensors Power						
Product size	ø180 x 35mm	115 x 95 x 22.5mm	82 x 72 x 20mm	180 x 85 x 9.8mm	68 x 154 x 16mm	ø105.6 x 17.3mm
Product size (sensor)						

LD-0333

Product						
Model	WP009	WP010	WP015	WP016	YT80100	YT80102
Number of Charging Pad	Single	Single	Single	Dual	Single	Single
5W Wireless Charging	•	•	•	•	•	•
7.5W Wireless Charging	•	•	•	•	•	•
10W Wireless fast Charging	•	•	•	•	•	•
USB Charging Port	1 x 5V/1A, 1 x 5V/500mA				1 x 5V/1A	
Wireless Charging Indication	•	•	•	•	•	•
RCC						•
Alarm & Snooze					•	
Temperature					In	In/Out
Humidity						In/Out
Moon Phase						•
Weekday display language					DE/EN/ES/FR/IT/NL	DE/EN/ES/FR/IT/NL
Low Battery Indication					•	•
Color Display						•
Backlight Color					White	White
RF Wireless frequency						433MHz
RF Transmission Range						Up to 100m
Remote sensors support						848 thermo-hygro sensor
Input port	Type C	Type C	Type C	Type C	5mm DC Jack / Type C	Type C
input	DC 5V/2A, 9V/2A	DC 5V/2A, 9V/2A	DC 5V/2A, 9V/2A	DC 5V/2A, 9V/2A	DC 9V/2.5A	DC 9V/2A
QC2.0/5.0 adaptor compatibility	Yes	Yes	Yes	Yes	Yes	
PD adaptor compatibility	Yes	Yes	Yes	Yes	Yes	
Button					4	1
Backup Battery					1 x CR2032	2 x AA
Remote sensors Power						2 x AAA
Product size	180 x 84 x 85mm	ø102 x 12mm	70 x 78 x 115mm	180 x 85 x 9.5mm	141 x 91 x 56.5mm	155 x 115 x 129mm
Product size (sensor)						40 x 104 x 26mm

502

Product	
Model	YT68015
Number of Charging Pad	Single
5W Wireless Charging	•
7.5W Wireless Charging	•
10W Wireless fast Charging	•
USB Charging Port	
Wireless Charging Indication	
RCC	
Alarm & Snooze	•
Temperature	•
Humidity	
Moon Phase	
Weekday display language	
Low Battery Indication	
Color Display	
Backlight Color	
RF Wireless frequency	
RF Transmission Range	
Remote sensors support	
Input port	Qi
Input	DC 9V/2A
QC2.0/3.0 adaptor compatibility	
PD adaptor compatibility	
Button	
Backup Battery	4 x AAA
Remote sensors Power	
Product size	160 x 70 x 70mm
Product size (sensor)	



DAB- / FM / BLUETOOTH RADIO

Under-Mounted Alarm Clock DAB+ Kitchen Radio

YT81112

- Large display 2.4" color TFT display.
- Real Time and calendar display.
- 12/24 hour display.
- Dual Alarm with 3 selectable alarm output (Buzzer/DAB+/FM).
- Built in Bluetooth Music Streaming.
- Built in DAB+ radio, with up to 30 DAB+ preset stations.
- Built in FM radio, with up to 30 FM preset stations.
- 2 count down timer.
- Sleep Timer.
- 5 direct access keys for stations preset and recall.
- Clear loud stereo output sound.
- 3 brightness levels for backlight.
- 12 languages available for mode displays.
- 12 functional buttons.
- 1 tuning knobs volume tuning.
- Bluetooth version available.
- AC-DC Adaptor: DC 5V/1.5A
- Product size: 254 x 160 x 59 mm



Exterior colours

LD-0333

KIMPORT

DAB- / FM / BLUETOOTH RADIO

Bluetooth Clock Radio with Wireless Charger

BQ002

- Time display.
- 12/24 hour display.
- Dual Alarm with 3 selectable alarm output (Buzzer/FM/USB).
- 9 functional buttons.
- 3 levels of brightness.
- Sleep Timer.
- Built in Bluetooth Streaming.
- Built in FM radio, with up to 10 FM preset stations.
- USB plug and play.
- Auxiliary audio input.
- USB charging with 5V/1A.
- Built-in Qi-certified Wireless Charging for :
5W (standard charging)/7.5W/10W (fast charging).
- 6W Stereo Speaker (2 x 3W).
- CR2032 Backup battery(not included).
- AC-DC Adaptor : DC 9V/3A
- LCD display size : 79.6 x 37.6mm
- Product size : 138 x 138 x 69mm



Exterior colours

504

DAB- / FM / BLUETOOTH RADIO

FM Radio

YT60145

- » Great reception and clear loud sound.
- » FM Radio with frequency range 87.0 - 108.0MHz.
- » Power consumption 1.2W
- » Auxiliary audio input.
- » 2 tuning knobs for FM frequency tuning and volume control.
- » 3 pcs AA battery.
- » AC power operated.
- » Product size : 180 x 120 x 85 mm



Exterior colours 

LD-0333

KIMPORT

DAB- / FM / BLUETOOTH RADIO

FM Radio

YT60150

- » Great reception and clear loud sound.
- » FM Radio with frequency range 87.0 - 108.0MHz.
- » Power consumption 1.2W.
- » Auxiliary audio input.
- » 2 tuning knobs for FM frequency tuning and volume control.
- » 3 pcs AA battery.
- » AC-DC Adaptor : DC 5V/1A
- » Product size : 81.5 x 127 x 100mm



Exterior colours 

505

DAB- / FM / BLUETOOTH RADIO

Portable Alarm Clock DAB+ Radio

YT81107

- » Large display 2.4" color TFT display.
- » Real Time and calendar display.
- » 12/24 hour display.
- » Dual Alarm with 3 selectable alarm output (Buzzer/DAB+/FM).
- » Built in Bluetooth Music Streaming.
- » Built in DAB+ radio, with up to 30 DAB+ preset stations.
- » Built in FM radio, with up to 30 FM preset stations.
- » Sleep Timer.
- » 5 direct access keys for stations preset and recall.
- » Clear loud output sound.
- » 3 brightness levels for backlight.
- » 12 languages available for mode displays.
- » 10 functional buttons.
- » 1 tuning knobs volume tuning.
- » Ear phone Jack output.
- » Bluetooth version available.
- » 4 pcs AA battery operated.
- » AC-DC Adaptor : DC 5V/1A
- » Product size : 160 x 102 x 51mm



Exterior colours

LD-0333

KIMPORT

DAB- / FM / BLUETOOTH RADIO

Under-mounted Alarm Clock DAB+ Radio with night light function

YT81108

- » Large display with super bright backlight.
- » Clock and calendar display.
- » 12/24 hour display.
- » Dual Alarm with 3 selectable alarm output (Buzzer/DAB+/FM).
- » Built in Bluetooth Music Streaming.
- » Built in DAB+ radio, with up to 30 DAB+ preset stations.
- » Built in FM radio, with up to 30 FM preset stations.
- » 2 count down timers.
- » LED night light function
- » 3 brightness levels for backlight.
- » 12 languages available for mode displays.
- » 2 pcs AA backup battery (not included)
- » Bluetooth version available.
- » AC-DC Adaptor : DC 5V/1A
- » LCD display size : 51 x 14.8mm
- » Product size : 260 x 50 x 160.5mm



Exterior colours

506

DAB- / FM / BLUETOOTH RADIO

Alarm Clock DAB+ Radio

YT81109

- » Large display with super bright backlight.
- » Real Time and calendar display.
- » 12/24 hour display.
- » Dual Alarm with 3 selectable alarm output (Buzzer/DAB+/FM).
- » Built in DAB+ radio, with up to 10 DAB+ preset stations.
- » Built in FM radio, with up to 10 FM preset stations.
- » 3 brightness levels for backlight.
- » 12 languages available for mode displays.
- » 11 functional buttons.
- » Bluetooth version available.
- » USB charging with 5V/1A.
- » AC-DC Adaptor : DC 5V/2A
- » LCD display size : 61.8*20.3mm
- » Product size : 192 x 43.5 x 139mm



Exterior colours 

LD-0333

DAB- / FM / BLUETOOTH RADIO

Under-mounted Alarm Clock DAB+ Radio

YT81110

- » Large display with super bright backlight.
- » Real Time and calendar display.
- » 12/24 hour display.
- » Dual Alarm with 3 selectable alarm output (Buzzer/DAB+/FM).
- » Built in Bluetooth Music Streaming.
- » Built in DAB+ radio, with up to 30 DAB+ preset stations.
- » Built in FM radio, with up to 30 FM preset stations.
- » 2 count down timers.
- » LED night light function
- » 3 brightness levels for backlight.
- » 12 languages available for mode displays.
- » Bluetooth version available.
- » 12 functional buttons.
- » 1 tuning knob
- » AC-DC Adaptor : DC 5V/1.5A
- » LCD display size : 51 x 14.8mm
- » Product size : 254 x 56 x 160mm



Exterior colours 

507

KIMPORT

Product							
Model	YT81112	BQ002	YT60145	YT60150	YT81107	YT81108	YT81109
Display	2.4" Color TFT display	Mono display			2.4" Color TFT display	Mono display	Mono display
DAB+	•	•			•	•	•
FM	•	•	•	•	•	•	•
Bluetooth	•	•			•	•	•
Wireless Charge		•					
Clock	•	•			•	•	•
Alarm	•	•			•	•	•
Count Down Timer	•				•	•	
Sleep Timer	•	•			•	•	•
Backlight brightness level	3 levels	3 levels			3 levels	3 levels	3 levels
DAB+ preset stations memory	30	10			30	30	10
FM preset station memory	30	10			30	30	10
Night Light Function	•					•	
USB Charging		•					•
3.5mm phone Jack audio output					•		
Auxiliary audio input		•	•	•			
Language	12 OSD language				8 OSD language	12 OSD language	12 OSD language
Button	12	9			10	6	11
Knob	1		2	2	1	2	
Power		CR2032	3 x AA	3 x AA	4 x AA	2 x AA	
AD-DC adaptor	DC 5V/1.5A	DC 9V/1A		DC 5V/1A	DC 5V/1A	DC 5V/1A	DC 5V/2A
Product Size	180 x 120 x 65mm	81.5 x 127 x 100mm	180 x 120 x 85mm	81.5 x 127 x 100mm	160 x 102 x 51mm	260 x 50 x 160.5mm	192 x 45.5 x 139mm

Product		
Model	YT81110	
Display	Mono display	
DAB+	•	
FM	•	
Bluetooth	•	
Wireless Charge		
Clock	•	
Alarm	•	
Count Down Timer	•	
Sleep Timer	•	
Backlight brightness level	3 levels	
DAB+ preset stations memory		
FM preset station memory		
Night Light Function	•	
USB Charging		
3.5mm phone Jack audio output		
Auxiliary audio input		
Language	12 OSD language	
Button	12	
Knob	1	
Power		
AD-DC adaptor	DC 9V/1.5A	
Product Size	254 x 56 x 160mm	



LD-0333

Digital Instant read Meat Thermometer

YT6785

- › Instant response time.
- › Automatic power off function.
- › Temperature hold function.
- › Low battery indication.
- › Switch between Fahrenheit and Celsius.
- › 1 x LR44 battery.
- › 3 functional buttons.
- › Measurement range : -50~250°C
- › Product size : 190 x 25 x 22mm



Exterior colours

509

Digital Instant read Meat Thermometer

YT67106

- » Instant response time.
- » Switch between Fahrenheit and Celsius.
- » Protective sheath features a clip.
- » 1 x LR44 battery.
- » Measurement range : -45~200°C
- » Product size : 151,5 x 35 x 30,4mm



Exterior colours 

LD-0333

KIMPORT

Digital Instant read Meat Thermometer

YT67116

- » Instant response time.
- » Automatic power off function.
- » Temperature hold function.
- » Low battery indication.
- » Switch between Fahrenheit and Celsius.
- » 1 x LR44 battery.
- » 3 functional buttons.
- » Measurement range : -40~200°C
- » Product size : 151,8 x 20 x 16,9mm



Exterior colours 

510

Digital Instant read Meat Thermometer

YT67119

- » Instant readout of the inner food temperature during cooking cycle.
- » Food types and flavor choices.
- » Audible alert when the temperature is reached.
- » Count up /count down function with max 99 min 59 sec.
- » Backlight.
- » 5 functional buttons.
- » 2 x AAA battery.
- » Measurement range : 0-300°C
- » Product size : 86.3 x 162.8 x 64.3mm



Exterior colours

LD-0333

KIMPORT

Product			
Model	YT6785	YT67106	YT67116
Auto off function	•		•
Temperature hold function	•		•
Temperature alert function			•
Timer			Count up & Count down timer up to 99 min 59 sec
Switch between Fahrenheit and Celsius	•	•	•
Low battery indication	•		•
LED Backlight			•
Measuring temperature range	-50 to 250 °C	-45 to 200 °C	-40 to 200 °C
Button	3	2	3
Power	1 x LR44	1 x LR44	1 x LR44
Product Size	190 x 25 x 22mm	151.5 x 35 x 30.4mm	151.8 x 20 x 16.9mm

KIMPORT

AIR QUALITY



PM2.5 Monitor with Touch button

YT6960

- » True Black display to share time, temperature, humidity, PM2.5, PM10, AQI
- » Real Time Clock display.
- » Alarm Clock function.
- » Real time PM2.5, PM10 readings.
- » Real Time temperature (°C/°F) and humidity readings
- » 3-level comfort level indicator.
- » 4 functional buttons.
- » Built-in 2000mAh rechargeable battery
- » WIFI version available.
- » USB-C port for charging.
- » Product size : 76 x 96 x 36mm



Exterior colours . ■

CO₂ Monitor with Touch button

YT6961

- True Black display to share time, temperature, humidity, CO₂
- Real Time Clock display.
- Alarm Clock function.
- Real time CO₂ readings.
- Real Time temperature (°C/°F) and humidity readings.
- 3-level comfort level indicator.
- 4 functional buttons.
- Built-in 2000mAh rechargeable battery.
- WiFi version available.
- USB-C port for charging.
- Product size : 76 x 96 x 36mm

Exterior colours

LD-0333

KIMPORT

Air Quality Monitor

YT6962

- True Black display to show time, temperature, humidity, PM2.5, CO₂, AQI readings.
- Real Time clock display.
- Real time Temperature (°C/°F) & humidity readings.
- Real Time PM2.5 reading.
- Real Time CO₂ reading
- Real Time AQI reading
- 3-level comfort level indication.
- 4 functional buttons.
- Built-in 2000mAh rechargeable battery.
- WiFi version available.
- USB-C port for charging.
- Product size : 96 x 76 x 36mm

Exterior colours

513

KIMPORT

AIR QUALITY

Air Quality Monitor

YT6963

- True Black display to show time, temperature, humidity, PM2.5, PM10, TVOC, HCHO, AQI readings.
- Real Time clock display.
- Real time Temperature (°C/°F) & humidity readings.
- Real Time PM2.5 reading.
- Real Time PM10 reading
- Real Time TVOC reading
- Real Time HCHO reading
- Real Time AQI reading
- 3-level comfort level indication.
- 4 functional buttons.
- Built-in 2000mAh rechargeable battery.
- WiFi version available.
- USB-C port for charging.
- Product size : 96 x 76 x 36mm



Exterior colours

LD-0333

AIR QUALITY

Air Quality Monitor

YT6964

- True Black display to show time, temperature, humidity, PM2.5, PM10, HCHO, TVOC, CO2, AQI readings.
- Real Time clock display.
- Real time Temperature (°C/°F) & humidity readings.
- Real Time PM2.5 reading.
- Real Time PM10 reading
- Real Time CO2 reading
- Real Time HCHO reading
- Real Time TVOC reading
- Real Time AQI reading
- 3-level comfort level indication.
- 4 functional buttons.
- Built-in 2000mAh rechargeable battery.
- WiFi version available.
- USB-C port for charging.
- Product size : 96 x 76 x 36mm



Exterior colours

514

KIMPORT

AIR QUALITY

Wifi PM2.5 Monitor

YT6917

- True Black display to show time, temperature, humidity & CO2 readings.
- Real Time clock display.
- Real time Temperature (°C/°F) & humidity readings.
- Real Time CO2 reading with index bar.
- 3-level comfort level indication.
- 3 functional buttons.
- Micro USB port for charging.
- Product size : 81.5 x 80.6 x 30mm



Exterior colours

LD-0333

AIR QUALITY

Wifi CO2 Monitor

YT6918

- True Black display to show time, temperature, humidity & CO2 readings.
- Real Time clock display.
- Real time Temperature (°C/°F) & humidity readings.
- Real Time CO2 reading with index bar.
- 3-level comfort level indication.
- 3 functional buttons.
- Micro USB port for charging.
- Product size : 81.5 x 80.6 x 30mm



Exterior colours

515

AIR QUALITY

CO₂ Monitor

YT6920

- True Black display to show time, temperature, humidity & CO₂ readings.
- Real Time clock display.
- Real time Temperature (°C/°F) & humidity readings.
- Real Time CO₂ reading with index bar.
- 3-level comfort level indication.
- 3 functional buttons.
- Micro USB port for charging.
- Product size : 81.5 x 80.6 x 30mm



Exterior colours 

LD-0333

KIMPORT

AIR QUALITY

PM2.5 Monitor

YT6928

- True Black display to show time, temperature, humidity & PM2.5 readings.
- Real Time clock display.
- Real time Temperature (°C/°F) & humidity readings.
- Real Time P M2.5 reading with index bar.
- 3-level comfort level indication.
- 3 functional buttons.
- Micro USB port for charging.
- Product size : 81.5 x 80.6 x 30mm



Exterior colours 

516

KIMPORT

Product						
Model	YT6960	YT6961	YT6962	YT6963	YT6964	YT6917
Alarm	•	•		•	•	
Temperature	•	•	•	•	•	•
Humidity	•	•	•	•	•	•
PM2.5	•		•	•	•	•
PM10			•	•	•	•
TVOC			•	•	•	•
HCHO			•	•	•	•
CO2		•	•			
AQI	•			•	•	
Comfort level	3 levels	3 levels	3 levels	3 levels	3 levels	3 levels
USB Charging	•	•	•	•	•	•
Measuring temperature Range	-9.9 to 50 °C	-9.9 to 50 °C	-9.9 to 50 °C	-9.9 to 50 °C	-9.9 to 50 °C	-9.9 to 50 °C
Measuring humidity Range	1 to 99 %	1 to 99 %	1 to 99 %	1 to 99 %	1 to 99 %	1 to 99 %
Measuring PM2.5 Range	0 to 999 µg/m3		0 to 999 µg/m3	0 to 999 µg/m3	0 to 999 µg/m3	0 to 999 µg/m3
Measuring CO2 Range		400 to 5000 ppm	400 to 5000 ppm			
Version	Standard / WIFI	Standard / WIFI	Standard / WIFI	Standard / WIFI	Standard / WIFI	WIFI
Button	4	4	4	4	4	3
Product size	76 x 96 x 36mm	76 x 96 x 36mm	96 x 76 x 31mm	76 x 96 x 36mm	76 x 96 x 36mm	81.5 x 80.6 x 30mm

Product			
Model	YT6918	YT6920	YT6928
Alarm			
Temperature	•	•	•
Humidity	•	•	•
PM2.5			•
PM10			
TVOC			
HCHO			
CO2	•	•	
AQI			
Comfort level	3 levels	3 levels	3 levels
USB Charging	•	•	•
Measuring temperature Range	-9.9 to 50 °C	-9.9 to 50 °C	-9.9 to 50 °C
Measuring humidity Range	1 to 99 %	1 to 99 %	1 to 99 %
Measuring PM2.5 Range			0 to 999 µg/m3
Measuring CO2 Range	400 to 5000 ppm	400 to 5000 ppm	
Version	WIFI	Standard	Standard
Button	3	3	3
Product size	81.5 x 80.6 x 30mm	81.5 x 80.6 x 30mm	81.5 x 80.6 x 30mm



MISCELLANEOUS



YT6681



YT62001



YT62002



YT6692



YT62003



YT62003

Ajánlatkéréshez szíveskedjen elküldeni KIMPORT-os kapcsolattartója részére (vagy az arajanlat@kimport.hu-ra) kitöltve az ajánlatkérő excel fájlt.

[Ajánlatkérő excel](#)



**Kimport Purchasing Kft.
1112 Budapest, Tippan utca 2.
HU23490495
Tel.: +36-1-249-46-22
arajanlat@kimport.hu**

KIMPORT